

```
In [1]: import pandas as pd
        from matplotlib import pyplot as plt
        %matplotlib inline
```

```
In [2]: df=pd.read_csv(r"C:\Users\HP\Downloads\Income.csv")
        df
```


```
Out[2]:
```

	Gender	Age	Income(\$)
0	Male	19	15
1	Male	21	15
2	Female	20	16
3	Female	23	16
4	Female	31	17
...
195	Female	35	120
196	Female	45	126
197	Male	32	126
198	Male	32	137
199	Male	30	137

200 rows × 3 columns

```
In [3]: plt.scatter(df["Age"],df["Income($)"])
plt.xlabel("Age")
plt.ylabel("Income($)")
```

```
Out[3]: Text(0, 0.5, 'Income($)')
```

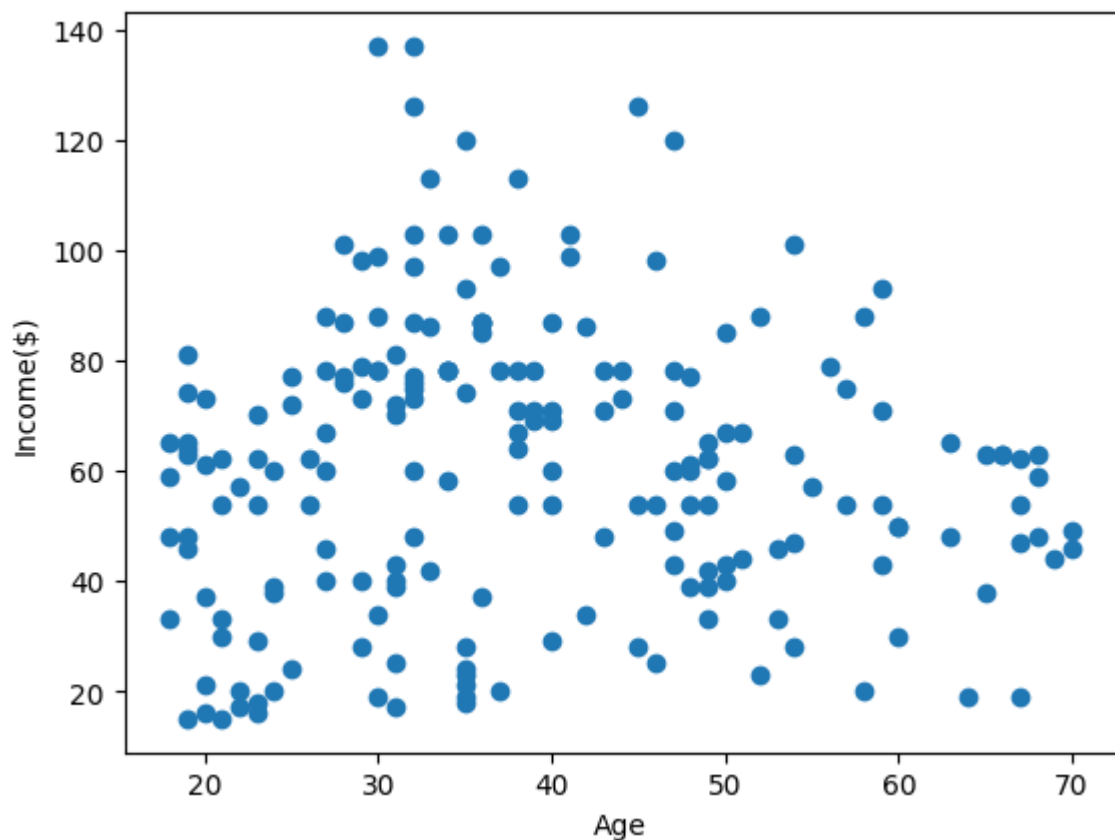

```
In [4]: from sklearn.cluster import KMeans
```

```
In [5]: km=KMeans()
km
```

```
Out[5]: KMeans()
```

In a Jupyter environment, please rerun this cell to show the HTML representation or trust the notebook.

On GitHub, the HTML representation is unable to render, please try loading this page with nbviewer.org.

```
In [6]: y_predicted=km.fit_predict(df[["Age","Income($)"]])
y_predicted
```

```
C:\Users\HP\AppData\Roaming\Python\Python310\site-packages\sklearn\cluster\_
kmeans.py:870: FutureWarning: The default value of `n_init` will change from
10 to 'auto' in 1.4. Set the value of `n_init` explicitly to suppress the wa
rning
  warnings.warn(
```

```
Out[6]: array([2, 2, 2, 2, 2, 2, 2, 2, 4, 2, 4, 2, 4, 2, 2, 2, 2, 2, 4, 2, 2, 2,
 4, 2, 4, 2, 4, 2, 4, 2, 4, 2, 4, 5, 4, 5, 4, 5, 5, 5, 4, 5, 4, 5,
 4, 5, 4, 5, 5, 5, 4, 5, 5, 4, 4, 4, 4, 7, 5, 4, 7, 5, 7, 7, 7, 5,
 1, 7, 5, 5, 7, 1, 7, 7, 7, 5, 1, 1, 5, 1, 7, 1, 7, 1, 5, 1, 7, 5,
 1, 1, 7, 3, 1, 1, 3, 3, 1, 3, 1, 3, 3, 1, 7, 3, 1, 3, 7, 1, 7, 7,
 7, 3, 1, 3, 3, 3, 7, 1, 1, 1, 3, 1, 1, 1, 3, 3, 1, 1, 1, 1, 1, 1,
 3, 3, 3, 3, 1, 3, 3, 3, 1, 3, 3, 3, 3, 3, 1, 3, 3, 3, 1, 3, 1, 3,
 1, 3, 3, 3, 3, 3, 1, 3, 3, 3, 6, 6, 6, 6, 6, 6, 6, 6, 6, 6, 6, 6,
 6, 6, 6, 6, 6, 6, 6, 6, 6, 6, 6, 6, 6, 6, 6, 6, 0, 0, 0, 0, 0, 0,
 0, 0])
```

```
In [7]: df["cluster"]=y_predicted
df.head()
```

```
Out[7]:
```


	Gender	Age	Income(\$)	cluster
0	Male	19	15	2
1	Male	21	15	2
2	Female	20	16	2
3	Female	23	16	2
4	Female	31	17	2

```

In [9]: df1=df[df.cluster==0]
df2=df[df.cluster==1]
df3=df[df.cluster==2]
plt.scatter(df1["Age"],df1["Income($)"],color="red")
plt.scatter(df2["Age"],df2["Income($)"],color="green")
plt.scatter(df3["Age"],df3["Income($)"],color="blue")
plt.xlabel("Age")
plt.ylabel("Income($)")

```

Out[9]: Text(0, 0.5, 'Income(\$)')

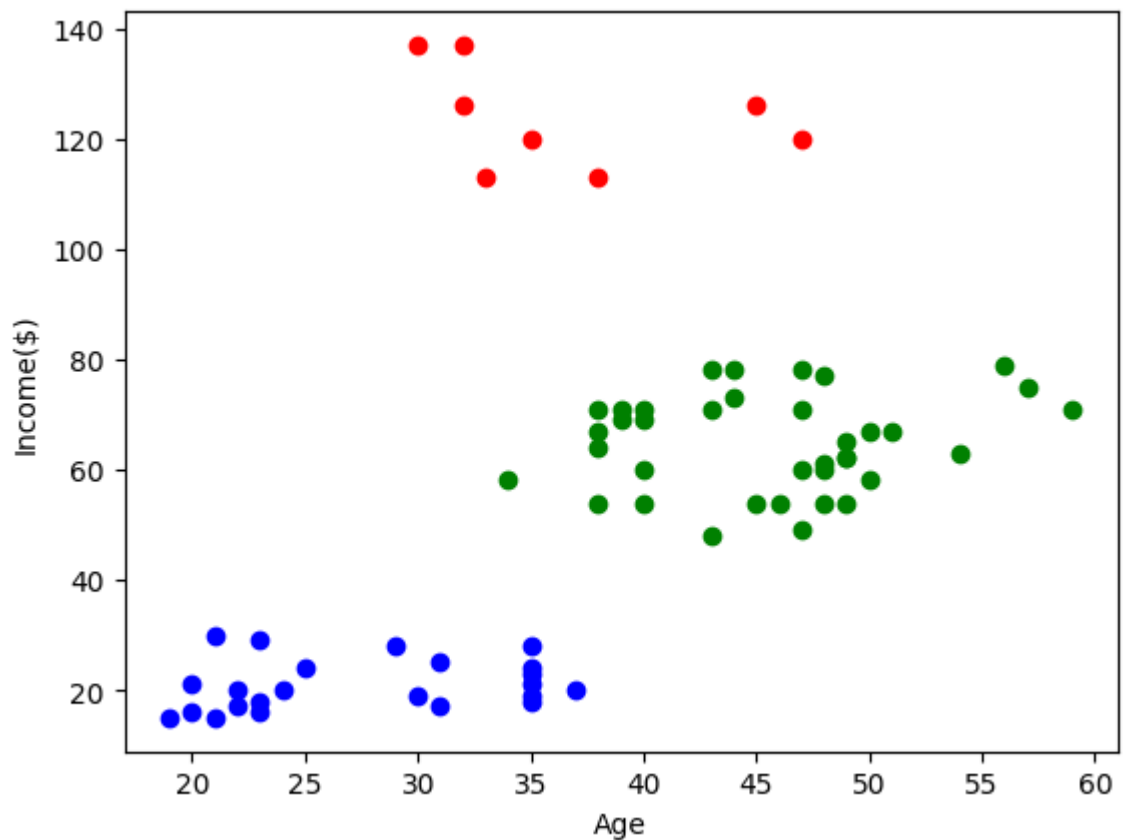

```

In [10]: from sklearn.preprocessing import MinMaxScaler

```

```

In [11]: scaler=MinMaxScaler()

```

```
In [12]: scaler.fit(df[["Income($)"]])
df["Income($)"]=scaler.transform(df[["Income($)"]])
df.head()
```

```
Out[12]:
```

	Gender	Age	Income(\$)	cluster
0	Male	19	0.000000	2
1	Male	21	0.000000	2
2	Female	20	0.008197	2
3	Female	23	0.008197	2
4	Female	31	0.016393	2

```
In [13]: km=KMeans()
```

```
In [14]: y_predicted=km.fit_predict(df[["Age", "Income($)"]])
y_predicted
```

C:\Users\HP\AppData\Roaming\Python\Python310\site-packages\sklearn\cluster_kmeans.py:870: FutureWarning: The default value of `n_init` will change from 10 to 'auto' in 1.4. Set the value of `n_init` explicitly to suppress the warning
 warnings.warn(

```
Out[14]: array([7, 7, 7, 1, 4, 7, 6, 1, 5, 4, 5, 6, 2, 1, 6, 7, 6, 7, 3, 6, 6, 1,
3, 4, 2, 4, 3, 6, 0, 1, 2, 7, 2, 7, 3, 7, 0, 4, 6, 7, 5, 1, 3, 4,
3, 1, 3, 1, 4, 4, 3, 6, 4, 2, 3, 3, 3, 5, 1, 2, 5, 7, 5, 2, 5, 7,
0, 5, 7, 4, 5, 3, 2, 2, 2, 1, 3, 0, 1, 3, 2, 0, 5, 3, 7, 3, 2, 7,
6, 3, 5, 7, 3, 0, 4, 1, 3, 1, 3, 7, 1, 3, 5, 1, 3, 7, 5, 2, 5, 5,
5, 7, 0, 7, 7, 7, 5, 3, 3, 3, 1, 0, 0, 0, 1, 4, 0, 0, 2, 0, 3, 0,
1, 4, 7, 4, 0, 4, 7, 6, 2, 4, 4, 4, 1, 4, 3, 4, 6, 6, 0, 0, 0, 0,
3, 1, 6, 4, 6, 4, 2, 4, 7, 4, 3, 6, 0, 6, 6, 4, 0, 4, 6, 6, 3, 4,
2, 1, 2, 6, 6, 4, 3, 4, 0, 4, 2, 4, 0, 6, 6, 4, 6, 0, 3, 6, 3, 4,
4, 4])
```

```
In [15]: df["New cluster"]=y_predicted
df.head()
```

```
Out[15]:
```

	Gender	Age	Income(\$)	cluster	New cluster
0	Male	19	0.000000	2	7
1	Male	21	0.000000	2	7
2	Female	20	0.008197	2	7
3	Female	23	0.008197	2	1
4	Female	31	0.016393	2	4

```


In [16]: df1=df[df.cluster==0]
df2=df[df.cluster==1]
df3=df[df.cluster==2]
plt.scatter(df1["Age"],df1["Income($)"],color="red")
plt.scatter(df2["Age"],df2["Income($)"],color="green")
plt.scatter(df3["Age"],df3["Income($)"],color="blue")
plt.xlabel("Age")
plt.ylabel("Income($)")

```

```

Out[16]: Text(0, 0.5, 'Income($)')

```

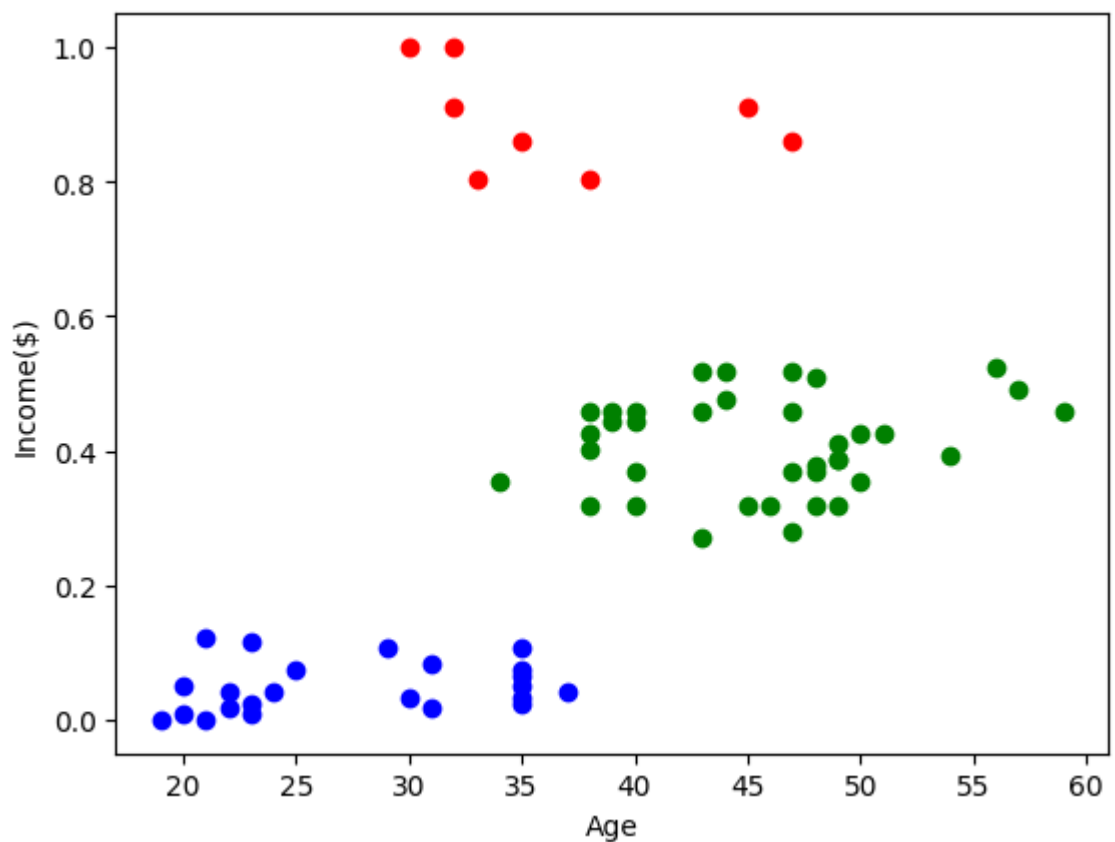

```

In [17]: km.cluster_centers_

```

```

Out[17]: array([[40.33333333,  0.45935792],
 [24.9047619 ,  0.29625293],
 [56.78947368,  0.34383089],
 [48.3030303 ,  0.36612022],
 [30.48571429,  0.47142857],
 [66.64705882,  0.28688525],
 [35.03846154,  0.42465322],
 [19.8       ,  0.25639344]])


```

```

In [23]: df1=df[df.cluster==0]
df2=df[df.cluster==1]
df3=df[df.cluster==2]
plt.scatter(df1["Age"],df1["Income($)"],color="red")
plt.scatter(df2["Age"],df2["Income($)"],color="green")
plt.scatter(df3["Age"],df3["Income($)"],color="blue")
plt.scatter(km.cluster_centers_[0],km.cluster_centers_[1],color="orange",marker='x')
plt.xlabel("Age")
plt.ylabel("Income($)")

```

Out[23]: Text(0, 0.5, 'Income(\$))')

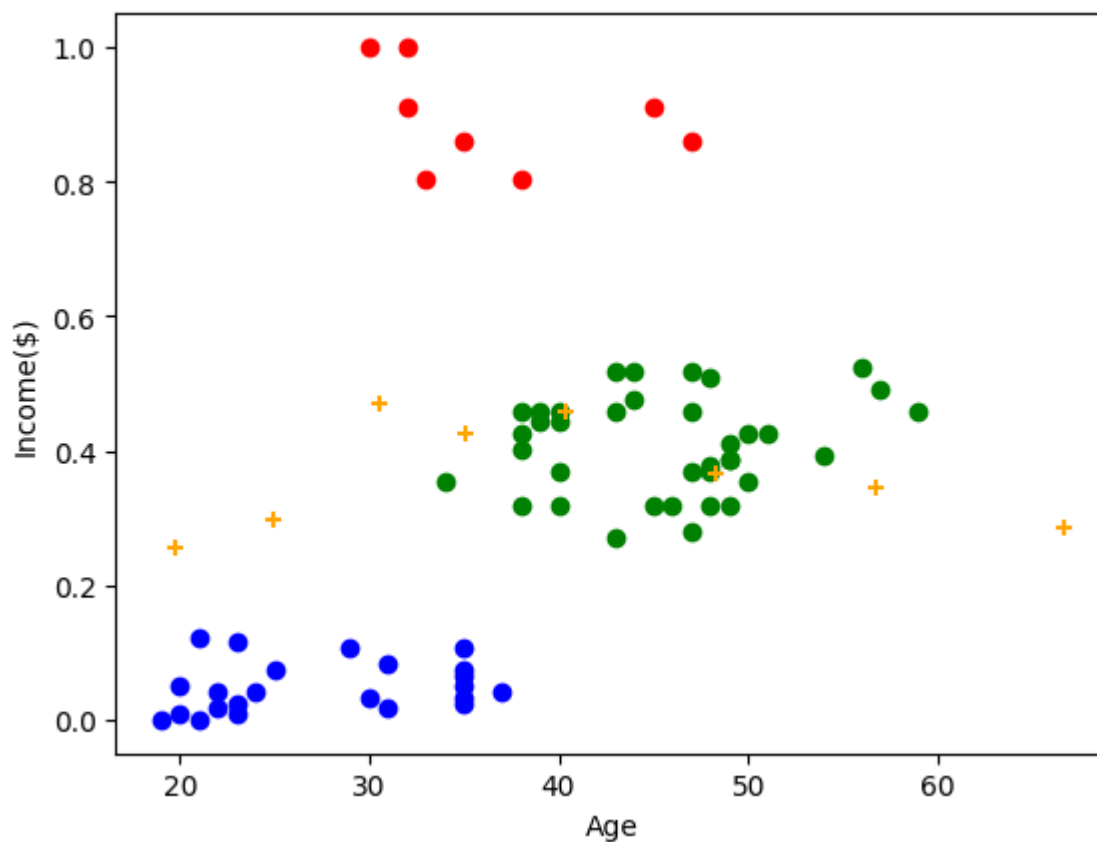

```
In [24]: k_rng=range(1,10)
sse=[]
for k in k_rng:
    km=KMeans(n_clusters=k)
    km.fit(df[["Age", "Income($)"]])
    sse.append(km.inertia_)
sse
```

C:\Users\HP\AppData\Roaming\Python\Python310\site-packages\sklearn\cluster_kmeans.py:870: FutureWarning: The default value of `n_init` will change from 10 to 'auto' in 1.4. Set the value of `n_init` explicitly to suppress the warning

warnings.warn(
C:\Users\HP\AppData\Roaming\Python\Python310\site-packages\sklearn\cluster_kmeans.py:870: FutureWarning: The default value of `n_init` will change from 10 to 'auto' in 1.4. Set the value of `n_init` explicitly to suppress the warning

warnings.warn(
C:\Users\HP\AppData\Roaming\Python\Python310\site-packages\sklearn\cluster_kmeans.py:870: FutureWarning: The default value of `n_init` will change from 10 to 'auto' in 1.4. Set the value of `n_init` explicitly to suppress the warning

warnings.warn(
C:\Users\HP\AppData\Roaming\Python\Python310\site-packages\sklearn\cluster_kmeans.py:870: FutureWarning: The default value of `n_init` will change from 10 to 'auto' in 1.4. Set the value of `n_init` explicitly to suppress the warning

warnings.warn(
C:\Users\HP\AppData\Roaming\Python\Python310\site-packages\sklearn\cluster_kmeans.py:870: FutureWarning: The default value of `n_init` will change from 10 to 'auto' in 1.4. Set the value of `n_init` explicitly to suppress the warning

warnings.warn(
C:\Users\HP\AppData\Roaming\Python\Python310\site-packages\sklearn\cluster_kmeans.py:870: FutureWarning: The default value of `n_init` will change from 10 to 'auto' in 1.4. Set the value of `n_init` explicitly to suppress the warning

warnings.warn(
C:\Users\HP\AppData\Roaming\Python\Python310\site-packages\sklearn\cluster_kmeans.py:870: FutureWarning: The default value of `n_init` will change from 10 to 'auto' in 1.4. Set the value of `n_init` explicitly to suppress the warning

warnings.warn(
C:\Users\HP\AppData\Roaming\Python\Python310\site-packages\sklearn\cluster_kmeans.py:870: FutureWarning: The default value of `n_init` will change from 10 to 'auto' in 1.4. Set the value of `n_init` explicitly to suppress the warning


warnings.warn(
C:\Users\HP\AppData\Roaming\Python\Python310\site-packages\sklearn\cluster_kmeans.py:870: FutureWarning: The default value of `n_init` will change from 10 to 'auto' in 1.4. Set the value of `n_init` explicitly to suppress the warning

warnings.warn(
C:\Users\HP\AppData\Roaming\Python\Python310\site-packages\sklearn\cluster_kmeans.py:870: FutureWarning: The default value of `n_init` will change from 10 to 'auto' in 1.4. Set the value of `n_init` explicitly to suppress the warning


```
Out[24]: [38840.72314431604,  
          10558.825329634628,  
          5645.132218476091,  
          2521.859262993656,  
          1614.5937582632423,  
          1033.4314152361628,  
          817.5346085477312,  
          608.4293370428608,  
          473.7633327357144]
```

```
In [25]: plt.plot(k_rng,sse)  
plt.xlabel("k")  
plt.ylabel("sum of squared Error")
```

```
Out[25]: Text(0, 0.5, 'sum of squared Error')
```

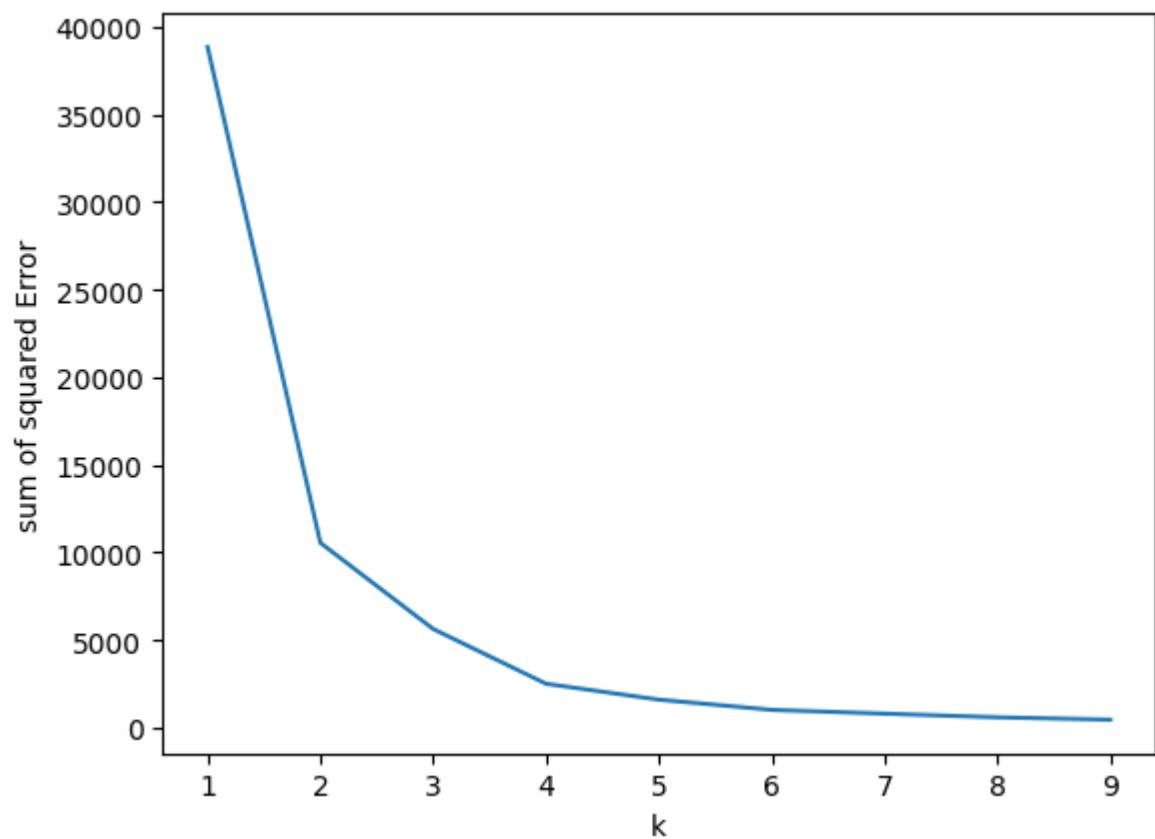

```
In [ ]:
```