

# LOGISTIC REGRESSION

## PROBLEM STATEMENT: TO PREDICT AND ANALYZE WHICH GENDER HAS A HIGH CHANCE OF SURVIVAL AT THE TIME OF DISASTER

```
In [1]: import numpy as np
import pandas as pd
from sklearn import preprocessing
import matplotlib.pyplot as plt
import seaborn as sns
sns.set(style="white")
sns.set(style="whitegrid",color_codes=True)
import warnings
warnings.simplefilter(action='ignore')
```

```
In [2]: train_df=pd.read_csv(r"C:\Users\91720\Downloads\train.gender_submission.csv")
train_df
```

Out[2]:

	PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked
0	1	0	3	Braund, Mr. Owen Harris	male	22.0	1	0	A/5 21171	7.2500	NaN	S
1	2	1	1	Cumings, Mrs. John Bradley (Florence Briggs Th...	female	38.0	1	0	PC 17599	71.2833	C85	C
2	3	1	3	Heikkinen, Miss. Laina	female	26.0	0	0	STON/O2. 3101282	7.9250	NaN	S
3	4	1	1	Futrelle, Mrs. Jacques Heath (Lily May Peel)	female	35.0	1	0	113803	53.1000	C123	S
4	5	0	3	Allen, Mr. William Henry	male	35.0	0	0	373450	8.0500	NaN	S
...	...	...	...	...	...	...	...	...	...	...	...	...
886	887	0	2	Montvila, Rev. Juozas	male	27.0	0	0	211536	13.0000	NaN	S
887	888	1	1	Graham, Miss. Margaret Edith	female	19.0	0	0	112053	30.0000	B42	S
888	889	0	3	Johnston, Miss. Catherine Helen "Carrie"	female	NaN	1	2	W./C. 6607	23.4500	NaN	S
889	890	1	1	Behr, Mr. Karl Howell	male	26.0	0	0	111369	30.0000	C148	C
890	891	0	3	Dooley, Mr. Patrick	male	32.0	0	0	370376	7.7500	NaN	Q

891 rows × 12 columns

```
In [3]: test_df=pd.read_csv(r"C:\Users\91720\Downloads\test.gender_submission.csv")
test_df
```

Out[3]:

	PassengerId	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked
0	892	3	Kelly, Mr. James	male	34.5	0	0	330911	7.8292	NaN	Q
1	893	3	Wilkes, Mrs. James (Ellen Needs)	female	47.0	1	0	363272	7.0000	NaN	S
2	894	2	Myles, Mr. Thomas Francis	male	62.0	0	0	240276	9.6875	NaN	Q
3	895	3	Wirz, Mr. Albert	male	27.0	0	0	315154	8.6625	NaN	S
4	896	3	Hirvonen, Mrs. Alexander (Helga E Lindqvist)	female	22.0	1	1	3101298	12.2875	NaN	S
...	...	...	...	...	...	...	...	...	...	...	...
413	1305	3	Spector, Mr. Woolf	male	NaN	0	0	A.5. 3236	8.0500	NaN	S
414	1306	1	Oliva y Ocana, Dona. Fermina	female	39.0	0	0	PC 17758	108.9000	C105	C
415	1307	3	Saether, Mr. Simon Sivertsen	male	38.5	0	0	SOTON/O.Q. 3101262	7.2500	NaN	S
416	1308	3	Ware, Mr. Frederick	male	NaN	0	0	359309	8.0500	NaN	S
417	1309	3	Peter, Master. Michael J	male	NaN	1	1	2668	22.3583	NaN	C

418 rows × 11 columns

```
In [4]: train_df.head()
```

Out[4]:

	PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked
0	1	0	3	Braund, Mr. Owen Harris	male	22.0	1	0	A/5 21171	7.2500	NaN	S
1	2	1	1	Cumings, Mrs. John Bradley (Florence Briggs Th...	female	38.0	1	0	PC 17599	71.2833	C85	C
2	3	1	3	Heikkinen, Miss. Laina	female	26.0	0	0	STON/O2. 3101282	7.9250	NaN	S
3	4	1	1	Futrelle, Mrs. Jacques Heath (Lily May Peel)	female	35.0	1	0	113803	53.1000	C123	S
4	5	0	3	Allen, Mr. William Henry	male	35.0	0	0	373450	8.0500	NaN	S

```
In [5]: train_df.shape
```

Out[5]: (891, 12)

```
In [6]: test_df.head()
```

Out[6]:

	PassengerId	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked
0	892	3	Kelly, Mr. James	male	34.5	0	0	330911	7.8292	NaN	Q
1	893	3	Wilkes, Mrs. James (Ellen Needs)	female	47.0	1	0	363272	7.0000	NaN	S
2	894	2	Myles, Mr. Thomas Francis	male	62.0	0	0	240276	9.6875	NaN	Q
3	895	3	Wirz, Mr. Albert	male	27.0	0	0	315154	8.6625	NaN	S
4	896	3	Hirvonen, Mrs. Alexander (Helga E Lindqvist)	female	22.0	1	1	3101298	12.2875	NaN	S

```
In [7]: test_df.shape
```

Out[7]: (418, 11)

```
In [8]: train_df.describe()
```

Out[8]:

	PassengerId	Survived	Pclass	Age	SibSp	Parch	Fare
count	891.000000	891.000000	891.000000	714.000000	891.000000	891.000000	891.000000
mean	446.000000	0.383838	2.308642	29.699118	0.523008	0.381594	32.204208
std	257.353842	0.486592	0.836071	14.526497	1.102743	0.806057	49.693429
min	1.000000	0.000000	1.000000	0.420000	0.000000	0.000000	0.000000
25%	223.500000	0.000000	2.000000	20.125000	0.000000	0.000000	7.910400
50%	446.000000	0.000000	3.000000	28.000000	0.000000	0.000000	14.454200
75%	668.500000	1.000000	3.000000	38.000000	1.000000	0.000000	31.000000
max	891.000000	1.000000	3.000000	80.000000	8.000000	6.000000	512.329200

```
In [9]: train_df.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 891 entries, 0 to 890
Data columns (total 12 columns):
#   Column      Non-Null Count  Dtype
---  -
0   PassengerId  891 non-null    int64
1   Survived     891 non-null    int64
2   Pclass       891 non-null    int64
3   Name         891 non-null    object
4   Sex          891 non-null    object
5   Age          714 non-null    float64
6   SibSp        891 non-null    int64
7   Parch        891 non-null    int64
8   Ticket       891 non-null    object
9   Fare         891 non-null    float64
10  Cabin        204 non-null    object
11  Embarked     889 non-null    object
dtypes: float64(2), int64(5), object(5)
memory usage: 83.7+ KB
```

```
In [10]: test_df.describe()
```

Out[10]:

	PassengerId	Pclass	Age	SibSp	Parch	Fare
count	418.000000	418.000000	332.000000	418.000000	418.000000	417.000000
mean	1100.500000	2.265550	30.272590	0.447368	0.392344	35.627188
std	120.810458	0.841838	14.181209	0.896760	0.981429	55.907576
min	892.000000	1.000000	0.170000	0.000000	0.000000	0.000000
25%	996.250000	1.000000	21.000000	0.000000	0.000000	7.895800
50%	1100.500000	3.000000	27.000000	0.000000	0.000000	14.454200
75%	1204.750000	3.000000	39.000000	1.000000	0.000000	31.500000
max	1309.000000	3.000000	76.000000	8.000000	9.000000	512.329200

```
In [11]: test_df.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 418 entries, 0 to 417
Data columns (total 11 columns):
#   Column          Non-Null Count  Dtype
---  -
0   PassengerId     418 non-null   int64
1   Pclass          418 non-null   int64
2   Name            418 non-null   object
3   Sex             418 non-null   object
4   Age             332 non-null   float64
5   SibSp           418 non-null   int64
6   Parch           418 non-null   int64
7   Ticket          418 non-null   object
8   Fare            417 non-null   float64
9   Cabin           91 non-null    object
10  Embarked        418 non-null   object
dtypes: float64(2), int64(4), object(5)
memory usage: 36.1+ KB
```

## TO FIND MISSION VALUES

```
In [12]: test_df.isnull().sum()
```

Out[12]:

PassengerId	0
Pclass	0
Name	0
Sex	0
Age	86
SibSp	0
Parch	0
Ticket	0
Fare	1
Cabin	327
Embarked	0

dtype: int64


```
In [13]: train_df.isnull().sum()
```

Out[13]:

PassengerId	0
Survived	0
Pclass	0
Name	0
Sex	0
Age	177
SibSp	0
Parch	0
Ticket	0
Fare	0
Cabin	687
Embarked	2

dtype: int64

```
In [14]: ax=train_df['Age'].hist(bins=15,density=True,stacked=True,color='cyan',alpha=0.6)
train_df['Age'].plot(kind='density',color='teal')
ax.set(xlabel='Age')
plt.xlim(-10,85)
plt.show()
```

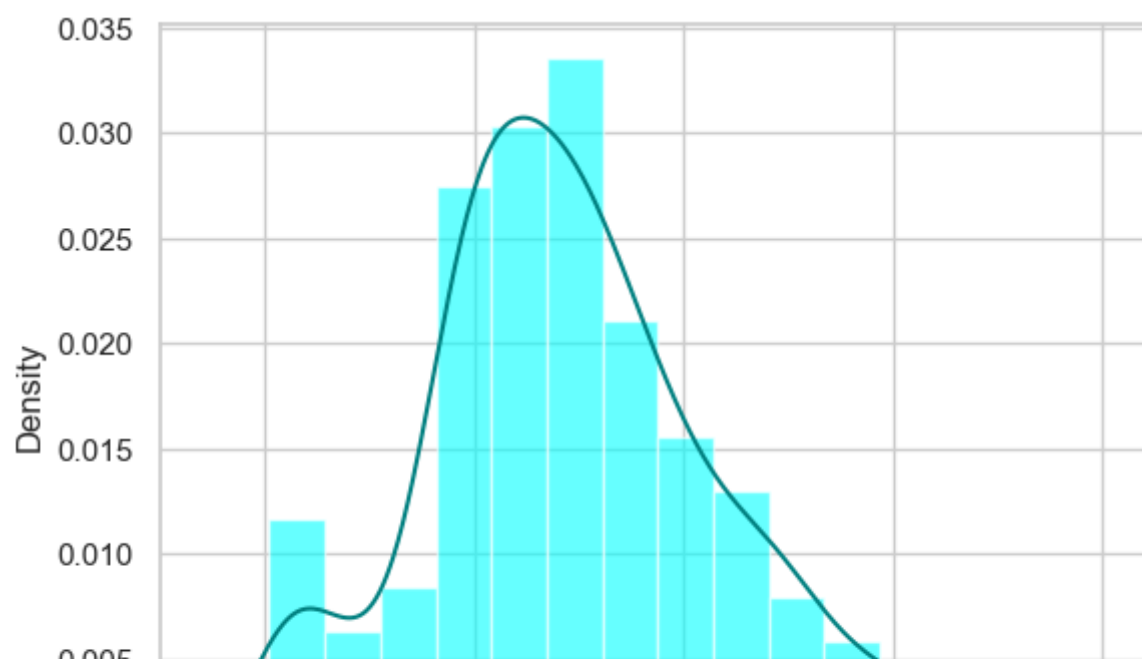

```
In [15]: print(train_df['Age'].mean(skipna=True))
print(train_df['Age'].median(skipna=True))
```

```
29.69911764705882
28.0
```

```
In [16]: print((train_df['Cabin'].isnull().sum()/train_df.shape[0])*100)
```

```
77.10437710437711
```


```
In [17]: print((train_df['Embarked'].isnull().sum()/train_df.shape[0])*100)
```

```
0.22446689113355783
```

```
In [18]: print('Boarded passengers grouped by port of embarkation(c=Cherbourg,q=Queenstown,s=Southampton):')
print(train_df['Embarked'].value_counts())
sns.countplot(x='Embarked',data=train_df,palette='Set2')
plt.show()
```

```
Boarded passengers grouped by port of embarkation(c=Cherbourg,q=Queenstown,s=Southampton):
```

```
Embarked
S    644
C    168
Q     77
Name: count, dtype: int64
```

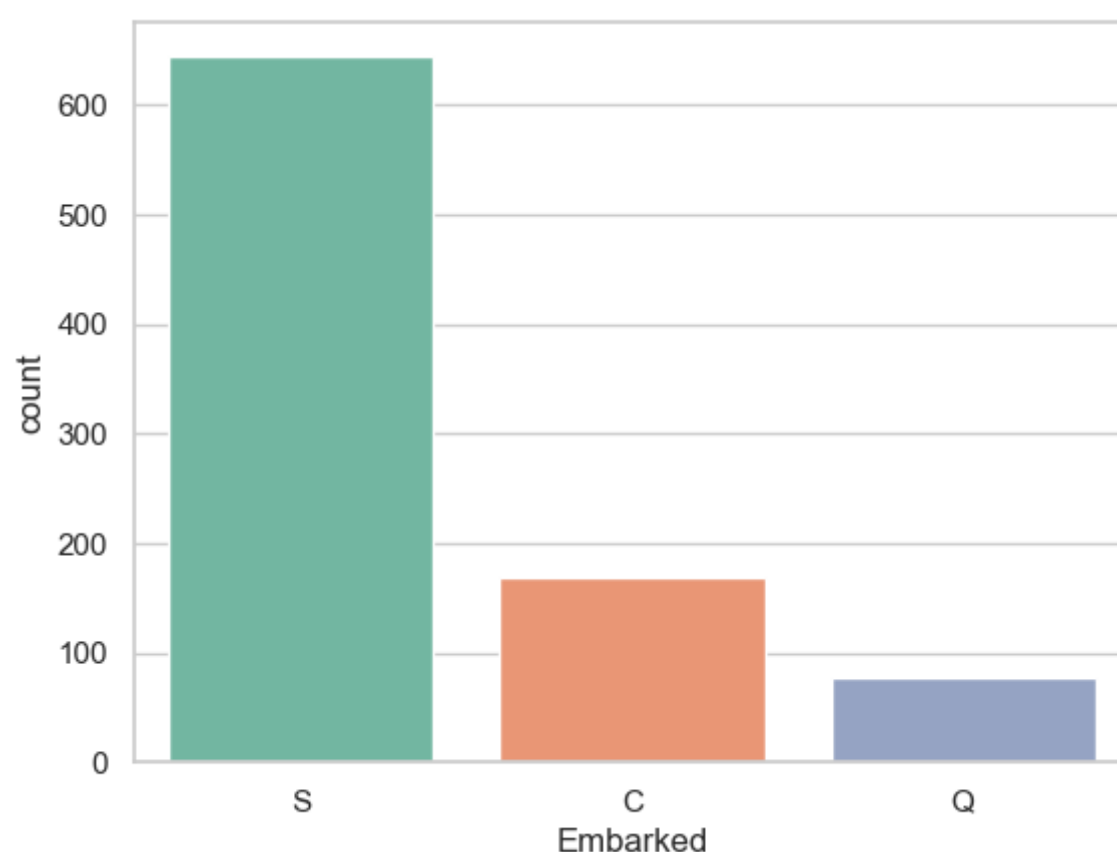

```
In [19]: print(train_df['Embarked'].value_counts().idxmax())
```

```
S
```

```
In [20]: train_data=train_df.copy()
train_data['Age'].fillna(train_df["Age"].median(skipna=True),inplace=True)
train_data["Embarked"].fillna(train_df['Embarked'].value_counts().idxmax(),inplace=True)
train_data.drop('Cabin',axis=1,inplace=True)
```

```
In [21]: train_data.isnull().sum()
```


```
Out[21]: PassengerId    0
Survived      0
Pclass        0
Name          0
Sex           0
Age           0
SibSp         0
Parch         0
Ticket        0
Fare          0
Embarked      0
dtype: int64
```

```
In [22]: train_data.head()
```

```
Out[22]:
```

	PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Embarked
0	1	0	3	Braund, Mr. Owen Harris	male	22.0	1	0	A/5 21171	7.2500	S
1	2	1	1	Cumings, Mrs. John Bradley (Florence Briggs Th...	female	38.0	1	0	PC 17599	71.2833	C
2	3	1	3	Heikkinen, Miss. Laina	female	26.0	0	0	STON/O2. 3101282	7.9250	S
3	4	1	1	Futrelle, Mrs. Jacques Heath (Lily May Peel)	female	35.0	1	0	113803	53.1000	S
4	5	0	3	Allen, Mr. William Henry	male	35.0	0	0	373450	8.0500	S

```
In [23]: plt.figure(figsize=(15,8))
ax=train_df["Age"].hist(bins=15,density=True,stacked=True,color='teal',alpha=0.6)
train_df["Age"].plot(kind='density',color='teal')
ax=train_data["Age"].hist(bins=15,density=True,stacked=True,color='orange',alpha=0.5)
train_data["Age"].plot(kind='density',color='orange')
ax.legend(['Raw Age','Adjusted Age'])
ax.set(xlabel='Age')
plt.xlim(-10,85)
plt.show()
```

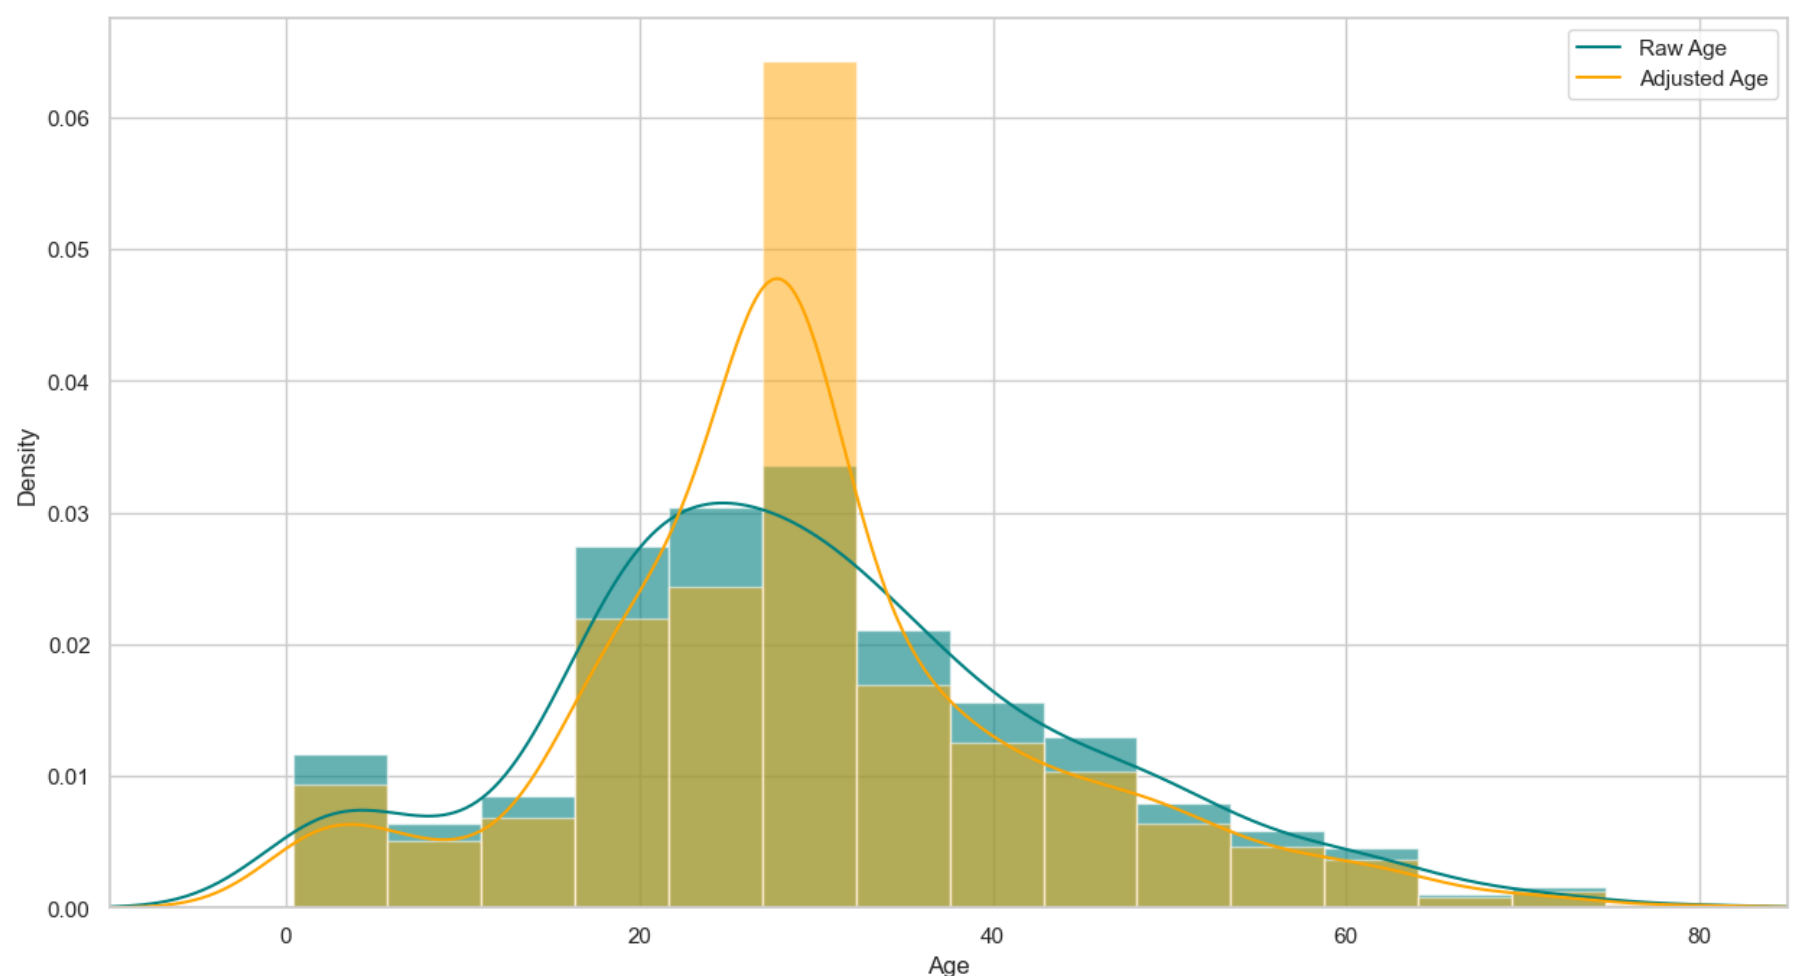

```
In [27]: train_data['TravelAlone']=np.where((train_data["SibSp"]+train_data["Parch"])>0,0,1)
train_data.drop('SibSp',axis=1,inplace=True)
train_data.drop('Parch',axis=1,inplace=True)
```

```
In [28]: training=pd.get_dummies(train_data, columns=["Pclass","Embarked","Sex"])
training.drop('Sex_female', axis=1, inplace=True)
training.drop('PassengerId', axis=1, inplace=True)
training.drop('Name', axis=1, inplace=True)
training.drop('Ticket', axis=1, inplace=True)
final_train = training
final_train.head()
```

```
Out[28]:
```

	Survived	Age	Fare	TravelAlone	Pclass_1	Pclass_2	Pclass_3	Embarked_C	Embarked_Q	Embarked_S	Sex_male
0	0	22.0	7.2500	0	False	False	True	False	False	True	True
1	1	38.0	71.2833	0	True	False	False	True	False	False	False
2	1	26.0	7.9250	1	False	False	True	False	False	True	False
3	1	35.0	53.1000	0	True	False	False	False	False	True	False
4	0	35.0	8.0500	1	False	False	True	False	False	True	True

```
In [29]: test_df.isnull().sum()
```

```
Out[29]: PassengerId      0
Pclass      0
Name      0
Sex      0
Age      86
SibSp      0
Parch      0
Ticket      0
Fare      1
Cabin     327
Embarked      0
dtype: int64
```

```
In [30]: test_data = test_df.copy()
test_data["Age"].fillna(train_df["Age"].median(skipna=True), inplace=True)
test_data["Fare"].fillna(train_df["Fare"].median(skipna=True), inplace=True)
test_data.drop('Cabin', axis=1, inplace=True)
test_data['TravelAlone']=np.where((test_data["SibSp"]+test_data["Parch"])>0, 0, 1)
test_data.drop('SibSp', axis=1, inplace=True)
test_data.drop('Parch', axis=1, inplace=True)
testing = pd.get_dummies(test_data, columns=["Pclass","Embarked","Sex"])
testing.drop('Sex_female', axis=1, inplace=True)
testing.drop('PassengerId', axis=1, inplace=True)
testing.drop('Name', axis=1, inplace=True)
testing.drop('Ticket', axis=1, inplace=True)
final_test = testing
final_test.head()
```


```
Out[30]:
```

	Age	Fare	TravelAlone	Pclass_1	Pclass_2	Pclass_3	Embarked_C	Embarked_Q	Embarked_S	Sex_male
0	34.5	7.8292	1	False	False	True	False	True	False	True
1	47.0	7.0000	0	False	False	True	False	False	True	False
2	62.0	9.6875	1	False	True	False	False	True	False	True
3	27.0	8.6625	1	False	False	True	False	False	True	True
4	22.0	12.2875	0	False	False	True	False	False	True	False


## EXPLORATORY DATA ANALYSIS

```
In [31]: plt.figure(figsize=(15,8))
ax = sns.kdeplot(final_train["Age"][final_train.Survived == 1], color="darkturquoise",shade=True)
sns.kdeplot(final_train["Age"][final_train.Survived == 0], color="lightcoral", shade=True)
plt.legend(['Survived', 'Died'])
plt.title('Density Plot of Age for Surviving Population and Deceased Population')
```

Out[31]: Text(0.5, 1.0, 'Density Plot of Age for Surviving Population and Deceased Population')

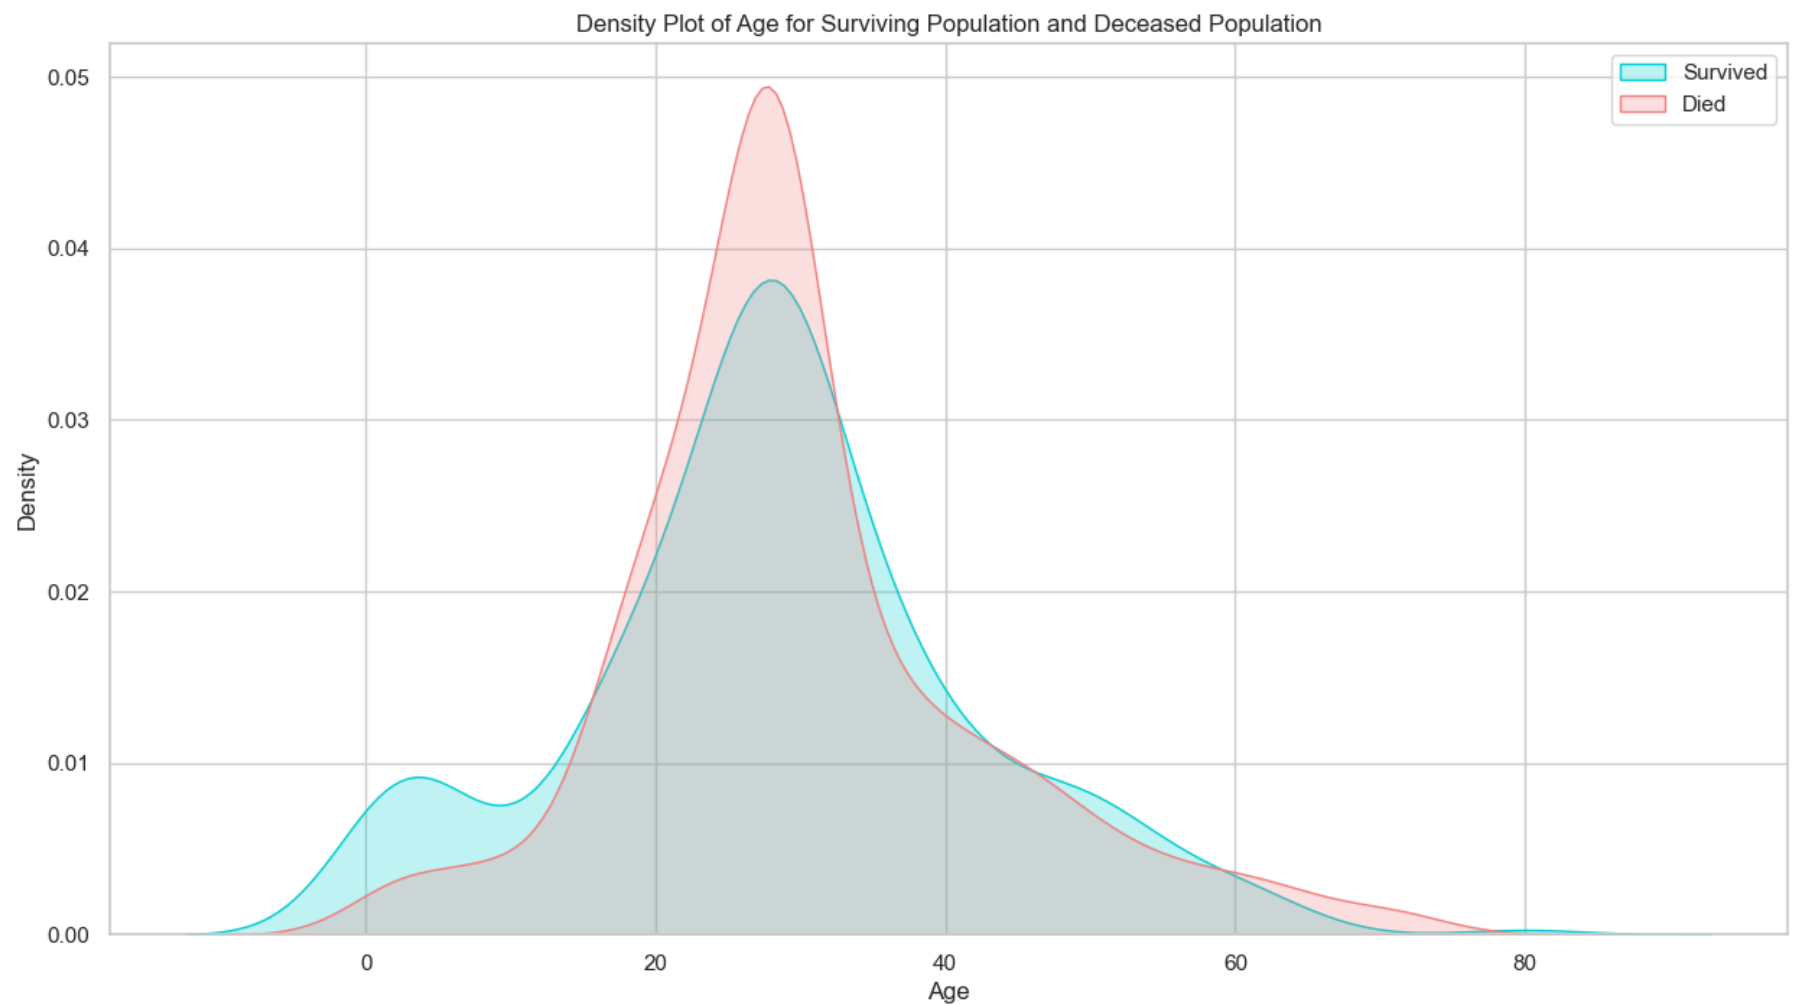

```
In [35]: plt.figure(figsize=(20,8))
avg_survival_byage = final_train[["Age", "Survived"]].groupby(['Age'], as_index=False).mean()
g = sns.barplot(x='Age', y='Survived', data=avg_survival_byage, color="LightSeaGreen")
plt.show()
```

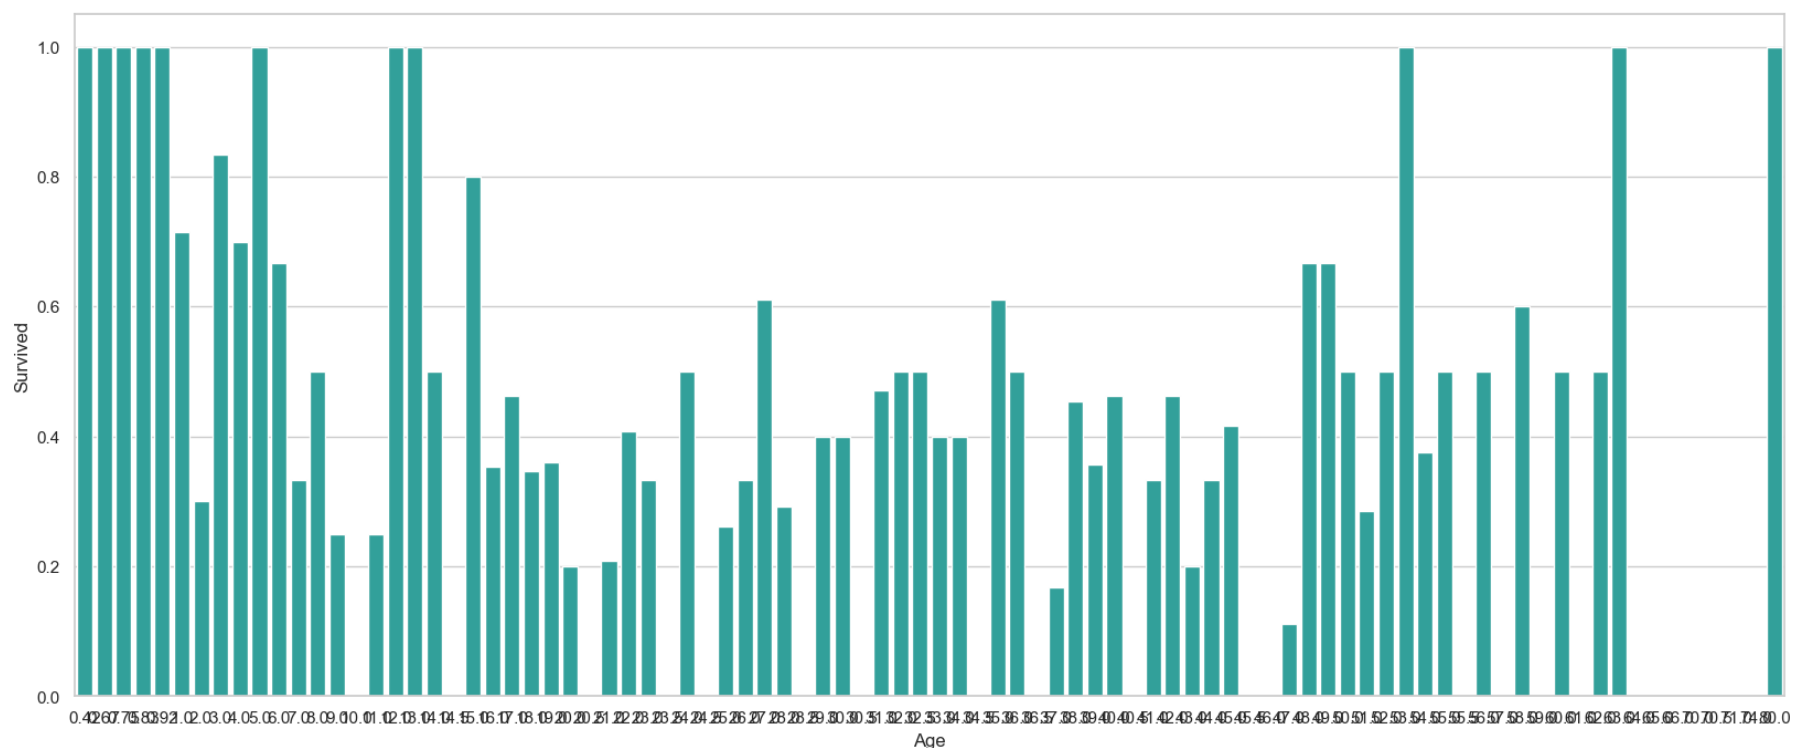

```
In [36]: final_train['IsMinor']=np.where(final_train['Age']<=16, 1, 0)
print(final_train['IsMinor'])
```


```
0      0
1      0
2      0
3      0
4      0
..
886    0
887    0
888    0
889    0
890    0
Name: IsMinor, Length: 891, dtype: int32
```

```
In [37]: final_test['IsMinor']=np.where(final_test['Age']<=16, 1, 0)
print(final_test['IsMinor'])
```

```
0      0
1      0
2      0
3      0
4      0
..
413    0
414    0
415    0
416    0
417    0
Name: IsMinor, Length: 418, dtype: int32
```

```
In [38]: sns.barplot(x='TravelAlone', y='Survived', data=final_train, color="mediumturquoise")
```

```
Out[38]: <Axes: xlabel='TravelAlone', ylabel='Survived'>
```

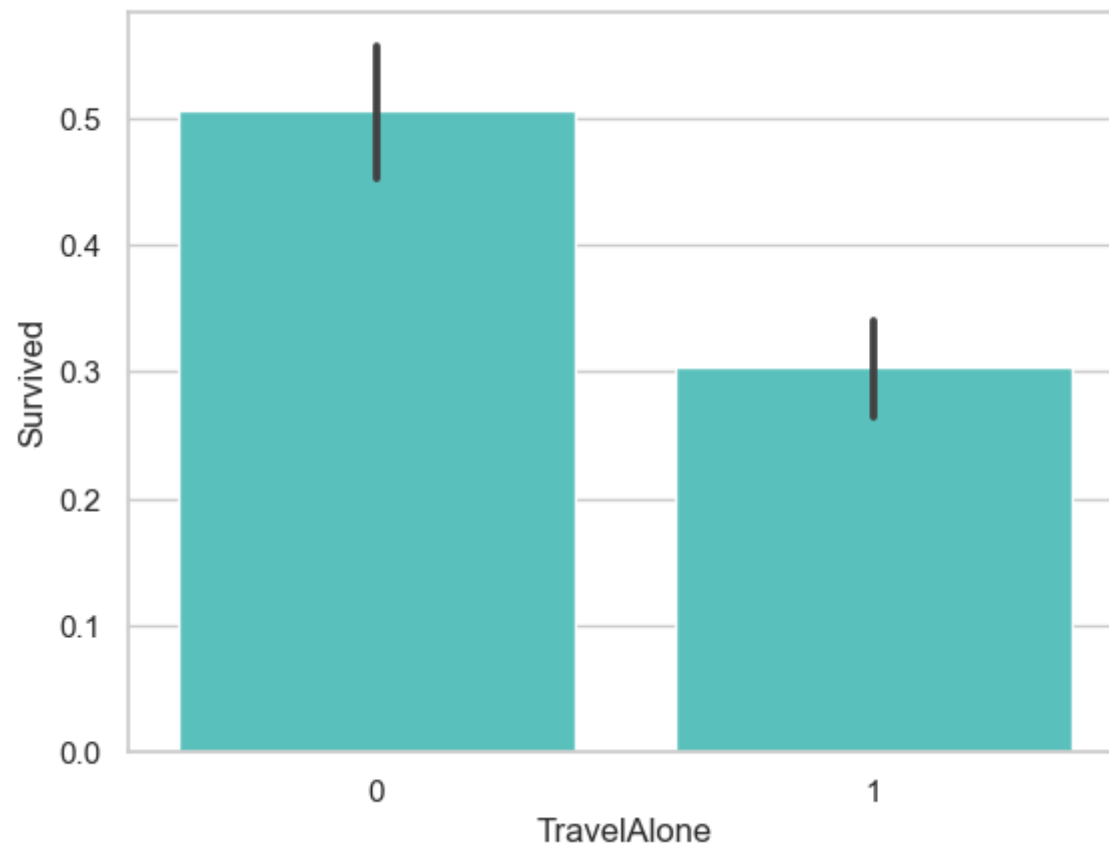

```
In [39]: import seaborn as sns
import matplotlib.pyplot as plt
sns.barplot(x='Sex',y='Survived',data=train_df,color='aquamarine')
plt.show()
```

