

Learning Interpretable Tumor Microenvironment Representations by Fitting Pan-Cancer Cell State–Niche Correlation

Xiao Xiao^{*1}, Jiashu He², Shiyang Zhang¹, and Meiyi Mao³

¹Yale University

²University of Pennsylvania

³University of Michigan, Ann Arbor

Abstract

In the tumor microenvironment, cell’s state is influenced by cell–cell interactions (CCIs) with neighboring cells in its niches. Identifying dysregulated CCIs that are associated with pathogenic process pinpoints targets for drug discovery. Imaging-based spatial transcriptomics and single-cell RNA sequencing provide, respectively, single-cell spatial information and transcriptome-wide measurements needed to study CCIs, but neither modality provides both. Existing spatial transcriptomics foundation models also cannot effectively learn from spatially resolved single-cell data with full-transcriptome coverage, explicitly infer the CCI mechanisms driving cell state–niche associations, or interpretable enough to support direct biological interpretations. Here, we present GITIII-scale, a hierarchical, interpretable pan-cancer spatial transcriptomics foundation model for TME representation learning that investigates cell state–niche associations and their underlying ligand–receptor (LR) signaling pathways. GITIII-scale uses transformers to model interactions between pairs of cells at defined spatial distances, an interpretable single-layer graph transformer without a feed-forward network to decompose how each gene in a receiver cell is influenced by each neighboring sender cell, and a graph transformer to generate cellular-neighborhood embeddings. Trained on our assembled pan-cancer database of specimen-matched scRNA-seq and imaging-based spatial transcriptomics datasets, GITIII-scale generated TME embeddings that recovered niche-associated state changes more accurately than existing spatial transcriptomics foundation models in cancer types unseen during training. A case study of an unseen breast cancer dataset further demonstrated the model’s interpretability by identifying potentially drug-targetable LR pathways associated with endothelial overgrowth and tumorigenesis.

1 Introduction

Cells coordinate their behavior through cell–cell interactions within their local microenvironment. A CCI depends jointly on ligand–receptor (LR) signaling, the physical distance between the two cells, and the downstream regulatory network of the receiver, producing a context-dependent mapping from a cell’s niche (neighboring cells) to its state. We refer to this mapping as the *cell state–niche correlation*: how much of a cell’s deviation from the mean expression level of its cell type is attributable to the cells around it. In tumors this quantity is crucial for disease: different arrangements of malignant, immune, stromal, and endothelial cells induce distinct pathological programs (Hanahan, 2022; de Visser and Joyce, 2023). For instance, tumor-derived vascular endothelial growth factor (VEGF) acts on receptors on neighboring endothelial cells

^{*}Corresponding author.

to drive their proliferation and sprouting, and the resulting angiogenesis supplies the growing tumor (Ferrara et al., 2003).

Quantifying cell state–niche correlations and identifying the specific LR pathways that drive them are therefore crucial for understanding cancer dynamics and developing targeted therapies. For example, the endothelial overgrowth state was found to correlate with malignant cells in the niche through VEGF signaling, which led to the development of VEGF-targeted drugs such as bevacizumab (Ferrara et al., 2004) that suppress tumor growth by inhibiting tumorigenesis induced by VEGF signaling. Learning cell state–niche correlation across cancer types can further distinguish conserved microenvironmental programs from cancer-specific interactions, prioritize robust therapeutic targets, support drug repurposing, and reveal the cellular contexts in which a target is most likely to be effective.

Comprehensively modeling the tumor microenvironment (TME) requires spatial context and transcriptome-wide measurement at once, and no single assay provides both. Single-cell RNA sequencing (scRNA-seq) reads full transcriptomes but dissociates the tissue and discards position. Imaging-based spatial transcriptomics (IST) preserves single-cell position but measures a targeted panel — 312 to 6,175 genes across the platforms used here (Chen et al., 2015; Janesick et al., 2023). Neither technique alone captures both the niche and the state it induces — but profiling the same specimen with both does, which is the resource we build here, with the two modalities integrated by SpaIM (Li et al., 2025).

Spatial transcriptomics foundation models (Blampey et al., 2025; Tejada-Lapuerta et al., 2025; Madhu et al., 2025; Wang et al., 2025, 2026; Birk et al., 2026) have recently demonstrated that large-scale pre-training captures transferable patterns of tissue organization and cellular context. Their objectives, however, target tissue architecture, spatial domains, cell identity, or expression similarity, none of which reveals cell state–niche correlation: different cell types may occur within the same domain, and cells with different niches and different states may also occur within the same domain. A model can therefore be perfectly domain-discriminative while carrying no information about how the niche shifted the receiver’s state, and its TME representation cannot be decomposed into directional CCIs or the pathways that would make it useful for target discovery. Existing foundation models are also trained on data that carries partial biological measurement: either on spot-level data, where several cells per spot blur the correlation, or on IST data without transcriptome-wide measurement, so only a panel-sized slice of the biology is visible (Hu et al., 2021; Long et al., 2023; Madhu et al., 2025; Blampey et al., 2025) — a dilemma that paired IST and scRNA-seq on one specimen removes. Finally, previous deep learning-based CCI analysis methods such as (Xiao et al., 2025; Li et al., 2023a; Fischer et al., 2022) are designed to be dataset-specific models and have not being scaled up or trained in a large corpus to learn generalizable CCI features.

To this end, we introduce GITIII-scale (graph inductive bias transformer for intercellular interaction investigation—scale), a hierarchical interpretable pan-cancer foundation model for TME representation learning to investigate cell state–niche correlation and its underlying LR pathways (Figure 1). At the first level, sender and receiver cells and intercellular distances are tokenized; the cross-attention module then models directional interaction, and an interpretable single-layer graph inductive-bias transformer takes the interaction tokens and estimates the influence of each sender cell on each gene of the receiver. These influences are additive, so the summed contributions of a receiver’s senders constitute its predicted state and every prediction decomposes exactly by sender and by gene. At the second level, a multi-layer graph transformer takes the resulting sender-receiver pair interaction representations to model higher-order cell state–niche correlation and produces an embedding of the niche as a whole. GITIII-scale is self-supervised pretrained on biological sample-matched scRNA-seq and IST data comprising 4,254,069 spatial cells, imputed to a common 20,000-gene vocabulary (Section 2.5), and is evaluated on held-out cancer types and platforms to test whether its TME embeddings recover cell state–niche correlation under biological distribution shift. Overall, we propose GITIII-scale and make the following contributions:

- **Foundation model for CCI representation learning in TME.** GITIII-scale is the first interpretable

foundation model to learn how cell states are influenced by a cell’s niche, enabling CCI modeling and representation learning. We assemble and release a pan-cancer corpus of sample-matched imaging-based spatial transcriptomics and scRNA-seq from the same biological specimens, enabling the model to learn richer information from imputed full transcriptomics at single-cell resolution compared to previous models that either lose single-cell resolution or full transcriptomics measurement.

- **Pan-cancer pretraining for cell state–niche representations.** Pretrained to model how cellular niches shape receiver-cell states across cancer types, GITIII-scale can generate TME embeddings that recover niche-associated state changes more accurately than existing spatial transcriptomics foundation models on cancer types unseen during training.
- **Interpretable foundation model for biological findings.** Our model’s interpretable architecture decomposes each predicted receiver-cell state into gene-level contributions from individual neighboring cells. This goes beyond conventional CCI analysis, which typically identifies candidate ligand–receptor events but does not model their downstream transcriptional consequences at single-cell level. GITIII-scale also enables statistical testing of which ligand–receptor axes and which cell types are associated with specific gene programs in a receiver cell type, supporting potential biological discovery and therapeutic-target prioritization.

2 Method

2.1 Data preprocessing

Cell type / cell state split and graph construction. Let μ_c denote the mean expression profile of cell type c within a sample. We decompose each measured profile x_i into a cell type component $\mu_{t(i)}$, representing the average expression for cells of the same cell type, and a cell state component z_i , representing the cell’s deviation from its cell type average level,

$$x_i = \mu_{t(i)} + z_i, \quad z_i = x_i - \mu_{t(i)}, \quad (1)$$

We then construct a k -nearest-neighbor graph and a Delaunay triangulation over the cell centroids P . The Delaunay triangulation indicates the neighboring cells that directly contact with the central cell. The **cellular neighborhood** $\mathcal{N}_i$ of a receiver cell i comprises itself and its $k = 49$ nearest cells together with their types, states, and relative geometry, and the Delaunay graph identifies which of them are in direct physical contact with i .

2.2 Method training and evaluation

Same-type masking. Neighboring cells of the same type tend to be in similar states simply because they share similar niche features, and a model given access to neighboring cells of the same cell type as the central cell to predict could reach high accuracy by copying them, thus learning nothing about cell–cell communication (Xiao et al., 2025). As a result, for cells within $\mathcal{N}_i$ that share the receiver’s type, including the receiver itself, their expressions are masked as μ_t with their state removed in training.

Tokenizing cells and distances. Treating genes as tokens, as language-inspired single-cell models do, yields sequences of tens of thousands of elements per cell and makes a neighborhood of fifty cells computationally prohibitive; it also places the attention mechanism between genes, when the relationships of interest here are between cells. GITIII-scale therefore treats *cells* as tokens: two multi-layer perceptrons (MLPs), one for sender cells and one for the receiver cell, map a G -dimensional gene expression profile to $T = 32$

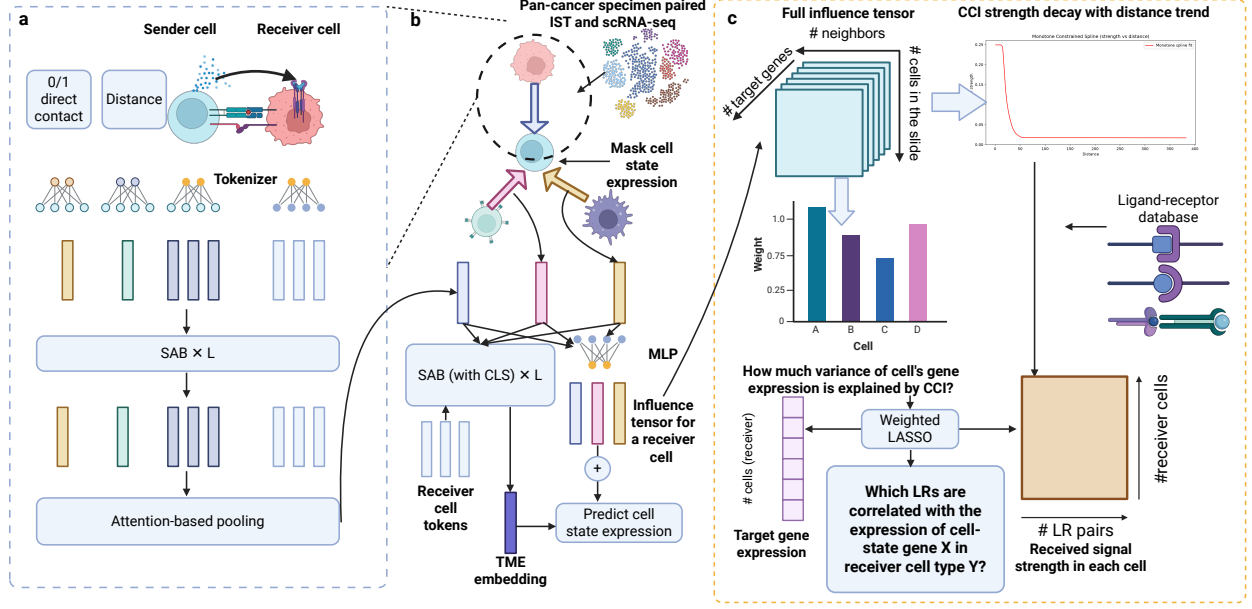


Figure 1: GITIII-scale model architecture. **a.** GITIII-scale treats the gene expression of receiver and sender cells, the distance, and direct contact features between one sender and one receiver cell as tokens, and use transformer blocks to model them. **b.** GITIII-scale utilizes a single-layer graph transformer block without feed-forward network to retain interpretability and estimate additive CCI's influence from different sender cells to the receiver cell, then use a multi-layer transformer block to generate TME embedding and estimate higher-order CCI's influence from different sender cells to the receiver cell. **c.** The interpretability analysis pipeline of GITIII-scale. A LASSO regression is used to identify the LR pair(s) whose signaling strength is correlated with target gene expression in receiver cells. LR signaling strength is estimated by modeling the decay of interaction strength with distance and integrating information from the LR database, with receiver cells weighted by their cell-state prediction accuracy in the regression.

tokens of width $d = 256$, so that a cell is represented differently depending on whether it is sending or receiving:

$$\mathbf{S}_j = \text{reshape}(\text{MLP}_{\text{snd}}(\mathbf{x}_j)), \quad \mathbf{R}_i = \text{reshape}(\text{MLP}_{\text{rec}}(\mathbf{x}_i)) \in \mathbb{R}^{T \times d}, \quad T = 32, d = 256. \quad (2)$$

The two roles are kept separate because the biology is asymmetric: the genes that matter for sending signal are ligand genes, while those that matter for receiving it are receptors and downstream regulatory genes, and a shared encoder would not project them to different spaces.

The pairwise spatial distance d_{ij} is expanded into a small set of decay features spanning contact-range to diffusive length scales (Appendix S5) and mapped by an MLP to a single distance token $\mathbf{u}_{ij} \in \mathbb{R}^d$, while a contact token $\mathbf{c}_{ij} \in \mathbb{R}^d$ embeds whether two cells are in direct contact according to the Delaunay triangulation.

The sender cell tokens, distance token, and the direct contact token of one sender-receiver pair are then processed through self-attention blocks (SAB), and the resulting token set is concatenated with the receiver cell tokens and processed by another stack of SABs (Figure 1a). The outputs of the SABs are then pooled by a multi-head cross-attention block (MCAB) (Jaegle et al., 2021), in which $L = 4$ learned latent queries

attend to the tokens and return a fixed-size, permutation-invariant summary that is flattened and projected:

$$\tilde{\mathbf{S}}_{ij} = \text{SAB}([\mathbf{S}_j; \mathbf{u}_{ij}; \mathbf{c}_{ij}]) \in \mathbb{R}^{(T+2) \times d}, \quad (3)$$

$$\mathbf{H}_{ij} = \text{SAB}([\tilde{\mathbf{S}}_{ij}; \mathbf{R}_i; \mathbf{u}_{ij}; \mathbf{c}_{ij}]) \in \mathbb{R}^{(2T+4) \times d}, \quad (4)$$

$$\mathbf{e}_{ij} = W_c \text{flatten}(\text{MCAB}(\mathbf{H}_{ij})), \quad \text{MCAB}(\cdot) \in \mathbb{R}^{L \times d}, \quad \mathbf{e}_{ij} \in \mathbb{R}^{256}, \quad (5)$$

with three SAB blocks at each stage.

2.3 Prediction heads and pretraining

Level one: an interpretable additive graph inductive-bias transformer. Both prediction heads take the sender, receiver, distance, direct contact tokens produced above (Figure 1b) as inputs. For the first head, similar to the interpretability analysis in GITIII (Xiao et al., 2025), two MLPs each map $\mathbf{e}_{ij}$ to a per-gene attention logit and a per-gene value, and attention scores are normalized *across senders, independently for each gene*. Then we multiply the value by attention scores and sum them up to directly predict the cell state expression:

$$\alpha_{ij}^{(g)} = \frac{\exp(W_A(\mathbf{e}_{ij})^{(g)})}{\sum_{j'} \exp(W_A(\mathbf{e}_{ij'})^{(g)})}, \quad I_{ij}^{(g)} = \alpha_{ij}^{(g)} W_V(\mathbf{e}_{ij})^{(g)}, \quad \hat{z}_i^{(1)(g)} = \sum_{j=1}^k I_{ij}^{(g)}. \quad (6)$$

Equation 6 is where the interpretability of the model is established: (1) each entry of the influence tensor $\mathcal{I} \in \mathbb{R}^{N \times k \times G}$, is computed from the features of cells i and j and their distance using a one-layer aggregation, so no multi-layer graph neural network (GNN) can distort it; (2) $\sum_{j=1}^k I_{ij}^{(g)}$ directly predicts the cell-state expression target, which is not distorted by non-linear transform that would destroy interpretability. As a result, each entry $I_{ij}^{(g)}$ states how much of the receiver cell i 's gene g 's predicted cell state (gene expression deviation from its cell type average expression) is attributable to its neighbor j .

Level two: higher-order effects and the TME embedding. Additivity makes the first head interpretable, but also limits it. A sum of influence from all sender cells of a receiver cell cannot express the effect that requires a combination of neighbors, such as a signal that acts only when a second cell type is co-present, or a suppression that happens only in the absence of another type of cell. Rather than sacrifice the additive decomposition, we add a second head that reads the same tokens as the level-one head and makes them attend to each other before pooling:

$$\mathbf{h}_i = \text{flatten}\left(\text{MCAB}\left(\text{SAB}([W_p \mathbf{e}_{i1}, \dots, W_p \mathbf{e}_{ik}; \mathbf{R}_i])\right)\right) \in \mathbb{R}^{L \cdot d} = \mathbb{R}^{1024}, \quad \hat{\mathbf{z}}_i^{(2)} = W_{\text{out}} \mathbf{h}_i, \quad (7)$$

with four SAB blocks. The pooled representation $\mathbf{h}_i$ is the TME embedding.

Self-supervised objective. We wish to know whether a gene's variation across cells in the same cell type is correlated with variation in their neighborhoods. The absolute scale of the cell state expression is largely governed by panel sensitivity and batch effects, which differ across platforms and would make the mean squared error loss reflect assay properties rather than biology. We therefore optimize per-gene Pearson correlation computed *across cells within a gene in the same cell type*, which directly measures cell state–niche correlation. Over a set $\mathcal{B}$ of receiver cells of the same receiver cell type in the same sample,

$$\rho^{(g)} = \text{corr}_{i \in \mathcal{B}}(\hat{z}_i^{(g)}, z_i^{(g)}), \quad \mathcal{L}_{\mathcal{B}} = \sum_g w^{(g)} \left[(1 - \rho^{(g)}) + \lambda \|\hat{\mathbf{z}}^{(g)} - \mathbf{z}^{(g)}\|^2 \right], \quad (8)$$

where the weights $w^{(g)} \propto \text{std}_{i \in \mathcal{B}}(z_i^{(g)})$, normalized to mean one to make genes with more intra-cell-type variance contribute more in the training. The second term is a mean squared error between z -scored predictions and targets with $\lambda = 0.05$ to stabilize the training. The training loss sums Equation 8 over the two heads.

Pretraining. GITIII-scale has 2,296,747,232 ($\sim 2.3\text{B}$) parameters and is pretrained on the 4,254,069 spatial cells of Table S5: 10 samples spanning 4 tumor contexts and 2 imaging platforms. We use AdamW at a constant learning rate of 10^{-4} and batch size 344 for 2 epochs on a single NVIDIA B200 GPU, reshuffling dataset order each epoch, and select the checkpoint with the best macro-averaged validation correlation. The model is trained for 23 hours.

2.4 Pathway attribution from the influence tensor

The influence tensor identifies the cell state of the receiver cell that is related to its niche features, but it does not point out the signaling axis through which the effect was mediated, and related data-driven methods are lacking. Bridging that gap requires external knowledge of ligand–receptor biochemistry, and the following procedure utilizes the curated LR database (Jin et al., 2021; Zhao et al., 2023) to infer which LR is correlated with the influence. Given a receiver cell type c and a target gene g^* , we recover the responsible axes in the following steps (Figure 1c).

(1) Distance scaler. A monotone spline between the estimated influence from a sender cell to a receiver cell targeting one gene and the distance between the sender and the receiver cell is fitted to form the distance scaler $s_{c,g^*}(d)$. It is estimated *separately for each (receiver type, target gene) combination*, because signal strength decay trend is different for the correlated LR targeting each (receiver type, target gene) combination: the LR that influences target gene A in receiver type X may be a contact-dependent program, while the LR that influences target gene B in receiver type Y may be a cytokine-driven program with another distance decay trend. Thus s_{c,g^*} is the model’s own learned interaction range for that specific readout, not a global assumption that fits all of them.

(2) Cell weights. A cell whose cell state expression cannot be explained by the model is likely to carry less information about how CCI influences cell state and may contain more noise, so it should be weighted less in the analysis. We therefore weight each receiver by the fidelity of its own prediction,

$$\omega_i = \exp\left(-|z_i^{(g^*)} - \hat{z}_i^{(g^*)}| / \max_{i'} |z_i^{(g^*)} - \hat{z}_i^{(g^*)}|\right), \quad (9)$$

so that cells whose expression is well explained by their neighbors contribute most.

(3) LR signal strength. For each LR pair (ℓ, r) , we scale the ligand expression of every sender by the distance scaler calculated from the distance between the sender and the receiver cell, then sum them over the receiver cell’s neighboring sender cells, and multiply by the receiver’s own receptor expression to form the received signaling strength by the receiver cell:

$$S_i^{(\ell,r)} = \left(\sum_{j \in \mathcal{N}_i} s_{c,g^*}(d_{ij}) \text{gm}(\mathbf{x}_j^{(\ell)}) \right) \cdot \text{gm}(\mathbf{x}_i^{(r)}), \quad (10)$$

where $\text{gm}(\cdot)$ denotes the geometric mean over the subunits of a multimeric ligand or receptor, so that a complex scores highly only when all of its components are present. The product form encodes the requirement that signaling needs both an available ligand nearby and a receptor on the receiving cell. The LR pairs are extracted from CellChat (Jin et al., 2021) and NeuronChat (Zhao et al., 2023).

(4) Sparse selection. The measured target $z^{(g^*)}$ is regressed on all candidate $S^{(\ell,r)}$ by weighted LASSO, with the penalty α selected by cross-validated mean squared error and cells weighted by ω_i . Sparsity is essential here: several thousand LR pairs are tested against one gene, many of them collinear through

shared subunits, and an unregularized fit would distribute the signal across all of them. Axes with nonzero coefficients are retained and ranked by coefficient magnitude to select the most correlated LR.

(5) Stability. The selection is repeated five times, and only axes that are top-ranked across all repeats are reported.

2.5 Pretraining corpus

Table S5 of the supplementary material summarizes the samples used, together with their per-sample accessions and download links: four liver (HCC/iCCA) CosMx samples (Liu et al., 2026) and matched CosMx/Xenium pairs of colon adenocarcinoma, hepatocellular carcinoma, and ovarian cancer (Ren et al., 2025). Cell type annotations are taken from each dataset’s original study release. Every IST sample is paired with scRNA-seq from the same specimen, which is what makes it possible to impute the measured panel onto the shared 20,000-gene vocabulary. The scRNA-seq and IST integration and gene imputation are performed with the state-of-the-art SpaIM (Li et al., 2025) model. The breast sample used in the case study in Section 3.5 is held out from pretraining.

3 Experiments

3.1 Dataset

We evaluate on three held-out samples with specimen matched IST and scRNA-seq data spanning two platforms and three cancer types: the breast cancer Xenium FFPE sample (Janesick et al., 2023) (103,209 cells, a 312-gene panel, 18 annotated cell types), and colorectal carcinoma and melanoma MERFISH samples (Zhang et al., 2026). All three are withheld from GITIII-scale pretraining in their entirety: neither breast cancer nor the melanoma cancer type appears in the training corpus, and the MERFISH platform is also absent from the training data. The comparison on the breast cancer dataset is conservative for us and favorable to the baselines: these samples belong to the pretraining corpora of both Novae (Blampey et al., 2025) and HEIST (Madhu et al., 2025), so their embeddings are in-distribution here while ours are not.

For each cell we build a cellular neighborhood as described in Section 2.1, and every neighboring sender cell sharing the receiver’s cell type, the receiver included, has its expression replaced by that type’s mean $\mu_{t(i)}$. The mask is intended to make a fair comparison between methods and to truly evaluate whether different models can encode cell state–niche correlations. As discussed above, cell state is spatially autocorrelated within a type, so a probe with access to the unmasked states of nearby same-type cells can score well by interpolating from them. As a result, the comparison does not reward the embedding that preserves cell’s own expression most faithfully. The same masked neighborhoods are supplied to every model with different data preprocessing procedure in the comparison.

3.2 Metrics

Spatial foundation models differ in architecture, in pretraining corpus, and in the downstream interfaces their authors provide, they do not enable zero-shot prediction of cell state–niche correlations either, which makes end-to-end comparison ambiguous. To enable comparison, we compare all foundation models as *frozen encoders* under a single downstream probe and train all dataset-specific models on each dataset individually, so that differences in performance reflect what a representation encodes about cell state–niche correlation. Each model produces a TME embedding $\mathbf{h}_i$ per cell from the same cell type expression masked neighborhood, with per-model extraction details given in Appendix S6. A two-layer MLP then predicts the cell’s state from that embedding together with its cell-type identity,

$$\hat{z}_i = \text{MLP}([\mathbf{h}_i; \text{Emb}(t(i))]), \quad (11)$$

using a 128-dimensional cell-type embedding and a 1024-unit hidden layer. We also repeated the experiments using a similar MLP with a 256-unit hidden layer to remove the influence of different embedding size. Supplying the cell type explicitly means the probe need not recover it from the embedding, so the measurement isolates the niche information a representation adds beyond identity. Cells are randomly split into training, validation, and test sets with ratio 0.7/0.15/0.15; the probe is trained on the training split, early-stopped on the validation split, and all reported numbers are computed on the test split over five seeds. Architecture, split, and optimizer are held identical across models, so that the embedding source is the only variable.

The two metrics focus on how much each model’s output TME representation encodes the cell state–niche correlation. The first metric is the cell-state Pearson correlation coefficient (PCC):

$$\text{PCC} = \frac{1}{|\mathcal{G}|} \sum_{g \in \mathcal{G}} \text{corr}_{i \in \text{test}}(\hat{z}_i^{(g)}, z_i^{(g)}), \quad (12)$$

The second is variance explained, which is also used by NCEM (Fischer et al., 2022),

$$R^2 = \frac{1}{|\mathcal{G}|} \sum_{g \in \mathcal{G}} \left(1 - \frac{\sum_{i \in \text{test}} (z_i^{(g)} - \hat{z}_i^{(g)})^2}{\sum_{i \in \text{test}} (z_i^{(g)} - \bar{z}^{(g)})^2} \right), \quad \bar{z}^{(g)} = \frac{1}{|\text{test}|} \sum_{i \in \text{test}} z_i^{(g)}, \quad (13)$$

In the benchmarking, we calculated the above-mentioned metrics in observed gene’s expression (Measured) and all genes’ (observed and imputed) expression (All). Both metrics are computed per gene across test cells and then averaged over the genes with nonzero variance.

3.3 Results

We compare against three groups of baselines: pretrained spatial foundation models that produce niche embeddings — TERRA (Birk et al., 2026), HEIST (Madhu et al., 2025), Novae (Blampey et al., 2025), and SpatialFormer (Wang et al., 2026) — non-pretrained graph models trained directly on each target dataset, and a probe built from neighborhood cell-type composition alone (Appendix S2). For pretrained spatial foundation models, the input is the same cellular neighborhood with same cell type masking followed by each method’s specific data preprocessing pipelines.

As shown in Figure 2, GITIII-scale achieves the best variance explained and the best mean PCC on all three held-out samples (numeric values in Tables S1 and S2). Which baseline is the strongest varies by sample — TERRA (Birk et al., 2026) on breast and melanoma, HEIST (Madhu et al., 2025) on colorectal — whereas the ordering of GITIII-scale is stable across cancer types and across both platforms. NCEM with the graph convolutional network (NCEM-GCN) (Fischer et al., 2022) and the graph attention network (GAT) (Veličković et al., 2018) are not foundation models and are trained with random initialization directly on each dataset’s train/val/test split. The k -NN cell-type proportion probe, MLP(cell-type embedding, niche cell-type proportion), measures how much of the signal is available from neighborhood composition alone; it recovers between 28% and 54% of GITIII-scale’s variance explained depending on sample and k . To test the influence of different MLP probes, we repeat the above-mentioned 10 methods $\times$ 3 datasets $\times$ 5 replicates = 150 experiments on an MLP with a smaller hidden layer, whereas the results show that GITIII-scale still performs the best (Table S2).

3.4 Ablation studies

Four ablations, all evaluated on the held-out breast sample, were performed to evaluate whether data scaling, model scaling, model hyperparameter changes, and architecture ablations would lead to decreased model performance (Figure 2, bottom row). More training cells improves variance explained monotonically from

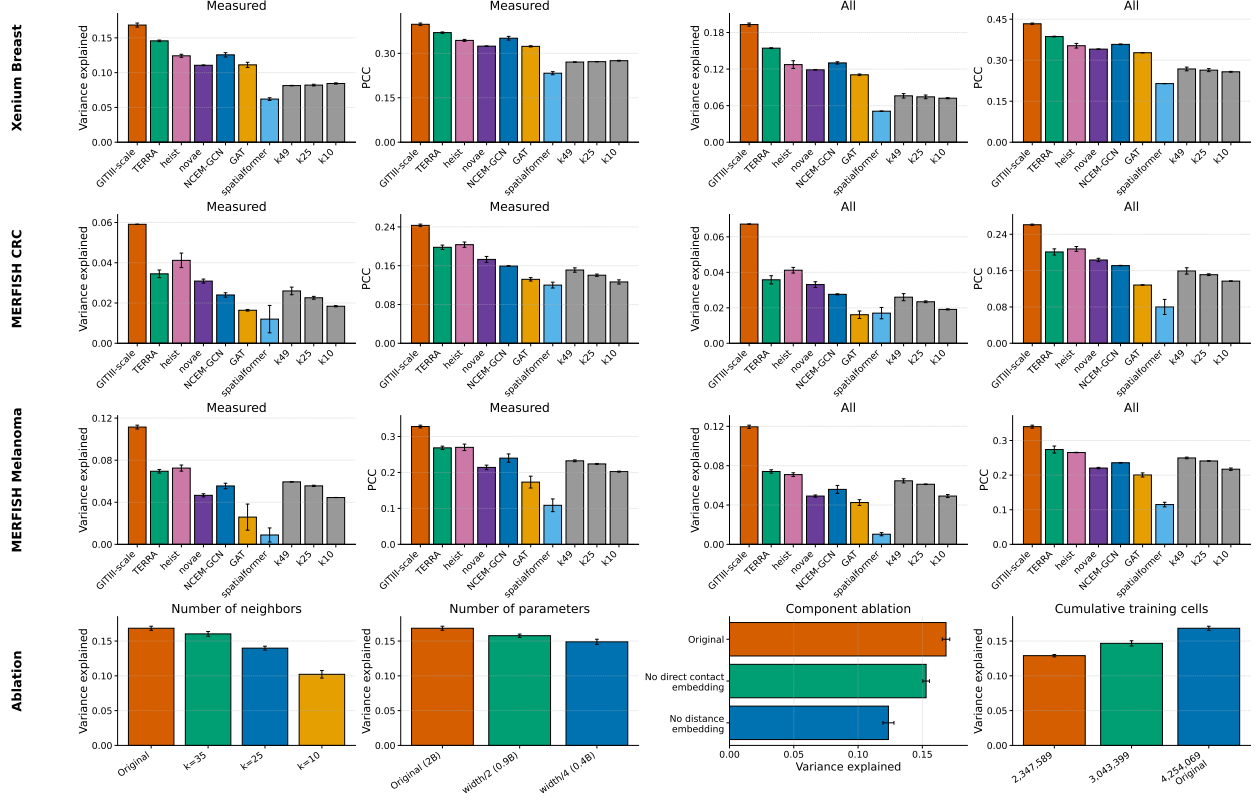


Figure 2: The benchmarking and ablation study results.

0.1290 at 2.35M cells to 0.1684 at 4.25M. Since the steps are matched, the gain is attributable to corpus size and diversity rather than to additional optimization. Halving and quartering the model width degrades its performance from 0.1684 at 2B parameters to 0.1577 and 0.1489, showing the model scales with capacity. Shrinking the neighborhood is the most damaging ablation of the four: $k = 35, 25$, and 10 give 0.1603, 0.1398, and 0.1022, the last a 39% relative loss, indicating that the signal extends well beyond the immediately adjacent cells. Removing the geometry inputs is the next most damaging — dropping the direct-contact embedding gives 0.1529 and dropping the distance embedding 0.1236, a 27% relative loss — confirming that spatial information is crucial in the cell-state–niche correlation. In addition, we trained the GITIII-scale model purely on the three evaluation datasets with the same cross-validation and found the model cannot converge on a single dataset. As an ablation study, we also trained GITIII on the three evaluation datasets and found that the dataset-specific training leads to about 4% to 9% variance explained decrease in the three datasets (Table S6).

The two prediction heads also let us quantify the cost of interpretability directly. Across the same runs, the additive head 1, whose predictions decompose exactly into the influence tensor, reaches an average gene PCC within 2% of the graph-transformer head 2 (0.1902 vs. 0.1934 at the selected checkpoint; 0.3702 vs. 0.3726 on the training corpus). Exact decomposability therefore costs almost nothing in accuracy.

3.5 Case study: an interpretable endothelial proliferation axis

To demonstrate our model’s interpretability, we asked which signaling axis is most correlated with expression of *MKI67* (Ki-67), a proliferation marker whose expression level is routinely used for tumor grading

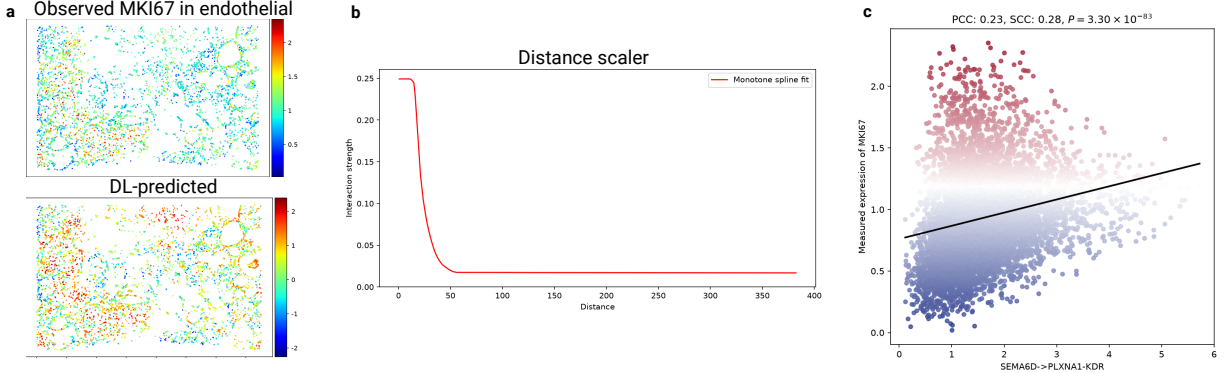


Figure 3: Interpretability case study in the held-out breast sample. **(a)** Observed and predicted *MKI67* in endothelial cells. **(b)** Fitted distance scaler for this (receiver type, target gene) pair. **(c)** Received KDR-axis signal strength versus measured *MKI67* in receiver endothelial cells.

and prognosis (Davey et al., 2021). The model reproduces the spatial pattern of *MKI67* in this cell type (Figure 3a) with similar spatial expression patterns between the observed and predicted. The fitted distance scaler (Figure 3b) decays sharply within $\sim 20\text{--}50\ \mu\text{m}$ and then plateaus, aligning with expected ligand diffusion physical law. Applying the attribution procedure of Section 2.4 selects the KDR (VEGFR2) axis as the top-ranked pathway, and the received signal strength correlates with measured *MKI67* in receiver endothelial cells (Figure 3c; PCC 0.23, $P = 3.3 \times 10^{-83}$, $n = 7,064$). Repeating the selection five times returns the same top-ranked axis each time. VEGFR-related signaling pathway is the canonical driver of endothelial proliferation and the target of anti-angiogenic therapy (Ferrara et al., 2003; Al-Sanea et al., 2021), so the model recovers a well-established mechanism in a tumor type absent from its training corpus.

4 Conclusion

We present GITIII-scale, an interpretable graph foundation model for cell state–niche correlation analysis in spatial transcriptomics. GITIII-scale uses transformers to model the interaction between two single cells at a given spatial distance and a graph transformer to model the cellular neighborhood features. Trained on our assembled pan-cancer, specimen-level matched scRNA-seq and IST database with 4,254,069 cells, GITIII-scale overcomes previous databases’ drawback of losing either single-cell resolution or full transcriptomics measurement, and can produce TME embeddings that capture cell state–niche correlation better than previous foundation models. Its unique interpretable architecture also enables the single-cell-level analysis of how each gene of each receiver cell is influenced by each of its neighboring sender cell, and further statistical analysis of which pathway is highly correlated with the target gene expression in a given receiver cell type, enabling an interpretable modelling of intercellular interaction, the TME, and drug target discovery studies.

However, our study suffers from the following limitations, which are our future working directions. 1. Specimen-level matched publicly available scRNA-seq and IST data are rare, so we will keep collecting data to further scale the model. And due to limited computational resources, the imputation of full transcriptomics using IST and scRNA-seq is only performed on the SpaIM model 2. It is hard to systematically evaluate the analysis accuracy of our LR attribution since there is no ground truth, and our analysis can only tell correlation instead of causality; further biological validation will be performed to better evaluate and

train our model. 3. To acquire biological interpretation, our model requires inputs imputed from specimen-level paired IST and scRNA-seq data, which may limit the usage of our model to more datasets. Also, it is important to note that the benchmarked spatial transcriptomics foundation models were not specifically designed to capture cell state–niche relationships, and their original input formulation may not involve predicting masked gene expression from the surrounding niche. Therefore, providing invaluable contribution to the field, they may underperform GITIII-scale in encoding cell state–niche correlations. The comparison only reflects differences in model objectives and design.

Ethics Statement

All datasets used in this study are publicly available and were obtained from previously published works with appropriate citations. These datasets were originally collected under IRB approval or equivalent ethical review, with informed consent obtained as documented in the source publications. We only use fully anonymized data and did not conduct any new data collection or direct interactions with human subjects. No personally identifiable information or sensitive patient data is included. Our methods are designed to advance scientific understanding of spatial transcriptomics and biological modeling and do not pose foreseeable risks related to privacy, misuse, or social harm.

Declaration of Large Language Models Usage in This Work

Large Language Models (LLMs) were used as a writing aid to enhance clarity and readability during the preparation of this manuscript. The use of these tools was strictly limited to grammatical correction and stylistic refinements. LLMs (Claude and ChatGPT) were additionally used to create or modify the scientific figures and images in this manuscript. All intellectual content, analyses, and arguments in the paper did not rely on the use of LLMs in any way.

Reproducibility Statement

All datasets used are public; their platforms, panel sizes, and cell counts are listed in Table S5 of the supplementary material. The original data of the pretraining data used in this paper can be found in their corresponding papers. The imputed pretraining data, codes and the model checkpoint to reproduce the results are available at https://github.com/lugia-xiao/GITIII_scale.

Acknowledgements

This study is personally funded by Meiyi Mao.

References

- Mohammad M. Al-Sanea, Garri Chilingaryan, Narek Abelyan, Arsen Sargsyan, Sargis Hovhannisyan, Hayk Gasparyan, Smbat Gevorgyan, Sarah Albogami, Mohammed M. Ghoneim, Ahmed K. Farag, Ahmed A. B. Mohamed, and Ashraf K. El-Damasy. Identification of novel potential VEGFR-2 inhibitors using a combination of computational methods for drug discovery. *Life*, 11(10):1070, 2021. doi: 10.3390/life11101070.
- Sebastian Birk, Mohammad Vali Sanian, Amirhossein Vahidi, Samuel Ogden, Daniyal J. Jafree, Mostafa Bakhti, and Mohammad Lotfollahi. Multi-scale modeling of human tissues from spatial transcriptomics with TERRA. *bioRxiv*, 2026.
- Quentin Blampey et al. Novae: a graph-based foundation model for spatial transcriptomics data. *Nature Methods*, 2025. doi: 10.1038/s41592-025-02899-6.
- Robin Browaeys, Wouter Saelens, and Yvan Saeys. NicheNet: modeling intercellular communication by linking ligands to target genes. *Nature Methods*, 17(2):159–162, 2019. doi: 10.1038/s41592-019-0667-5.
- Zixuan Cang et al. Screening cell–cell communication in spatial transcriptomics via collective optimal transport. *Nature Methods*, 2023. doi: 10.1038/s41592-022-01728-4.
- Kok Hao Chen, Alistair N. Boettiger, Jeffrey R. Moffitt, Siyuan Wang, and Xiaowei Zhuang. Spatially resolved, highly multiplexed RNA profiling in single cells. *Science*, 2015. doi: 10.1126/science.aaa6090.
- Matthew G. Davey, Sean O. Hynes, Michael J. Kerin, Nicola Miller, and Aoife J. Lowery. Ki-67 as a prognostic biomarker in invasive breast cancer. *Cancers*, 13(17):4455, 2021. doi: 10.3390/cancers13174455.
- Karin E. de Visser and Johanna A. Joyce. The evolving tumor microenvironment: From cancer initiation to metastatic outgrowth. *Cancer Cell*, 41(3):374–403, 2023. doi: 10.1016/j.ccell.2023.02.016.
- Daniel Dimitrov, Philipp Sven Lars Schäfer, Elias Farr, Pablo Rodriguez-Mier, Sebastian Lobentanzer, Pau Badia-i Mompel, Aurelien Dugourd, Jovan Tanevski, Ricardo Omar Ramirez Flores, and Julio Saez-Rodriguez. LIANA+ provides an all-in-one framework for cell–cell communication inference. *Nature Cell Biology*, 26(9):1613–1622, 2024. doi: 10.1038/s41556-024-01469-w.
- Mirjana Efremova, Miquel Vento-Tormo, Sarah A. Teichmann, and Roser Vento-Tormo. CellPhoneDB: inferring cell–cell communication from combined expression of multi-subunit ligand–receptor complexes. *Nature Protocols*, 2020. doi: 10.1038/s41596-020-0292-x.
- Napoleone Ferrara, Hans-Peter Gerber, and Jennifer LeCouter. The biology of VEGF and its receptors. *Nature Medicine*, 9(6):669–676, 2003. doi: 10.1038/nm0603-669.
- Napoleone Ferrara, Kenneth J. Hillan, Hans-Peter Gerber, and William Novotny. Discovery and development of bevacizumab, an anti-VEGF antibody for treating cancer. *Nature Reviews Drug Discovery*, 3(5):391–400, 2004. doi: 10.1038/nrd1381.
- David S. Fischer, Anna C. Schaar, and Fabian J. Theis. Modeling intercellular communication in tissues using spatial graphs of cells. *Nature Biotechnology*, 41(3):332–336, 2022. doi: 10.1038/s41587-022-01467-z.
- Douglas Hanahan. Hallmarks of cancer: New dimensions. *Cancer Discovery*, 12(1):31–46, 2022. doi: 10.1158/2159-8290.CD-21-1059.

- Jian Hu et al. SpaGCN: Integrating gene expression, spatial location and histology to identify spatial domains and spatially variable genes by graph convolutional network. *Nature Methods*, 2021. doi: 10.1038/s41592-021-01255-8.
- Andrew Jaegle, Felix Gimeno, Andy Brock, Andrew Zisserman, Oriol Vinyals, and João Carreira. Perceiver: General perception with iterative attention. In *International Conference on Machine Learning (ICML)*, pages 4651–4664, 2021.
- Amanda Janesick et al. High resolution mapping of the tumor microenvironment using integrated single-cell, spatial and in situ analysis. *Nature Communications*, 2023. doi: 10.1038/s41467-023-43458-x.
- Suoqin Jin et al. Inference and analysis of cell-cell communication using CellChat. *Nature Communications*, 2021. doi: 10.1038/s41467-021-21246-9.
- Bo Li, Ziyang Tang, Aishwarya Budhkar, Xiang Liu, Tonglin Zhang, Baijian Yang, Jing Su, and Qianqian Song. SpaIM: single-cell spatial transcriptomics imputation via style transfer. *Nature Communications*, 16(1):7861, 2025. doi: 10.1038/s41467-025-63185-9.
- Haochen Li, Tianxing Ma, Minsheng Hao, Wenbo Guo, Jin Gu, Xuegong Zhang, and Lei Wei. Decoding functional cell–cell communication events by multi-view graph learning on spatial transcriptomics. *Briefings in Bioinformatics*, 24(6):bbad359, 2023a. doi: 10.1093/bib/bbad359.
- Zhuoxuan Li, Tianjie Wang, Pentao Liu, and Yuanhua Huang. SpatialDM for rapid identification of spatially co-expressed ligand–receptor and revealing cell–cell communication patterns. *Nature Communications*, 14(1):3995, 2023b. doi: 10.1038/s41467-023-39608-w.
- Meng Liu, Maria O. Hernandez, Darko Castven, Hsin-Pei Lee, Wenqi Wu, Limin Wang, Marshonna Forgues, Jonathan M. Hernandez, Jens U. Marquardt, and Lichun Ma. Tumor cell villages define the co-dependency of tumor and microenvironment in liver cancer. *Nature Communications*, 17(1):1986, 2026. doi: 10.1038/s41467-026-69797-z.
- Yahui Long, Kok Siong Ang, Mengwei Li, Kian Long Kelvin Chong, Raman Sethi, Chengwei Zhong, Hang Xu, Zhiwei Ong, Karishma Sachaphibulkij, Ao Chen, et al. Spatially informed clustering, integration, and deconvolution of spatial transcriptomics with GraphST. *Nature Communications*, 2023. doi: 10.1038/s41467-023-36796-3.
- Hiren Madhu et al. HEIST: A graph foundation model for spatial transcriptomics and proteomics data. *arXiv preprint arXiv:2506.11152*, 2025.
- Giovanni Palla et al. Squidpy: a scalable framework for spatial omics analysis. *Nature Methods*, 2022. doi: 10.1038/s41592-021-01358-2.
- Pengfei Ren, Rui Zhang, Yunfeng Wang, Peng Zhang, Ce Luo, Suyan Wang, Xiaohong Li, Zongxu Zhang, Yanping Zhao, Yufeng He, et al. Systematic benchmarking of high-throughput subcellular spatial transcriptomics platforms across human tumors. *Nature Communications*, 16(1):9232, 2025. doi: 10.1038/s41467-025-64292-3.
- Alejandro Tejada-Lapuerta, Anna C. Schaar, Robert Gutgesell, Giovanni Palla, Lennard Halle, Mariia Minaeva, et al. Nicheformer: a foundation model for single-cell and spatial omics. *Nature Methods*, 2025. doi: 10.1038/s41592-025-02814-z.

- Kevin Troulé, Robert Petryszak, Batuhan Cakir, James Cranley, Alicia Harasty, Martin Prete, Zewen Kelvin Tuong, Sarah A. Teichmann, Luz Garcia-Alonso, and Roser Vento-Tormo. CellPhoneDB v5: inferring cell–cell communication from single-cell multiomics data. *Nature Protocols*, 20(12):3412–3440, 2025. doi: 10.1038/s41596-024-01137-1.
- Petar Veličković, Guillem Cucurull, Arantxa Casanova, Adriana Romero, Pietro Liò, and Yoshua Bengio. Graph attention networks. In *International Conference on Learning Representations (ICLR)*, 2018.
- Chloe Xueqi Wang, Haotian Cui, Andrew Hanzhuo Zhang, Ronald Xie, Hani Goodarzi, and Bo Wang. scGPT-spatial: Continual pretraining of single-cell foundation model for spatial transcriptomics. *bioRxiv*, 2025. doi: 10.1101/2025.02.05.636714.
- Jun Wang, Yuanhua Huang, and Ole Winther. SpatialFormer: universal spatial representation learning from subcellular molecular to multicellular landscapes. *Nature Computational Science*, 2026. doi: 10.1038/s43588-026-01016-7.
- Xiao Xiao, Le Zhang, Hongyu Zhao, and Zuoheng Wang. Inferring spatial single-cell-level interactions through interpreting cell state and niche correlations learned by self-supervised graph transformer. *Nature Machine Intelligence*, 2025. doi: 10.1038/s42256-025-01161-0.
- Wubing Zhang, Erin L. Brown, Abul Usmani, Noah Earland, Minji Kang, Aaron M. Newman, and Aadel A. Chaudhuri. Non-invasive profiling of the tumour microenvironment with spatial ecotypes. *Nature*, 2026. doi: 10.1038/s41586-026-10452-4.
- Wei Zhao, Kevin G. Johnston, Honglei Ren, Xiangmin Xu, and Qing Nie. Inferring neuron-neuron communications from single-cell transcriptomics through NeuronChat. *Nature Communications*, 14(1):1128, 2023. doi: 10.1038/s41467-023-36800-w.

Supplementary Material

S1 Benchmark results in numeric form

Table S1 reports the values plotted in Figure 2 of the main text, so that exact numbers and dispersions are available without reading them off bars. Table S2 reports the corresponding values for the repeated experiment with a 256-unit probe hidden layer. Every entry uses the masking convention, data split, and training recipe of Section S6; the two tables differ only in the width of the probe’s hidden layer.

Table S1: Cell-state prediction across the three held-out samples with a 1024-unit probe hidden layer; these are the values plotted in Figure 2 of the main text. R^2 is variance explained and PCC is the gene-averaged Pearson correlation, both on the test split; entries are mean $\pm$ s.d. across replicates. *Measured genes* restricts the target set to genes on each platform’s panel; *All genes* uses every nonzero-variance gene after imputation. Best value per column in bold.

Method	Xenium Breast		MERFISH CRC		MERFISH Melanoma	
	R^2	PCC	R^2	PCC	R^2	PCC
<i>Measured genes</i>						
GITHI-scale (ours)	0.168 ± 0.003	0.398 ± 0.004	0.059 ± 0.000	0.243 ± 0.003	0.112 ± 0.002	0.328 ± 0.004
TERRA	0.146 ± 0.001	0.370 ± 0.002	0.035 ± 0.002	0.198 ± 0.004	0.070 ± 0.002	0.268 ± 0.005
HEIST	0.124 ± 0.002	0.344 ± 0.003	0.041 ± 0.004	0.203 ± 0.005	0.072 ± 0.003	0.270 ± 0.009
Novae	0.111 ± 0.001	0.324 ± 0.001	0.031 ± 0.001	0.173 ± 0.006	0.047 ± 0.002	0.214 ± 0.006
SpatialFormer	0.062 ± 0.002	0.233 ± 0.005	0.012 ± 0.007	0.120 ± 0.006	0.009 ± 0.007	0.109 ± 0.018
NCEM-GCN	0.126 ± 0.003	0.351 ± 0.006	0.024 ± 0.001	0.159 ± 0.001	0.056 ± 0.003	0.240 ± 0.012
GAT	0.111 ± 0.004	0.324 ± 0.002	0.016 ± 0.000	0.132 ± 0.004	0.026 ± 0.012	0.173 ± 0.017
k -NN prop. ($k=49$)	0.081 ± 0.000	0.271 ± 0.001	0.026 ± 0.002	0.151 ± 0.004	0.059 ± 0.000	0.232 ± 0.003
k -NN prop. ($k=25$)	0.082 ± 0.001	0.272 ± 0.001	0.023 ± 0.001	0.140 ± 0.002	0.056 ± 0.001	0.224 ± 0.001
k -NN prop. ($k=10$)	0.084 ± 0.001	0.275 ± 0.001	0.018 ± 0.000	0.127 ± 0.004	0.044 ± 0.000	0.202 ± 0.001
<i>All genes</i>						
GITHI-scale (ours)	0.193 ± 0.003	0.433 ± 0.003	0.067 ± 0.000	0.261 ± 0.001	0.120 ± 0.002	0.340 ± 0.004
TERRA	0.154 ± 0.001	0.387 ± 0.001	0.036 ± 0.002	0.201 ± 0.007	0.074 ± 0.002	0.274 ± 0.010
HEIST	0.127 ± 0.006	0.353 ± 0.009	0.041 ± 0.002	0.208 ± 0.005	0.071 ± 0.002	0.265 ± 0.001
Novae	0.119 ± 0.000	0.341 ± 0.000	0.033 ± 0.002	0.183 ± 0.004	0.049 ± 0.001	0.220 ± 0.002
SpatialFormer	0.051 ± 0.000	0.214 ± 0.000	0.017 ± 0.003	0.080 ± 0.017	0.010 ± 0.002	0.115 ± 0.007
NCEM-GCN	0.130 ± 0.002	0.358 ± 0.001	0.028 ± 0.000	0.171 ± 0.001	0.056 ± 0.004	0.236 ± 0.001
GAT	0.111 ± 0.001	0.327 ± 0.000	0.016 ± 0.002	0.128 ± 0.000	0.043 ± 0.003	0.201 ± 0.006
k -NN prop. ($k=49$)	0.076 ± 0.004	0.268 ± 0.007	0.026 ± 0.002	0.159 ± 0.007	0.065 ± 0.002	0.250 ± 0.002
k -NN prop. ($k=25$)	0.074 ± 0.003	0.264 ± 0.005	0.023 ± 0.001	0.151 ± 0.002	0.061 ± 0.000	0.241 ± 0.000
k -NN prop. ($k=10$)	0.072 ± 0.001	0.258 ± 0.002	0.019 ± 0.000	0.137 ± 0.001	0.049 ± 0.002	0.217 ± 0.003

S2 Related work

Foundation models for spatial transcriptomics. Individual spatial transcriptomics slides are small, noisy, and measured on incompatible gene panels, so models fit to one slide neither generalize nor pool information across studies. Spatial foundation models are designed to overcome this. Such a model is pretrained once on many slides with a self-supervised objective, and then exposes a frozen per-cell or per-niche embedding. Downstream users probe that embedding with a light task head instead of training a new model for each dataset. scGPT-spatial (Wang et al., 2025) continually pretrains a gene-token transformer

Table S2: The same comparison with a 256-unit probe hidden layer, all else identical to Table S1. The ranking is unchanged, so the margin of GITIII-scale is not an artifact of probe capacity.

Method	Xenium Breast		MERFISH CRC		MERFISH Melanoma	
	R^2	PCC	R^2	PCC	R^2	PCC
<i>Measured genes</i>						
GITIII-scale (ours)	0.170 ± 0.004	0.400 ± 0.005	0.064 ± 0.003	0.251 ± 0.006	0.106 ± 0.006	0.320 ± 0.010
TERRA	0.145 ± 0.001	0.369 ± 0.002	0.036 ± 0.002	0.194 ± 0.004	0.076 ± 0.005	0.275 ± 0.009
HEIST	0.121 ± 0.000	0.340 ± 0.001	0.043 ± 0.001	0.207 ± 0.002	0.077 ± 0.002	0.275 ± 0.003
Novae	0.111 ± 0.002	0.324 ± 0.003	0.029 ± 0.001	0.168 ± 0.002	0.044 ± 0.001	0.206 ± 0.003
SpatialFormer	0.057 ± 0.010	0.223 ± 0.020	0.012 ± 0.003	0.121 ± 0.002	0.014 ± 0.005	0.106 ± 0.016
NCEM-GCN	0.128 ± 0.006	0.352 ± 0.005	0.021 ± 0.007	0.149 ± 0.018	0.052 ± 0.003	0.227 ± 0.009
GAT	0.102 ± 0.006	0.311 ± 0.006	0.015 ± 0.002	0.132 ± 0.002	0.032 ± 0.003	0.185 ± 0.012
k -NN prop. ($k=49$)	0.080 ± 0.002	0.269 ± 0.004	0.028 ± 0.001	0.159 ± 0.001	0.061 ± 0.005	0.237 ± 0.009
k -NN prop. ($k=25$)	0.081 ± 0.002	0.269 ± 0.004	0.021 ± 0.001	0.135 ± 0.004	0.053 ± 0.001	0.220 ± 0.003
k -NN prop. ($k=10$)	0.081 ± 0.001	0.269 ± 0.001	0.018 ± 0.001	0.123 ± 0.003	0.045 ± 0.000	0.203 ± 0.001
<i>All genes</i>						
GITIII-scale (ours)	0.193 ± 0.001	0.433 ± 0.001	0.069 ± 0.002	0.262 ± 0.005	0.119 ± 0.002	0.337 ± 0.005
TERRA	0.154 ± 0.002	0.386 ± 0.002	0.034 ± 0.003	0.193 ± 0.001	0.075 ± 0.003	0.267 ± 0.006
HEIST	0.124 ± 0.003	0.348 ± 0.004	0.041 ± 0.002	0.204 ± 0.006	0.072 ± 0.001	0.268 ± 0.002
Novae	0.117 ± 0.002	0.337 ± 0.003	0.031 ± 0.001	0.175 ± 0.003	0.050 ± 0.002	0.220 ± 0.003
SpatialFormer	0.047 ± 0.000	0.202 ± 0.001	0.017 ± 0.002	0.078 ± 0.009	0.019 ± 0.001	0.130 ± 0.003
NCEM-GCN	0.123 ± 0.005	0.347 ± 0.008	0.026 ± 0.004	0.167 ± 0.003	0.053 ± 0.008	0.225 ± 0.018
GAT	0.103 ± 0.015	0.318 ± 0.020	0.015 ± 0.004	0.122 ± 0.019	0.040 ± 0.001	0.196 ± 0.004
k -NN prop. ($k=49$)	0.072 ± 0.001	0.260 ± 0.002	0.022 ± 0.010	0.141 ± 0.037	0.064 ± 0.000	0.245 ± 0.001
k -NN prop. ($k=25$)	0.074 ± 0.000	0.264 ± 0.000	0.015 ± 0.003	0.120 ± 0.010	0.063 ± 0.003	0.246 ± 0.007
k -NN prop. ($k=10$)	0.074 ± 0.002	0.261 ± 0.003	0.018 ± 0.000	0.129 ± 0.003	0.050 ± 0.001	0.220 ± 0.002

from spot- and cell-resolution slides. Its objective masks a subset of a cell’s gene tokens and regresses their binned expression values, with a neighborhood term that asks the same decoder to reconstruct a spot from the embeddings of its spatially adjacent spots. It outputs contextual cell and gene embeddings, and is applied to cell-type deconvolution of spots and to imputation of unmeasured genes. Nicheformer (Tejada-Lapuerta et al., 2025) tokenizes each cell as a gene sequence ordered by expression rank and trains a transformer encoder with a masked-language-model objective, predicting the identity of randomly masked gene tokens by cross-entropy over the gene vocabulary. It outputs a per-cell embedding, which is linearly probed or fine-tuned to predict spatial context labels such as niche and region for dissociated cells. Because that embedding represents the cell itself rather than its surrounding niche — the model consumes one cell’s gene sequence and never a neighborhood — Nicheformer produces no niche-level representation to supply to our probe, and we therefore exclude it from the benchmark. Novae (Blampey et al., 2025) encodes a cell’s neighborhood subgraph with a graph attention network. Rather than reconstructing expression, it clusters neighborhoods into a set of learned prototypes and trains the encoder so that two randomly perturbed versions of the same neighborhood are assigned to the same prototype. It outputs a per-cell niche embedding and a discrete niche assignment used for spatial domain annotation. HEIST (Madhu et al., 2025) models a tissue as a hierarchical graph, a spatial cell graph whose nodes each carry a gene co-expression network, and pretrains a hierarchical graph transformer on IST datasets. It outputs gene-level embeddings and niche embeddings that are used for cell typing, gene imputation, and clinical outcome prediction. SpatialFormer (Wang et al., 2026) combines convolutional and transformer blocks over rank-ordered gene tokens and is pretrained on cell pairs with masked-token, subcellular transcript-adjacency, and pairwise-proximity objectives. It outputs cell embeddings applied to batch correction, cell-type annotation, and co-localization

detection. TERRA (Birk et al., 2026) tokenizes an index cell together with its neighborhood as one gene-token sequence and pretrains a joint-embedding predictive architecture that predicts masked molecular and spatial context in latent space. It outputs gene, cell, and neighborhood embeddings from one backbone, used zero-shot for niche and cell-type identification and for in silico gene perturbation. These models are designed for representing cells and their spatial context, and are not intended for cell state–niche correlation analysis.

Models and tools for cell–cell interaction analysis. Most previous CCI methods focus on estimating which interaction events occur between which two cell types and through which LR pair. The candidate LR pairs are supplied by established databases, and each candidate is scored by a statistical test on co-expression: permutation of cell-type labels in CellPhoneDB (Efremova et al., 2020; Troulé et al., 2025), a mass-action score with cofactor terms in CellChat (Jin et al., 2021), and consensus scoring across resources in LIANA+ (Dimitrov et al., 2024). Later tools for spatial transcriptomics incorporate spatial information into this scoring, either with graph neural networks over the cell graph or by distance-based thresholding and weighting of candidate interactions (Cang et al., 2023; Li et al., 2023b; Palla et al., 2022). Only a few methods instead estimate the downstream effect of a CCI on the receiver cell: NicheNet (Browaeys et al., 2019) propagates ligands through a prior signaling and gene-regulatory network to a ligand–target regulatory potential matrix. It inherits the coverage of the prior they are built on, so signaling and target genes that are not yet curated fall outside the hypothesis space regardless of the evidence a dataset contains. NCEM (Fischer et al., 2022) regresses a cell’s expression on its neighborhood composition with graph convolutional models, and GITIII (Xiao et al., 2025) together with graph-attention models such as HoloNet (Li et al., 2023a) learns dataset specific cell state-niche correlation and attribution that correlation to certain cells or pathways. The data-driven models estimate the relationship from the data instead, but are typically fitted to one dataset at a time, so what they learn in one tissue is not carried over to the next. Estimating neighbor-attributable state changes in a way that is both data-driven and transferable across samples therefore remains open.

S3 Differences from GITIII

GITIII-scale shares its motivating question with GITIII (Xiao et al., 2025) — decomposing a receiver cell’s state into contributions from individual neighboring senders — but differs from it in three respects that together are what make a pretrained, transferable model possible.

Architecture. GITIII models a neighborhood in a single pass over the sender set. In GITIII-scale the sender–receiver relationship is instead built in two levels. A pairwise transformer first encodes each (sender, receiver, distance, contact) tuple independently. The sending and receiving roles have separate encoders, and intercellular distance is carried as its own token rather than as a scalar weight. Cross-attention pooling then compresses each pair to a fixed-width vector. The two prediction heads then act on these pair vectors. The first is a single-layer graph transformer with no feed-forward block; its per-gene attention is normalized across senders, so its prediction is an exact sum of per-sender, per-gene influences. That property is what the interpretability analysis depends on. The second head is a deeper stack, which trades exact decomposability for accuracy and supplies the cellular-neighborhood embedding used as the TME representation. Because one model yields both an exactly decomposable influence tensor and a niche-level embedding, GITIII-scale serves as a foundation model and an attribution tool simultaneously rather than as one or the other.

Pan-cancer pretraining rather than per-dataset fitting. GITIII is fitted to a single dataset at a time, so nothing it learns in one tissue transfers to the next, and each new sample requires training from scratch.

GITIII-scale is pretrained once across a pan-cancer corpus of 4,254,069 cells spanning several tumor contexts and two imaging platforms, and is then applied frozen to held-out cancer types and platforms. Section S8 quantifies the benefit. Dataset-specific GITIII training loses variance explained on all three evaluation samples relative to the pretrained model, and GITIII-scale trained from scratch on a single evaluation dataset does not converge at all.

Spatial single-cell data with full-transcriptome coverage. GITIII operates on the measured panel of an imaging-based platform, a few hundred to a few thousand genes, so the influence it estimates is defined only over that panel. Every sample in the GITIII-scale corpus is instead paired with scRNA-seq from the same specimen, which allows the measured panel to be imputed onto a shared 20,000-gene vocabulary. Three consequences follow. The influence tensor is defined over a transcriptome-scale gene set rather than a panel. A single vocabulary is shared across platforms whose panels are otherwise incompatible, without which one pretrained model could not span them. And ligand–receptor attribution can reach axes whose genes appear on no single platform’s panel.

S4 Hyperparameters and architecture specification

Table S3 lists every architecture and optimization hyperparameter of the GITIII-scale run reported in the main text. At this configuration the model has 2,296,747,232 parameters ($\sim 2.3\text{B}$). All corpus-size ablation runs of Section 3.4 of the main text use exactly this configuration and differ only in which datasets enter the training list, so that the corpus-size comparison is not confounded by an architecture change. At inference, embedding all 103,209 cells of the breast evaluation sample takes 229 s on one B200 GPU.

Cell-type-aware input construction. A sender cell’s input vector is its own measured cell state expression added to its cell-type mean profile, except where the sender shares the receiver’s cell type, in which case only the cell-type mean is supplied. This is the same-type masking of Section 2.2 of the main text, applied at the input rather than as a separate preprocessing pass, and it removes the receiver’s own state and the states of same-type neighbors from every training example.

Pooling. Both levels pool with a multi-head cross-attention block (MCAB) in which learned latent queries, initialized as $\mathcal{N}(0, 0.02^2)$, attend to the token set and return a fixed-size output independent of the number of input tokens. The pair vector and the TME embedding are therefore permutation-invariant with respect to sender ordering.

S5 Distance featurization

The Euclidean separation d_{ij} between receiver i and sender j , in microns, is expanded into five scalar features before being mapped to the distance token,

$$\phi(d) = \left[\frac{10}{d+1}, \quad \frac{10}{\sqrt{d}+1}, \quad \frac{100}{d^3+1}, \quad \frac{10}{d+1}e^{-d/0.76}, \quad \frac{10}{d+1}e^{-d/190.67} \right]. \quad (1)$$

The five terms span the decay regimes that intercellular signaling is expected to occupy. Two are slow algebraic decays and one is a steep cubic decay that acts as a contact-range indicator. The remaining two are exponentially damped, with length constants of $0.76 \mu\text{m}$ and $190.67 \mu\text{m}$ that bracket juxtacrine and diffusive transport. Separate linear maps embed $\phi(d_{ij})$ for the sender stage and for the interaction stage, so the two

Table S3: GITIII-scale architecture and optimization hyperparameters.

Group	Hyperparameter	Value
Input	Gene vocabulary G	20,000
	Neighborhood size k (senders per receiver)	49
	Cells per training example (1 receiver + k senders)	50
	Input tensor shape (batch, cells, genes)	(344, 50, 20,000)
Tokenization	Tokens per cell T	32
	Token width / embedding dimension d	256
	Attention heads	16
	MLP expansion ratio	4.0
	Distance features per sender–receiver pair	5
	Contact token each	1
Pair encoder	Sender self-attention blocks (SAB)	3
	Interaction self-attention blocks (SAB)	3
	Pair-vector dimension <code>out_edge_dim</code>	256
	MCAB latent queries, pair encoder	4
Head 1 (additive)	Per-gene attention normalization	across senders
	Output	influence tensor $\mathcal{I}_i \in \mathbb{R}^{k \times G}$
Head 2 (niche)	Transformer blocks <code>num_layers_deeper</code>	4
	MCAB latent queries L	4
	TME embedding dimension $L \cdot d$	1024
Regularization	Dropout	0.0
	Attention dropout	0.0
Objective	Per-gene loss	$1 - \text{PCC}$ across cells
	Gene weighting $w^{(g)}$	$\propto \text{std}_i(z_i^{(g)})$, mean-norm.
	Magnitude term weight λ	0.05
	Numerical guard ϵ	10^{-8}
	Stratification	receiver cell type, macro-avg.
	Heads optimized	both, losses summed
Optimization	Optimizer	AdamW
	Learning rate	10^{-4} (constant)
	Batch size	344
	Epochs	2
	Dataset order	reshuffled each epoch
	Checkpoint selection	best validation PCC
Hardware	GPU	$1 \times \text{NVIDIA B200}$
	Pretraining wall-clock	23 h

stages can weight the regimes differently. The model is given no distance prior beyond Equation 1; the effective interaction range reported in the case study of the main text is fit from data.

A binary contact token, taken from whether i and j share an edge in the Delaunay triangulation, is embedded alongside the distance token.

S6 Per-model embedding-extraction protocol

Every method is evaluated under the identical masking convention, data split, downstream probe, and training recipe described in Section 3.2 of the main text; the only variable is the representation handed to the probe. Methods divide into two groups. The four pretrained spatial foundation models (Novae, HEIST, TERRA, SpatialFormer) are used as *frozen* encoders. Each is run through its own authors’ released preprocessing and inference path rather than a reimplementaion, so that the pretrained weights receive the input distribution and graph topology they were trained on. The resulting per-cell embedding is computed once per dataset and reused unchanged across every probe configuration and replicate. The remaining baselines (NCEM-GCN, GAT, and the k -NN cell-type-proportion probe) have no pretrained component and are re-trained end to end for every configuration and replicate. Table S4 summarizes the resulting representations.

Table S4: Representations supplied to the shared probe. All methods see the same masked neighborhoods of the same cells and the same 0.7/0.15/0.15 split. D is the dimensionality of the per-cell representation reaching the probe.

Method	Representation	D
GITIII-scale	TME embedding $\mathbf{h}_i$ (head 2)	1024
Novae	niche representation z	64
HEIST	cell $\oplus$ mean-pooled gene-network	256
TERRA	mean-pooled context tokens	384
SpatialFormer	mean CLS state over center-neighbor pairs	512
NCEM-GCN	center node after 2 GCNConv layers	256
GAT	center node after 2 GATConv layers	256
k -NN proportion	niche cell-type composition	n_t

GITIII-scale. The TME embedding is the pooled output of the second-level head, $\mathbf{h}_i \in \mathbb{R}^{1024}$, read from the checkpoint selected on validation correlation. No fine-tuning is performed on any held-out sample.

S6.1 Pretrained foundation models: checkpoints and inference API

For these four methods we record only the checkpoint identifier and the exact library calls used, since all preprocessing, graph construction, and tokenization are the authors’ own and are invoked unmodified.

Novae. Checkpoint `prism-oncology/novae-human-0` (<https://huggingface.co/prism-oncology/novae-human-0>), loaded with `novae.Novae.from_pretrained(...)` followed by `.eval()`. The spatial graph is built by `novae.spatial_neighbors(adata, radius=100)` and each center cell’s local subgraph uses the `n_hops_local` value stored in the checkpoint rather than an override. Novae’s internal `model._prepare_adatas` performs gene selection against the model’s own vocabulary and `ZScoreTorch` standardizes the selected matrix. Per batch, subgraphs are packed as `torch_geometric.data.Data` objects, collated with `Batch.from_data_list`, and embedded under `torch.no_grad()` as `model.encoder(model.cell_embedder(batch))`. The embedding is that encoder output, $D = \text{model.hparams.output_size} = 64$.

HEIST. Checkpoint `HirenMadhu/HEIST` (<https://huggingface.co/HirenMadhu/HEIST>), with the `GraphEncoder` class taken from the authors’ repository (<https://github.com/HirenMadhu/HEIST>).

`//github.com/Graph-and-Geometric-Learning/HEIST`) and loaded via `GraphEncoder.from_pretrained(...)` at the released configuration (`pe_dim = hidden_dim = output_dim = 128`, 10 layers, 8 heads, cross-message-passing and positional encoding enabled), then `.eval()`. Inference uses a custom batched encode rather than the library’s stock `model.encode()`. The stock path lets multi-head attention attend across all cells in a batch, whereas attention must be scoped to each cell’s own 50-node neighborhood. The custom path reshapes flat $(B \cdot L, D)$ tensors to (B, L, D) for the attention call only, running the GIN convolutions, TransformerConv cross-message-passing, and LayerNorm on flattened block-diagonal tensors, which is numerically equivalent for those submodules. The embedding concatenates the center node’s 128-dimensional cell-level representation with the 128-dimensional mean-pooled representation of its gene co-expression network, $D = 256$.

TERRA. Checkpoint `Lotfollahi-lab/TERRA-96M` (<https://huggingface.co/Lotfollahi-lab/TERRA-96M>). The model is constructed by the library’s `init_model(...)` from the checkpoint’s own `model_config.yaml` (`enc_emb_dim= 384`, `enc_depth= 12`, `num_heads= 6`), and weights are loaded into the target-encoder branch — the JEPA context-representation branch used for embeddings, not the online encoder or predictor — via `load_checkpoint(..., target_encoder=..., is_training=False)`, then `.eval()`. The spatial graph is TERRA’s own `construct_neighbor_graph` with `n_neighs=10`, matching its pretraining configuration. Inference calls `target_encoder.backbone.return_layer_emb(layers=[12], ..., ignore_spc_tokens=True)` under `torch.inference_mode()` with `bfloat16` autocast, attending only to non-pad tokens; the per-token outputs are mean-pooled over all non-pad positions of all 11 segments, $D = 384$.

SpatialFormer. Checkpoint `ckp_pair_13tissues_71.ckpt`, the variant recommended by the authors, obtained from the Figshare asset linked in their repository (https://figshare.com/articles/dataset/pair_input_checkpoint_5k/31146247; code at <https://github.com/TerminatorJ/Spatialformer>) and checksum-verified against the published file. The model is built by the repository’s `manual_train_fm(config=..., use_flash_attn=False)` from its large paired training config with the packaged gene-embedding table, weights loaded with `model.load_state_dict(...)`, then `model.eval()` and `model.input_type = "pair"`. Batches are collated with the library’s own `collate_fn` to preserve its ALiBi-compatible padding layout, and embeddings are read from `model.get_embeddings(batch, layers=[-1], pair_prediction=True)` under `bfloat16` autocast, taking the CLS-position hidden state. Each center cell is paired with each of its 10 nearest neighbors and the 10 CLS states are averaged, $D = 512$ (`dim_model`).

Same cell type expression masking. The masking rule is identical for every method, but the representation it acts on differs by necessity, since it must be applied at whichever stage each pretrained model accepts input. For Novae this is after its per-slide z -scoring; for HEIST, on its denoised gene panel; and for TERRA and SpatialFormer, at the token level, where a type-mean tokenization is substituted for a cell’s own. The latter two require one further departure. Their public tokenizers cache one tokenization per cell and reuse it wherever that cell appears as another cell’s neighbor, which masking cannot accommodate when the substitution depends on the query cell’s type. For those two methods we therefore reimplement the ranking and truncation logic at the script level, verified to reproduce the library tokenizer exactly on unmasked input.

S6.2 Baselines trained end to end

Shared graph for NCEM-GCN and GAT. Both use a Delaunay triangulation truncated to edges of at most $100\ \mu\text{m}$, from which an induced ego-subgraph (center, its direct neighbors, and the edges among them) is extracted per center cell and cached. Both trunks apply two message-passing layers over this subgraph, so information reaches the center cell over paths of up to two hops. The same cached topology is used by both architectures, so the comparison between them is not confounded by graph construction. Node features are the reconstructed full expression over nonzero-variance genes, z -scored with train-split statistics and held fixed across configurations so that the input information budget does not vary with the target gene set. Masking replaces the z -scored feature row of the center cell and of every same-type node in its ego-subgraph with the type-mean vector, z -scored under the same train-split statistics.

NCEM-GCN. A linear input projection to 256 units with ReLU, two `GCNConv` layers at width 256, and the center node’s output concatenated with a 128-dimensional learned cell-type embedding before the head. The graph trunk width is fixed across configurations; only the head width and output gene count vary.

GAT. Identical in every respect to NCEM-GCN except the trunk: ELU activations in place of ReLU, and two `GATConv` layers with 4 attention heads (the first concatenating heads to 256 dimensions, the second averaging them).

k -NN cell-type proportion. This baseline consumes no expression at all. A `cKDTree` over spatial coordinates retrieves each cell’s k nearest *other* cells, and the feature vector is the cell-type composition of those neighbors: a length- n_t vector whose entries are the fractions of the k neighbors belonging to each cell type, summing to one. It is concatenated with the same 128-dimensional learned cell-type embedding and passed to a head of the shared shape. Neither a normalization layer nor input standardization is needed here, since a composition vector is already bounded in $[0, 1]$ and does not exhibit the collapse described above. Changing $k \in \{10, 25, 49\}$ changes only which precomputed composition array is loaded; architecture and hyperparameters are identical across the three variants. The same-type masking convention does not apply here and is not invoked, since there is no expression feature to replace; the prediction target is the unmasked cell-state residual, exactly as for every other method.

S6.3 Shared probe and training recipe

Every method’s representation is consumed by a probe of the same shape, $\text{Linear}(D+128, h) \rightarrow \text{ReLU} \rightarrow \text{Linear}(h, n_{\text{genes}})$, where the 128-dimensional cell-type embedding is learned jointly with the probe and never part of a frozen upstream model. Training uses Adam at learning rate 10^{-3} , mean squared error loss, early stopping on validation loss with patience 10 against a maximum of 200 epochs, and restoration of the best-validation checkpoint before test evaluation. Batch size is 1024 for the frozen-embedding methods and the composition baseline, and 512 for the two graph baselines, whose batch elements are variable-size ego-subgraphs rather than fixed-length vectors. For the frozen-embedding methods only the probe is retrained per configuration; for the end-to-end baselines the whole model is retrained, since the head width and target gene set enter the joint objective.

Masking. For every method that consumes expression, both the receiver cell and all same-type neighbors have their expression replaced by the cell-type mean $\mu_{t(i)}$ before encoding. The substitution is always applied to reconstructed full expression, never to the cell-state residual, because the residual is the prediction target and must not enter the input. Masking the receiver as well as its same-type neighbors is what renders the probe leakage-safe. Cell state is spatially autocorrelated within a type, so an encoder with access to

unmasked same-type neighbors can score well simply by interpolating between them. Such a score measures how faithfully the encoder preserves local expression, not what it captures about cell–cell interaction.

S7 Dataset accessions

Table S5 gives the provenance of every sample in the corpus. Cell counts are as loaded by the pipeline; gene counts are the measured imaging panel size before imputation onto the shared 20,000-gene vocabulary. Every imaging-based sample is paired with an scRNA-seq reference, which is what permits the imputation described in Section 2.5 of the main text; that pairing is at the specimen level for all samples except the two MERFISH evaluation samples, as noted below the table. Where the two platform arms of one specimen share a single scRNA-seq reference, that reference is listed on every row it serves.

Table S5: Pan-cancer corpus: per-sample accessions and download sources. *Panel* is the measured imaging gene panel size before imputation onto the shared 20,000-gene vocabulary, and *# types* is the number of annotated cell types in the imaging sample. The three samples in the first block are held out from pretraining and used only for out-of-distribution evaluation; the ten below constitute the pretraining corpus.

Sample	Tumor type	Platform	Panel	IST cells	sc cells	# types	Source
<i>Held out from pretraining (evaluation samples)</i>							
breast_xenium_ffpe	Breast	Xenium	312	103,209	30,365	18	10x Genomics portal ^a
ecotypes__CRC2	Colorectal (met.)	MERFISH	500	38,080	48,426	9	SpatialEcoTyper portal ^d
ecotypes__Melanoma1	Melanoma (met.)	MERFISH	500	27,907	48,426	9	SpatialEcoTyper portal ^d
<i>Pretraining corpus</i>							
liver_villages_cosmx__1	Liver (HCC/iCCA)	CosMx	1,000	835,033	33,495	6	Zenodo 13773977 ^c
liver_villages_cosmx__2	Liver (HCC/iCCA)	CosMx	1,000	433,303	29,811	6	Zenodo 13773977 ^c
liver_villages_cosmx__3	Liver (HCC/iCCA)	CosMx	1,000	867,430	30,762	6	Zenodo 13773977 ^c
liver_villages_cosmx__4	Liver (HCC/iCCA)	CosMx	1,000	211,823	18,438	6	Zenodo 13773977 ^c
spatch_coad_cosmx	Colon adeno.	CosMx	6,175	292,371	8,288	16	SPATCH portal ^b
spatch_coad_xenium	Colon adeno.	Xenium	5,001	405,927	8,288	16	SPATCH portal ^b
spatch_hcc_cosmx	Hepatocellular	CosMx	6,175	237,030	12,226	17	SPATCH portal ^b
spatch_hcc_xenium	Hepatocellular	Xenium	5,001	271,687	12,226	17	SPATCH portal ^b
spatch_ov_cosmx	Ovarian	CosMx	6,175	289,272	9,229	13	SPATCH portal ^b
spatch_ov_xenium	Ovarian	Xenium	5,001	410,193	9,229	13	SPATCH portal ^b
Total (pretraining)		2 platforms		4,254,069			

^a Janesick et al. (2023); 10x Genomics Xenium human breast dataset explorer (manual download; no stable direct URL). ^b Ren et al. (2025); SPATCH portal, <http://spatch.pku-genomics.org/>. ^c Liu et al. (2026); Zenodo record 13773977 (imaging) and GEO accession GSE189903 (scRNA-seq). ^d Zhang et al. (2026); SpatialEcoTyper vignette portal, <https://spatialecotyper.stanford.edu/>, imaging; GEO accession GSE320042, scRNA-seq. The two MERFISH samples share a single pan-tumor scRNA-seq reference whose specimen identifiers do not overlap with the imaging specimens, so for these two samples the reference is matched at the tumor-type rather than the specimen level.

Paired imputation. Each imaging sample and its matched scRNA-seq reference are integrated with SpaIM (Li et al., 2025), which learns a per-dataset mapping from measured-panel expression to the full scRNA-seq gene space conditioned on Leiden clusters of the reference, and applies it to every spatial cell. Integration over the full corpus takes five days on two GPUs.

S8 Dataset-specific training comparison

Table S6 compares GITIII-scale against GITIII (Xiao et al., 2025) trained separately on each evaluation dataset with the same cross-validation protocol. Both columns report variance explained on the measured gene panel, mean $\pm$ s.d. over five seeds. GITIII-scale was also trained from scratch on each of the three evaluation datasets alone; those runs did not converge, so no single-dataset GITIII-scale numbers are reported.

Table S6: Dataset-specific training versus pan-cancer pretraining. Variance explained on the measured panel, mean $\pm$ s.d. over five seeds. GITIII is trained on each evaluation dataset separately with cross-validation; GITIII-scale is pretrained pan-cancer with all three samples held out.

Dataset	GITIII (dataset-specific)	GITIII-scale (pretrained)	Relative change
Xenium Breast	0.1530 ± 0.0032	0.1684 ± 0.0029	-9.1%
MERFISH CRC	0.0565 ± 0.0049	0.0591 ± 0.0001	-4.4%
MERFISH Melanoma	0.1050 ± 0.0037	0.1115 ± 0.0018	-5.8%