

Rethinking Class Imbalance for Single-Cell Foundation Models: A Systematic Benchmark Across Architectures and Long-Tail Loss Functions

Zeyu Dong Jiahui Zhong

Abstract

Single-cell foundation models (scGPT, scBERT, Geneformer) achieve cell-type classification accuracy up to 97.5% in our experiments, yet this aggregate accuracy can mask systematic failure on rare, often disease-relevant cell populations that long-tail loss functions are widely assumed to address. We present a systematic benchmark of six long-tail loss functions (cross-entropy, weighted CE, class-balanced loss, focal loss, LDAM, logit-adjusted softmax) across three architectures and three datasets (Multiple Sclerosis, Zheng68K, human Pancreas), totaling 162 controlled training runs (3 backbones $\times$ 3 datasets $\times$ 6 losses $\times$ 3 seeds). The gap between overall accuracy, Macro-F1, and rare-class recall under plain cross-entropy is consistent across all nine (architecture, dataset) settings, driven by dataset structure rather than pre-training. Rare-class failure itself splits into two regimes with distinct embedding-geometry signatures, visible before any loss is chosen: some classes are recoverable by the right loss, while others retain linear separability yet are absorbed into unrelated classes’ neighborhoods under every evaluated loss and architecture. Among the recoverable classes, the efficacy of reweighting is predicted by a class’s *absolute* training-set size, rather than its share of the dataset or the dataset’s overall imbalance ratio. Class-balanced loss and LDAM are the most consistent choices across all nine settings, while logit adjustment trades rare-class precision for recall rather than improving both. Our results give both a reusable benchmark and mechanism-grounded practical guidelines for combining foundation models with imbalanced biological data.

1 Introduction

Foundation models for single-cell RNA sequencing (scRNA-seq), including scGPT (Cui et al. 2024), scBERT (Yang et al. 2022), Geneformer (Theodoris et al. 2023), scFoundation (Hao et al. 2024), and CellPLM (Wen et al. 2024), have become the default backbone for cell-type annotation (Zhang et al. 2025b). Reported accuracy on standard benchmarks is often above 90%, but this aggregate metric is dominated by common cell types (Li et al. 2025). Rare cell populations, which frequently carry critical disease-relevant signals, such as early-transitional or pathological states (Zheng et al. 2024), are systematically under-served, a pattern first documented at the benchmark level by Alsabbagh et al. (2023); Wu et al. (2025). Alsabbagh et al. (2023) attempt to address it at the sampling-strategy level, and Naziri et al. (2025) document it in the specific context of disease-state subgroup failure.

While long-tail failures in single-cell foundation models are increasingly recognized, loss-level interventions have

not been systematically investigated across architectures. We benchmark six general-purpose long-tail strategies (Lin et al. 2017; Cui et al. 2019; Cao et al. 2019; Menon et al. 2021) to determine which are most consistently effective for rare cell populations, whether benefits are backbone-dependent, and how embedding geometry and training-set scarcity delimit the gains attainable through loss-level optimization.

Our contributions are fourfold. (1) We introduce the first systematic, loss-function-level benchmark for class imbalance in single-cell foundation models: a 162-run controlled study spanning a full loss-function grid across three foundation-model architectures and three general-purpose datasets, addressing both questions above. (2) We show that loss function optimization alone is insufficient to recover certain rare classes, a limitation explained via neural collapse theory (Papayan, Han, and Donoho 2020) in Section 5. (3) We find that, among recoverable classes, absolute training-set size, rather than relative frequency, predicts reweighting benefit, consistent with findings in the general long-tail learning literature (the effective-number-of-samples framework (Cui et al. 2019), computer-vision studies under imbalance (Buda, Maki, and Mazurowski 2018; Saini and Susan 2023), and imbalance’s multiple characterizing axes (Gao et al. 2026)); we show this holds for single-cell foundation models specifically, predicting how much a class gains from replacing cross-entropy among classes with non-trivial reweighting-based F1. (4) We show that different long-tail losses make different, quantifiable trade-offs (recall for precision) that a single aggregate metric such as Macro-F1 obscures, and translate this into actionable guidelines for practitioners.

2 Related Work

Alsabbagh et al. (2023) benchmark scGPT, scBERT, and Geneformer on imbalanced cell-type annotation and find random oversampling the most consistently effective mitigation, unlike undersampling or imputation-based resampling. They attribute Geneformer’s weaker performance to its rank-based (as opposed to expression-value-based) tokenization. Their study focuses on sampling strategies across two datasets; we complement it with a loss-level axis across three datasets, holding sample distribution and batch composition fixed throughout to isolate the effect of the loss-function axis. Other rare-cell annotation methods use synthetic oversampling (Bej et al. 2021) or adaptive weight sampling (Cheng et al. 2023); unlike ours, these interventions jointly alter the training distribution and classifier design. A separate evaluation of four foundation models on an acute myeloid

leukemia dataset shows that strong aggregate F1 masks substantial subgroup-level performance gaps (e.g., scGPT’s F1 falling from above 0.90 on healthy samples to below 0.75 on relapse cases), attributed to pretraining-corpus bias toward healthy cells and calling for better representation of disease-specific cell types in future pretraining data (Naziri et al. 2025). A complementary imbalance axis, demographic composition rather than cell-type frequency, also measurably affects scGPT fine-tuning outcomes (Al Amin, Filienko, and Qin 2025). General-purpose single-cell transcriptomics benchmarks cover similar ground but do not focus on class-imbalance failure modes specifically (Qi et al. 2025; Qiu et al. 2025). Liu et al. (2026) compare ten single-cell foundation models across eight downstream tasks but evaluate cell-type annotation only in aggregate, without a rare-class or loss-function axis.

Outside single-cell biology, long-tail learning is a mature area (Gao et al. 2026; de Alvis and Seneviratne 2024; Zhang et al. 2023b), spanning sampling-based approaches such as SMOTE’s synthetic minority oversampling (Chawla et al. 2002) and the loss-level reweighting family we focus on here; imbalance-aware benchmarking has also spread to other structured-data domains, e.g., tabular data (Liu et al. 2025). Loss-level approaches re-derive the training objective to counteract class frequency: inverse-frequency reweighting and its effective-number-of-samples refinement, class-balanced loss (Cui et al. 2019), focal loss’s down-weighting of easy examples (Lin et al. 2017), LDAM’s label-distribution-aware margin (Cao et al. 2019), and logit adjustment’s additive class-prior correction (Menon et al. 2021). Within single-cell biology, Zhao et al. (2025) propose a dedicated loss function paired with a purpose-built pretrained model and a new 40-million-cell dataset for long-tailed annotation. Other work addresses long-tailed open-world annotation through distribution-independent contrastive learning (Zhai, Chen, and Deng 2024). We systematically benchmark six established general-purpose losses across three existing pretrained backbones, isolating how loss choice alone interacts with an otherwise unmodified pretraining stage. Representation-level approaches instead decouple feature learning from classifier calibration (Kang et al. 2020); Weerasekara et al. (2026) apply this to single-cell foundation models via marker-gene priors reshaping the embedding manifold post-pretraining, and other methods build on this decoupling with multiple distribution-aware experts (Wang et al. 2021), supervised contrastive learning (Cui et al. 2021), or reflective learning (Zhao et al. 2024), combining representation- and loss-level ideas in one pipeline. These directions require either a second training stage on a frozen backbone or multiple parallel classification heads. Our study focuses on loss-level interventions that compose directly with pre-trained backbones, offering a complementary perspective to architectural modifications. A separate line of work addresses long-tailed single-cell annotation through a class-incremental lens, using generative replay to retain rare-class knowledge as new cell types are introduced over time (Li et al. 2026); we instead focus on the fixed-class-set setting standard in cell-type annotation benchmarks.

3 Experimental Setup

Backbones. scGPT (Cui et al. 2024), scBERT (Yang et al. 2022), and Geneformer (Theodoris et al. 2023), each fine-tuned with a linear classification head on top of the pretrained encoder, using its default cell-level aggregation: scGPT extracts a dedicated CLS token; Geneformer uses HuggingFace’s standard pooler (a transformed first-position hidden state); scBERT instead passes the full per-gene-token sequence through a convolution-and-fully-connected head, with no separate pooling step. scGPT and Geneformer use full-parameter fine-tuning, with every encoder and head parameter trainable. scBERT follows its default protocol: the pretrained encoder is frozen except for its final normalization layer and penultimate Performer block, alongside the newly initialized classification head; the remainder of the encoder is frozen. Each backbone thus uses its recommended fine-tuning protocol rather than a single protocol imposed uniformly across architectures. All three use a single learning rate across every trainable parameter, with no layer-wise decay. scGPT and Geneformer train for a fixed 15 epochs. scBERT trains for up to 15 epochs with early stopping (patience 10 on validation Macro-F1, matching scBERT’s protocol). All three follow Alsabbagh et al. (2023)’s per-backbone optimizer choice: Adam (Kingma and Ba 2015) ($\text{lr} = 10^{-4}$) for scGPT and scBERT, AdamW (Loshchilov and Hutter 2019) ($\text{lr} = 5 \times 10^{-5}$, weight decay 10^{-3}) for Geneformer. Batch size follows Alsabbagh et al. (2023)’s per-backbone protocol (32/1/12 for scGPT/scBERT/Geneformer respectively) on MS and Pancreas; for scBERT on Zheng68K, we use gradient accumulation for an effective batch size of 60, matching the batch-size-1 protocol applied to MS and Pancreas. Every loss under test computes its class-level term from fixed, globally precomputed training-set statistics, and scBERT’s Performer backbone normalizes per sample via LayerNorm; neither depends on batch composition. All experiments were conducted on NVIDIA RTX 4090 GPUs using bfloat16 mixed precision.

Datasets. Multiple Sclerosis (MS, 18 cell types, top-3000 highly variable genes, underlying atlas from Schirmer et al. 2019) and Zheng68K (11 cell types, top-3000 highly variable genes, underlying atlas from Zheng et al. 2017) follow the protocol of Alsabbagh et al. (2023), which applies this HVG reduction to MS but not Zheng68K; we extend it to Zheng68K as well for cross-dataset consistency, selecting the panel from the training split only and applying it unchanged to the test split. MS’s and Pancreas’s gene panels are inherited pre-selected from public tutorials. We retain two ambiguous MS labels as defined in the source atlas. Human Pancreas (14 cell types, top-3000 highly variable genes matching the other two datasets, underlying atlas from Baron et al. 2016) was introduced in this benchmark, using scGPT’s public tutorial annotation split, which leaves three cell types (macrophage, Schwann, T cell) with zero test-set cells; we exclude these from all evaluation metrics. All three datasets’ gene panels are selected via scanpy’s (Wolf, Angerer, and Theis 2018) `highly_variable_genes` (cell_ranger flavor, a variance-based feature-selection step) on library-size-normalized (10^4 counts per cell) and $\ln(1 + x)$ -transformed

expression, the same gene panel shared by all three backbones per dataset, before any backbone-specific tokenization. Geneformer’s rank-based tokenizer requires values proportional to raw counts rather than log-transformed ones: for Zheng68K we used independently sourced raw counts directly; for MS and Pancreas, where independent raw counts were unavailable, we recovered count-proportional values via $\exp(x) - 1$, exactly preserving gene rankings since library-size normalization and this recovery both apply the same per-cell scalar. Our three datasets’ train/test splits also differ by design: Zheng68K is class-proportion-preserving, MS holds out entire patients (9 train/12 test donors, providing a clinically realistic test of out-of-distribution generalization to unseen individuals), and Pancreas follows its source tutorial’s split.

Losses. Cross-entropy (CE), inverse-frequency weighted CE, class-balanced loss (Cui et al. 2019) ($\beta = 0.9999$), focal loss (Lin et al. 2017) ($\gamma = 2.0$), LDAM (Cao et al. 2019) (maximum margin 0.5, logit scale 30, at default), and logit-adjusted softmax (Menon et al. 2021). Every loss uses default hyperparameters, to evaluate each loss family’s off-the-shelf robustness on this benchmark.

Protocol. For each of the $3 \times 3 \times 6 = 54$ (backbone, dataset, loss) cells we train 3 seeds and report the mean. For each run, we select the checkpoint with the best Macro-F1 on a held-out validation set (10% of the training data) and evaluate it once on the test set. Class predictions are assigned by argmax over each model’s output logits. A class is considered rare if its training-split frequency is below 5% per domain experience; let $\mathcal{R} \subseteq \{1, \dots, C\}$ denote the resulting set of rare classes in a given dataset. We report accuracy, Macro-F1,

$$\text{Macro-F1} = \frac{1}{C} \sum_{c=1}^C F_{1,c}, \quad (1)$$

the unweighted mean of each class’s F1 score across all C evaluated classes, and rare-class recall,

$$\text{Recall}_{\mathcal{R}} = \frac{1}{|\mathcal{R}|} \sum_{c \in \mathcal{R}} \text{Recall}_c, \quad (2)$$

the macro-averaged recall restricted to $\mathcal{R}$. Rare-class precision is defined analogously, using precision_c in place of recall_c . Rare-class AUPRC (Table 1) instead macro-averages each class’s one-vs-rest area under the precision-recall curve over $\mathcal{R}$.

4 Systematic Evaluation

4.1 Aggregate Accuracy Overstates Rare-Class Performance, Regardless of Architecture

The raw training-set class distribution for all three datasets (Figure 1) shows Pancreas is the most extreme by relative measures (imbalance ratio 2822:1 and 64% of its classes below the 5% rare-class threshold, both higher than MS’s 603:1 and 61%); however, MS exhibits the greatest benefit from reweighting. Figure 2 (left) shows accuracy, Macro-F1, and rare-class recall under plain cross-entropy, averaged over

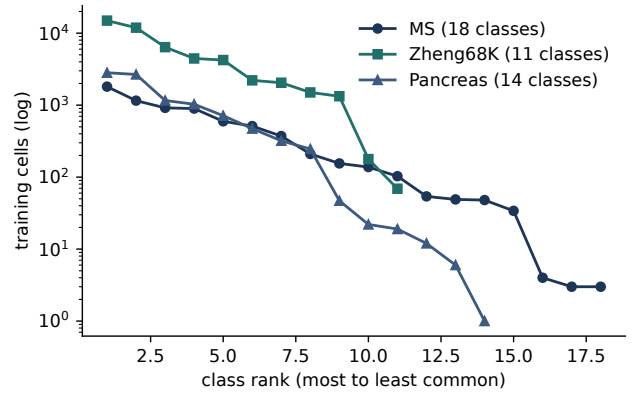


Figure 1: Training-set class rank vs. count for all three datasets (log scale). MS’s and Pancreas’s smallest classes reach a minimum of single-digit sample counts, while Zheng68K’s smallest class still has ~ 70 training cells.

all three backbones, for each dataset. Across all nine (backbone, dataset) combinations, accuracy exceeds Macro-F1, which in turn exceeds rare-class recall. This gap is present regardless of which foundation model is used, indicating it is an inherent property of the data’s imbalance structure. (Its plain-CE Macro-F1 for scBERT on MS is 0.639, differing from 0.858 reported by Alsabbagh et al. (2023); this variance arises from adoption of scBERT’s default configuration across Gene2Vec (Du et al. 2019), checkpoint-loading, batch size, and optimizer schedule.)

4.2 Loss-Function Comparison

Table 1 reports Macro-F1 and rare-class recall for all six losses, averaged across backbones and seeds. Loss rankings below are still computed within each (backbone, dataset) cell before averaging, so this cross-backbone variance does not confound them. Ranking each loss by its average position across all nine (backbone, dataset) cells, class-balanced loss (mean rank 2.4 of 6) and LDAM (2.6) are the most consistent generalists, ahead of the remaining four losses; neither is the top performer on every dataset column (weighted CE has the best MS Macro-F1 at 0.721, and LDAM itself the best Pancreas Macro-F1 at 0.819), but both consistently rank near the top across all nine cells rather than exhibiting severe dataset-specific variance. Ranked instead by rare-class macro-AUPRC (a threshold-free measure of ranking quality across the full precision-recall curve that avoids committing to any single decision threshold), class-balanced loss remains the strongest (0.734). LDAM, in contrast, yields the lowest performance (0.690) despite its strong F1-based mean rank, consistent with a margin-based objective that shapes decision boundaries without directly calibrating class probabilities. Logit adjustment gives the largest rare-recall gain on Zheng68K (0.685 vs. the next-best 0.649) and ties for second on Pancreas (0.766 vs. LDAM’s 0.767; paired t -test across the nine backbone-seed cells, $t = 0.04$, $p = 0.97$), trailing only weighted CE’s 0.772. It is nonetheless the weakest generalist overall (mean rank 5.2), trading broad consistency

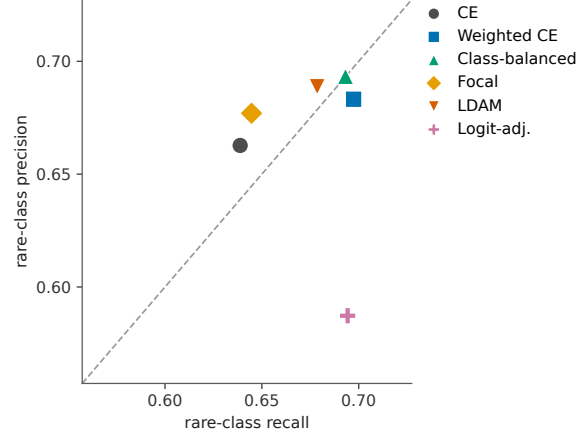
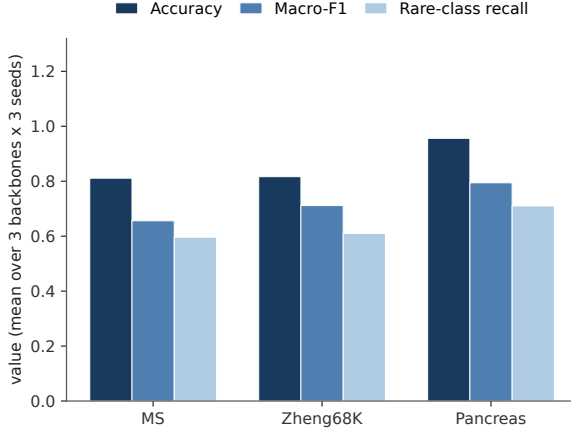


Figure 2: **Left:** per-dataset breakdown under plain CE (mean of 9 backbone×seed runs per bar); Pancreas has the highest accuracy but also the largest accuracy-to-rare-recall drop. **Right:** rare-class precision vs. recall by loss (Section 4.4); dashed line is $y = x$. Points above trade recall for precision, points below trade precision for recall.

for rare-class-specific recall. The relative Macro-F1 improvement of the best loss over CE is largest on MS (+9.9%) and smallest on Zheng68K (+0.9%), even though Zheng68K is not the most imbalanced dataset in absolute-count terms, as analyzed in Section 4.3.

4.3 Reweighting Benefit Is Predicted by Absolute Rare-Class Sample Count

To determine whether the best loss’s Macro-F1 gain over CE (Section 4.2: +9.9% on MS, +0.9% on Zheng68K) is spread evenly across rare classes or concentrated in a few, we evaluate what predicts each rare class’s gain from switching away from cross-entropy. For each rare class c , we compute

$$\Delta F_{1,c} = \max_{\ell \in \mathcal{L}} F_{1,c}^{(\ell)} - F_{1,c}^{(\text{CE})}, \quad (3)$$

where $\mathcal{L}$ is the set of six losses under test and $F_{1,c}^{(\ell)}$ is class c ’s F1 under loss ℓ , averaged over backbones and seeds. We then correlate $\Delta F_{1,c}$ with that class’s absolute training-set size. We exclude rare classes whose best-available-loss F1 is itself near zero (mean < 0.2 across backbones, $n = 4$ classes) from this regression, since these represent the severely entangled regime (Section 5). Figure 3 (right) shows a strong, significant negative Pearson correlation ($r = -0.77$, $p < 0.001$, $n = 19$ rare classes) between each rare class’s log-transformed absolute training-set size and its reweighting gain. Reintroducing these four severely entangled classes yields a weaker but still significant correlation ($r = -0.53$, $p = 0.010$, $n = 23$), demonstrating the trend’s robustness to this exclusion. This inverse relationship between absolute sample count and reweighting benefit directly explains the dataset-level pattern in Section 4.2: MS, whose rare classes have the fewest training examples in absolute terms despite a comparable imbalance *ratio* to Zheng68K, exhibits the greatest benefit from reweighting. This relationship remains negative and significant across a range of severely entangled exclusion thresholds ($r = -0.53$

to -0.78 , $p < 0.01$, $n = 18\text{--}23$) and rare-class-frequency cutoffs ($r = -0.72$ to -0.80 , $p < 0.001$, $n = 14\text{--}30$).

4.4 Logit Adjustment Trades Rare-Class Precision for Recall Gains

Figure 2 (right) plots rare-class precision against rare-class recall, averaged over all nine settings, for each loss. Class-balanced loss shows the largest joint gain in both precision and recall relative to CE (precision +0.031, recall +0.054), followed closely by LDAM (+0.026, +0.040), both improving precision and recall simultaneously. Logit adjustment improves recall by a similar margin but incurs a substantial precision penalty: it has the lowest rare-class precision of all six losses. This indicates it achieves its recall gains primarily by shifting the decision threshold rather than fundamentally improving feature separability, leading to more false positives. Non-rare-class precision and recall are comparatively stable across loss choice (1.1- and 2.1-point spreads respectively across all six losses), versus a 10.6-point spread in rare-class precision and a 5.9-point spread in rare-class recall, indicating the differences between losses are concentrated in rare-class behavior.

4.5 Computational Efficiency

Loss-level reweighting introduces negligible computational overhead: across all nine (backbone, dataset) settings and five reweighting-based losses (45 comparisons), wall-clock training time stays within 3.2% of plain cross-entropy, and under 1% in most cases. Backbone selection affects cost far more than loss choice: on MS under plain CE (seed 0), scBERT requires 35.5 minutes (batch size 1) versus 6.2 for scGPT and 1.9 for Geneformer, while scGPT’s peak GPU memory (8.0 GB) is roughly 6× Geneformer’s (1.3 GB) and 19× scBERT’s (0.4 GB).

Loss	MS		Zheng68K		Pancreas		$\Delta F1$	Rare AUPRC	Mean Rank
	F1	Recall $\mathcal{R}$	F1	Recall $\mathcal{R}$	F1	Recall $\mathcal{R}$			
Cross-entropy	0.656 $\pm$.054	0.596 $\pm$.072	0.711 $\pm$.026	0.610 $\pm$.054	0.794 $\pm$.052	0.710 $\pm$.106	—	0.712 $\pm$.083	4.56
Weighted CE	0.721 $\pm$.035	0.687 $\pm$.042	0.704 $\pm$.041	0.634 $\pm$.050	0.816 $\pm$.039	0.772 $\pm$.065	+0.026	0.728 $\pm$.066	2.78
Class-balanced	0.716 $\pm$.042	0.685 $\pm$.047	0.708 $\pm$.042	0.649 $\pm$.050	0.816 $\pm$.028	0.746 $\pm$.068	+0.026	0.734 $\pm$.062	2.44
Focal	0.662 $\pm$.059	0.605 $\pm$.071	0.718 $\pm$.027	0.625 $\pm$.042	0.787 $\pm$.034	0.704 $\pm$.081	+0.002	0.719 $\pm$.068	3.44
LDAM	0.693 $\pm$.050	0.644 $\pm$.066	0.717 $\pm$.031	0.625 $\pm$.048	0.819 $\pm$.021	0.767 $\pm$.047	+0.022	0.690 $\pm$.095	2.56
Logit-adjusted	0.650 $\pm$.045	0.632 $\pm$.061	0.704 $\pm$.038	0.685 $\pm$.040	0.761 $\pm$.047	0.766 $\pm$.062	−0.016	0.700 $\pm$.075	5.22

Table 1: Macro-F1 and rare-class recall ($n=9$: 3 backbones $\times$ 3 seeds; $\pm$ is the standard deviation across these nine cells) per loss and dataset, plus mean $\Delta F1$ over CE (Eq. 3), rare-class macro-AUPRC (area under the precision-recall curve per rare class, macro-averaged, mean over the same nine cells; $n=24$ for cross-entropy, $n=27$ for every other loss), and mean rank (1=best, 6=worst) across all nine cells. Bold marks the best value per column.

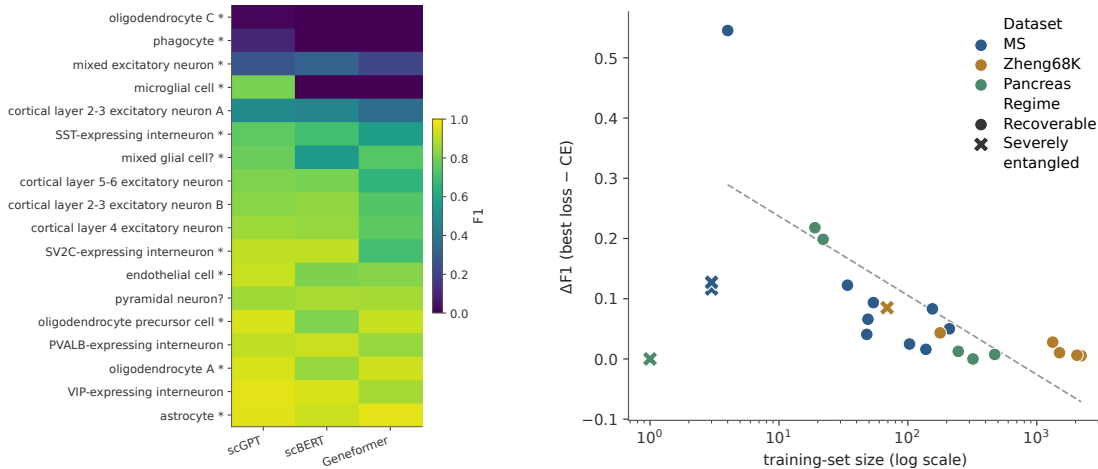


Figure 3: **Left:** per-class F1 heatmap (CE, MS), rows sorted by mean F1 across the three backbones, hardest (top) to easiest (bottom); a class with high F1 on one backbone but low F1 on the other two can still rank as hard. * marks a rare class (Section 3). The two hardest classes are dark across all three columns since no backbone architecture recovers them; classes further down show lighter, more backbone-dependent shading (three-way split, Section 5). **Right:** per-class $\Delta F1$ against training-set size (log x -axis) for all rare classes across all three datasets; color marks dataset. Circles (fit line, $n=19$, $r=-0.77$) are the recoverable regime; $\times$ markers show the four severely entangled classes (two from MS, one each from Zheng68K and Pancreas); the same near-floor regime recurs across all three datasets (Section 4.3).

5 Diagnostic Analysis

5.1 Two Distinct Rare-Class Failure Regimes

Figure 3 (left) shows per-class F1 for CE across the three backbones on MS, sorted from hardest to easiest. Two classes exhibit near-zero F1 scores irrespective of backbone or loss (oligodendrocyte C, phagocyte). Both have only 3 training examples, too few for any of the reweighting schemes we test to compensate for. Several other rare classes (e.g., microglial cell) show F1 ranging from 0 to nearly 1 depending on loss and seed. For these specific classes, the choice of loss function substantially affects performance, whereas the remaining rare classes already perform well under plain CE regardless of loss choice. This three-way split (severely entangled, loss-sensitive, and loss-insensitive) recurs on Zheng68K and Pancreas and suggests that reporting a single aggregated rare-class metric can obscure where a given method is effective. To test whether this failure is specific to foundation-model pretraining or persists across representations, we additionally

evaluate two non-foundation-model baselines: a distance-weighted 5-nearest-neighbor classifier (Cover and Hart 1967; Dudani 1976) and a class-balanced random forest (Breiman 2001; Chen, Liaw, and Breiman 2004) with 300 trees, both fit directly on raw gene-expression features with no intervening learned representation step (e.g., PCA or a variational embedding). Both yield an F1 score of 0 on these same classes, matching every loss function’s fully trained classifier head; the failure is therefore not specific to pretrained representations. Both baselines are otherwise non-trivial on MS overall (Macro-F1 0.28 for the 5-NN, 0.65 for the random forest, comparable to the foundation models’ plain-CE Macro-F1), confirming this is not merely a degenerate-baseline artifact.

5.2 Geometric Signatures and Neighborhood Absorption

We analyze the embedding geometry and confusion patterns of the two severely entangled MS classes to understand their

uniform failure across CE, LDAM, and logit-adjusted softmax: they are absorbed into unrelated classes’ regions of representation space rather than forming their recognizable cluster, consistent with too few training examples to learn a distinguishable representation, independent of backbone or loss (Figure 4). Extending this analysis to all three backbones under CE, both classes are consistently misclassified into the *same* pair of neighboring classes regardless of architecture. Oligodendrocyte A and an unspecified mixed glial type jointly account for 91–97% of all phagocyte misclassifications across scGPT, scBERT, and Geneformer (individually 44–76% and 21–47% respectively, varying in relative split while the same two classes dominate throughout). Oligodendrocyte C is absorbed into excitatory-neuron classes for 75–89% of its errors in all three. This cross-architecture agreement is consistent with real transcriptional overlap between these cell types: phagocyte is identified by ingested myelin/oligodendrocyte RNA (Schirmer et al. 2019), rather than an architecture-specific failure mode. The same pattern appears at the representation level: phagocyte’s embedding centroid is the nearest of all 17 other MS classes to *both* of its confusion partners in every one of six (backbone, loss) combinations we evaluated (scGPT, scBERT, Geneformer $\times$ CE, LDAM), indicating a topology-driven failure rather than a classifier decision-boundary failure.

Phagocyte and oligodendrocyte C differ in their geometric failure modes. Specifically, 72.5% of phagocyte cells’ nearest non-self-class neighbors belong to oligodendrocyte A alone (3 unique neighbor classes, normalized entropy 0.71), a concentrated absorption consistent with data scarcity. Conversely, oligodendrocyte C’s nearest neighbors spread across 10 classes (normalized entropy 0.90), extending beyond mere data scarcity. Biologically, oligodendrocyte C is an MS-specific pathological subcluster; its confusion with excitatory neurons reflects shared self-antigen-presentation (B2M, HLA-C) and cell-stress activation in MS lesions (Schirmer et al. 2019). This geometric-proximity pattern generalizes beyond MS, though less uniformly: under scGPT/CE, Zheng68K’s CD14+ Monocyte and Dendritic cells are mutually each other’s rank-1/rank-2 nearest centroid ($p \approx 0.022$), while on Pancreas the effect is present but weaker, with MHC class II’s confusion partner ranking only second nearest. Geometric proximity consistently contributes to confusion across datasets, although its magnitude varies.

We also quantify the within-class/between-class geometry using the standard neural collapse trace ratio (Papayan, Han, and Donoho 2020)

$$\text{NC1} = \frac{\text{tr}(\Sigma_W)}{\text{tr}(\Sigma_B)}, \quad (4)$$

where Σ_W is the average within-class scatter and Σ_B is the between-class scatter of class centroids around their group mean (lower NC1 indicates tighter, better-separated clusters; the ratio is the reciprocal of the Fisher Discriminant Ratio from classical pattern recognition). Following prior work characterizing this geometry directly under class imbalance (Fang et al. 2021; Zhang et al. 2025a), we adopt this trace ratio to geometrically characterize frozen test-set em-

beddings. Restricted to MS’s 11 rare classes under plain CE, oligodendrocyte C shows substantially higher NC1 than most other rare classes on every backbone (scGPT: 1.19, scBERT: 1.30, Geneformer: 1.79; second-highest of the 11 rare classes on average, behind only mixed excitatory neuron), quantitatively confirming it lacks the tight, well-separated clustering observed in most other rare classes, consistent with the confusion and nearest-neighbor evidence above. Phagocyte’s NC1, by contrast, is not elevated (0.17–0.32, ranking 8th of 11): its small cell count means a handful of tightly clustered cells embedded inside another class’s region can produce low within-class scatter despite total confusability, a signature the nearest-neighbor evidence above captures instead. This contrast replicates across all three MS backbones. Together, the confusion-pattern, NC1, and nearest-neighbor evidence distinguish MS’s two severely entangled classes from its other rare classes, each through a different geometric signature.

5.3 Linear Probing Reveals Unused Discriminative Signal

To investigate whether “severely entangled” reflects a genuine absence of discriminative signal, or merely a failure of the six loss functions to exploit signal that is present, we fit an independent linear probe (Alain and Bengio 2017) for oligodendrocyte C, phagocyte, and (as a loss-sensitive control) microglial cell on each backbone’s CE-fine-tuned embeddings: a class-balanced logistic regression evaluated by 5-fold stratified cross-validation within the frozen test-set embeddings (measuring CV-internal separability, not train/test generalization).

For the two entangled classes, the probe recovers non-trivial F1 with high recall but low precision (oligodendrocyte C: 0.175–0.465, phagocyte: 0.248–0.462 across backbones), and in all six (backbone, class) combinations this *exceeds* the best F1 the model’s fully trained classifier head achieves under any of the six losses (e.g., scGPT/oligodendrocyte C: probe 0.465 vs. best trained 0.329; Geneformer/oligodendrocyte C: probe 0.175 vs. 0.000). For the loss-sensitive control class microglial cell, this margin shrinks sharply and, for two of three backbones, reverses: scGPT’s probe still outperforms its trained classifier, but by only 4.3 points, versus 13.6 and 8.3 points for oligodendrocyte C and phagocyte respectively, while scBERT’s probe underperforms by 8.5 points (0.634 vs. 0.719) and Geneformer’s by 1.6 points (0.844 vs. 0.860).

Discriminative signal therefore survives in the frozen representation for the two severely entangled classes despite only 3 training examples each. The reweighting-based losses we evaluate leave part of this signal unused, placing the bottleneck partly in loss design rather than solely in data scarcity. Since the probe and the model’s classifier head are fit on the same fine-tuned embeddings, this localizes the bottleneck to classifier training rather than to a collapse of the representation itself, consistent with the motivation behind decoupling classifier calibration from representation learning (Kang et al. 2020).

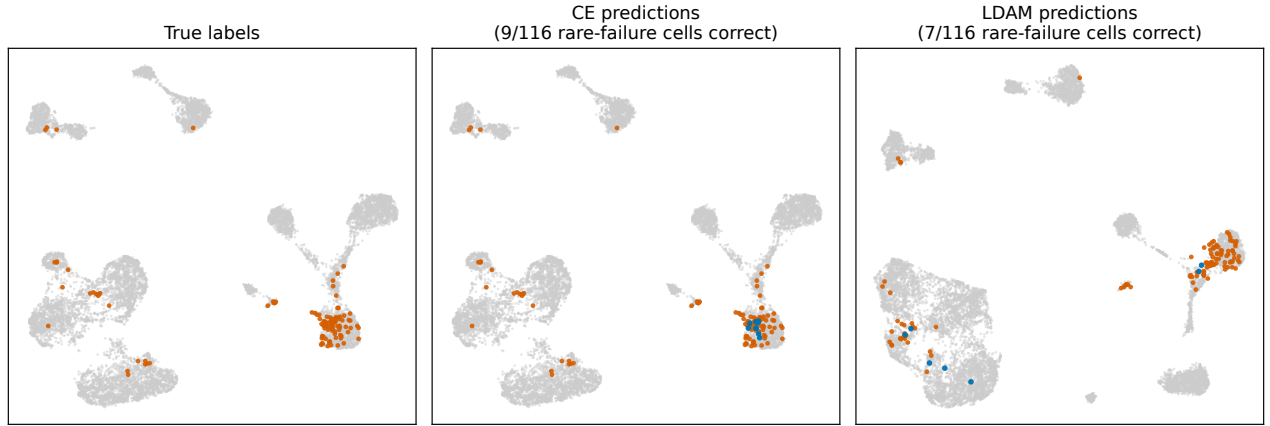


Figure 4: UMAP (Healy and McInnes 2024) of MS test-set embeddings (scGPT), with the two severely entangled classes’ 116 test-set cells (oligodendrocyte C: 34, phagocyte: 82) highlighted against all other classes in gray throughout all three panels. **Left:** true labels in CE’s embedding space; these 116 cells appear in orange. **Center:** the same 116 cells in the same CE embedding space, now colored by CE’s prediction correctness (blue = correctly classified, orange = misclassified). **Right:** the same 116 cells in LDAM’s own, separately fine-tuned embedding space, colored by LDAM’s prediction correctness, since CE and LDAM are separately fine-tuned checkpoints. Both losses recover only a small minority of these cells (9/116 under CE, 7/116 under LDAM, both blue), confirming the failure is rooted in the embedding geometry itself, not a specific classifier head.

6 Discussion and Limitations

Given that the rare cell types most affected by this bottleneck are disproportionately disease-relevant (Naziri et al. 2025; Zheng et al. 2024; Schilder et al. 2026), a foundation model that reports strong aggregate accuracy can still be unreliable on the subpopulations most relevant to a clinical or discovery pipeline. A severely entangled class identified by the embedding-geometry check in Section 5 signals a data-scarcity bottleneck better addressed by collecting more data or abstaining (a reject-option strategy) than by further loss engineering.

Practical Guidelines. First, default to class-balanced loss when a rare class is loss-sensitive: it yields the most consistent gains in both classification quality and calibration (Section 4.2); LDAM is a close second by rank but shows the weakest calibration. Second, treat logit adjustment as a trade-off mechanism for precision and recall rather than a default choice: its recall gains come at a substantial precision cost (Section 4.4), so reserve it for settings where missing a rare-class instance is costlier than a false positive. Third, embedding geometry, such as the NC1 trace ratio and nearest-neighbor confusion patterns computed before any loss is chosen, predicts which rare classes will fail regardless of loss choice (Section 5); for those that do, a linear probe on the frozen embeddings distinguishes unused signal, warranting further loss engineering, from genuine data scarcity.

Biological Significance of the Loss-Sensitive Regime. This regime has direct biological implications: although microglia mediate demyelination in MS (Zhang et al. 2023a), detecting them under CE remains architecture-dependent. They are well recovered on scGPT (F1 0.73–0.84) but undetected on scBERT and Geneformer (F1 = 0 across seeds). Class-balanced loss and weighted CE recover this population

consistently on Geneformer (F1 0.84–0.87) and partially on scBERT (F1 0.86–0.92 in two seeds; 0.32–0.39 in one).

Limitations and Future Work. We evaluate three pre-trained architectures (scGPT, scBERT, Geneformer); other existing single-cell foundation models, such as scFoundation and CellPLM (Hao et al. 2024; Wen et al. 2024), remain untested. While our linear-probe analysis (Section 5) demonstrates that discriminative signal is linearly separable in the frozen representation, a more expressive, nonlinear classifier head might extract additional signal beyond what the six losses we test currently achieve. Finally, this study isolates cell-type class imbalance specifically; compounding variables such as demographic composition (Al Amin, Filienko, and Qin 2025) or batch effects (Maan et al. 2024) require future investigation.

7 Conclusion

We present a 162-run benchmark of six long-tail losses across three single-cell foundation model architectures and three datasets. Rare-class failure manifests as two diagnosable regimes, loss-sensitive and severely entangled, the latter being discernible in embedding geometry and unresolved by the evaluated losses. Among the recoverable classes, a rare class’s absolute training-set size, rather than its share of the dataset, predicts its benefit from reweighting. Class-balanced loss and LDAM are the most consistent choices across all nine settings, whereas logit adjustment trades rare-class precision for recall rather than improving both.

Code Availability. Implementation and experiment configurations are available at <https://github.com/jz890/sc-imbalance>.

References

- Al Amin, M. A. U.; Filienko, D.; and Qin, H. 2025. Influence of Gender-Specific Data Imbalance on scGPT Fine-Tuning for Single-Cell Genomics. In *Proceedings of the AAAI Symposium Series*, volume 7, 420–427.
- Alain, G.; and Bengio, Y. 2017. Understanding intermediate layers using linear classifier probes. In *International Conference on Learning Representations (Workshop Track)*.
- Alsabbagh, A. R.; Maillou Ruiz de Infante, A.; Gomez-Cabrero, D.; Kiani, N. A.; Khan, S. A.; and Tegnér, J. N. 2023. Foundation Models Meet Imbalanced Single-Cell Data When Learning Cell Type Annotations. *bioRxiv* 2023.10.24.563625.
- Baron, M.; Veres, A.; Wolock, S. L.; Faust, A. L.; Gaujoux, R.; Vetere, A.; Ryu, J. H.; Wagner, B. K.; Shen-Orr, S. S.; Klein, A. M.; Melton, D. A.; and Yanai, I. 2016. A Single-Cell Transcriptomic Map of the Human and Mouse Pancreas Reveals Inter- and Intra-cell Population Structure. *Cell Systems*, 3(4): 346–360.
- Bej, S.; Galow, A.-M.; David, R.; Wolfen, M.; and Wolkenhauer, O. 2021. Automated annotation of rare-cell types from single-cell RNA-sequencing data through synthetic oversampling. *BMC Bioinformatics*, 22(1): 557.
- Breiman, L. 2001. Random Forests. *Machine Learning*, 45(1): 5–32.
- Buda, M.; Maki, A.; and Mazurowski, M. A. 2018. A systematic study of the class imbalance problem in convolutional neural networks. *Neural Networks*, 106: 249–259.
- Cao, K.; Wei, C.; Gaidon, A.; Arechiga, N.; and Ma, T. 2019. Learning Imbalanced Datasets with Label-Distribution-Aware Margin Loss. In *Advances in Neural Information Processing Systems*, volume 32, 1565–1576.
- Chawla, N. V.; Bowyer, K. W.; Hall, L. O.; and Kegelmeyer, W. P. 2002. SMOTE: Synthetic Minority Over-sampling Technique. *Journal of Artificial Intelligence Research*, 16: 321–357.
- Chen, C.; Liaw, A.; and Breiman, L. 2004. Using Random Forest to Learn Imbalanced Data. Technical Report 666, Department of Statistics, University of California, Berkeley.
- Cheng, Y.; Fan, X.; Zhang, J.; and Li, Y. 2023. A scalable sparse neural network framework for rare cell type annotation of single-cell transcriptome data. *Communications Biology*, 6(1): 545.
- Cover, T.; and Hart, P. 1967. Nearest neighbor pattern classification. *IEEE Transactions on Information Theory*, 13(1): 21–27.
- Cui, H.; Wang, C.; Maan, H.; Pang, K.; Luo, F.; Duan, N.; and Wang, B. 2024. scGPT: toward building a foundation model for single-cell multi-omics using generative AI. *Nature Methods*, 21(8): 1470–1480.
- Cui, J.; Zhong, Z.; Liu, S.; Yu, B.; and Jia, J. 2021. Parametric Contrastive Learning. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 715–724.
- Cui, Y.; Jia, M.; Lin, T.-Y.; Song, Y.; and Belongie, S. 2019. Class-Balanced Loss Based on Effective Number of Samples. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 9260–9269.
- de Alvis, C.; and Seneviratne, S. 2024. A Survey of Deep Long-Tail Classification Advancements. *arXiv preprint arXiv:2404.15593*.
- Du, J.; Jia, P.; Dai, Y.; Tao, C.; Zhao, Z.; and Zhi, D. 2019. Gene2vec: distributed representation of genes based on co-expression. *BMC Genomics*, 20(Suppl 1): 82.
- Dudani, S. A. 1976. The Distance-Weighted k-Nearest-Neighbor Rule. *IEEE Transactions on Systems, Man, and Cybernetics*, SMC-6(4): 325–327.
- Fang, C.; He, H.; Long, Q.; and Su, W. J. 2021. Exploring deep neural networks via layer-peeled model: Minority collapse in imbalanced training. *Proceedings of the National Academy of Sciences*, 118(43): e2103091118.
- Gao, X.; Xie, D.; Zhang, Y.; Wang, Z.; Chen, C.; He, C.; Yin, H.; and Zhang, W. 2026. A comprehensive survey on imbalanced data learning. *Frontiers of Computer Science*, 20(11): 2011622.
- Hao, M.; Gong, J.; Zeng, X.; Liu, C.; Guo, Y.; Cheng, X.; Wang, T.; Ma, J.; Zhang, X.; and Song, L. 2024. Large-scale foundation model on single-cell transcriptomics. *Nature Methods*, 21(8): 1481–1491.
- Healy, J.; and McInnes, L. 2024. Uniform manifold approximation and projection. *Nature Reviews Methods Primers*, 4: 82.
- Kang, B.; Xie, S.; Rohrbach, M.; Yan, Z.; Gordo, A.; Feng, J.; and Kalantidis, Y. 2020. Decoupling representation and classifier for long-tailed recognition. In *International Conference on Learning Representations*.
- Kingma, D. P.; and Ba, J. 2015. Adam: A Method for Stochastic Optimization. In *International Conference on Learning Representations*.
- Li, T.; Wang, Z.; Liu, Y.; He, S.; Zou, Q.; and Zhang, Y. 2025. An overview of computational methods in single-cell transcriptomic cell type annotation. *Briefings in Bioinformatics*, 26(3): bbaf207.
- Li, T.; Wang, Z.; Wu, C.; Huang, Z.; Xiang, Y.; Liu, Y.; Zou, Q.; Wen, N.; and Zhang, Y. 2026. Distribution and expression aware retrospective learning for single-cell long-tailed class-incremental annotation. *Applied Soft Computing*, 114745.
- Lin, T.-Y.; Goyal, P.; Girshick, R.; He, K.; and Dollár, P. 2017. Focal Loss for Dense Object Detection. In *Proceedings of the IEEE International Conference on Computer Vision*, 2999–3007.
- Liu, T.; Li, K.; Wang, Y.; Li, H.; and Zhao, H. 2026. Evaluating the Utilities of Foundation Models in Single-Cell Data Analysis. *Advanced Science*, 13(27).
- Liu, Z.; Li, Z.; Yang, Z.; Wei, T.; Kang, J.; Zhu, Y.; Hamann, H.; He, J.; and Tong, H. 2025. CLIMB: Class-imbalanced Learning Benchmark on Tabular Data. In *Advances in Neural Information Processing Systems*, volume 38.
- Loshchilov, I.; and Hutter, F. 2019. Decoupled Weight Decay Regularization. In *International Conference on Learning Representations*.

- Maan, H.; Zhang, L.; Yu, C.; Geuenich, M. J.; Campbell, K. R.; and Wang, B. 2024. Characterizing the impacts of dataset imbalance on single-cell data integration. *Nature Biotechnology*, 42(12): 1899–1908.
- Menon, A. K.; Jayasumana, S.; Rawat, A. S.; Jain, H.; Veit, A.; and Kumar, S. 2021. Long-tail learning via logit adjustment. In *International Conference on Learning Representations*.
- Naziri, A.; Asgari, A.; An, A.; Sachlos, E.; and Seyyed-Kalantari, L. 2025. From Bias to Breakdown: Benchmarking Failure Mode Analysis of Single-cell RNA Sequencing Foundation Models in Acute Myeloid Leukemia. In *Proceedings of the AAAI Symposium Series*, volume 7, 553–557.
- Papayan, V.; Han, X. Y.; and Donoho, D. L. 2020. Prevalence of neural collapse during the terminal phase of deep learning training. *Proceedings of the National Academy of Sciences*, 117(40): 24652–24663.
- Qi, J.; Cui, Y.; Guo, K.; Zhang, X.; Huang, J.; and Xie, G. 2025. A simple and comprehensive benchmark for single-cell transcriptomics. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 39, 676–684.
- Qiu, P.; Chen, Q.; Qin, H.; Fang, S.; Zhang, Y.; Zhang, Y.; Xia, T.; Cao, L.; Zhang, Y.; Fang, X.; Li, Y.; and Hu, L. 2025. BioLLM: A standardized framework for integrating and benchmarking single-cell foundation models. *Patterns*, 6(8): 101326.
- Saini, M.; and Susan, S. 2023. Tackling class imbalance in computer vision: a contemporary review. *Artificial Intelligence Review*, 56(S1): 1279–1335.
- Schilder, B. M.; Murphy, K. B.; Dash, H.; Zhang, Y.; Gordon-Smith, R.; Chapman, J.; Otani, M.; and Skene, N. G. 2026. Cell type-specific contextualisation of the human phenome: towards the systematic treatment of all rare diseases. *Genome Medicine*, 18: 113.
- Schirmer, L.; Velmesshev, D.; Holmqvist, S.; Kaufmann, M.; Werneburg, S.; Jung, D.; Vistnes, S.; Stockley, J. H.; Young, A.; Steindel, M.; Tung, B.; Goyal, N.; Bhaduri, A.; Mayer, S.; Engler, J. B.; Bayraktar, O. A.; Franklin, R. J. M.; Haeussler, M.; Reynolds, R.; Schafer, D. P.; Friese, M. A.; Shioh, L. R.; Kriegstein, A. R.; and Rowitch, D. H. 2019. Neuronal vulnerability and multilineage diversity in multiple sclerosis. *Nature*, 573: 75–82.
- Theodoris, C. V.; Xiao, L.; Chopra, A.; Chaffin, M. D.; Al Sayed, Z. R.; Hill, M. C.; Mantineo, H.; Brydon, E. M.; Zeng, Z.; Liu, X. S.; and Ellinor, P. T. 2023. Transfer learning enables predictions in network biology. *Nature*, 618(7965): 616–624.
- Wang, X.; Lian, L.; Miao, Z.; Liu, Z.; and Yu, S. X. 2021. Long-tailed recognition by routing diverse distribution-aware experts. In *International Conference on Learning Representations*.
- Weerasekara, S.; Darras, N.; Kamarthi, S.; Price, C.; and Isaacs, J. 2026. Prototype Guided Post-pretraining for Single-Cell Representation Learning. *arXiv preprint arXiv:2605.07938*.
- Wen, H.; Tang, W.; Dai, X.; Ding, J.; Jin, W.; Xie, Y.; and Tang, J. 2024. CellPLM: Pre-training of Cell Language Model Beyond Single Cells. In *International Conference on Learning Representations*.
- Wolf, F. A.; Angerer, P.; and Theis, F. J. 2018. SCANPY: large-scale single-cell gene expression data analysis. *Genome Biology*, 19: 15.
- Wu, J.; Ye, Q.; Wang, Y.; Hu, R.; Zhu, Y.; Yin, M.; Wang, T.; Wang, J.; Hsieh, C.-Y.; and Hou, T. 2025. Biology-driven insights into the power of single-cell foundation models. *Genome Biology*, 26: 334.
- Yang, F.; Wang, W.; Wang, F.; Fang, Y.; Tang, D.; Huang, J.; Lu, H.; and Yao, J. 2022. scBERT as a large-scale pretrained deep language model for cell type annotation of single-cell RNA-seq data. *Nature Machine Intelligence*, 4(10): 852–866.
- Zhai, Y.; Chen, L.; and Deng, M. 2024. Distribution-Independent Cell Type Identification for Single-Cell RNA-seq Data. In *Proceedings of the Thirty-Third International Joint Conference on Artificial Intelligence*, 6143–6151.
- Zhang, E.; Li, C.; Geng, C.; and Chen, S. 2025a. All-Around Neural Collapse for Imbalanced Classification. *IEEE Transactions on Knowledge and Data Engineering*, 37(8): 4460–4470.
- Zhang, F.; Chen, H.; Zhu, Z.; Zhang, Z.; Lin, Z.; Qiao, Z.; Zheng, Y.; and Wu, X. 2025b. A Survey on Foundation Language Models for Single-cell Biology. In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, 528–549.
- Zhang, X.; Chen, F.; Sun, M.; Wu, N.; Liu, B.; Yi, X.; Ge, R.; and Fan, X. 2023a. Microglia in the context of multiple sclerosis. *Frontiers in Neurology*, 14: 1157287.
- Zhang, Y.; Kang, B.; Hooi, B.; Yan, S.; and Feng, J. 2023b. Deep Long-Tailed Learning: A Survey. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 45(9): 10795–10816.
- Zhao, H.; Liu, Y.; Yao, J.; Xiong, L.; Zhou, Z.; and Zhang, Z. 2025. Celler: A Genomic Language Model for Long-Tailed Single-Cell Annotation. *arXiv preprint arXiv:2504.00020*.
- Zhao, Q.; Dai, Y.; Lin, S.; Hu, W.; Zhang, F.; and Liu, J. 2024. LTRL: Boosting Long-Tail Recognition via Reflective Learning. In *Proceedings of the European Conference on Computer Vision*, 1–18.
- Zheng, C.; Wang, Y.; Cheng, Y.; Wang, X.; Wei, H.; King, I.; and Li, Y. 2024. scNovel: a scalable deep learning-based network for novel rare cell discovery in single-cell transcriptomics. *Briefings in Bioinformatics*, 25(3): bbae112.
- Zheng, G. X. Y.; Terry, J. M.; Belgrader, P.; Ryvkin, P.; Bent, Z. W.; Wilson, R.; Ziraldo, S. B.; Wheeler, T. D.; McDermott, G. P.; Zhu, J.; Gregory, M. T.; Shuga, J.; Montesclaros, L.; Underwood, J. G.; Masquelier, D. A.; Nishimura, S. Y.; Schnall-Levin, M.; Wyatt, P. W.; Hindson, C. M.; Bhargava, R.; Wong, A.; Ness, K. D.; Beppu, L. W.; Deeg, H. J.; McFarland, C.; Loeb, K. R.; Valente, W. J.; Ericson, N. G.; Stevens, E. A.; Radich, J. P.; Mikkelsen, T. S.; Hindson, B. J.; and Bielas, J. H. 2017. Massively parallel digital transcriptional profiling of single cells. *Nature Communications*, 8: 14049.