




P1

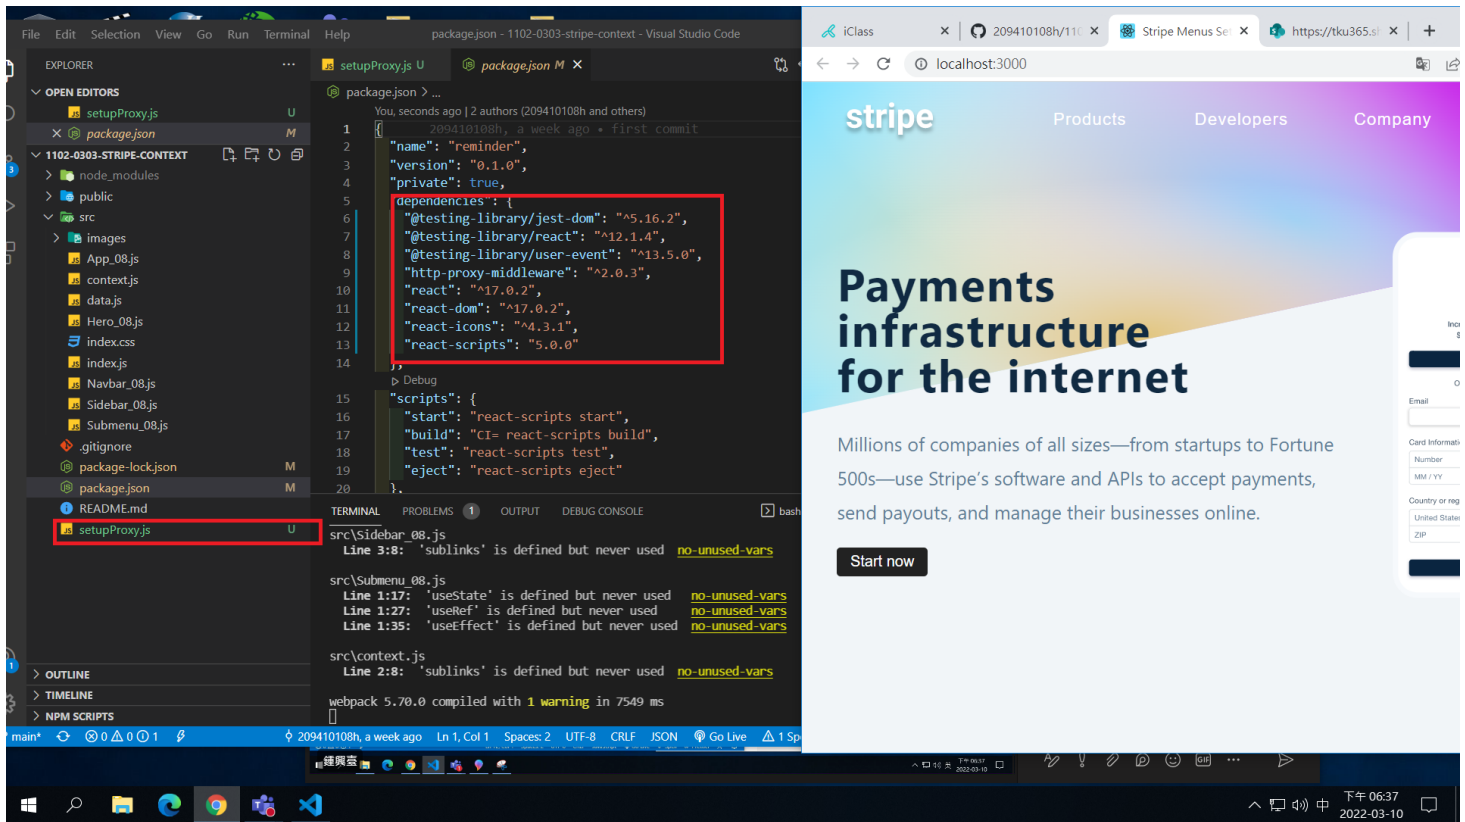


P2

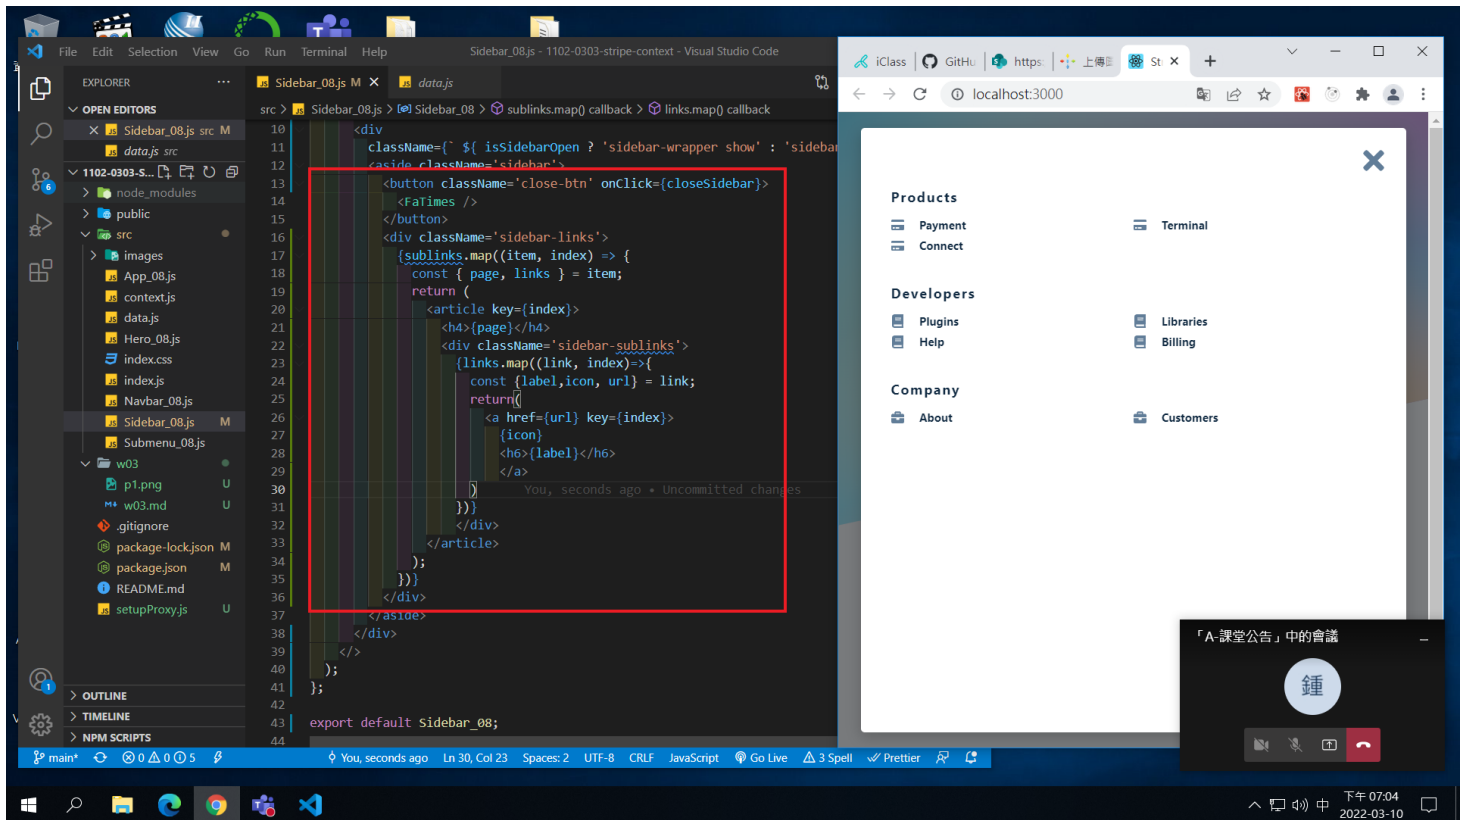

P3

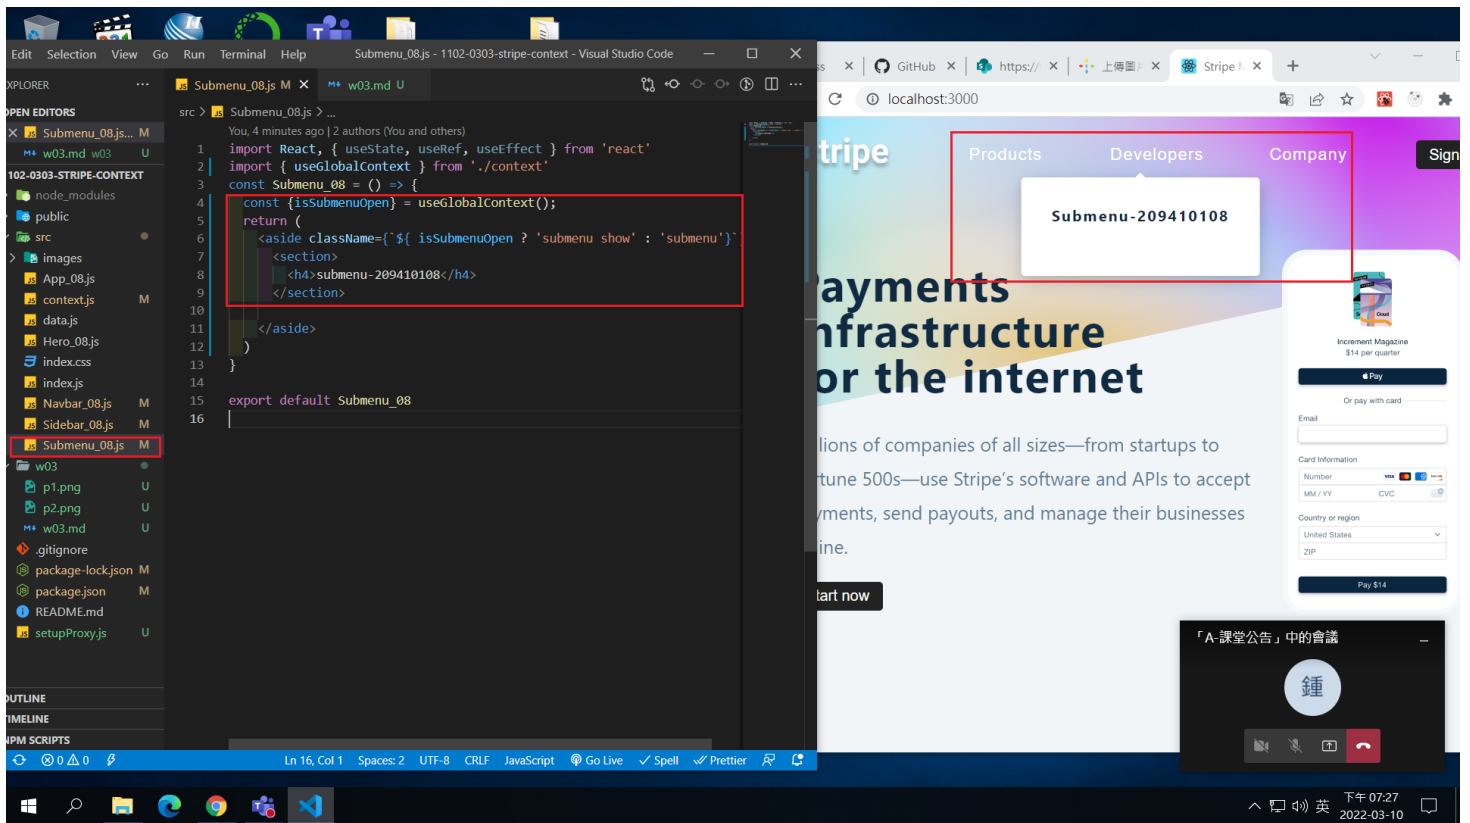

P4

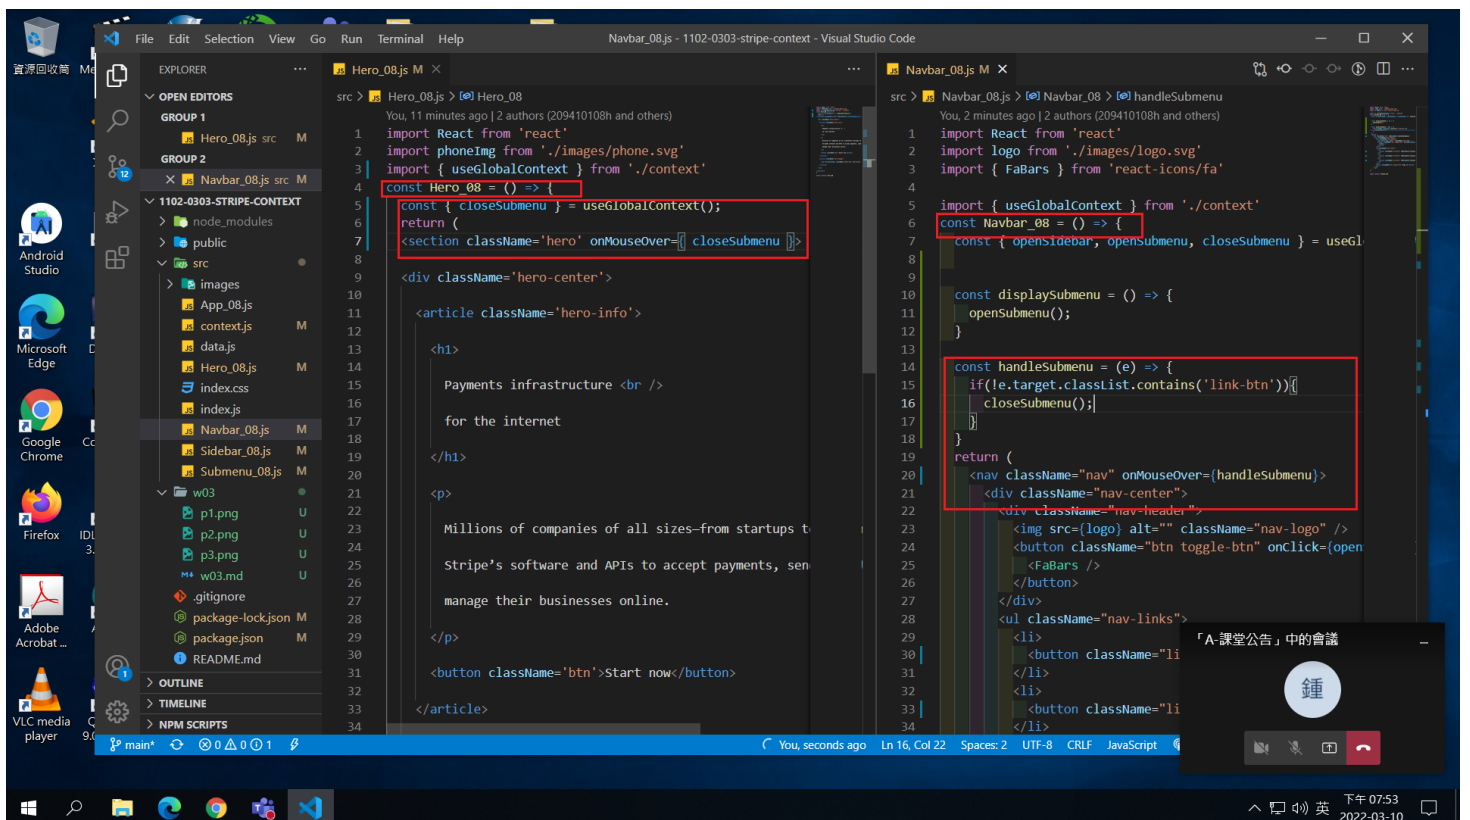

The image shows a development environment with a code editor and a web browser. The code editor displays a JavaScript file named `Submenu_08.js` with the following code:

```
useEffect(() => {
  setColumns('col-2');
  const submenu = container.current;
  console.log('submenu', submenu);
  const { center, bottom } = location;
  submenu.style.left = `${center}px`;
  submenu.style.top = `${bottom}px`;
  if(links.length === 3) {
    setColumns('col-3');
  }
  if(links.length > 3) {
    setColumns('col-4');
  }
}, [page, location]);
return (
  <aside className={` ${ isSubmenuOpen ? 'submenu show' : 'submenu'}`>
    <section>
      <div><page>_08</div>
      <div className={`submenu-center ${columns}`>
        {links.map((link, index) => {
          const { label, icon, url } = link;
          return (
            <a key={index} href={url}>
              {icon}
              {label}
            </a>
          )
        })}
      </div>
    </section>
  </aside>
)
```

The web browser shows a Stripe menu on a localhost page. The menu is titled **Products_08** and contains three items: **Payment**, **Terminal**, and **Connect**. The console shows the following log:

```
submenu > <aside class="submenu show" style="left: 275.538px; top: 61.5px;"></aside>
submenu > <aside class="submenu" style="left: 275.538px; top: 61.5px;"></aside>
e.target > DOMRect {x: 195.53750610351562, y: 15.5, width: 160, height: 49, top: 15.5, ...}
page > {page: 'products', links: Array(3)}
submenu > <aside class="submenu show" style="left: 275.538px; top: 61.5px;"></aside>
e.target > DOMRect {x: 195.53750610351562, y: 15.5, width: 160, height: 49, top: 15.5, ...}
page > {page: 'products', links: Array(3)}
  > <aside class="submenu" style="left: 275.538px; top: 61.5px;">
    > <section></section>
  > </aside>
```