P1

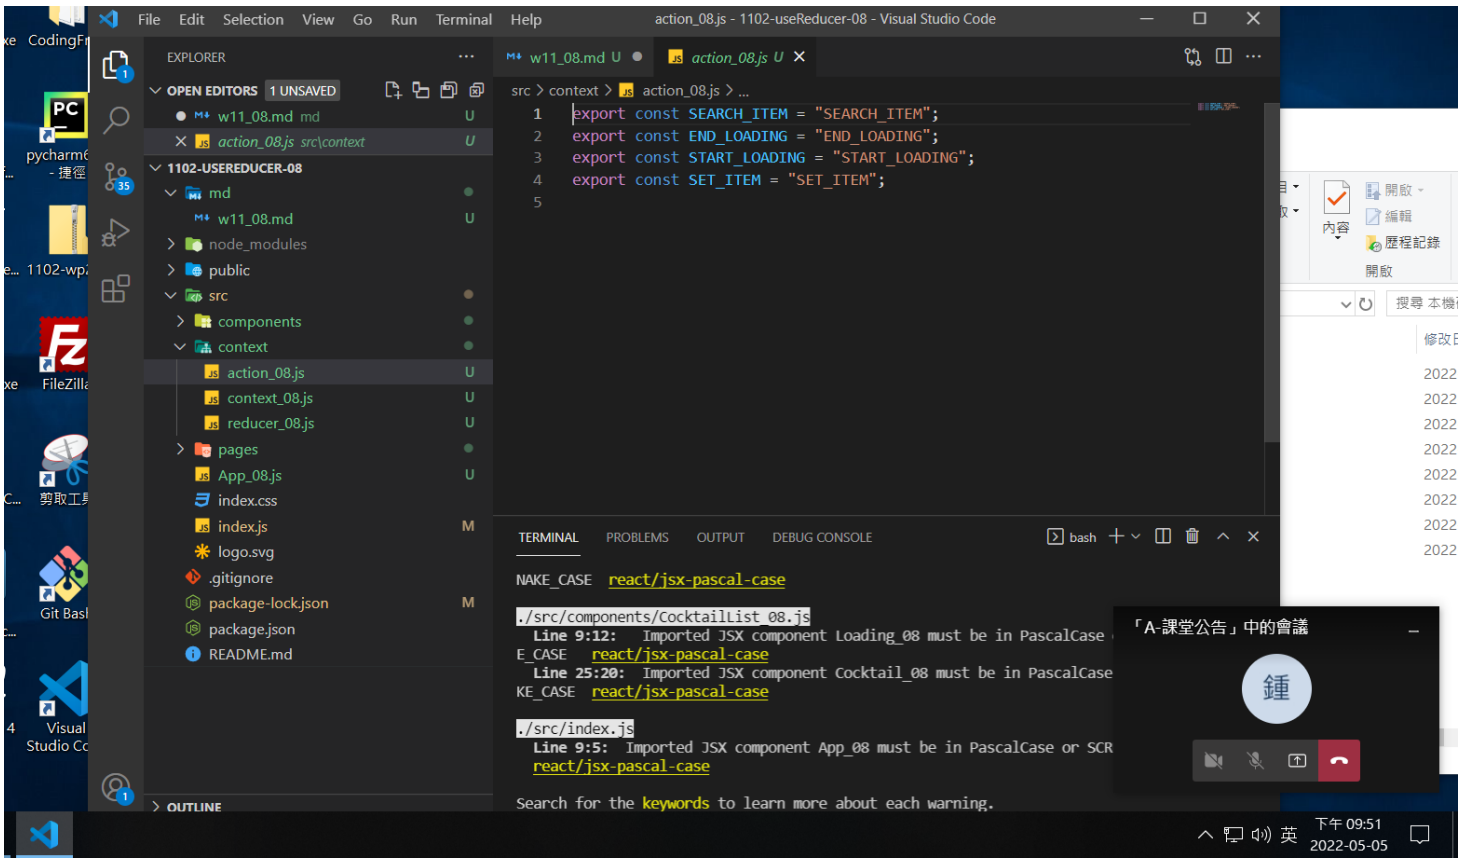
File Edit Selection View Go Run Terminal Help
action_08.js - 1102-useReducer-08 - Visual Studio Code
EXPLORER
OPEN EDITORS 1 UNSAVED
w11_08.md md
action_08.js src\context
1102-USEREDUCER-08
md
w11_08.md
node_modules
public
src
components
context
action_08.js
context_08.js
reducer_08.js
pages
App_08.js
index.css
index.js
logo.svg
.gitignore
package-lock.json
package.json
README.md
OUTLINE
w11_08.md U
action_08.js U
src > context > action_08.js > ...
1 export const SEARCH_ITEM = "SEARCH_ITEM";
2 export const END_LOADING = "END_LOADING";
3 export const START_LOADING = "START_LOADING";
4 export const SET_ITEM = "SET_ITEM";
5
TERMINAL PROBLEMS OUTPUT DEBUG CONSOLE
bash
NAKE_CASE react/jsx-pascal-case
./src/components/CocktailList_08.js
Line 9:12: Imported JSX component Loading_08 must be in PascalCase
E_CASE react/jsx-pascal-case
Line 25:20: Imported JSX component Cocktail_08 must be in PascalCase
KE_CASE react/jsx-pascal-case
./src/index.js
Line 9:5: Imported JSX component App_08 must be in PascalCase or SCR
react/jsx-pascal-case
Search for the keywords to learn more about each warning.
「A-課堂公告」中的會議
鍾
下午 09:51
2022-05-05

P2

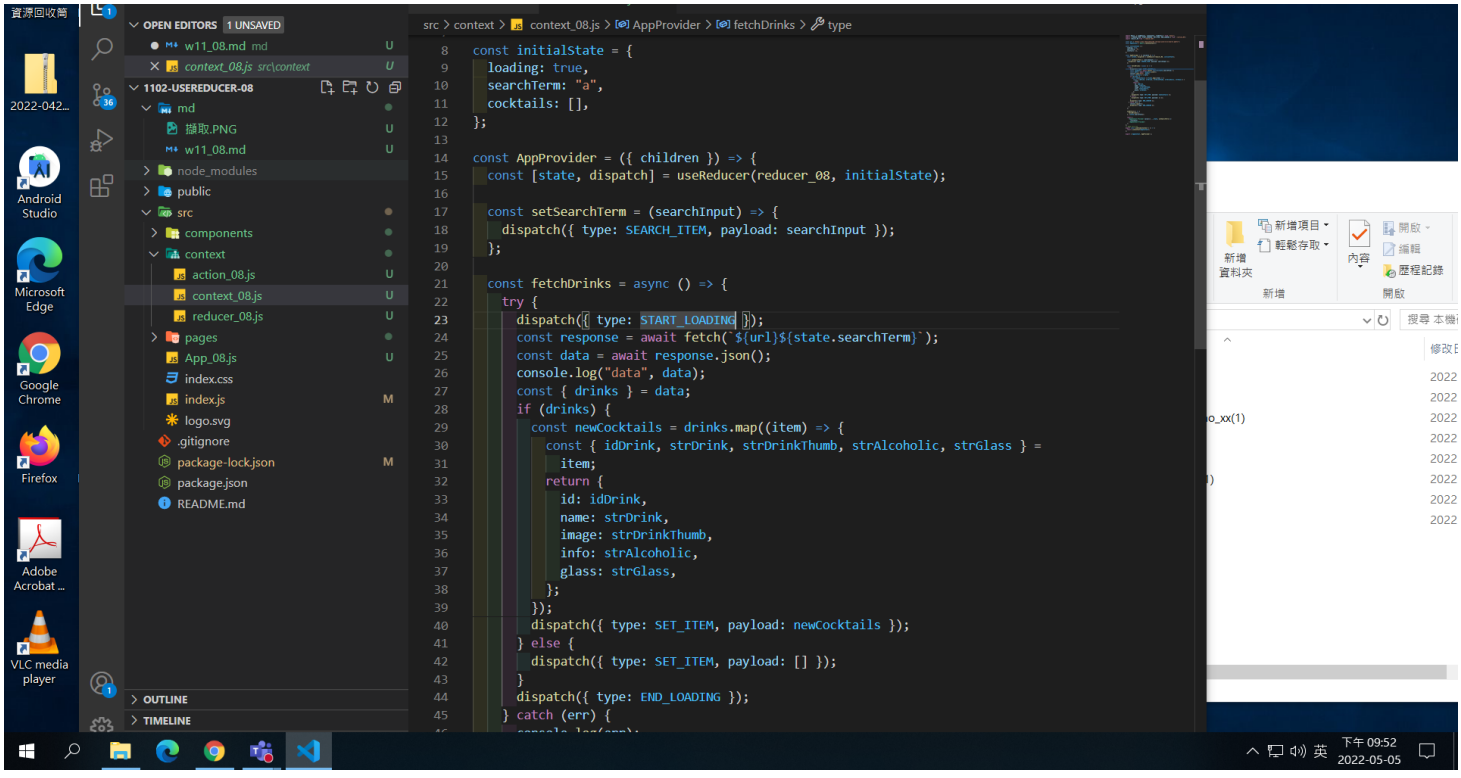
OPEN EDITORS 1 UNSAVED
w11_08.md md
context_08.js src\context
1102-USEREDUCER-08
md
攝取.PNG
w11_08.md
node_modules
public
src
components
context
action_08.js
context_08.js
reducer_08.js
pages
App_08.js
index.css
index.js
logo.svg
.gitignore
package-lock.json
package.json
README.md
OUTLINE
TIMELINE
src > context > context_08.js > AppProvider > fetchDrinks > type
const initialState = {
loading: true,
searchTerm: "a",
cocktails: [],
};
const AppProvider = ({ children }) => {
const [state, dispatch] = useReducer(reducer_08, initialState);
const setSearchTerm = (searchInput) => {
dispatch({ type: SEARCH_ITEM, payload: searchInput });
};
const fetchDrinks = async () => {
try {
dispatch({ type: START_LOADING });
const response = await fetch(`${url}${state.searchTerm}`);
const data = await response.json();
console.log("data", data);
const { drinks } = data;
if (drinks) {
const newCocktails = drinks.map((item) => {
const { idDrink, strDrink, strDrinkThumb, strAlcoholic, strGlass } =
item;
return {
id: idDrink,
name: strDrink,
image: strDrinkThumb,
info: strAlcoholic,
glass: strGlass,
};
});
dispatch({ type: SET_ITEM, payload: newCocktails });
} else {
dispatch({ type: SET_ITEM, payload: [] });
}
dispatch({ type: END_LOADING });
} catch (err) {
下午 09:52
2022-05-05

P3

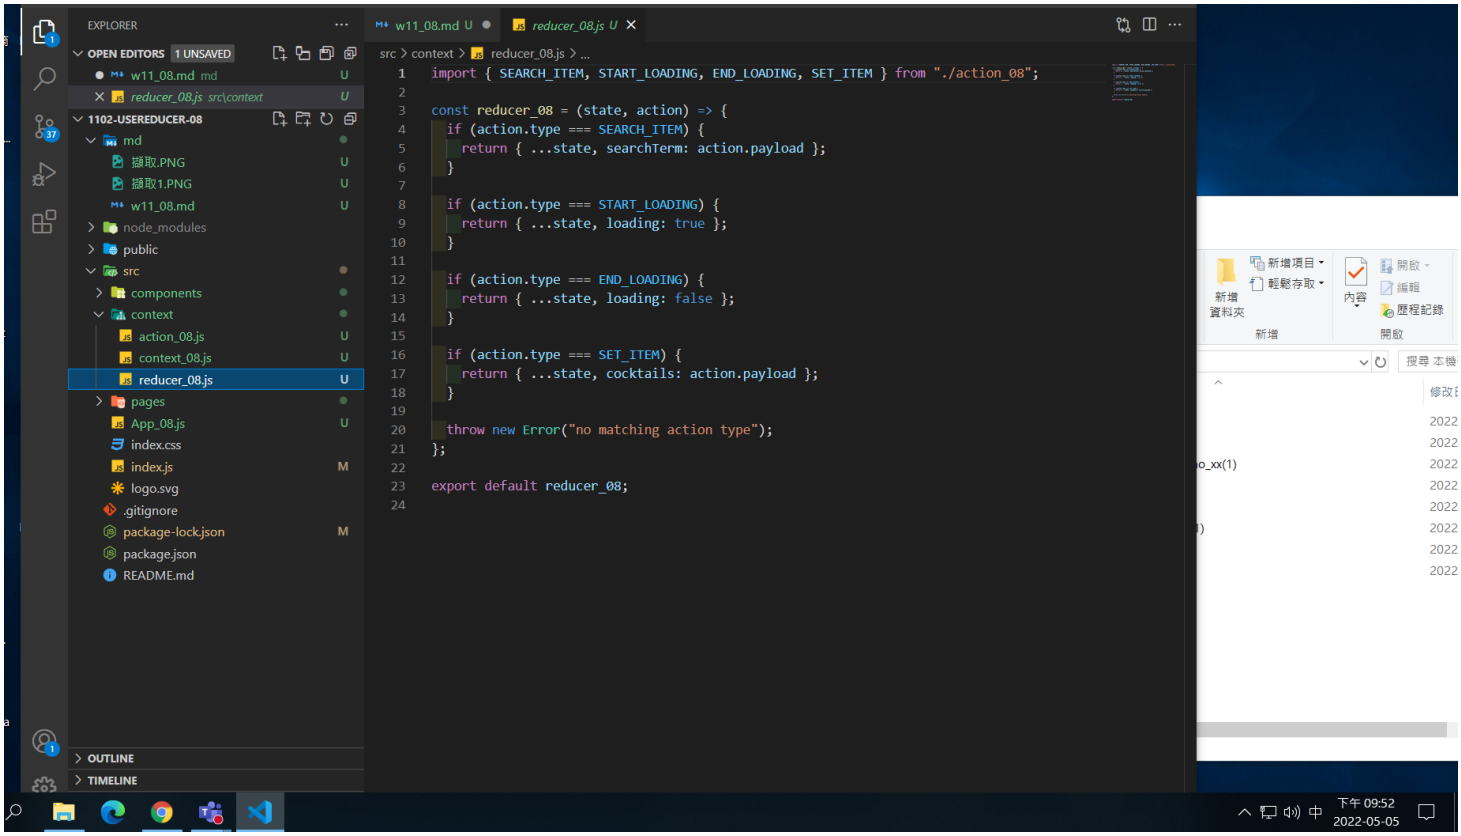
EXPLORER
OPEN EDITORS 1 UNSAVED
w11_08.md md
reducer_08.js src\context
1102-USEREDUCER-08
md
node_modules
public
src
components
context
action_08.js
context_08.js
reducer_08.js
pages
App_08.js
index.css
index.js
logo.svg
.gitignore
package-lock.json
package.json
README.md
OUTLINE
TIMELINE
w11_08.md U
reducer_08.js U
src > context > reducer_08.js > ...
import { SEARCH_ITEM, START_LOADING, END_LOADING, SET_ITEM } from "./action_08";
const reducer_08 = (state, action) => {
if (action.type === SEARCH_ITEM) {
return { ...state, searchTerm: action.payload };
}
if (action.type === START_LOADING) {
return { ...state, loading: true };
}
if (action.type === END_LOADING) {
return { ...state, loading: false };
}
if (action.type === SET_ITEM) {
return { ...state, cocktails: action.payload };
}
throw new Error("no matching action type");
};
export default reducer_08;

P4

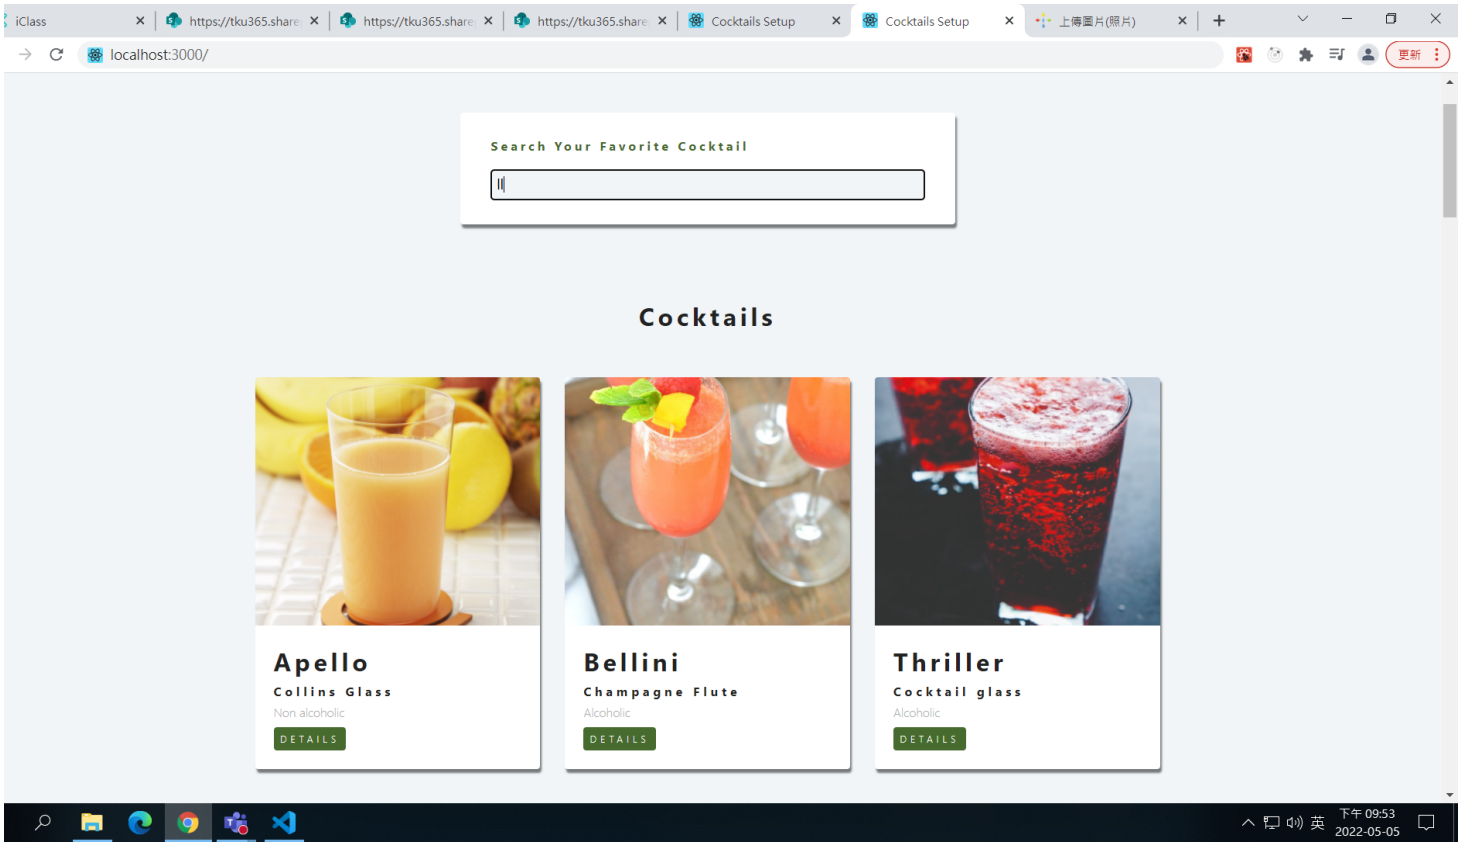
localhost:3000/
Search Your Favorite Cocktail
Cocktails
Apello
Collins Glass
Non alcoholic
DETAILS
Bellini
Champagne Flute
Alcoholic
DETAILS
Thriller
Cocktail glass
Alcoholic
DETAILS