
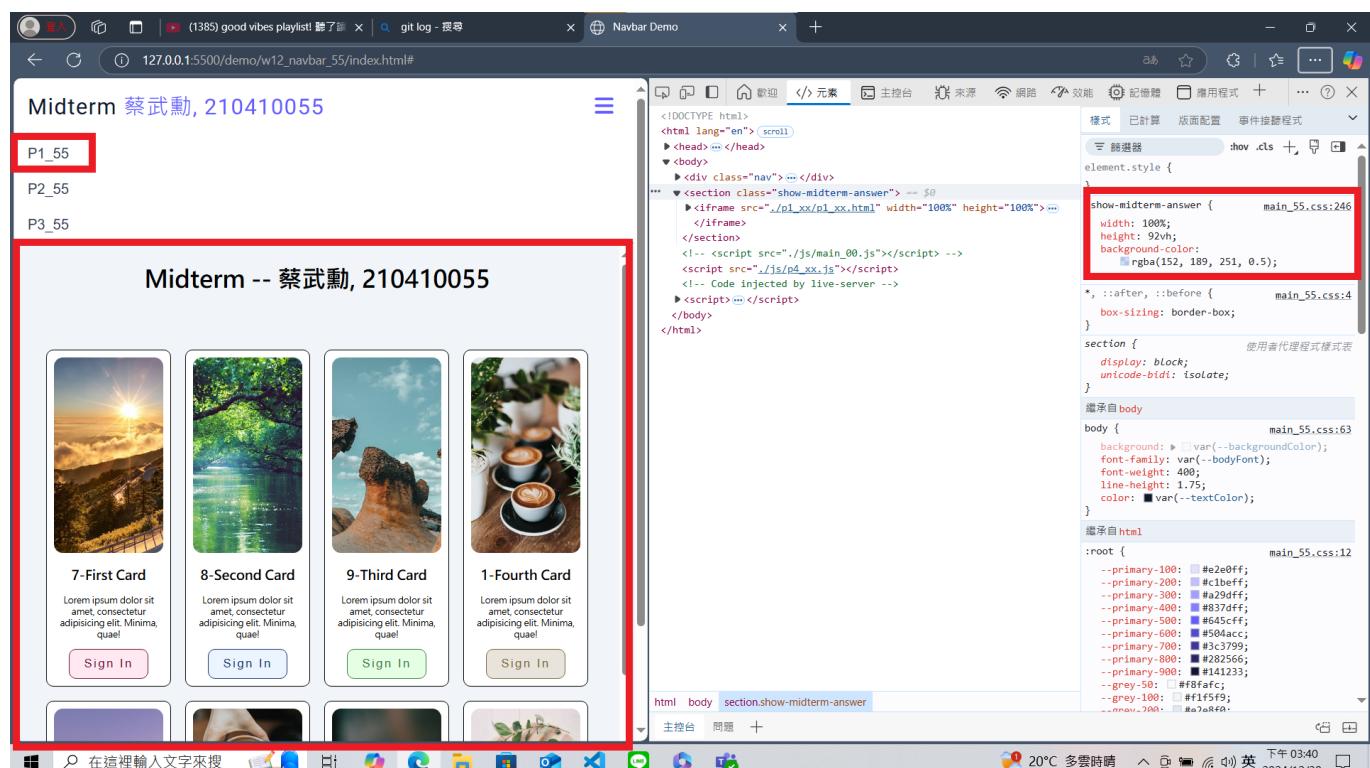


## My Github URL

W12-P1: Show answer of p1\_xx, p2\_xx, p3\_xx in midterm exam

=> show p1\_xx

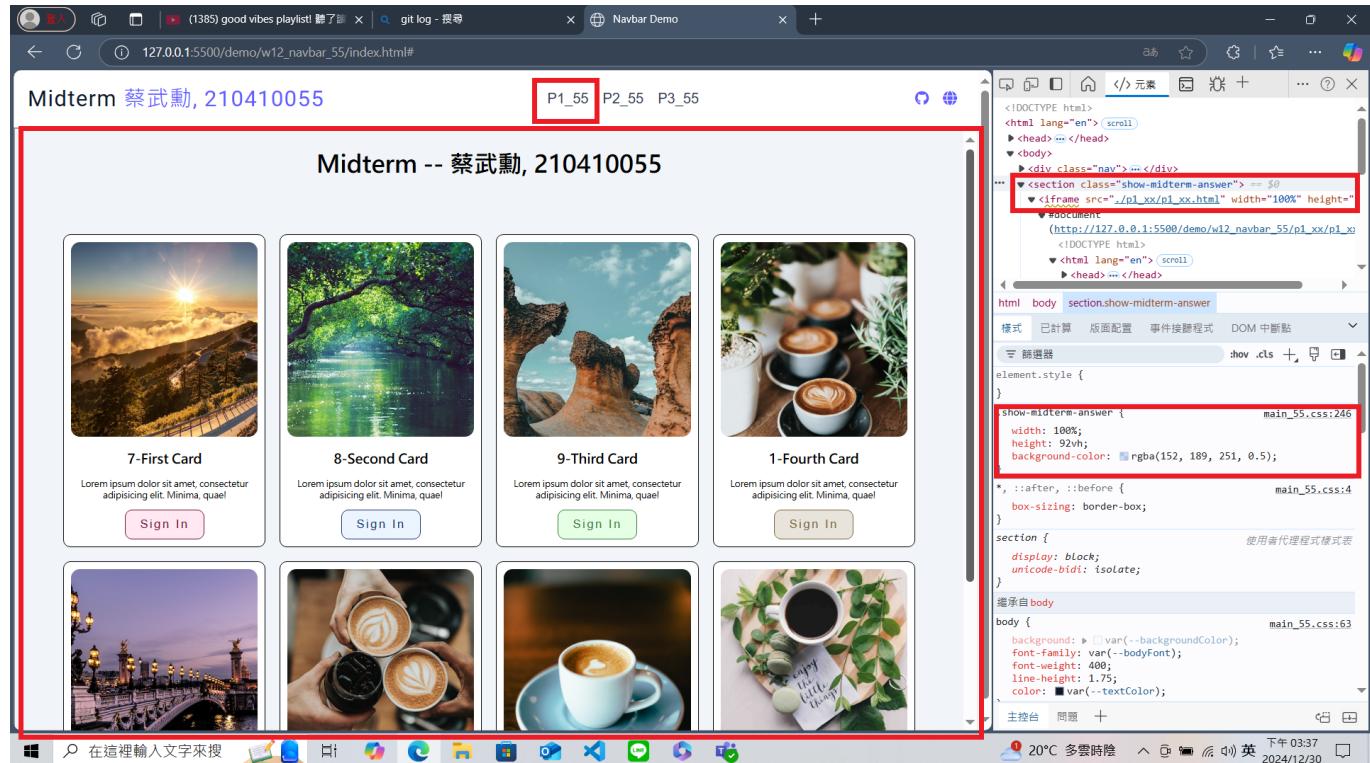

=> show p2\_xx

Midterm 蔡武勳, 210410055 P1\_55 P2\_55 P3\_55

蔡武勳, 210410055

20°C 多雲時晴 2024/12/30

html body section.show-midterm-answer

.show-midterm-answer { main\_55.css:246 width: 100%; height: 92vh; background-color: #rgba(152, 189, 251, 0.5); }

Midterm 蔡武勳, 210410055 P1\_55 P2\_55 P3\_55

蔡武勳, 210410055

html body section.show-midterm-answer

.show-midterm-answer { main\_55.css:246 width: 100%; height: 92vh; background-color: #rgba(152, 189, 251, 0.5); }

=> show p3\_xx

Midterm 蔡武勳, 210410055

P1\_55 P2\_55 P3\_55

Midterm -- 蔡武勳, 210410055

High-Back Bench \$9.99

Albany Table \$79.99

```
<!DOCTYPE html>
<html lang="en"> scroll
  <head> ... </head>
  <body>
    <div class="nav"> ... </div>
    <section class="show-midterm-answer"> ...
      <!-- ... -->
      <script src="/js/main_00.js"></script> ...
      <script src="/js/p3_xx.js"></script>
      <!-- Code injected by live-server -->
      <script> ... </script>
    </section>
  </body>
</html>
```

html body section.show-midterm-answer

樣式 已計算 版面配置 事件接聽程式

元素選器 .show-midterm-answer { main\_55.css:246 }

element.style { }

.show-midterm-answer { main\_55.css:246 }

width: 100%; height: 92vh; background-color: #rgba(152, 189, 251, 0.5);

\* ::after, ::before { main\_55.css:4 }

box-sizing: border-box;

section { 使用者代理程式樣式表 display: block; unicode-bidi: isolate; }

繼承自 body

body { main\_55.css:63 }

background: #var(--backgroundColor); font-family: var(--bodyFont); font-weight: 400; line-height: 1.75; color: #var(--textColor);

Midterm 蔡武勳, 210410055

P1\_55

P2\_55

P3\_55

Midterm -- 蔡武勳, 210410055

High-Back Bench \$9.99

```
<!DOCTYPE html>
<html lang="en"> scroll
  <head> ... </head>
  <body>
    <div class="nav"> ... </div>
    <section class="show-midterm-answer"> ...
      <!-- ... -->
      <iframe src="/p3_xx/p3_xx.html" width="100%" height="100%" frameborder="0" style="border: none;">
        <!DOCTYPE html>
        <html lang="en"> scroll
          <head> ... </head>
          <body> ...
            ...
          </body>
        </html>
      </iframe>
    </section>
  </body>
</html>
```

html body section.show-midterm-answer

樣式 已計算 版面配置 事件接聽程式

元素選器 .show-midterm-answer { main\_55.css:246 }

element.style { }

.show-midterm-answer { main\_55.css:246 }

width: 100%; height: 92vh; background-color: #rgba(152, 189, 251, 0.5);

\* ::after, ::before { main\_55.css:4 }

box-sizing: border-box;

section { 使用者代理程式樣式表 display: block; unicode-bidi: isolate; }

繼承自 body

body { main\_55.css:63 }


background: #var(--backgroundColor); font-family: var(--bodyFont); font-weight: 400; line-height: 1.75; color: #var(--textColor);

W12-P2: Embed p1\_xx, p2\_xx, p3\_xx content into index.html, and make it to work correctly

=> select p3\_xx nav link, navbar-fixed will be displayed

=> select p1\_xx nav link, navbar-fixed will be removed

=> select p2\_xx nav link, navbar-fixed will be displayed

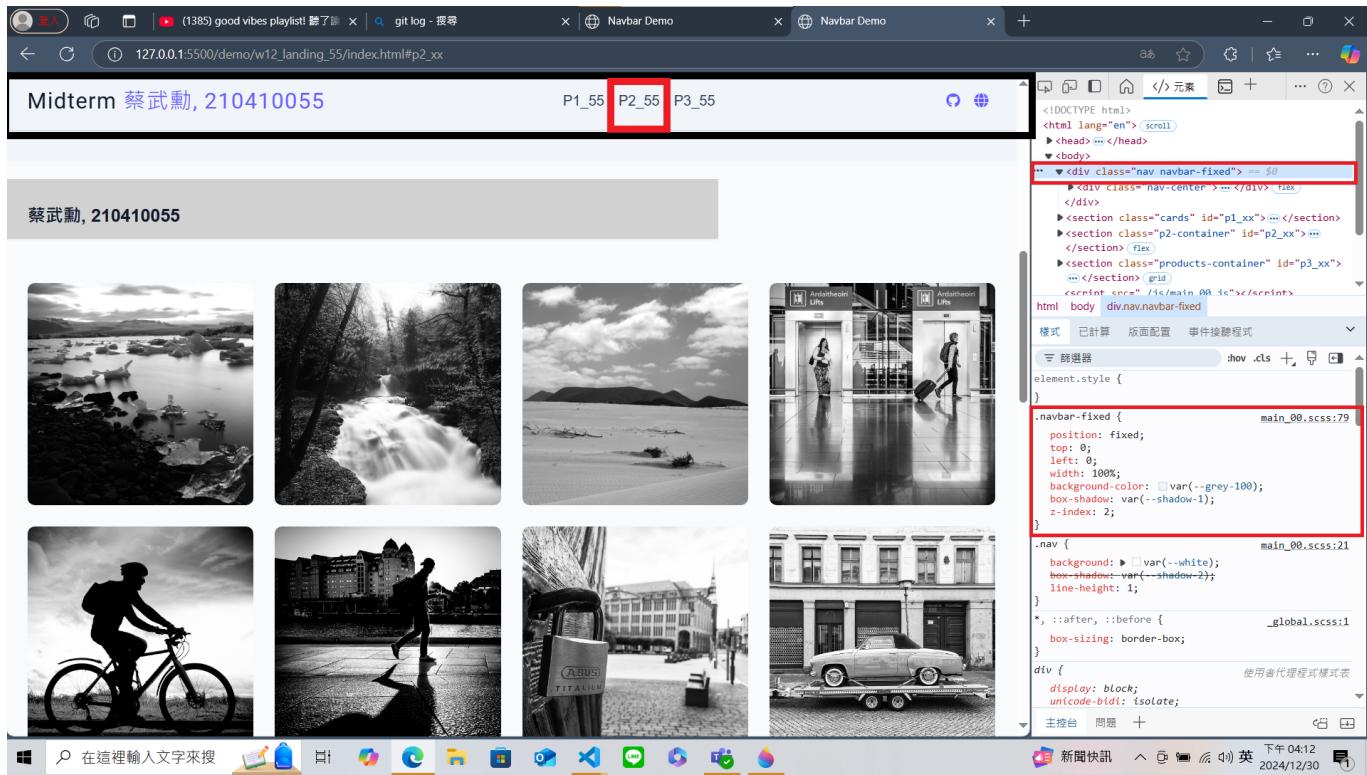

## W12-logs: git logs of W12

```
$ git log --pretty=format:"%h%x09%an%x09%ad%x09%s" --after="2024-11-29"
fe683c4 210410055      Mon Dec 30 16:16:46 2024 +0800  W12-P2: Embed p1_xx,
p2_xx, p3_xx content into index.html, and make it to work correctly
8494b0b 210410055      Mon Dec 30 16:10:52 2024 +0800  W12-P1: Show answer of
p1_xx, p2_xx, p3_xx in midterm exam
a95f5a7 thl010521       Sat Nov 30 23:13:41 2024 +0800  w12 navbar & landing code
and md
```