

PROJECT TITLE: RESTAURANT TABLE BOOOKING.

CONTENTS

1. Abstract.....	
2. Introduction.....	
3. Objective	
4. Purpose	
5. Scope	
6.Requirement specification	
• Hardware Specification	
• Software Specification	
7. Apache	
8. PhP	
9. Mysql	
10. Designer introduction	
•Usecase diagram	
•Er notation	
•Er diagram	
11. coding	
12.Data flow diagrams	
13.Database Design	
14.screenshots	
15.conclusion	
16. Bibliography	

Abstract

“Restaurant Table Booking System” is web based application which help restaurant administration to store the details of booking tables and manage sub-admin . The system is also intended to provide better services to users, provide meaningful, consistent, and timely data and information and finally promotes efficiency by converting paper processes to electronic form. The system was developed using basic technologies such as MySQL database and PHP. The system is free of errors and very efficient and less time consuming due to the care taken to develop it. All the phases of software development cycle are employed and it is worthwhile to state that the system is user friendly and strong. Provision is made for future development in the system.

Introduction

Visiting restaurant for having best food has become most common these days. Besides best food, service is also an important factor which attracts customers. Generally, we have to wait in the restaurant or hotels for table availability and it leads to time wasting. So we develop a we based application called“Restaurant Table Booking System”. This application is helpful for restaurant and hotels for keeping records of booking. It contains the user section and admin section. The users can go through the site and make a reservation of tables and that request is sent to restaurant administrator. The design of this system is simple so that the user and restaurant administrator won’t get any difficulties while working on it.

Objective

The objective of “Restaurant Table Booking System” is to allow the restaurant administrator to check table booking details and find previous records of booking.

It will also facilitate keeping all the record of sub-admins and booking tables, So all the information about them will be available in a few seconds. Basically, of “Restaurant Table Booking System” is a system, developed for the restaurant as well as user for booking tables which leads to decrease the waiting time.

Purpose

The purpose of developing “Restaurant Table Booking System” is to provide an online platform for the restaurant customers to book table without waiting a time and it also computerized the tradition way of recording data of booking tables and to generate the report automatically.

Scope

Visiting restaurant for having good food stuff has become common these days. Besides good food, service is also an important factor which attracts customers. Generally, we have to wait in the restaurant for table availability and it leads to time wasting.

“Restaurant Table Booking System” is online platform for to the Restaurant Administrator and the Restaurant Users. The application has a simple website that is accessible to anyone where the visitor can book the table of the restaurant. Users can simply submit their booking requests by filling all the fields on the booking form. For Restaurant Administrator, the system contains an Admin Panel where the management can manage the booking list which is sent by the users and mange sub- admin.

In this project we use PHP and MySQL database. It has two modules admin and user.

Admin Module

1. **Dashboard:** In this section admin can see all detail in brief like total sub-admin, Total Booking, New Booking, Accepted Booking and Rejected booking.
2. **Sub-Admins:** In this section, admin can create the subadmin, delete sub-admins, edit sub-admins, and reset the passwords of subadmins.
3. **Booking:** In this section, admin can view booking request and take actions on new bookings.
4. **Table:** In this section admin can manage tables (Add/Delete)
5. **Reports:** In this section admin can view table booking details in particular periods.

Admin can also update his profile, change password and recover password.

User Module

In “Restaurant Table Booking System” user visit to website which is accessible to anyone where the user can book the table of the restaurant. Users can simply submit their booking requests by filling all the fields on the booking form.

Requirement Specification

Hardware Configuration:

Client Side:

RAM	512 MB
Hard disk	10 GB
Processor	1.0 GHz

Server side:

RAM	1 GB
Hard disk	20 GB
Processor	2.0 GHz

Software Requirement:

Client Side:

Web Browser	Google Chrome or any compatible browser
Operating System	Windows or any equivalent OS

Server Side:

Web Server	APACHE
Server Side Language	PHP5.6 or above version
Database Server	MYSQL
Web Browser	Google Chrome or any compatible browser
Operating System	Windows or any equivalent OS

APACHE

The Apache HTTP Server Project is an effort to develop and maintain an open-source HTTP server for modern operating systems including UNIX and Windows. The goal of this project is to provide a secure, efficient and extensible server that provides HTTP services in sync with the current HTTP standards. The Apache HTTP Server ("httpd") was launched in 1995 and it has been the most popular web server on the Internet since April 1996. It has celebrated its 20th birthday as a project in February 2015.

PHP

- ✓ PHP stands for PHP: Hypertext Preprocessor.

- ✓ PHP is a server-side scripting language, like ASP.
- ✓ PHP scripts are executed on the server.
- ✓ PHP supports many databases (MYSQL, Informix, Oracle, Sybase, Solid, Generic ODBC, etc.).
- ✓ PHP is an open source software .
- ✓ PHP is free to download and use.

MYSQL

*MYSQL is ideal for both small and large applications

- ✓ MYSQL supports standard SQL
- ✓ MYSQL compiles on a number of platforms
- ✓ MYSQL is free to download and use
- ✓ How to access MySQL:

<http://localhost/phpmyadmin>

Analysis and Design

Analysis:

In present all work done on the paper. The whole details is stored in the registers. We can't generate reports as per our requirements because its take more time to make report of old people.

Disadvantage of present system:

- **Not user friendly:** The present system not user friendly because data is not stored in structure and proper format.

- **Manual Control:** All report calculation is done manually so there is a chance of error.
- **Lots of paper work:** Attendance maintain in the register so lots of paper require storing attendance.
- **Time consuming**

Design Introduction:

Design is the first step in the development phase for any techniques and principles for the purpose of defining a device, a process or system in sufficient detail to permit its physical realization.

Once the software requirements have been analyzed and specified the software design involves three technical activities - design, coding, implementation and testing that are required to build and verify the software.

The design activities are of main importance in this phase, because in this activity, decisions ultimately affecting the success of the software implementation and its ease of maintenance are made. These decisions have the final bearing upon reliability and maintainability of the system. Design is the only way to accurately translate the customer's requirements into finished software or a system.

Design is the place where quality is fostered in development. Software design is a process through which requirements are translated into a representation of software. Software design is conducted in two steps. Preliminary design is concerned with the transformation of requirements into data.

UML Diagrams:Actor:

A coherent set of roles that users of use cases play when interacting with the use cases.



Use case:

A description of sequence of actions, including variants, that a system performs that yields an observable result of value of an actor.



UML stands for Unified Modeling Language. UML is a language for specifying, visualizing and documenting the system. This is the step while developing any product after analysis. The goal from this is to produce a model of the entities involved in the project which later need to be built. The representation of the entities that are to be used in the product being developed need to be designed.

USECASE DIAGRAMS:

Use case diagrams model behavior within a system and helps the developers understand of what the user require. The stick man represents what's called an actor.

Use case diagram can be useful for getting an overall view of the system and clarifying who can do and more importantly what they can't do.


Use case diagram consists of use cases and actors and shows the interaction between the use case and actors.

- The purpose is to show the interactions between the use case and actor.
- To represent the system requirements from user's perspective.
- An actor could be the end-user of the system or an external system.

USECASE DIAGRAM:


A Use case is a description of set of sequence of actions. Graphically it is rendered as an ellipse with solid line including only its name. Use case diagram is a behavioral diagram that shows a set of use cases and actors and their relationship. It is an association between the use cases and actors. An actor represents a real-world object. Primary Actor – Sender, Secondary Actor Receiver.

User Use Case Diagram

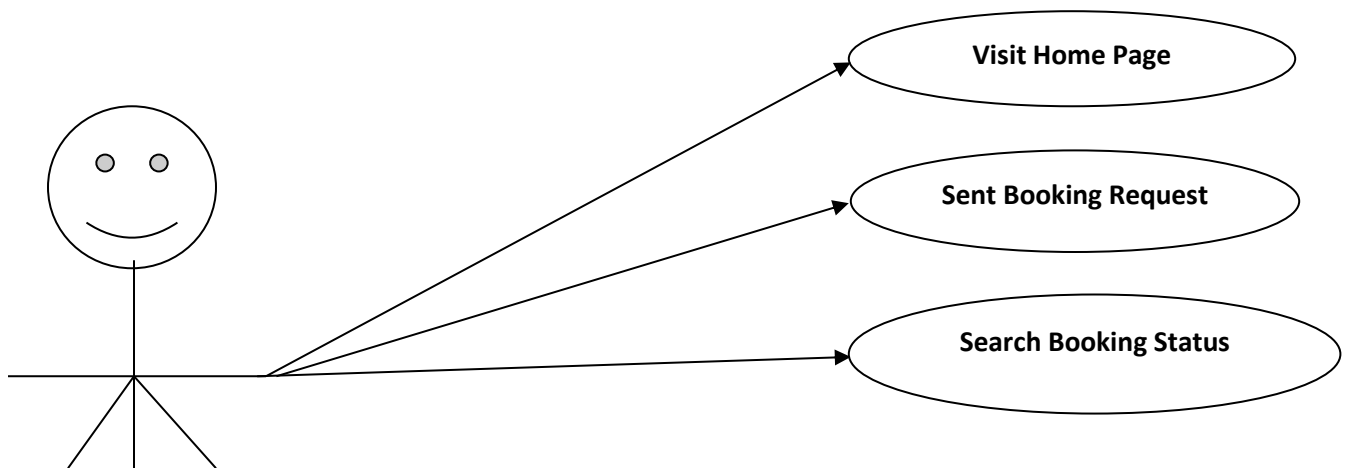


Users

Admin use case diagram

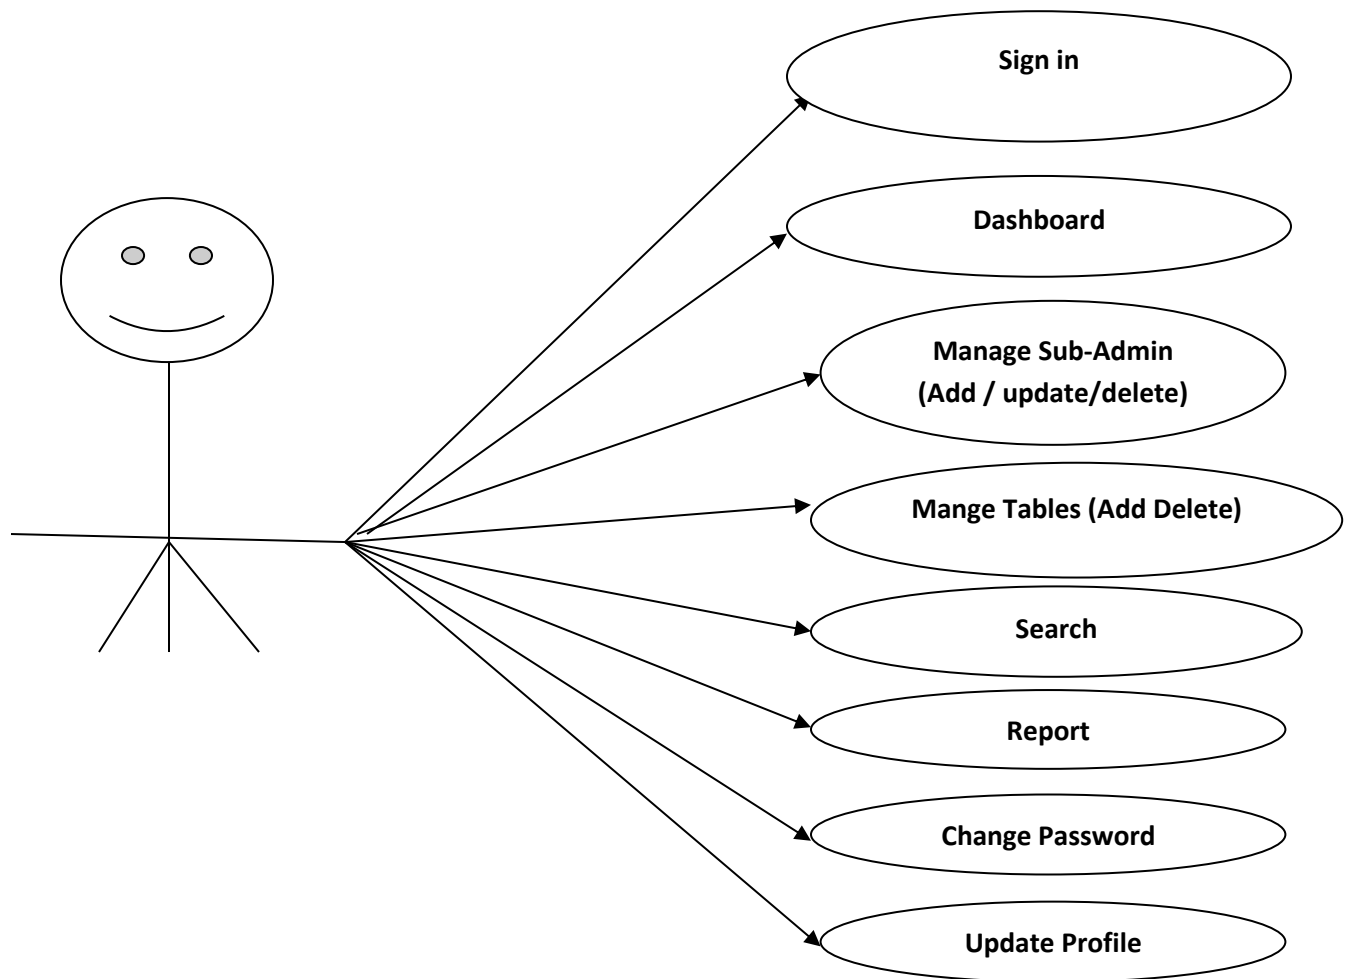

Class Diagram:

A description of set of objects that share the same attributes operations, relationships, and semantics.

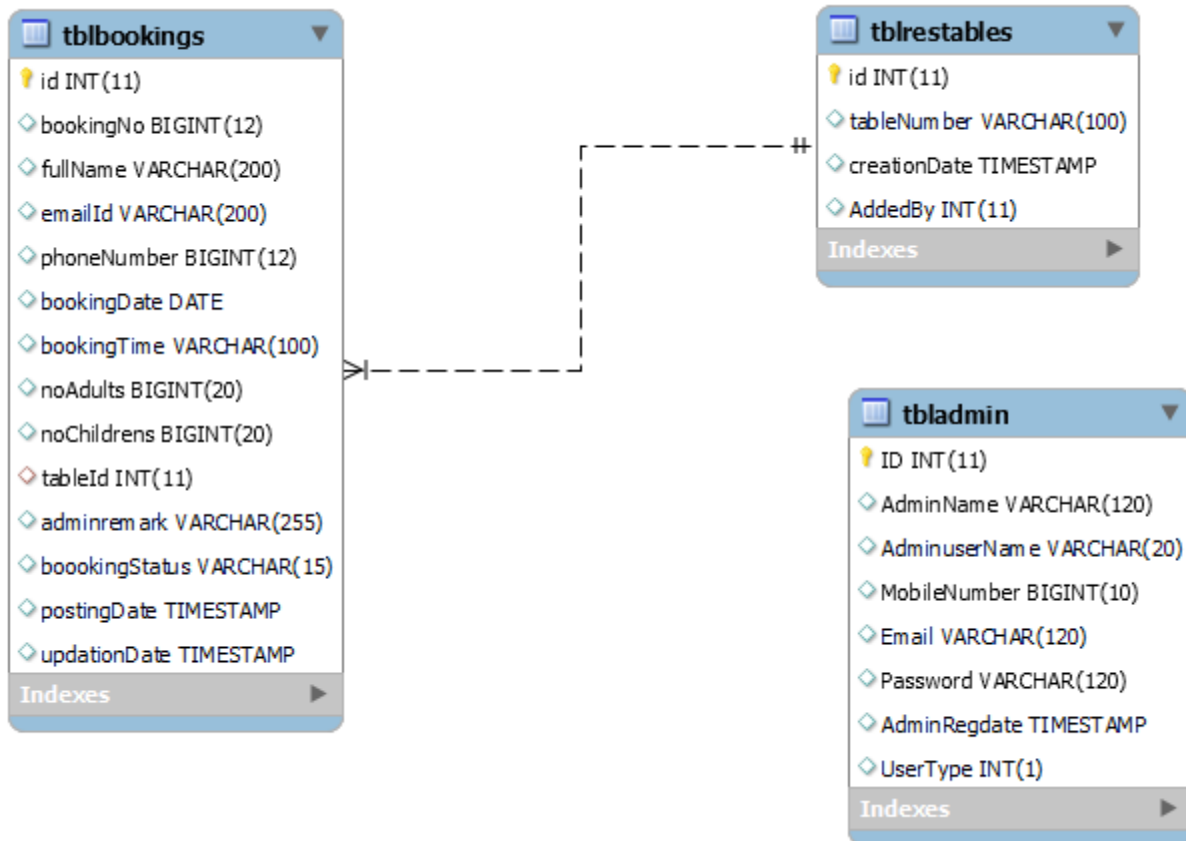

ER Diagram:

The Entity-Relationship (ER) model was originally proposed by Peter in 1976 [Chen76] as a way to unify the network and relational database views. Simply stated the ER model is a conceptual data model that views the real world as entities and relationships. A basic component of the model is the Entity-Relationship

diagram which is used to visually represent data objects. Since Chen wrote his paper the model has been extended and today it is commonly used for database design for the database designer, the utility of the ER model is:

- It maps well to the relational model. The constructs used in the ER model can easily be transformed into relational tables.
- It is simple and easy to understand with a minimum of training. Therefore, the model can be used by the database designer to communicate the design to the end user.
- In addition, the model can be used as a design plan by the database developer to implement a data model in specific database management software.


ER Notation

There is no standard for representing data objects in ER diagrams. Each modeling methodology uses its own notation. The original notation used by Chen is widely used in academics texts and journals but rarely seen in either CASE tools or publications by non-academics. Today, there are a number of notations used; among the more common are Bachman, crow's foot, and IDEFIX.

All notational styles represent entities as rectangular boxes and relationships as lines connecting boxes. Each style uses a special set of symbols to represent the cardinality of a connection. The notation used in this document is from Martin. The symbols used for the basic ER constructs are:

- **Entities** are represented by labeled rectangles. The label is the name of the entity. Entity names should be singular nouns.
- **Relationships** are represented by a solid line connecting two entities. The name of the relationship is written above the line. Relationship names should be verbs
- **Attributes**, when included, are listed inside the entity rectangle. Attributes which are identifiers are underlined. Attribute names should be singular nouns.
- **Cardinality** of many is represented by a line ending in a crow's foot. If the crow's foot is omitted, the cardinality is one.

Existence is represented by placing a circle or a perpendicular bar on the line. Mandatory existence is shown by the bar (looks like a 1) next to the entity for an instance is required. Optional existence is shown by placing a circle next to the entity that is optional.

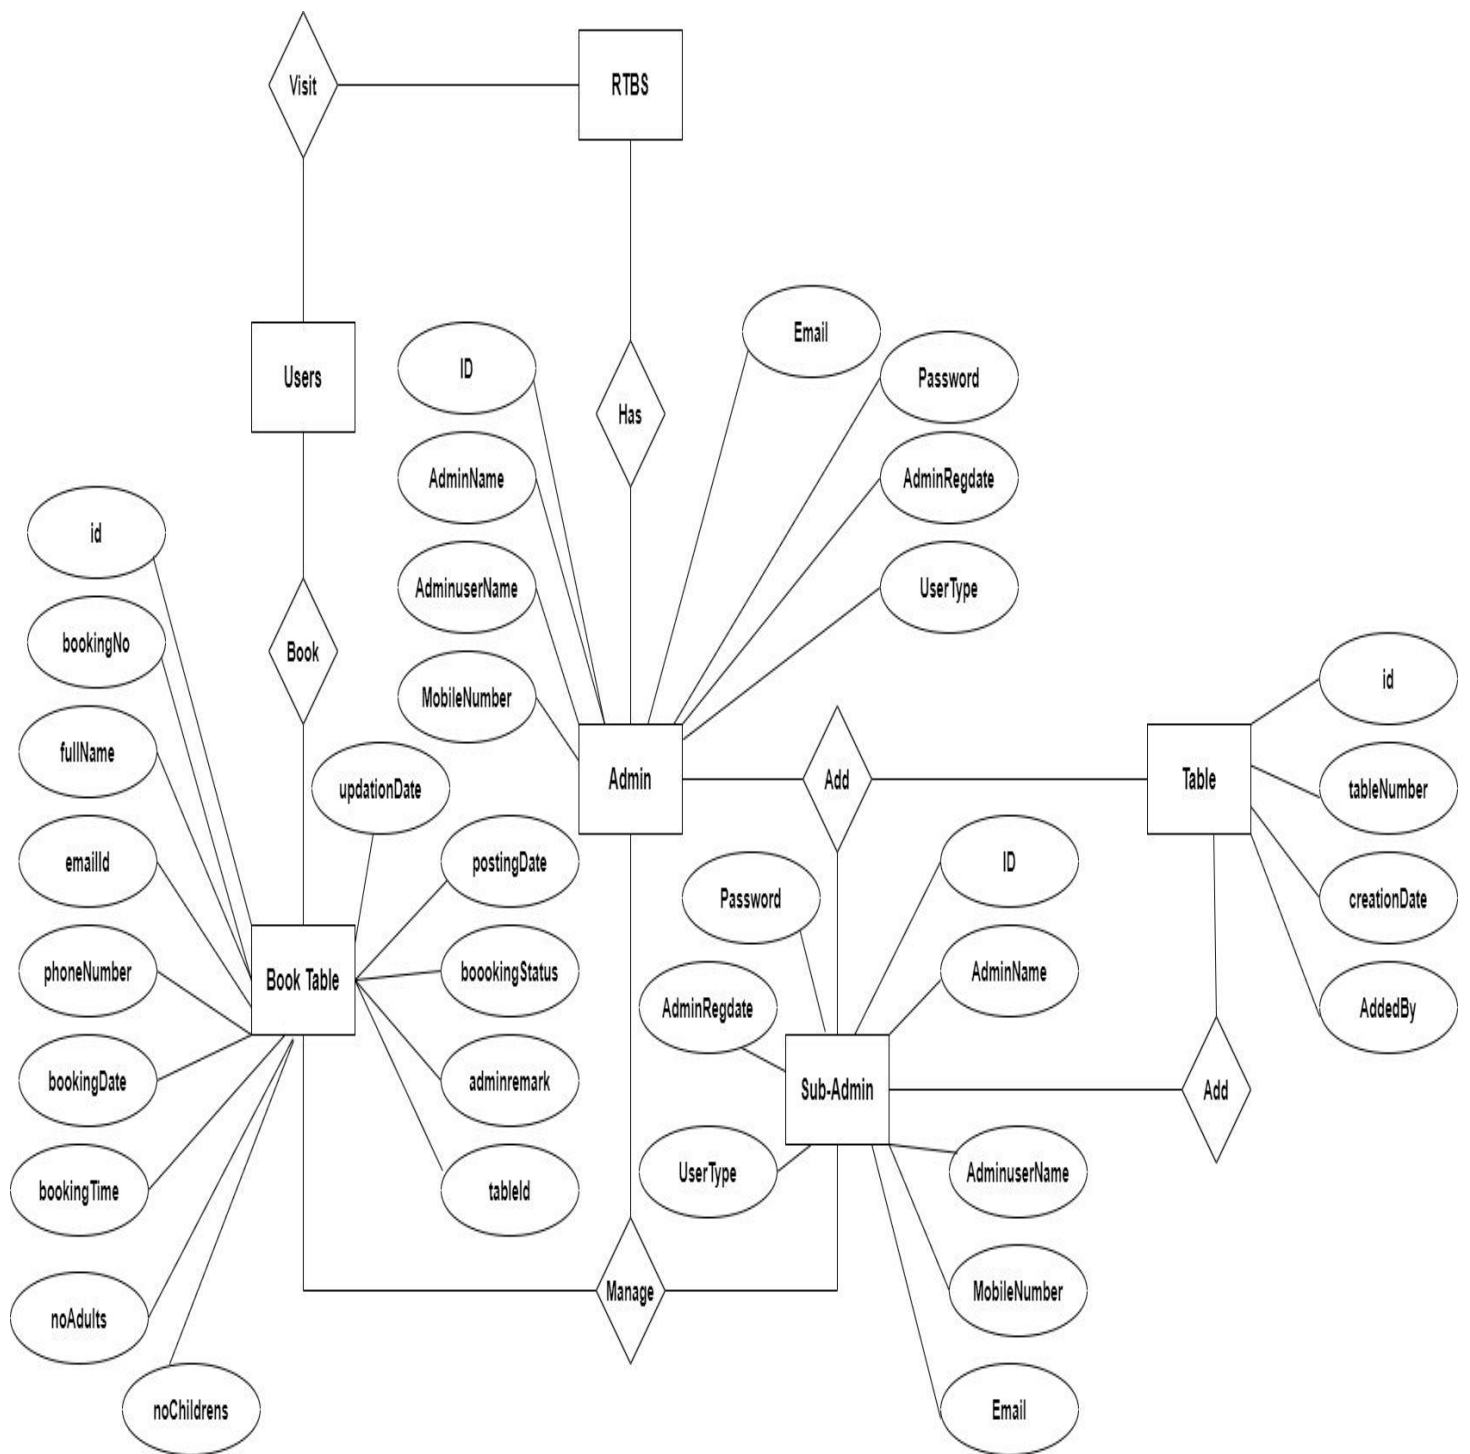


Data Flow diagram (DFD)

DFD graphically representing the functions, or processes, which capture, manipulate, store, and distribute data between a system and its environment and between components of a system. The visual representation makes it a good communication tool between User and System designer. Structure of DFD allows starting from a broad overview and expand it to a hierarchy of detailed diagrams.


DFD has often been used due to the following reasons:

- Logical information flow of the system
- Determination of physical system construction requirements
- Simplicity of notation
- Establishment of manual and automated systems requirements


Zero Level DFD

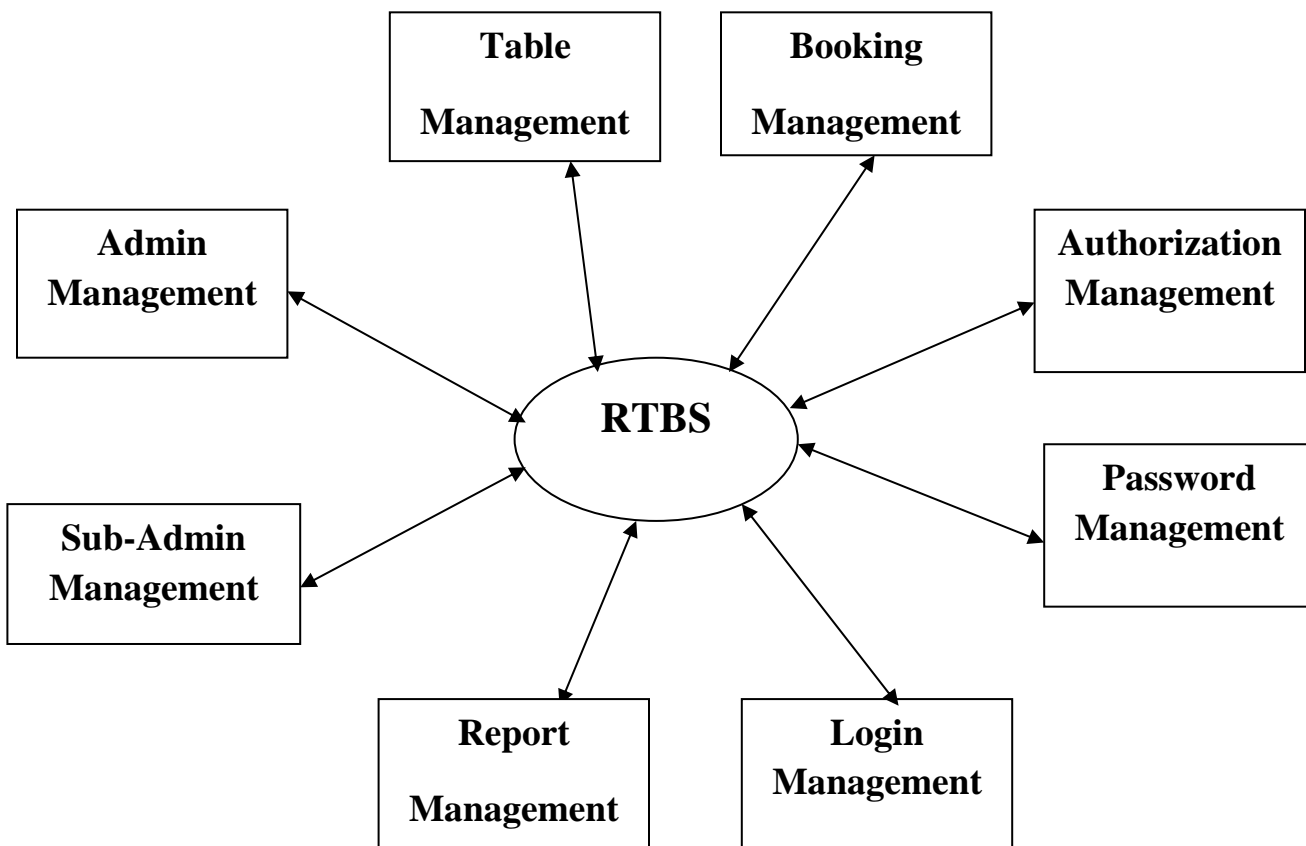

First Level DFD

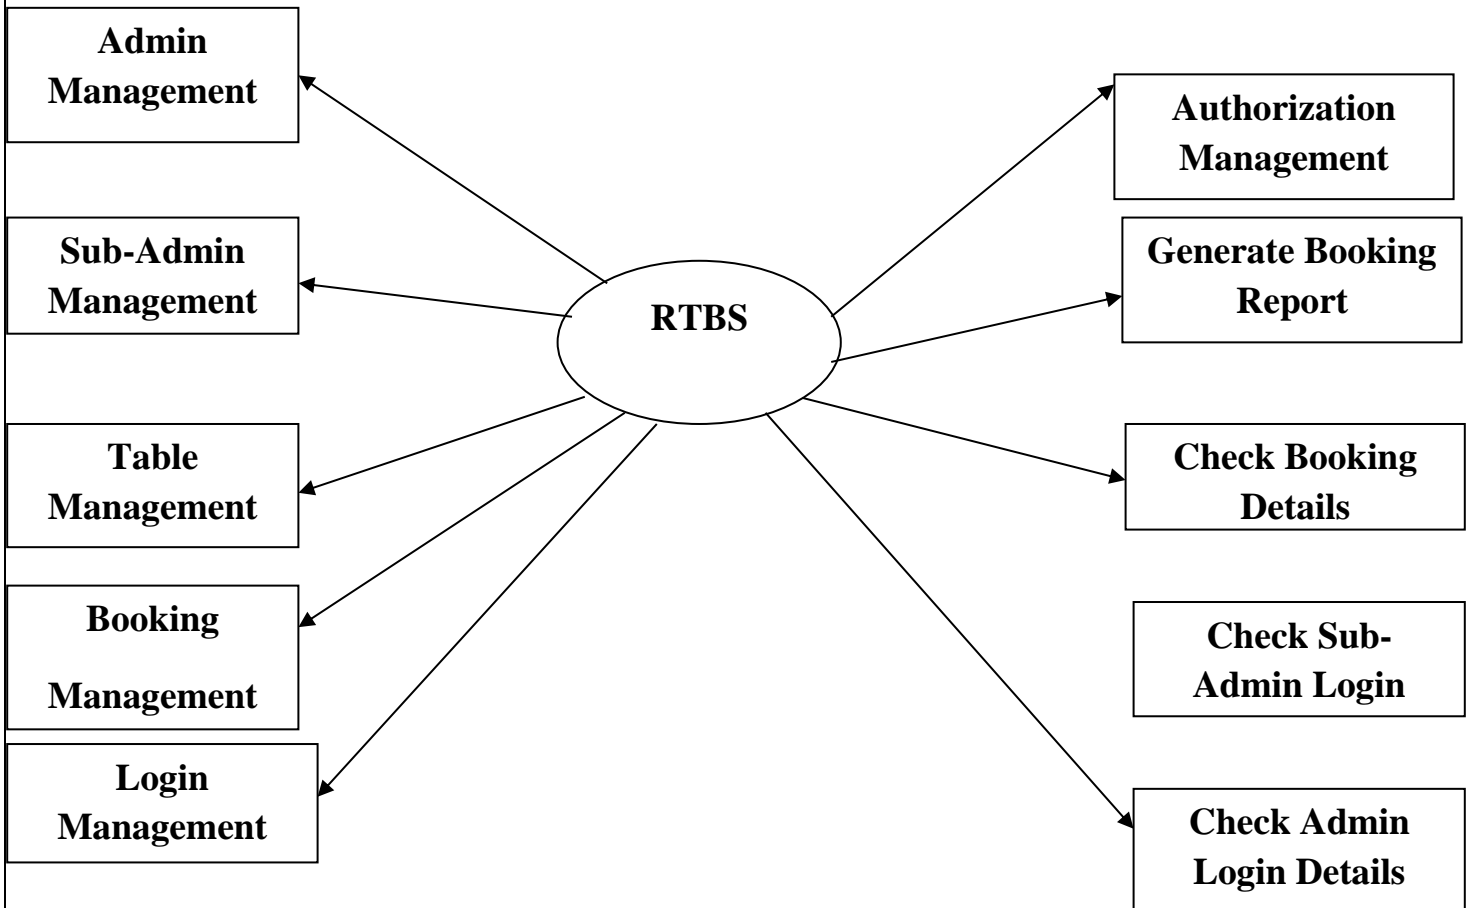

Second Level DFD

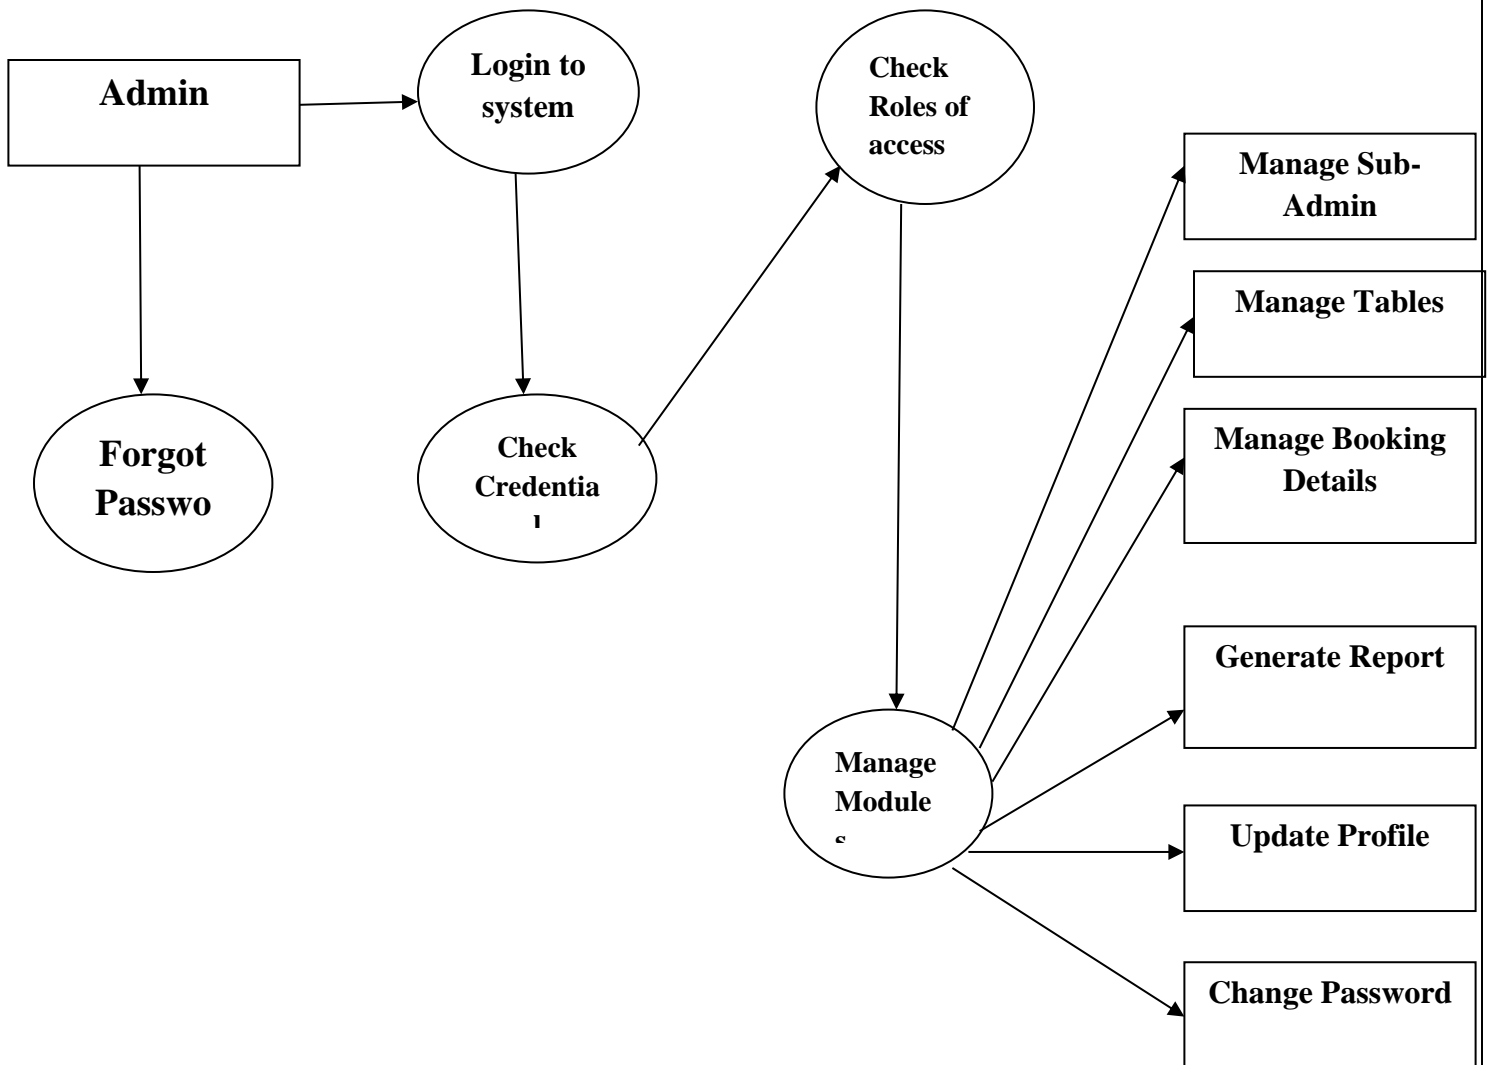

Codeing:

Admin:

Index:

```
<?php
session_start();
include('includes/config.php');
if(isset($_POST['login']))
{
    $uname=$_POST['username'];
    $Password=md5($_POST['inputpwd']);
    $query=mysqli_query($con,"select ID,AdminuserName,UserType from tbladmin where
AdminuserName='$uname' && Password='$Password' ");
    $ret=mysqli_fetch_array($query);
    if($ret>0){
        $_SESSION['aid']=$ret['ID'];
        $_SESSION['uname']=$ret['AdminuserName'];
        $_SESSION['utype']=$ret['UserType'];
        header('location:dashboard.php');
    }
    else{
        echo "<script>alert('Invalid Details.');";
    }
}
?>
<!DOCTYPE html>
```

```

<html lang="en">
<head>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <title>Restaurent Table Reservation System | Login</title>
  <!-- Google Font: Source Sans Pro -->
  <link rel="stylesheet"
href="https://fonts.googleapis.com/css?family=Source+Sans+Pro:300,400,400i,700&display=fal
lback">
  <!-- Font Awesome -->
  <link rel="stylesheet" href="../plugins/fontawesome-free/css/all.min.css">
  <!-- icheck bootstrap -->
  <link rel="stylesheet" href="../plugins/icheck-bootstrap/icheck-bootstrap.min.css">
  <!-- Theme style -->
  <link rel="stylesheet" href="../dist/css/adminlte.min.css">
</head>
<body class="hold-transition login-page">
<div class="login-box">
  <!-- /.login-logo -->
  <div class="card card-outline card-primary">
    <div class="card-header text-center">
      <a href="../index.php" class="h1"><b>Admin</b> | RTRS</a>
    </div>
    <div class="card-body">
      <p class="login-box-msg">Sign in to start your session</p>
      <form method="post">
        <div class="input-group mb-3">

```

```

        <input type="text" class="form-control" placeholder="Username" name="username"
required>
        <div class="input-group-append">
            <div class="input-group-text">
                <span class="fas fa-envelope"></span>
            </div>
        </div>
    </div>
</div>
<div class="input-group mb-3">
    <input type="password" class="form-control" placeholder="Password" name="inputpwd"
required>
    <div class="input-group-append">
        <div class="input-group-text">
            <span class="fas fa-lock"></span>
        </div>
    </div>
</div>
<div class="row">
    <div class="col-8">
</div>
        <!-- /.col -->
        <div class="col-4">
            <button type="submit" class="btn btn-primary btn-block" name="login">Sign
In</button>
        </div>
        <!-- /.col -->
    </div>
</form>

```

```

<p class="mb-1">
    <a href="password-recovery.php">I forgot my password</a>
</p>
</div>
<!-- /.card-body -->
</div>
<!-- /.card -->
</div>
<!-- /.login-box -->
<!-- jQuery -->
<script src="../../plugins/jquery/jquery.min.js"></script>
<!-- Bootstrap 4 -->
<script src="../../plugins/bootstrap/js/bootstrap.bundle.min.js"></script>
<!-- AdminLTE App -->
<script src="../../dist/js/adminlte.min.js"></script>
</body>
</html>

```

DASHBOARD

```

<?php session_start();
// Database Connection
include('includes/config.php');
//Validating Session
if(strlen($_SESSION['aid'])==0)
{
header('location:index.php');
}
else{ ?>

```

```

<!DOCTYPE html>

<html lang="en">

<head>

  <meta charset="utf-8">

  <meta name="viewport" content="width=device-width, initial-scale=1">

  <title>Restaurent Table Booking System | Dashboard</title>

  <!-- Google Font: Source Sans Pro -->

  <link rel="stylesheet"
href="https://fonts.googleapis.com/css?family=Source+Sans+Pro:300,400,400i,700&display=fal
lback">

  <!-- Font Awesome -->

  <link rel="stylesheet" href="../../plugins/fontawesome-free/css/all.min.css">

  <!-- Icons -->

  <link rel="stylesheet"
href="https://code.ionicframework.com/ionicons/2.0.1/css/ionicons.min.css">

  <!-- Tempusdominus Bootstrap 4 -->

  <link rel="stylesheet" href="../../plugins/tempusdominus-bootstrap-4/css/tempusdominus-
bootstrap-4.min.css">

  <!-- iCheck -->

  <link rel="stylesheet" href="../../plugins/ichexk-bootstrap/ichexk-bootstrap.min.css">

  <!-- JQVMap -->

  <link rel="stylesheet" href="../../plugins/jqvmap/jqvmap.min.css">

  <!-- Theme style -->

  <link rel="stylesheet" href="../../dist/css/adminlte.min.css">

  <!-- overlayScrollbars -->

  <link rel="stylesheet" href="../../plugins/overlayScrollbars/css/OverlayScrollbars.min.css">

  <!-- Daterange picker -->

  <link rel="stylesheet" href="../../plugins/daterangepicker/daterangepicker.css">

  <!-- summernote -->

```



```

<link rel="stylesheet" href="../../plugins/summernote/summernote-bs4.min.css">
</head>
<body class="hold-transition sidebar-mini layout-fixed">
<div class="wrapper">
  <!-- Navbar -->
  <?php include_once('includes/navbar.php');?>
  <!-- Main Sidebar Container -->
  <?php include_once('includes/sidebar.php');?>
  <!-- Sidebar -->
  <!-- Content Wrapper. Contains page content -->
  <div class="content-wrapper">
    <!-- Content Header (Page header) -->
    <div class="content-header">
      <div class="container-fluid">
        <div class="row mb-2">
          <div class="col-sm-6">
            <h1 class="m-0">Dashboard</h1>
          </div><!-- /.col -->
          <div class="col-sm-6">
            <ol class="breadcrumb float-sm-right">
              <li class="breadcrumb-item"><a href="dashboard.php">Home</a></li>
              <li class="breadcrumb-item active">Dashboard</li>
            </ol>
          </div><!-- /.col -->
        </div><!-- /.row -->
      </div><!-- /.container-fluid -->
    </div>
  </div>

```

```

<!-- /.content-header -->
<!-- Main content -->
<section class="content">
  <div class="container-fluid">
    <!-- Small boxes (Stat box) -->
    <div class="row">
      <?php if($_SESSION['utype']==1):?>
        <div class="col-lg-4 col-6">
          <!-- small box -->
          <div class="small-box bg-info">
            <div class="inner">
              <?php $query=mysqli_query($con,"select id from tbladmin where UserType=0");
              $subadmincount=mysqli_num_rows($query);
              <h3><?php echo $subadmincount;?></h3>
              <p>Sub Admins</p>
            </div>
            <div class="icon">
              <i class="ion ion-person"></i>
            </div>
            <a href="manage-subadmins.php" class="small-box-footer">More info <i class="fas fa-
arrow-circle-right"></i></a>
          </div>
        </div>
      <?php endif;?>
    <!-- ./col -->
    <div class="col-lg-4 col-6">
      <!-- small box -->
      <div class="small-box bg-primary">

```

```

        <div class="inner">

<?php $query1=mysqli_query($con,"select * from tblbookings");
$allbookings=mysqli_num_rows($query1);
?>

        <h3><?php echo $allbookings;?></h3>

        <p>All bookings</p>
    </div>

    <div class="icon">

        <i class="ion ion-person-add"></i>

    </div>

    <a href="all-bookings.php" class="small-box-footer">More info <i class="fas fa-arrow-
circle-right"></i></a>

    </div>

</div>

<!-- ./col -->

<div class="col-lg-4 col-6">

    <!-- small box -->

    <div class="small-box bg-warning">

        <div class="inner">

            <?php $query3=mysqli_query($con,"select * from tblbookings where (boookingStatus is null ||
boookingStatus='')");
$newbookings=mysqli_num_rows($query3);
?>

            <h3><?php echo $newbookings;?></h3>

            <p>New Bookings</p>

```

```

        </div>

        <div class="icon">

            <i class="ion ion-person-add"></i>

        </div>

        <a href="new-bookings.php" class="small-box-footer">More info <i class="fas fa-arrow-
circle-right"></i></a>

    </div>

</div>

<!-- ./col -->

<hr />

<div class="col-lg-4 col-6">

    <!-- small box -->

    <div class="small-box bg-success">

        <div class="inner">

<?php $query11=mysqli_query($con,"select * from tblbookings where
(bookingStatus='Accepted')");

$acceptedbookings=mysqli_num_rows($query11);

?

        <h3><?php echo $acceptedbookings;?></h3>

        <p>Accepted Bookings</p>

    </div>

    <div class="icon">

        <i class="ion ion-person"></i>

    </div>

    <a href="accepted-bookings.php" class="small-box-footer">More info <i class="fas fa-
arrow-circle-right"></i></a>

    </div>

</div>

```

```

        <!-- ./col -->

        <div class="col-lg-4 col-6">

        <!-- small box -->

        <div class="small-box bg-danger">

        <div class="inner">

        <?php $query12=mysqli_query($con,"select * from tblbookings where
        (boookingStatus='Rejected')");

        $rejectedbookings=mysqli_num_rows($query12);

        ?

        <h3><?php echo $rejectedbookings;?></h3>

        <p>Rejected Bookings</p>

        </div>

        <div class="icon">

        <i class="ion ion-person-add"></i>

        </div>

        <a href="rejected-bookings.php" class="small-box-footer">More info <i class="fas fa-
        arrow-circle-right"></i></a>

        </div>

        </div>

        <!-- ./col -->

        <!-- ./col -->

        </div>

        <!-- /.row -->

        </div><!-- /.container-fluid -->

        </section>

        <!-- /.content -->

        </div>

        <!-- /.content-wrapper -->

```

```

<?php include_once('includes/footer.php');?>
</div>
<!-- ./wrapper -->
<!-- jQuery -->
<script src="../../plugins/jquery/jquery.min.js"></script>
<!-- jQuery UI 1.11.4 -->
<script src="../../plugins/jquery-ui/jquery-ui.min.js"></script>
<!-- Resolve conflict in jQuery UI tooltip with Bootstrap tooltip -->
<script>
    $.widget.bridge('uibutton', $.ui.button)
</script>
<!-- Bootstrap 4 -->
<script src="../../plugins/bootstrap/js/bootstrap.bundle.min.js"></script>
<!-- ChartJS -->
<script src="../../plugins/chart.js/Chart.min.js"></script>
<!-- Sparkline -->
<script src="../../plugins/sparklines/sparkline.js"></script>
<!-- JQVMap -->
<script src="../../plugins/jqvmap/jquery.vmap.min.js"></script>
<script src="../../plugins/jqvmap/maps/jquery.vmap.usa.js"></script>
<!-- jQuery Knob Chart -->
<script src="../../plugins/jquery-knob/jquery.knob.min.js"></script>
<!-- daterangepicker -->
<script src="../../plugins/moment/moment.min.js"></script>
<script src="../../plugins/daterangepicker/daterangepicker.js"></script>
<!-- Tempusdominus Bootstrap 4 -->
<script src="../../plugins/tempusdominus-bootstrap-4/js/tempusdominus-bootstrap-4.min.js"></script>

```

```

<!-- Summernote -->
<script src="../../plugins/summernote/summernote-bs4.min.js"></script>
<!-- overlayScrollbars -->
<script src="../../plugins/overlayScrollbars/js/jquery.overlayScrollbars.min.js"></script>
<!-- AdminLTE App -->
<script src="../../dist/js/adminlte.js"></script>
<!-- AdminLTE for demo purposes -->
<script src="../../dist/js/demo.js"></script>
<!-- AdminLTE dashboard demo (This is only for demo purposes) -->
<script src="../../dist/js/pages/dashboard.js"></script>
</body>
</html>
<?php } ?>

```

Accepted bookings

```

<?php session_start();
error_reporting(0);
// Database Connection
include('includes/config.php');
//Validating Session
if(strlen($_SESSION['aid'])==0)
{
header('location:index.php');
}
else{
?>
<!DOCTYPE html>

```

```

<html lang="en">
<head>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <title>Restaurent Table Booking System | Accepted Bookings</title>
  <!-- Google Font: Source Sans Pro -->
  <link rel="stylesheet"
href="https://fonts.googleapis.com/css?family=Source+Sans+Pro:300,400,400i,700&display=fal
lback">
  <!-- Font Awesome -->
  <link rel="stylesheet" href="../plugins/fontawesome-free/css/all.min.css">
  <!-- DataTables -->
  <link rel="stylesheet" href="../plugins/datatables-bs4/css/dataTables.bootstrap4.min.css">
  <link rel="stylesheet" href="../plugins/datatables-
responsive/css/responsive.bootstrap4.min.css">
  <link rel="stylesheet" href="../plugins/datatables-buttons/css/buttons.bootstrap4.min.css">
  <!-- Theme style -->
  <link rel="stylesheet" href="../dist/css/adminlte.min.css">
</head>
<body class="hold-transition sidebar-mini">
<div class="wrapper">
  <!-- Navbar -->
  <?php include_once("includes/navbar.php");?>
  <!-- /.navbar -->
  <?php include_once("includes/sidebar.php");?>
  <!-- Content Wrapper. Contains page content -->
  <div class="content-wrapper">
    <!-- Content Header (Page header) -->

```



```

<section class="content-header">
  <div class="container-fluid">
    <div class="row mb-2">
      <div class="col-sm-6">
        <h1>Accepted Bookings</h1>
      </div>
      <div class="col-sm-6">
        <ol class="breadcrumb float-sm-right">
          <li class="breadcrumb-item"><a href="dashboard.php">Home</a></li>
          <li class="breadcrumb-item active">Accepted Bookings</li>
        </ol>
      </div>
    </div>
  </div><!-- /.container-fluid -->
</section>

<!-- Main content -->
<section class="content">
  <div class="container-fluid">
    <div class="row">
      <div class="col-12">
        <div class="card">
          <div class="card">
            <div class="card-header">
              <h3 class="card-title">Bookings Details</h3>
            </div>
            <!-- /.card-header -->
            <div class="card-body">

```

```

<table id="example1" class="table table-bordered table-striped">
  <thead>
    <tr>
      <th>#</th>
      <th>Bookings No</th>
      <th>Name</th>
      <th>Email Id</th>
      <th>Mobile No</th>
      <th>No. Adults</th>
      <th>No of Childrens</th>
      <th>Boking Date/Time</th>
      <th>Posting Date</th>
      <th>Action</th>
    </tr>
  </thead>
  <tbody>
    <?php $query=mysqli_query($con,"select * from tblbookings where
    (boookingStatus='Accepted')");
    $cnt=1;
    while($result=mysqli_fetch_array($query)){
    ?>
      <tr>
        <td><?php echo $cnt;?></td>
        <td><?php echo $result['bookingNo']?></td>
        <td><?php echo $result['fullName']?></td>
        <td><?php echo $result['emailId']?></td>
        <td><?php echo $result['phoneNumber']?></td>
        <td><?php echo $result['noAdults']?></td>

```

```

        <td><?php echo $result['noChildrens']?></td>

        <td><?php echo $result['bookingDate']?></?php echo
$result['bookingTime']?></td>

        <td><?php echo $result['postingDate']?></td>

        <th>

        <a href="booking-details.php?bid=<?php echo $result['id'];?>" title="View Details"
class="btn btn-primary btn-xm"> View Details</a>

    </th>

</tr>

</tr>

<?php $cnt++;} ?>

</tbody>

<tfoot>

<tr>

<th>#</th>

    <th>Bookings No</th>

    <th>Name</th>

    <th>Email Id</th>

    <th>Mobile No</th>

    <th>No. Adults</th>

    <th>No of Childrens</th>

    <th>Boking Date/Time</th>

    <th>Posting Date</th>

    <th>Action</th>

</tr>

</tfoot>

</table>

</div>

<!-- /.card-body -->

```

```

        </div>
        <!-- /.card -->
    </div>
    <!-- /.col -->
</div>
<!-- /.row -->
</div>
<!-- /.container-fluid -->
</section>
<!-- /.content -->
</div>
<!-- /.content-wrapper -->
<?php include_once('includes/footer.php');?>
<!-- Control Sidebar -->
<aside class="control-sidebar control-sidebar-dark">
    <!-- Control sidebar content goes here -->
</aside>
<!-- /.control-sidebar -->
</div>
<!-- ./wrapper -->
<!-- jQuery -->
<script src="../../plugins/jquery/jquery.min.js"></script>
<!-- Bootstrap 4 -->
<script src="../../plugins/bootstrap/js/bootstrap.bundle.min.js"></script>
<!-- DataTables & Plugins -->
<script src="../../plugins/datatables/jquery.dataTables.min.js"></script>
<script src="../../plugins/datatables-bs4/js/dataTables.bootstrap4.min.js"></script>

```

```

<script src="../../plugins/datatables-responsive/js/dataTables.responsive.min.js"></script>
<script src="../../plugins/datatables-responsive/js/responsive.bootstrap4.min.js"></script>
<script src="../../plugins/datatables-buttons/js/dataTables.buttons.min.js"></script>
<script src="../../plugins/datatables-buttons/js/buttons.bootstrap4.min.js"></script>
<script src="../../plugins/jszip/jszip.min.js"></script>
<script src="../../plugins/pdfmake/pdfmake.min.js"></script>
<script src="../../plugins/pdfmake/vfs_fonts.js"></script>
<script src="../../plugins/datatables-buttons/js/buttons.html5.min.js"></script>
<script src="../../plugins/datatables-buttons/js/buttons.print.min.js"></script>
<script src="../../plugins/datatables-buttons/js/buttons.colVis.min.js"></script>
<!-- AdminLTE App -->
<script src="../../dist/js/adminlte.min.js"></script>
<!-- AdminLTE for demo purposes -->
<script src="../../dist/js/demo.js"></script>
<!-- Page specific script -->
<script>
$(function () {
  $('#example1').DataTable({
    "responsive": true, "lengthChange": false, "autoWidth": false,
    "buttons": ["copy", "csv", "excel", "pdf", "print", "colvis"]
  }).buttons().container().appendTo('#example1_wrapper .col-md-6:eq(0)');
  $('#example2').DataTable({
    "paging": true,
    "lengthChange": false,
    "searching": false,
    "ordering": true,
    "info": true,

```

```

        "autoWidth": false,
        "responsive": true,
    });
});
</script>
</body>
</html>
<?php } ?>
<?php session_start();
// Database Connection
include('includes/config.php');
//Validating Session
if(strlen($_SESSION['aid'])==0)
    { header('location:index.php');
    }
else{
// Code for Add New Sub Admin
if(isset($_POST['submit'])){
$username=$_POST['sadminusername'];
$fname=$_POST['fullname'];
$email=$_POST['emailid'];
$mobileno=$_POST['mobilenumber'];
$password=md5($_POST['inputpwd']);
$usertype='0';

$query=mysqli_query($con,"insert into
tbladmin(AdminuserName,AdminName,MobileNumber,Email>Password,UserType )
values('$username','$fname','$mobileno','$email','$password','$usertype')");

if($query){

```

```

echo "<script>alert('Sub admin details added successfully.');";
echo "<script type='text/javascript'> document.location = 'add-subadmin.php'; </script>";
} else {
echo "<script>alert('Something went wrong. Please try again.');";
}
}

?>

<!DOCTYPE html>

<html lang="en">

<head>

<meta charset="utf-8">

<meta name="viewport" content="width=device-width, initial-scale=1">

<title>Restaurent Table Booking System | Add Sub admin</title>

<!-- Google Font: Source Sans Pro -->

<link rel="stylesheet"
href="https://fonts.googleapis.com/css?family=Source+Sans+Pro:300,400,400i,700&display=fal
lback">

<!-- Font Awesome -->

<link rel="stylesheet" href="../../plugins/fontawesome-free/css/all.min.css">

<!-- Theme style -->

<link rel="stylesheet" href="../../dist/css/adminlte.min.css">

<!--Function Email Availabilty---->

<script>

function checkAvailability() {

$("#loaderIcon").show();

jQuery.ajax({

```

```

url: "check_availability.php",
data:'username='+$("#sadminusername").val(),
type: "POST",
success:function(data){
$("#user-availability-status").html(data);
$("#loaderIcon").hide();
},
error:function (){}
});
}
</script>

```

```

</head>

```

```

<body class="hold-transition sidebar-mini">

```

```

<div class="wrapper">

```

```

  <!-- Navbar -->

```

```

  <?php include_once("includes/navbar.php");?>

```

```

  <!-- /.navbar -->

```

```

  <!-- Main Sidebar Container -->

```

```

  <?php include_once("includes/sidebar.php");?>

```

```

  <!-- Content Wrapper. Contains page content -->

```

```

  <div class="content-wrapper">

```

```

    <!-- Content Header (Page header) -->

```

```

    <section class="content-header">

```

```

      <div class="container-fluid">

```



```

<div class="row mb-2">
  <div class="col-sm-6">
    <h1>Create Subadmin</h1>
  </div>
  <div class="col-sm-6">
    <ol class="breadcrumb float-sm-right">
      <li class="breadcrumb-item"><a href="dashboard.php">Dashboard</a></li>
      <li class="breadcrumb-item active">Add Subadmin</li>
    </ol>
  </div>
</div>
</div>
</div><!-- /.container-fluid -->
</section>

<!-- Main content -->
<section class="content">
  <div class="container-fluid">
    <div class="row">
      <!-- left column -->
      <div class="col-md-8">
        <!-- general form elements -->
        <div class="card card-primary">
          <div class="card-header">
            <h3 class="card-title">Fill the Info</h3>
          </div>
          <!-- /.card-header -->
          <!-- form start -->

```

```

        <form name="subadmin" method="post">

        <div class="card-body">

<!-- Username-->

        <div class="form-group">

                <label for="exampleInputusername">Username (used for login)</label>

                <input type="text" placeholder="Enter Sub-Admin Username"
name="sadminusername" id="sadminusername" class="form-control" pattern="^[a-zA-Z][a-zA-Z0-9-_.]{5,12}$" title="Username must be alphanumeric 6 to 12 chars"
onBlur="checkAvailability()" required>

                <span id="user-availability-status" style="font-size:14px;"></span>

        </div>

<!-- Subadmin Full Name--->

        <div class="form-group">

                <label for="exampleInputFullname">Full Name</label>

                <input type="text" class="form-control" id="fullname" name="fullname"
placeholder="Enter Sub-Admin Full Name" required>

        </div>

<!-- Sub admin Email---->

        <div class="form-group">

                <label for="exampleInputEmail1">Email address</label>

                <input type="email" class="form-control" id="emailid" name="emailid"
placeholder="Enter email" required>

        </div>

<!-- Sub admin Contact Number---->

        <div class="form-group">

                <label for="text">Mobile Number</label>

                <input type="text" class="form-control" id="mobilenumber"
name="mobilenumber" placeholder="Enter email" pattern="[0-9]{10}" title="10 numeric
characters only" required>

        </div>

```

```

<!--Password-->

    <div class="form-group">

        <label for="exampleInputPassword1">Password</label>

        <input type="password" class="form-control" id="inputpwd" name="inputpwd"
placeholder="Password" required>

    </div>

<!-- /.card-body -->

<div class="card-footer">

    <button type="submit" class="btn btn-primary" name="submit"
id="submit">Submit</button>

</div>

</form>

</div>

<!-- /.card -->

</div>

<!--/.col (left) -->

</div>

<!-- /.row -->

</div><!-- /.container-fluid -->

</section>

<!-- /.content -->

</div>

<!-- /.content-wrapper -->

<?php include_once('includes/footer.php');?>

</div>

```

```

<!-- ./wrapper -->
<!-- jQuery -->
<script src="../../plugins/jquery/jquery.min.js"></script>
<!-- Bootstrap 4 -->
<script src="../../plugins/bootstrap/js/bootstrap.bundle.min.js"></script>
<!-- bs-custom-file-input -->
<script src="../../plugins/bs-custom-file-input/bs-custom-file-input.min.js"></script>
<!-- AdminLTE App -->
<script src="../../dist/js/adminlte.min.js"></script>
<!-- AdminLTE for demo purposes -->
<script src="../../dist/js/demo.js"></script>
<!-- Page specific script -->
<script>
$(function () {
    bsCustomFileInput.init();
});
</script>
</body>
</html>
<?php } ?>

```

ADD NEW TABLE

```

<?php session_start();
// Database Connection
include('includes/config.php');
//Validating Session
if(strlen($_SESSION['aid'])==0) {

```

```

header('location:index.php');
}
else{
// Code for Add New Teacher
if(isset($_POST['submit'])){
//Getting Post Values
$tno=$_POST['tableno'];
$addedby=$_SESSION['aid'];
$query=mysqli_query($con,"insert into tblrestables(tableNumber,AddedBy)
values('$tno','$addedby')");
if($query){
echo "<script>alert('Table added successfully.');

```

```

<link rel="stylesheet" href="../../plugins/select2/css/select2.min.css">
<link rel="stylesheet" href="../../plugins/select2-bootstrap4-theme/select2-bootstrap4.min.css">
<!-- Bootstrap4 Duallistbox -->
<link rel="stylesheet" href="../../plugins/bootstrap4-duallistbox/bootstrap-duallistbox.min.css">
<!-- BS Stepper -->
<link rel="stylesheet" href="../../plugins/bs-stepper/css/bs-stepper.min.css">
<!-- dropzonejs -->
<link rel="stylesheet" href="../../plugins/dropzone/min/dropzone.min.css">
<!-- Theme style -->
<link rel="stylesheet" href="../../dist/css/adminlte.min.css">
</head>
<body class="hold-transition sidebar-mini">
<div class="wrapper">
  <!-- Navbar -->
  <?php include_once("includes/navbar.php");?>
  <!-- /.navbar -->
  <!-- Main Sidebar Container -->
  <?php include_once("includes/sidebar.php");?>
  <!-- Content Wrapper. Contains page content -->
  <div class="content-wrapper">
    <!-- Content Header (Page header) -->
    <section class="content-header">
      <div class="container-fluid">
        <div class="row mb-2">
          <div class="col-sm-6">
            <h1>Add Table</h1>
          </div>

```

```

<div class="col-sm-6">
  <ol class="breadcrumb float-sm-right">
    <li class="breadcrumb-item"><a href="dashboard.php">Dashboard</a></li>
    <li class="breadcrumb-item active">Add Table</li>
  </ol>
</div>
</div>
</div>
</div><!-- /.container-fluid -->
</section>
<!-- Main content -->
<section class="content">
  <div class="container-fluid">
    <div class="row">
      <!-- left column -->
      <div class="col-md-8">
        <!-- general form elements -->
        <div class="card card-primary">
          <div class="card-header">
            <h3 class="card-title">Table Details</h3>
          </div>
          <!-- /.card-header -->
          <!-- form start -->
          <form name="addlawyer" method="post" enctype="multipart/form-data">
            <div class="card-body">
<!-- Table No--->
      <div class="form-group">
        <label for="exampleInputFullname">Table No</label>

```

```

        <input type="text" class="form-control" id="tableno" name="tableno"
placeholder="Enter Table Number" required>

    </div>

    <div class="card-footer">

        <button type="submit" class="btn btn-primary" name="submit"
id="submit">Submit</button>

    </div>

</div>

<!-- /.card-body -->

</div>

<!-- /.card -->

</div>

<!--/.col (left) -->

</form>

</div>

<!-- /.row -->

</div><!-- /.container-fluid -->

</section>

<!-- /.content -->

</div>

<!-- /.content-wrapper -->

<?php include_once('includes/footer.php');?>

</div>

<!-- ./wrapper -->

<!-- jQuery -->

<script src="../../plugins/jquery/jquery.min.js"></script>

<!-- Bootstrap 4 -->

<script src="../../plugins/bootstrap/js/bootstrap.bundle.min.js"></script>

```



```

<!-- bs-custom-file-input -->
<script src="../../plugins/bs-custom-file-input/bs-custom-file-input.min.js"></script>
<!-- AdminLTE App -->
<script src="../../dist/js/adminlte.min.js"></script>
<!-- AdminLTE for demo purposes -->
<script src="../../dist/js/demo.js"></script>
<!-- Page specific script -->
<script src="../../plugins/select2/js/select2.full.min.js"></script>
<script>
$(function () {
    bsCustomFileInput.init();
});
$(function () {
    //Initialize Select2 Elements
    $('.select2').select2()

    //Initialize Select2 Elements
    $('.select2bs4').select2({
        theme: 'bootstrap4'
    })
});
</script>
</body>
</html>
<?php } ?>
ALL BOOKINGS
<?php session_start();

```

```

error_reporting(0);

// Database Connection

include('includes/config.php');

//Validating Session

if(strlen($_SESSION['aid'])==0)
    {
header('location:index.php');
    }
else{
    ?>

<!DOCTYPE html>

<html lang="en">

<head>

    <meta charset="utf-8">

    <meta name="viewport" content="width=device-width, initial-scale=1">

    <title>Restaurent Table Booking System | All Bookings</title>


    <!-- Google Font: Source Sans Pro -->

    <link rel="stylesheet"
href="https://fonts.googleapis.com/css?family=Source+Sans+Pro:300,400,400i,700&display=fal
lback">

    <!-- Font Awesome -->

    <link rel="stylesheet" href="../plugins/fontawesome-free/css/all.min.css">

    <!-- DataTables -->

    <link rel="stylesheet" href="../plugins/datatables-bs4/css/dataTables.bootstrap4.min.css">

    <link rel="stylesheet" href="../plugins/datatables-responsive/css/responsive.bootstrap4.min.css">

    <link rel="stylesheet" href="../plugins/datatables-buttons/css/buttons.bootstrap4.min.css">

```

```

<!-- Theme style -->
<link rel="stylesheet" href="../../dist/css/adminlte.min.css">
</head>
<body class="hold-transition sidebar-mini">
<div class="wrapper">
  <!-- Navbar -->
  <?php include_once("includes/navbar.php");?>
  <!-- /.navbar -->
  <?php include_once("includes/sidebar.php");?>
  <!-- Content Wrapper. Contains page content -->
  <div class="content-wrapper">
    <!-- Content Header (Page header) -->
    <section class="content-header">
      <div class="container-fluid">
        <div class="row mb-2">
          <div class="col-sm-6">
            <h1>All Bookings</h1>
          </div>
          <div class="col-sm-6">
            <ol class="breadcrumb float-sm-right">
              <li class="breadcrumb-item"><a href="dashboard.php">Home</a></li>
              <li class="breadcrumb-item active">All Bookings</li>
            </ol>
          </div>
        </div>
      </div><!-- /.container-fluid -->
    </section>
  </div>

```

```

<!-- Main content -->
<section class="content">
  <div class="container-fluid">
    <div class="row">
      <div class="col-12">
        <div class="card">
          <div class="card">
            <div class="card-header">
              <h3 class="card-title">Bookings Details</h3>
            </div>
            <!-- /.card-header -->
            <div class="card-body">
              <table id="example1" class="table table-bordered table-striped">
                <thead>
                  <tr>
                    <th>#</th>
                    <th>Bookings No</th>
                    <th>Name</th>
                    <th>Email Id</th>
                    <th>Mobile No</th>
                    <th>No. Adults</th>
                    <th>No of Childrens</th>
                    <th>Boking Date/Time</th>
                    <th>Posting Date</th>
                    <th>Action</th>
                  </tr>

```

```

        </thead>

        <tbody>

        <?php $query=mysqli_query($con,"select * from tblbookings ");
        $cnt=1;
        while($result=mysqli_fetch_array($query)){
        ?>

            <tr>

                <td><?php echo $cnt;?></td>

                <td><?php echo $result['bookingNo']?></td>

                <td><?php echo $result['fullName']?></td>

                <td><?php echo $result['emailId']?></td>

                <td><?php echo $result['phoneNumber']?></td>

                <td><?php echo $result['noAdults']?></td>

                <td><?php echo $result['noChildrens']?></td>

                <td><?php echo $result['bookingDate']?></td><?php echo
        $result['bookingTime']?></td>

                <td><?php echo $result['postingDate']?></td>

                <th>

                    <a href="booking-details.php?bid=<?php echo $result['id'];?>" title="View Details"
        class="btn btn-primary btn-xm"> View Details</a>

                </th>

            </tr>

            <?php $cnt++;} ?>

        </tbody>

        <tfoot>

        <tr>

            <th>#</th>

```

```

        <th>Bookings No</th>
        <th>Name</th>
        <th>Email Id</th>
        <th>Mobile No</th>
        <th>No. Adults</th>
        <th>No of Childrens</th>
        <th>Boking Date/Time</th>
        <th>Posting Date</th>
        <th>Action</th>
    </tr>
</tfoot>
</table>
</div>
<!-- /.card-body -->
</div>
<!-- /.card -->
</div>
<!-- /.col -->
</div>
<!-- /.row -->
</div>
<!-- /.container-fluid -->
</section>
<!-- /.content -->
</div>
<!-- /.content-wrapper -->
<?php include_once('includes/footer.php');?>

```

```

<!-- Control Sidebar -->
<aside class="control-sidebar control-sidebar-dark">

  <!-- Control sidebar content goes here -->

</aside>

<!-- /.control-sidebar -->

</div>

<!-- ./wrapper -->

<!-- jQuery -->
<script src="../../plugins/jquery/jquery.min.js"></script>

<!-- Bootstrap 4 -->
<script src="../../plugins/bootstrap/js/bootstrap.bundle.min.js"></script>

<!-- DataTables & Plugins -->

<script src="../../plugins/datatables/jquery.dataTables.min.js"></script>
<script src="../../plugins/datatables-bs4/js/dataTables.bootstrap4.min.js"></script>
<script src="../../plugins/datatables-responsive/js/dataTables.responsive.min.js"></script>
<script src="../../plugins/datatables-responsive/js/responsive.bootstrap4.min.js"></script>
<script src="../../plugins/datatables-buttons/js/dataTables.buttons.min.js"></script>
<script src="../../plugins/datatables-buttons/js/buttons.bootstrap4.min.js"></script>
<script src="../../plugins/jszip/jszip.min.js"></script>
<script src="../../plugins/pdfmake/pdfmake.min.js"></script>
<script src="../../plugins/pdfmake/vfs_fonts.js"></script>
<script src="../../plugins/datatables-buttons/js/buttons.html5.min.js"></script>
<script src="../../plugins/datatables-buttons/js/buttons.print.min.js"></script>
<script src="../../plugins/datatables-buttons/js/buttons.colVis.min.js"></script>

<!-- AdminLTE App -->
<script src="../../dist/js/adminlte.min.js"></script>

<!-- AdminLTE for demo purposes -->

```

```

<script src="../dist/js/demo.js"></script>
<!-- Page specific script -->
<script>
$(function () {
    $("#example1").DataTable({
        "responsive": true, "lengthChange": false, "autoWidth": false,
        "buttons": ["copy", "csv", "excel", "pdf", "print", "colvis"]
    }).buttons().container().appendTo('#example1_wrapper .col-md-6:eq(0)');
    $('#example2').DataTable({
        "paging": true,
        "lengthChange": false,
        "searching": false,
        "ordering": true,
        "info": true,
        "autoWidth": false,
        "responsive": true,
    });
})</script></body>
</html>
<?php } ?>

```

BOOKING DETAILS

```

<?php session_start();
//error_reporting(0);
// Database Connection
include('includes/config.php');
//Validating Session

```



```

if(strlen($_SESSION['aid'])==0)
{
header('location:index.php');
}
else{
//Code For Updation the Enrollment
if(isset($_POST['submit'])){
$bid=intval($_GET['bid']);
$status=$_POST['status'];
$remark=$_POST['officialremak'];
$tbaleid=$_POST['table'];
$bdate=$_POST['bdate'];
$btime=strtotime($_POST['btime']);
$endTime = date("H:i:s", strtotime('+30 minutes', $btime));

$ret=mysqli_query($con,"SELECT * FROM tblbookings where ('$btime' BETWEEN
time(bookingTime) and '$endTime' || '$endTime' BETWEEN time(bookingTime) and '$endTime'
|| bookingTime BETWEEN '$btime' and '$endTime') and tableId='$tbaleid' and
bookingDate='$bdate' and boookingStatus='Accepted'");

$count=mysqli_num_rows($ret);
if($count>0){
echo "<script>alert('Table already booked for given Date and Time. please choose another
table');</script>";
} else{
$query=mysqli_query($con,"update tblbookings set
adminremark='$remark',boookingStatus='$status',tableId='$tbaleid' where id='$bid'");
if($query){
echo "<script>alert('Booking Details Updated  successfully.');

```

```

echo "<script>alert('Something went wrong. Please try again.');

```

```

<?php include_once("includes/navbar.php");?>
<!-- /.navbar -->

<?php include_once("includes/sidebar.php");?>
<!-- Content Wrapper. Contains page content -->
<div class="content-wrapper">
  <!-- Content Header (Page header) -->
  <section class="content-header">
    <div class="container-fluid">
      <div class="row mb-2">
        <div class="col-sm-6">
          <h1>Booking Details</h1>
        </div>
        <div class="col-sm-6">
          <ol class="breadcrumb float-sm-right">
            <li class="breadcrumb-item"><a href="dashboard.php">Home</a></li>
            <li class="breadcrumb-item active">Booking Details</li>
          </ol>
        </div>
      </div><!-- /.container-fluid -->
    </section>

    <!-- Main content -->
    <section class="content">
      <div class="container-fluid">
        <div class="row">
          <div class="col-12">

```

```

        <div class="card">
    <div class="card">
        <div class="card-header">
            <h3 class="card-title">Booking Details</h3>
        </div>
        <!-- /.card-header -->
        <div class="card-body">
            <table id="example1" class="table table-bordered table-striped">
                <tbody>
<?php $bid=intval($_GET['bid']);
$query=mysqli_query($con,"select * from tblbookings where id='$bid'");
$cnt=1;
while($result=mysqli_fetch_array($query)){
?>
        <tr>
            <th>Booking Number</th>
            <td colspan="3"><?php echo $result['bookingNo']?></td>
        </tr>
        <tr>
            <th> Name</th>
            <td><?php echo $result['fullName']?></td>
            <th>Email Id</th>
            <td> <?php echo $result['emailId']?></td>
        </tr>
        <tr>
            <th> Mobile No</th>
            <td><?php echo $result['phoneNumber']?></td>

```

```

        <th>No of Adults</th>

        <td><?php echo $result['noAdults']?></td>

    </tr>

    <tr>

        <th>No of Childs</th>

        <td><?php echo $result['noChildrens']?></td>

        <th>Booking Date / Time</th>

        <td><?php echo $date=$result['bookingDate']?></?php echo
        $btime=$result['bookingTime']?></td>

    </tr>

    <tr>

        <th>Posting Date</th>

        <td colspan="3"><?php echo $result['postingDate']?></td>

    </tr>

    <?php if($result['boookingStatus']!=""):?>

        <tr>

            <th>Booking Status</th>

            <td><?php echo $result['boookingStatus']?></td>

            <th>Updation Date</th>

            <td><?php echo $result['updationDate']?></td>

        </tr>

    <tr>

        <th> Remark</th>

        <td colspan="3"><?php echo $result['adminremark']?></td>

    </tr>

    <?php endif;?>

    <?php if($result['boookingStatus']==""):?>

    <tr>

```

```

        <td colspan="4" style="text-align:center;">

        <button type="button" class="btn btn-info" data-toggle="modal" data-target="#myModal">Take
        Action</button>

    </td>

<?php endif;?>

        <?php $cnt++;} ?>

        </tbody>

    </table>

</div>

    <!-- /.card-body -->

</div>

    <!-- /.card -->

</div>

    <!-- /.col -->

</div>

    <!-- /.row -->

</div>

    <!-- /.container-fluid -->

</section>

    <!-- /.content -->

</div>

    <!-- /.content-wrapper -->

<?php include_once('includes/footer.php');?>

</div>

<!-- ./wrapper -->

<div id="myModal" class="modal fade" role="dialog">

    <div class="modal-dialog">

```

```

<!-- Modal content-->
<div class="modal-content">
  <div class="modal-header">
    <h4 class="modal-title">Update Booking Satus</h4>
  </div>
  <div class="modal-body">
    <form name="takeaction" method="post">
      <p><select class="form-control" name="status" id="status" required>
        <option value="">Select Booking Status</option>
        <option value="Accepted">Accepted</option>
        <option value="Rejected">Rejected</option>
      </select></p>
      <p id='rtable'>
        <input type="hidden" name="bdate" value="<?php echo $date;?>">
        <input type="hidden" name="btime" value="<?php echo $btime;?>">
        <select class="form-control" name="table" id="table">
          <option value="">Select Table</option>
          <?php $ret=mysqli_query($con,"select id,tableNumber from tblrestables");
while($row=mysqli_fetch_array($ret)){
?>
          <option value="<?php echo $row['id'];?>"><?php echo $row['tableNumber'];?></option>
        </select></p>
        <p><textarea class="form-control" name="officialremak" placeholder="Official Remark"
rows="5" required></textarea></p>
        <input type="submit" class="btn btn-primary" name="submit" value="update">
      </form>
    </div>
  </div>

```

```

<div class="modal-footer">
    <button type="button" class="btn btn-default" data-dismiss="modal">Close</button>
</div>
</div>
</div>
</div>
<!-- jQuery -->
<script src="../../plugins/jquery/jquery.min.js"></script>
<!-- Bootstrap 4 -->
<script src="../../plugins/bootstrap/js/bootstrap.bundle.min.js"></script>
<!-- DataTables & Plugins -->
<script src="../../plugins/datatables/jquery.dataTables.min.js"></script>
<script src="../../plugins/datatables-bs4/js/dataTables.bootstrap4.min.js"></script>
<script src="../../plugins/datatables-responsive/js/dataTables.responsive.min.js"></script>
<script src="../../plugins/datatables-responsive/js/responsive.bootstrap4.min.js"></script>
<script src="../../plugins/datatables-buttons/js/dataTables.buttons.min.js"></script>
<script src="../../plugins/datatables-buttons/js/buttons.bootstrap4.min.js"></script>
<script src="../../plugins/jszip/jszip.min.js"></script>
<script src="../../plugins/pdfmake/pdfmake.min.js"></script>
<script src="../../plugins/pdfmake/vfs_fonts.js"></script>
<script src="../../plugins/datatables-buttons/js/buttons.html5.min.js"></script>
<script src="../../plugins/datatables-buttons/js/buttons.print.min.js"></script>
<script src="../../plugins/datatables-buttons/js/buttons.colVis.min.js"></script>
<!-- AdminLTE App -->
<script src="../../dist/js/adminlte.min.js"></script>
<!-- AdminLTE for demo purposes -->
<script src="../../dist/js/demo.js"></script>

```



```

<!-- Page specific script -->
<script>
$(function () {
    $("#example1").DataTable({
        "responsive": true, "lengthChange": false, "autoWidth": false,
        "buttons": ["copy", "csv", "excel", "pdf", "print", "colvis"]
    }).buttons().container().appendTo('#example1_wrapper .col-md-6:eq(0)');
    $('#example2').DataTable({
        "paging": true,
        "lengthChange": false,
        "searching": false,
        "ordering": true,
        "info": true,
        "autoWidth": false,
        "responsive": true,
    });
});
</script>
<script type="text/javascript">

//For report file
$('#rtable').hide();
$(document).ready(function(){
    $('#status').change(function(){
        if($('#status').val()=='Accepted')
        {
            $('#rtable').show();
        }
    });
});

```

```

jQuery("#table").prop('required',true);
}
else{
    $('#rtable').hide();
}
}}))
</script>
</body>
</html>
<?php } ?>

```

DATES REPORTS

```

<?php session_start();
// Database Connection
include('includes/config.php');
//Validating Session
if(strlen($_SESSION['aid'])==0)
    { header('location:index.php');
    }
else{
// Code for change Password
if(isset($_POST['change'])) {
    $admid=$_SESSION['aid'];
    $cpassword=md5($_POST['currentpassword']);
    $newpassword=md5($_POST['newpassword']);
    $query=mysqli_query($con,"select ID from tbladmin where ID='$admid' and Password='$cpassword'");
    $row=mysqli_fetch_array($query);

```

```

if($row>0){
$ret=mysqli_query($con,"update tbladmin set Password='$newpassword' where ID='$admid'");
echo '<script>alert("Your password successully changed.")</script>';
} else {
echo '<script>alert("Your current password is wrong.")</script>';
}
}
?>

<!DOCTYPE html>

<html lang="en">

<head>

<meta charset="utf-8">

<meta name="viewport" content="width=device-width, initial-scale=1">

<title>Restaurent Table Booking System | Change Password</title>

<!-- Google Font: Source Sans Pro -->

<link rel="stylesheet"
href="https://fonts.googleapis.com/css?family=Source+Sans+Pro:300,400,400i,700&display=fal
lback">

<!-- Font Awesome -->

<link rel="stylesheet" href="../../plugins/fontawesome-free/css/all.min.css">

<!-- Theme style -->

<link rel="stylesheet" href="../../dist/css/adminlte.min.css">

<!--Function Email Availabilty---->

</head>

<body class="hold-transition sidebar-mini">

<div class="wrapper">

<!-- Navbar -->

<?php include_once("includes/navbar.php");?>

```

```

<!-- /.navbar -->

<!-- Main Sidebar Container -->

<?php include_once("includes/sidebar.php");?>

<!-- Content Wrapper. Contains page content -->

<div class="content-wrapper">

    <!-- Content Header (Page header) -->

    <section class="content-header">

        <div class="container-fluid">

            <div class="row mb-2">

                <div class="col-sm-6">

                    <h1>B/w Dates Report</h1>

                </div>

                <div class="col-sm-6">

                    <ol class="breadcrumb float-sm-right">

                        <li class="breadcrumb-item"><a href="dashboard.php">Dashboard</a></li>

                        <li class="breadcrumb-item active">B/w Dates Report</li>

                    </ol>

                </div>

            </div>

        </div><!-- /.container-fluid -->

    </section>

    <!-- Main content -->

    <section class="content">

        <div class="container-fluid">

            <div class="row">

                <!-- left column -->

                <div class="col-md-8">

```

```

<!-- general form elements -->
<div class="card card-primary">
  <div class="card-header">
    <h3 class="card-title">B/w Dates Booking Report</h3>
  </div>
  <!-- /.card-header -->
  <!-- form start -->
<form method="post" name="bwdatesreport" action="bwdates-report-details.php">
  <div class="card-body">
<!-- From Date--->
  <div class="form-group">
    <label for="exampleInputFullname">From Date</label>
    <input class="form-control" id="fdate" name="fdate" type="date" required="true">
  </div>
<!--To Date---->
  <div class="form-group">
<label for="exampleInputEmail1">To Date</label>
<input class="form-control " id="tdate" type="date" name="tdate" required="true">
  </div>
  <!-- /.card-body -->
  <div class="card-footer">
    <button type="submit" class="btn btn-primary" name="submit"
id="submit">Submit</button>
  </div>
</form>
</div>
<!-- /.
  </div>
<!--/.col (left) -->

```

```

        </div>

        <!-- /.row -->

    </div><!-- /.container-fluid -->

</section>

<!-- /.content -->

</div>

<!-- /.content-wrapper -->

<?php include_once('includes/footer.php');?>

</div>

<!-- ./wrapper -->

<!-- jQuery -->

<script src="../../plugins/jquery/jquery.min.js"></script>

<!-- Bootstrap 4 -->

<script src="../../plugins/bootstrap/js/bootstrap.bundle.min.js"></script>

<!-- bs-custom-file-input -->

<script src="../../plugins/bs-custom-file-input/bs-custom-file-input.min.js"></script>

<!-- AdminLTE App -->

<script src="../../dist/js/adminlte.min.js"></script>

<!-- AdminLTE for demo purposes -->

<script src="../../dist/js/demo.js"></script>

<!-- Page specific script -->

<script>
$(function () {
    bsCustomFileInput.init();
});
</script>

</body>

```

</html>

<?php } ?>DA

REPORT DETAILS

<?php session_start();

error_reporting(0);

// Database Connection

include('includes/config.php');

//Validating Session

if(strlen(\$_SESSION['aid'])==0)

{

header('location:index.php');

}

else{

?>

<!DOCTYPE html>

<html lang="en">

<head>

<meta charset="utf-8">

<meta name="viewport" content="width=device-width, initial-scale=1">

<title>Restaurent Table Booking System | B/w Dates Report Details</title>

<!-- Google Font: Source Sans Pro -->

<link rel="stylesheet"
href="https://fonts.googleapis.com/css?family=Source+Sans+Pro:300,400,400i,700&display=fal
lback">

<!-- Font Awesome -->

<link rel="stylesheet" href="../plugins/fontawesome-free/css/all.min.css">

<!-- DataTables -->

<link rel="stylesheet" href="../plugins/datatables-bs4/css/dataTables.bootstrap4.min.css">

```

<link rel="stylesheet" href="../../plugins/datatables-responsive/css/responsive.bootstrap4.min.css">

<link rel="stylesheet" href="../../plugins/datatables-buttons/css/buttons.bootstrap4.min.css">

<!-- Theme style -->

<link rel="stylesheet" href="../../dist/css/adminlte.min.css">

</head>

<body class="hold-transition sidebar-mini">

<div class="wrapper">

    <!-- Navbar -->

    <?php include_once("includes/navbar.php");?>

    <!-- /.navbar -->

    <?php include_once("includes/sidebar.php");?>

    <!-- Content Wrapper. Contains page content -->

    <div class="content-wrapper">

        <!-- Content Header (Page header) -->

        <section class="content-header">

            <div class="container-fluid">

                <div class="row mb-2">

                    <div class="col-sm-6">

                        <?php $fdate=$_POST['fdate'];

                        $tdate=$_POST['tdate'];

                        $fromdate = date("d-m-Y", strtotime($fdate));

                        $todate = date("d-m-Y", strtotime($tdate));

                        ?>

                        <h1>B/w Dates Report Details</h1>

                    </div>

                    <div class="col-sm-6">

                        <ol class="breadcrumb float-sm-right">

```



```

    <li class="breadcrumb-item"><a href="dashboard.php">Home</a></li>
    <li class="breadcrumb-item active">B/w Dates Report Details</li>
  </ol>
</div>
</div>
</div>
</div><!-- /.container-fluid -->
</section>
<!-- Main content -->
<section class="content">
  <div class="container-fluid">
    <div class="row">
      <div class="col-12">
        <div class="card">
          <div class="card">
            <div class="card-header">
              <h3 class="card-title">Report Details</h3>
            </div>
            <!-- /.card-header -->
            <div class="card-body">
              <table id="example1" class="table table-bordered table-striped">
                <thead>
                  <tr>
                    <th>#</th>
                    <th>Bookings No</th>
                    <th>Name</th>
                    <th>Email Id</th>
                    <th>Mobile No</th>

```

```

        <th>No. Adults</th>

        <th>No of Childrens</th>

        <th>Boking Date/Time</th>

        <th>Posting Date</th>

        <th>Action</th>

    </tr>

</thead>

<tbody>

<?php $query=mysqli_query($con,"select * from tblbookings where bookingDate between
'$fdate' and '$tdate'");

$cnt=1;

while($result=mysqli_fetch_array($query)){
?>

    <tr>

        <td><?php echo $cnt;?></td>

        <td><?php echo $result['bookingNo']?></td>

        <td><?php echo $result['fullName']?></td>

        <td><?php echo $result['emailId']?></td>

        <td><?php echo $result['phoneNumber']?></td>

        <td><?php echo $result['noAdults']?></td>

        <td><?php echo $result['noChildrens']?></td>

        <td><?php echo $result['bookingDate']?></td><?php echo
$result['bookingTime']?></td>

        <td><?php echo $result['postingDate']?></td>

        <th>

            <a href="booking-details.php?bid=<?php echo $result['id'];?>" title="View Details"
class="btn btn-primary btn-xm"> View Details</a>

        </th>

```

```

        </tr>
<?php $cnt++;} ?>

    </tbody>
    <tfoot>
<tr>
    <th>#</th>
        <th>Bookings No</th>
        <th>Name</th>
        <th>Email Id</th>
        <th>Mobile No</th>
        <th>No. Adults</th>
        <th>No of Childrens</th>
        <th>Boking Date/Time</th>
        <th>Posting Date</th>
        <th>Action</th>
    </tr>
    </tfoot>
</table>
</div>
<!-- /.card-body -->
</div>
<!-- /.card -->
</div>
<!-- /.col -->
</div>
<!-- /.row -->

```

```

    </div>

    <!-- /.container-fluid -->

</section>

<!-- /.content -->

</div>

<!-- /.content-wrapper -->

<?php include_once('includes/footer.php');?>

<!-- Control Sidebar -->

<aside class="control-sidebar control-sidebar-dark">

    <!-- Control sidebar content goes here -->

</aside>

<!-- /.control-sidebar -->

</div>

<!-- ./wrapper -->

<!-- jQuery -->

<script src="../../plugins/jquery/jquery.min.js"></script>

<!-- Bootstrap 4 -->

<script src="../../plugins/bootstrap/js/bootstrap.bundle.min.js"></script>

<!-- DataTables & Plugins -->

<script src="../../plugins/datatables/jquery.dataTables.min.js"></script>

<script src="../../plugins/datatables-bs4/js/dataTables.bootstrap4.min.js"></script>

<script src="../../plugins/datatables-responsive/js/dataTables.responsive.min.js"></script>

<script src="../../plugins/datatables-responsive/js/responsive.bootstrap4.min.js"></script>

<script src="../../plugins/datatables-buttons/js/dataTables.buttons.min.js"></script>

<script src="../../plugins/datatables-buttons/js/buttons.bootstrap4.min.js"></script>

<script src="../../plugins/jszip/jszip.min.js"></script>

<script src="../../plugins/pdfmake/pdfmake.min.js"></script>

```

```

<script src="../../plugins/pdfmake/vfs_fonts.js"></script>
<script src="../../plugins/datatables-buttons/js/buttons.html5.min.js"></script>
<script src="../../plugins/datatables-buttons/js/buttons.print.min.js"></script>
<script src="../../plugins/datatables-buttons/js/buttons.colVis.min.js"></script>
<!-- AdminLTE App -->
<script src="../../dist/js/adminlte.min.js"></script>
<!-- AdminLTE for demo purposes -->
<script src="../../dist/js/demo.js"></script>
<!-- Page specific script -->
<script>
$(function () {
    $('#example1').DataTable({
        "responsive": true, "lengthChange": false, "autoWidth": false,
        "buttons": ["copy", "csv", "excel", "pdf", "print", "colvis"]
    }).buttons().container().appendTo('#example1_wrapper .col-md-6:eq(0)');
    $('#example2').DataTable({
        "paging": true,
        "lengthChange": false,
        "searching": false,
        "ordering": true,
        "info": true,
        "autoWidth": false,
        "responsive": true,
    });
});
</script>
</body>

```

```
</html>
```

```
<?php } ?>
```

CHANGE PASSWORD

```
<?php session_start();
```

```
// Database Connection
```

```
include('includes/config.php');
```

```
//Validating Session
```

```
if(strlen($_SESSION['aid'])==0)
```

```
{ header('location:index.php');
```

```
}
```

```
else{
```

```
// Code for change Password
```

```
if(isset($_POST['change'])){
```

```
$admid=$_SESSION['aid'];
```

```
$cpassword=md5($_POST['currentpassword']);
```

```
$newpassword=md5($_POST['newpassword']);
```

```
$query=mysqli_query($con,"select ID from tbladmin where ID='$admid' and  
Password='$cpassword'");
```

```
$row=mysqli_fetch_array($query);
```

```
if($row>0){
```

```
$ret=mysqli_query($con,"update tbladmin set Password='$newpassword' where ID='$admid'");
```

```
echo '<script>alert("Your password successully changed.")</script>';
```

```
} else {
```

```
echo '<script>alert("Your current password is wrong.")</script>';
```

```
}
```

```
} ?>
```

```
<!DOCTYPE html>
```

```

<html lang="en">
<head>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <title>Restaurent Table Booking System | Change Password</title>
  <!-- Google Font: Source Sans Pro -->
  <link rel="stylesheet"
href="https://fonts.googleapis.com/css?family=Source+Sans+Pro:300,400,400i,700&display=fal
lback">
  <!-- Font Awesome -->
  <link rel="stylesheet" href="../../plugins/fontawesome-free/css/all.min.css">
  <!-- Theme style -->
  <link rel="stylesheet" href="../../dist/css/adminlte.min.css">
  <!--Function Email Availabilty---->
<script type="text/javascript">
function checkpass()
{
if(document.changepassword.newpassword.value!=document.changepassword.confirmpassword.
value)
{
alert('New Password and Confirm Password field does not match');
document.changepassword.confirmpassword.focus();
return false;
}
return true;
}
</script>

```

```

</head>

<body class="hold-transition sidebar-mini">

<div class="wrapper">

  <!-- Navbar -->

  <?php include_once("includes/navbar.php");?>

  <!-- /.navbar -->

  <!-- Main Sidebar Container -->

  <?php include_once("includes/sidebar.php");?>

  <!-- Content Wrapper. Contains page content -->

  <div class="content-wrapper">

    <!-- Content Header (Page header) -->

    <section class="content-header">

      <div class="container-fluid">

        <div class="row mb-2">

          <div class="col-sm-6">

            <h1>Change Password</h1>

          </div>

          <div class="col-sm-6">

            <ol class="breadcrumb float-sm-right">

              <li class="breadcrumb-item"><a href="dashboard.php">Dashboard</a></li>

              <li class="breadcrumb-item active">Change Password</li>

            </ol>

          </div>

        </div>

      </div><!-- /.container-fluid -->

    </section>

```



```

<!-- Main content -->
<section class="content">
  <div class="container-fluid">
    <div class="row">
      <!-- left column -->
      <div class="col-md-8">
        <!-- general form elements -->
        <div class="card card-primary">
          <div class="card-header">
            <h3 class="card-title">Change your Password</h3>
          </div>
          <!-- /.card-header -->
          <!-- form start -->
          <form method="post" name="changepassword" onsubmit="return checkpass();">
            <div class="card-body">
              <!-- Current Password--->
              <div class="form-group">
                <label for="exampleInputFullname">Current Password</label>
                <input class="form-control" id="currentpassword" name="currentpassword"
type="password" required="true">
              </div>
              <!--New Password---->
              <div class="form-group">
                <label for="exampleInputEmail1">New Password</label>
                <input class="form-control " id="newpassword" type="password" name="newpassword"
required="true">
              </div>
              <!-- Confrim Password---->

```

```

<div class="form-group">
  <label for="text">Confirm Password</label>
  <input class="form-control " id="confirmpassword" type="password"
name="confirmpassword" required="true">
    </div>
  </div>
  <!-- /.card-body -->
  <div class="card-footer">
    <button type="submit" class="btn btn-primary" name="change"
id="change">Change</button>
  </div>
</form>
</div>
  <!-- /.card -->
</div>
  <!--/.col (left) -->
</div>
  <!-- /.row -->
</div><!-- /.container-fluid -->
</section>
  <!-- /.content -->
</div>
  <!-- /.content-wrapper -->
<?php include_once('includes/footer.php');?>
</div>
  <!-- ./wrapper -->
  <!-- jQuery -->
<script src=" ../plugins/jquery/jquery.min.js"></script>

```

```

<!-- Bootstrap 4 -->
<script src="../../plugins/bootstrap/js/bootstrap.bundle.min.js"></script>
<!-- bs-custom-file-input -->
<script src="../../plugins/bs-custom-file-input/bs-custom-file-input.min.js"></script>
<!-- AdminLTE App -->
<script src="../../dist/js/adminlte.min.js"></script>
<!-- AdminLTE for demo purposes -->
<script src="../../dist/js/demo.js"></script>
<!-- Page specific script -->
<script>
$(function () {
    bsCustomFileInput.init();
});
</script>
</body>
</html>
<?php } ?>

```

CHECK AVAILABILITY

```

<?php
require_once("includes/config.php");
// code username availability
if(!empty($_POST["username"])) {
    $uname= $_POST["username"];

    $query=mysqli_query($con,"select AdminuserName from tbladmin where
AdminuserName='$uname'");

    $row=mysqli_num_rows($query);
    if($row>0){

```

```

echo "<span style='color:red'> Username already exists. Try with another username</span>";
echo "<script>$('#submit').prop('disabled',true);</script>";
} else{
echo "<span style='color:green'> Username available for Registration .</span>";
echo "<script>$('#submit').prop('disabled',false);</script>";
}}
?>

```

LOGOUT

```

<?php session_start();
session_destroy(); // destroy session
header("location:index.php");
?>

```

EDIT SUB ADMIN

```

<?php session_start();
// Database Connection
include('includes/config.php');
//Validating Session
if(strlen($_SESSION['aid'])==0)
{
header('location:index.php');
}
else{
// Code for Update Sub Admin Details
if(isset($_POST['update'])){
$fname=$_POST['fullname'];
$email=$_POST['emailid'];
$mobileno=$_POST['mobilenumber'];

```

```

$subadminid=intval($_GET['said']);

$query=mysqli_query($con,"update tbladmin set
AdminName='$fname',MobileNumber='$mobilenno',Email='$email' where UserType=0 and
ID='$subadminid'");

if($query){

echo "<script>alert('Sub admin details added successfully.');";

echo "<script type='text/javascript'> document.location = 'manage-subadmins.php'; </script>";

} else {

echo "<script>alert('Something went wrong. Please try again.');";

}

}

?>

<!DOCTYPE html>

<html lang="en">

<head>

<meta charset="utf-8">

<meta name="viewport" content="width=device-width, initial-scale=1">

<title>Restaurent Table Booking System | Edit/Update Sub admin</title>

<!-- Google Font: Source Sans Pro -->

<link rel="stylesheet"
href="https://fonts.googleapis.com/css?family=Source+Sans+Pro:300,400,400i,700&display=fa
lback">

<!-- Font Awesome -->

<link rel="stylesheet" href="../plugins/fontawesome-free/css/all.min.css">

<!-- Theme style -->

<link rel="stylesheet" href="../dist/css/adminlte.min.css">

<!--Function Email Availabilty---->

</head>

<body class="hold-transition sidebar-mini">

```

```

<div class="wrapper">
    <!-- Navbar -->
    <?php include_once("includes/navbar.php");?>
    <!-- /.navbar -->
    <!-- Main Sidebar Container -->
    <?php include_once("includes/sidebar.php");?>
    <!-- Content Wrapper. Contains page content -->
    <div class="content-wrapper">
        <!-- Content Header (Page header) -->
        <section class="content-header">
            <div class="container-fluid">
                <div class="row mb-2">
                    <div class="col-sm-6">
                        <h1>Edit Subadmin Details</h1>
                    </div>
                    <div class="col-sm-6">
                        <ol class="breadcrumb float-sm-right">
                            <li class="breadcrumb-item"><a href="dashboard.php">Dashboard</a></li>
                            <li class="breadcrumb-item active">Edit Subadmin Details</li>
                        </ol>
                    </div>
                </div>
            </div><!-- /.container-fluid -->
        </section>
    <?php
    $said=intval($_GET['said']);
    $query=mysqli_query($con,"select * from tbladmin where UserType=0 and ID='$said'");

```

```

$cnt=1;
while($result=mysqli_fetch_array($query)){
?>
    <!-- Main content -->
    <section class="content">
        <div class="container-fluid">
            <div class="row">
                <!-- left column -->
                <div class="col-md-8">
                    <!-- general form elements -->
                    <div class="card card-primary">
                        <div class="card-header">
                            <h3 class="card-title">Update the Info</h3>
                        </div>
                        <!-- /.card-header -->
                        <!-- form start -->
                        <form name="subadmin" method="post">
                            <div class="card-body">
                                <!-- Username-->
                                <div class="form-group">
                                    <label for="exampleInputusername">Username (used for login)</label>
                                    <input type="text" name="sadminusername" id="sadminusername" class="form-control" value="<?php echo $result['AdminuserName'];?>" readonly>
                                </div>
                                <!-- Subadmin Full Name--->
                                <div class="form-group">
                                    <label for="exampleInputFullname">Full Name</label>

```

```

        <input type="text" class="form-control" id="fullname" name="fullname"
value="<?php echo $result['AdminName'];?>" placeholder="Enter Sub-Admin Full Name"
required>

    </div>

<!-- Sub admin Email---->

    <div class="form-group">

        <label for="exampleInputEmail1">Email address</label>

        <input type="email" class="form-control" id="emailid" name="emailid"
placeholder="Enter email" required value="<?php echo $result['Email'];?>">

    </div>

<!-- Sub admin Contact Number---->

    <div class="form-group">

        <label for="text">Mobile Number</label>

        <input type="text" class="form-control" id="mobilenumber"
name="mobilenumber" placeholder="Enter email" pattern="[0-9]{10}" title="10 numeric
characters only" required value="<?php echo $result['MobileNumber'];?>">

    </div>

<?php } ?>

</div>

<!-- /.card-body -->

<div class="card-footer">

    <button type="submit" class="btn btn-primary" name="update"
id="update">Update</button>

</div>

</form>

</div>

<!-- /.card -->

</div>

<!--/.col (left) -->

```



```

        </div>

        <!-- /.row -->

    </div><!-- /.container-fluid -->

</section>

<!-- /.content -->

</div>

<!-- /.content-wrapper -->

<?php include_once('includes/footer.php');?>

</div>

<!-- ./wrapper -->

<!-- jQuery -->

<script src="../../plugins/jquery/jquery.min.js"></script>

<!-- Bootstrap 4 -->

<script src="../../plugins/bootstrap/js/bootstrap.bundle.min.js"></script>

<!-- bs-custom-file-input -->

<script src="../../plugins/bs-custom-file-input/bs-custom-file-input.min.js"></script>

<!-- AdminLTE App -->

<script src="../../dist/js/adminlte.min.js"></script>

<!-- AdminLTE for demo purposes -->

<script src="../../dist/js/demo.js"></script>

<!-- Page specific script -->

<script>
$(function () {
    bsCustomFileInput.init();
});
</script>

</body>

```

</html>

<?php } ?>

MANAGE SUB ADMINS

```
<?php session_start();
```

```
// Database Connection
```

```
include('includes/config.php');
```

```
//Validating Session
```

```
if(strlen($_SESSION['aid'])==0)
```

```
{
```

```
header('location:index.php');
```

```
}
```

```
else{
```

```
// Code for Update Sub Admin Details
```

```
if(isset($_POST['update'])){
```

```
$fname=$_POST['fullname'];
```

```
$email=$_POST['emailid'];
```

```
$mobilenos=$_POST['mobilenumber'];
```

```
$subadminid=intval($_GET['said']);
```

```
$query=mysqli_query($con,"update tbladmin set  
AdminName='$fname',MobileNumber='$mobilenos',Email='$email' where UserType=0 and  
ID='$subadminid'");
```

```
if($query){
```

```
echo "<script>alert('Sub admin details added successfully.');
```

```
echo "<script type='text/javascript'> document.location = 'manage-subadmins.php'; </script>";
```

```
} else {
```

```
echo "<script>alert('Something went wrong. Please try again.');
```

```
}
```

```

}
?>
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <title>Restaurent Table Booking System | Edit/Update Sub admin</title>

  <!-- Google Font: Source Sans Pro -->
  <link rel="stylesheet"
href="https://fonts.googleapis.com/css?family=Source+Sans+Pro:300,400,400i,700&display=fal
lback">

  <!-- Font Awesome -->
  <link rel="stylesheet" href="../../plugins/fontawesome-free/css/all.min.css">

  <!-- Theme style -->
  <link rel="stylesheet" href="../../dist/css/adminlte.min.css">

  <!--Function Email Availabilty---->


</head>
<body class="hold-transition sidebar-mini">
<div class="wrapper">
  <!-- Navbar -->
  <?php include_once("includes/navbar.php");?>
  <!-- /.navbar -->


  <!-- Main Sidebar Container -->

```

```

<?php include_once("includes/sidebar.php");?>

<!-- Content Wrapper. Contains page content -->
<div class="content-wrapper">
    <!-- Content Header (Page header) -->
    <section class="content-header">
        <div class="container-fluid">
            <div class="row mb-2">
                <div class="col-sm-6">
                    <h1>Edit Subadmin Details</h1>
                </div>
                <div class="col-sm-6">
                    <ol class="breadcrumb float-sm-right">
                        <li class="breadcrumb-item"><a href="dashboard.php">Dashboard</a></li>
                        <li class="breadcrumb-item active">Edit Subadmin Details</li>
                    </ol>
                </div>
            </div>
        </div><!-- /.container-fluid -->
    </section>
<?php
$said=intval($_GET['said']);
$query=mysqli_query($con,"select * from tbladmin where UserType=0 and ID='$said'");
$cnt=1;
while($result=mysqli_fetch_array($query)){
?>
    <!-- Main content -->

```

```

<section class="content">
  <div class="container-fluid">
    <div class="row">
      <!-- left column -->
      <div class="col-md-8">
        <!-- general form elements -->
        <div class="card card-primary">
          <div class="card-header">
            <h3 class="card-title">Update the Info</h3>
          </div>
          <!-- /.card-header -->
          <!-- form start -->
          <form name="subadmin" method="post">
            <div class="card-body">
<!-- Username-->
          <div class="form-group">
            <label for="exampleInputusername">Username (used for login)</label>
            <input type="text" name="sadminusername" id="sadminusername" class="form-control" value="<?php echo $result['AdminuserName'];?>" readonly>
          </div>
<!-- Subadmin Full Name--->
          <div class="form-group">
            <label for="exampleInputFullname">Full Name</label>
            <input type="text" class="form-control" id="fullname" name="fullname" value="<?php echo $result['AdminName'];?>" placeholder="Enter Sub-Admin Full Name" required>
          </div>
<!-- Sub admin Email---->

```

```

        <div class="form-group">

            <label for="exampleInputEmail1">Email address</label>

            <input type="email" class="form-control" id="emailid" name="emailid"
placeholder="Enter email" required value="<?php echo $result['Email'];?>">

        </div>

<!-- Sub admin Contact Number---->

        <div class="form-group">

            <label for="text">Mobile Number</label>

            <input type="text" class="form-control" id="mobilenumber"
name="mobilenumber" placeholder="Enter email" pattern="[0-9]{10}" title="10 numeric
characters only" required value="<?php echo $result['MobileNumber'];?>">

        </div>

<?php } ?>

        </div>

        <!-- /.card-body -->

        <div class="card-footer">

            <button type="submit" class="btn btn-primary" name="update"
id="update">Update</button>

        </div>

    </form>

</div>

<!-- /.card -->

</div>

<!--/.col (left) -->

```

```

        </div>

        <!-- /.row -->

    </div><!-- /.container-fluid -->

</section>

<!-- /.content -->

</div>

<!-- /.content-wrapper -->
<?php include_once('includes/footer.php');?>

</div>

<!-- ./wrapper -->

<!-- jQuery -->
<script src="../../plugins/jquery/jquery.min.js"></script>

<!-- Bootstrap 4 -->
<script src="../../plugins/bootstrap/js/bootstrap.bundle.min.js"></script>

<!-- bs-custom-file-input -->
<script src="../../plugins/bs-custom-file-input/bs-custom-file-input.min.js"></script>

<!-- AdminLTE App -->
<script src="../../dist/js/adminlte.min.js"></script>

<!-- AdminLTE for demo purposes -->
<script src="../../dist/js/demo.js"></script>

<!-- Page specific script -->
<script>
$(function () {
    bsCustomFileInput.init();

```

```
});  
</script>  
</body>  
</html>  
<?php } ?>
```

MANAGE TABLES

```
<?php session_start();  
error_reporting(0);  
// Database Connection  
include('includes/config.php');  
//Validating Session  
if(strlen($_SESSION['aid'])==0)  
{  
header('location:index.php');  
}  
else{  
//Code For Deletion the classes  
if($_GET['action']=='delete'){  
$tid=intval($_GET['tid']);  
  
$query=mysqli_query($con,"delete from tblrestables where id='$tid'");  
if($query){  
echo "<script>alert('Table details deleted successfully.');echo "<script type='text/javascript'> document.location = 'manage-tables.php'; </script>";  
} else {  
echo "<script>alert('Something went wrong. Please try again.');}  
}
```



```

}

?>

<!DOCTYPE html>

<html lang="en">

<head>

  <meta charset="utf-8">

  <meta name="viewport" content="width=device-width, initial-scale=1">

  <title>Restaurent Table Booking System | Manage Tables</title>

  <!-- Google Font: Source Sans Pro -->

  <link rel="stylesheet"
href="https://fonts.googleapis.com/css?family=Source+Sans+Pro:300,400,400i,700&display=fal
lback">

  <!-- Font Awesome -->

  <link rel="stylesheet" href="../plugins/fontawesome-free/css/all.min.css">

  <!-- DataTables -->

  <link rel="stylesheet" href="../plugins/datatables-bs4/css/dataTables.bootstrap4.min.css">

  <link rel="stylesheet" href="../plugins/datatables-
responsive/css/responsive.bootstrap4.min.css">

  <link rel="stylesheet" href="../plugins/datatables-buttons/css/buttons.bootstrap4.min.css">

  <!-- Theme style -->

  <link rel="stylesheet" href="../dist/css/adminlte.min.css">

</head>

<body class="hold-transition sidebar-mini">

<div class="wrapper">

```

```

<!-- Navbar -->
<?php include_once("includes/navbar.php");?>
<!-- /.navbar -->

<?php include_once("includes/sidebar.php");?>

<!-- Content Wrapper. Contains page content -->
<div class="content-wrapper">
    <!-- Content Header (Page header) -->
    <section class="content-header">
        <div class="container-fluid">
            <div class="row mb-2">
                <div class="col-sm-6">
                    <h1>Manage Tables</h1>
                </div>
                <div class="col-sm-6">
                    <ol class="breadcrumb float-sm-right">
                        <li class="breadcrumb-item"><a href="dashboard.php">Home</a></li>
                        <li class="breadcrumb-item active">Manage Tables</li>
                    </ol>
                </div>
            </div>
            <!-- /.container-fluid -->
        </section>

        <!-- Main content -->
        <section class="content">

```

```

<div class="container-fluid">

<div class="row">

<div class="col-12">

<div class="card">


<div class="card">

<div class="card-header">

<h3 class="card-title">Table Details</h3>

</div>

<!-- /.card-header -->

<div class="card-body">

<table id="example1" class="table table-bordered table-striped">

<thead>

<tr>

<th>#</th>

<th>Table No</th>

<th>Added By</th>

<th>Creation Date</th>

<th>Action</th>

</tr>

</thead>

<tbody>

<?php $query=mysqli_query($con,"select AdminName,tblrestables.id as
tid,tblrestables.tableNumber,tblrestables.creationDate from tblrestables
left join tbladmin on tbladmin.ID=tblrestables.AddedBy");

$cnt=1;

while($result=mysqli_fetch_array($query)){

```

?>

```
<tr>

<td><?php echo $cnt;?></td>

<td><?php echo $result['tableNumber'];?></td>

<td><?php echo $result['AdminName'];?></td>

<td><?php echo $result['creationDate'];?></td>

<th>

<a href="manage-tables.php?action=delete&&tid=<?php echo $result['tid']; ?>"
style="color:red;" title="Delete this record" onclick="return confirm('Do you really want to
delete this record?');"><i class="fa fa-trash" aria-hidden="true"></i> </a>

</th>

</tr>

<?php $cnt++;} ?>

</tbody>

<tfoot>

<tr>

<th>#</th>

<th>Table No</th>

<th>Added By</th>

<th>Creation Date</th>

<th>Action</th>

</tr>

</tfoot>

</table>

</div>

<!-- /.card-body -->
```

```

        </div>
        <!-- /.card -->
    </div>
    <!-- /.col -->
</div>
<!-- /.row -->
</div>
<!-- /.container-fluid -->
</section>
<!-- /.content -->
</div>
<!-- /.content-wrapper -->
<?php include_once('includes/footer.php');?>
<!-- Control Sidebar -->
<aside class="control-sidebar control-sidebar-dark">
    <!-- Control sidebar content goes here -->
</aside>
<!-- /.control-sidebar -->
</div>
<!-- ./wrapper -->
<!-- jQuery -->
<script src="../../plugins/jquery/jquery.min.js"></script>
<!-- Bootstrap 4 -->
<script src="../../plugins/bootstrap/js/bootstrap.bundle.min.js"></script>
<!-- DataTables & Plugins -->
<script src="../../plugins/datatables/jquery.dataTables.min.js"></script>
<script src="../../plugins/datatables-bs4/js/dataTables.bootstrap4.min.js"></script>

```

```

<script src="../../plugins/datatables-responsive/js/dataTables.responsive.min.js"></script>
<script src="../../plugins/datatables-responsive/js/responsive.bootstrap4.min.js"></script>
<script src="../../plugins/datatables-buttons/js/dataTables.buttons.min.js"></script>
<script src="../../plugins/datatables-buttons/js/buttons.bootstrap4.min.js"></script>
<script src="../../plugins/jszip/jszip.min.js"></script>
<script src="../../plugins/pdfmake/pdfmake.min.js"></script>
<script src="../../plugins/pdfmake/vfs_fonts.js"></script>
<script src="../../plugins/datatables-buttons/js/buttons.html5.min.js"></script>
<script src="../../plugins/datatables-buttons/js/buttons.print.min.js"></script>
<script src="../../plugins/datatables-buttons/js/buttons.colVis.min.js"></script>
<!-- AdminLTE App -->
<script src="../../dist/js/adminlte.min.js"></script>
<!-- AdminLTE for demo purposes -->
<script src="../../dist/js/demo.js"></script>
<!-- Page specific script -->
<script>
$(function () {
  $('#example1').DataTable({
    "responsive": true, "lengthChange": false, "autoWidth": false,
    "buttons": ["copy", "csv", "excel", "pdf", "print", "colvis"]
  }).buttons().container().appendTo('#example1_wrapper .col-md-6:eq(0)');
  $('#example2').DataTable({
    "paging": true,
    "lengthChange": false,
    "searching": false,
    "ordering": true,
    "info": true,

```

```
        "autoWidth": false,  
        "responsive": true,  
    });  
});  
</script>  
</body>  
</html>  
<?php } ?>
```

NEW BOOKINGS

```
<?php session_start();  
error_reporting(0);  
// Database Connection  
include('includes/config.php');  
//Validating Session  
if(strlen($_SESSION['aid'])==0)  
{  
header('location:index.php');  
}  
else{  
?>  
<!DOCTYPE html>  
<html lang="en">  
<head>  
    <meta charset="utf-8">  
    <meta name="viewport" content="width=device-width, initial-scale=1">  
    <title>Restaurent Table Booking System | New Bookings</title>
```

```

<!-- Google Font: Source Sans Pro -->

<link rel="stylesheet"
href="https://fonts.googleapis.com/css?family=Source+Sans+Pro:300,400,400i,700&display=fal
lback">

<!-- Font Awesome -->

<link rel="stylesheet" href="../plugins/fontawesome-free/css/all.min.css">

<!-- DataTables -->

<link rel="stylesheet" href="../plugins/datatables-bs4/css/dataTables.bootstrap4.min.css">

<link rel="stylesheet" href="../plugins/datatables-
responsive/css/responsive.bootstrap4.min.css">

<link rel="stylesheet" href="../plugins/datatables-buttons/css/buttons.bootstrap4.min.css">

<!-- Theme style -->

<link rel="stylesheet" href="../dist/css/adminlte.min.css">

</head>

<body class="hold-transition sidebar-mini">

<div class="wrapper">

  <!-- Navbar -->

  <?php include_once("includes/navbar.php");?>

  <!-- /.navbar -->

  <?php include_once("includes/sidebar.php");?>

  <!-- Content Wrapper. Contains page content -->

  <div class="content-wrapper">

    <!-- Content Header (Page header) -->

    <section class="content-header">

      <div class="container-fluid">

        <div class="row mb-2">

          <div class="col-sm-6">

            <h1>New Bookings</h1>

```



```

</div>

<div class="col-sm-6">

  <ol class="breadcrumb float-sm-right">

    <li class="breadcrumb-item"><a href="dashboard.php">Home</a></li>

    <li class="breadcrumb-item active">New Bookings</li>

  </ol>

</div>

</div>

</div>

</div><!-- /.container-fluid -->

</section>

<!-- Main content -->

<section class="content">

  <div class="container-fluid">

    <div class="row">

      <div class="col-12">

        <div class="card">

          <div class="card">

            <div class="card-header">

              <h3 class="card-title">Bookings Details</h3>

            </div>

            <!-- /.card-header -->

            <div class="card-body">

              <table id="example1" class="table table-bordered table-striped">

                <thead>

                  <tr>

                    <th>#</th>

                    <th>Bookings No</th>


```

```

        <th>Name</th>
        <th>Email Id</th>
        <th>Mobile No</th>
        <th>No. Adults</th>
        <th>No of Childrens</th>
        <th>Boking Date/Time</th>
        <th>Posting Date</th>
        <th>Action</th>
    </tr>
</thead>
<tbody>
<?php $query=mysqli_query($con,"select * from tblbookings where (boookingStatus is null ||
boookingStatus='')");
$cnt=1;
while($result=mysqli_fetch_array($query)){
?>
        <tr>
            <td><?php echo $cnt;?></td>
            <td><?php echo $result['bookingNo']?></td>
            <td><?php echo $result['fullName']?></td>
            <td><?php echo $result['emailId']?></td>
            <td><?php echo $result['phoneNumber']?></td>
            <td><?php echo $result['noAdults']?></td>
            <td><?php echo $result['noChildrens']?></td>
            <td><?php echo $result['bookingDate']?></td><?php echo
$result['bookingTime']?></td>
            <td><?php echo $result['postingDate']?></td>
            <th>

```

```
<a href="booking-details.php?bid=<?php echo $result['id'];?>" title="View Details"
class="btn btn-primary btn-xm"> View Details</a>
```

```
</th>
```

```
</tr>
```

```
<?php $cnt++;} ?>
```

```
</tbody>
```

```
<tfoot>
```

```
<tr>
```

```
<th>#</th>
```

```
<th>Bookings No</th>
```

```
<th>Name</th>
```

```
<th>Email Id</th>
```

```
<th>Mobile No</th>
```

```
<th>No. Adults</th>
```

```
<th>No of Childrens</th>
```

```
<th>Boking Date/Time</th>
```

```
<th>Posting Date</th>
```

```
<th>Action</th>
```

```
</tr>
```

```
</tfoot>
```

```
</table>
```

```
</div>
```

```
<!-- /.card-body -->
```

```
</div>
```

```
<!-- /.card -->
```

```
</div>
```

```
<!-- /.col -->
```

```
</div>
```

```

        <!-- /.row -->

    </div>

    <!-- /.container-fluid -->

</section>

<!-- /.content -->

</div>

<!-- /.content-wrapper -->

<?php include_once('includes/footer.php');?>

<!-- Control Sidebar -->

<aside class="control-sidebar control-sidebar-dark">

    <!-- Control sidebar content goes here -->

</aside>

<!-- /.control-sidebar -->

</div>

<!-- ./wrapper -->

<!-- jQuery -->

<script src="../../plugins/jquery/jquery.min.js"></script>

<!-- Bootstrap 4 -->

<script src="../../plugins/bootstrap/js/bootstrap.bundle.min.js"></script>

<!-- DataTables & Plugins -->

<script src="../../plugins/datatables/jquery.dataTables.min.js"></script>

<script src="../../plugins/datatables-bs4/js/dataTables.bootstrap4.min.js"></script>

<script src="../../plugins/datatables-responsive/js/dataTables.responsive.min.js"></script>

<script src="../../plugins/datatables-responsive/js/responsive.bootstrap4.min.js"></script>

<script src="../../plugins/datatables-buttons/js/dataTables.buttons.min.js"></script>

<script src="../../plugins/datatables-buttons/js/buttons.bootstrap4.min.js"></script>

<script src="../../plugins/jszip/jszip.min.js"></script>

```

```

<script src="../../plugins/pdfmake/pdfmake.min.js"></script>
<script src="../../plugins/pdfmake/vfs_fonts.js"></script>
<script src="../../plugins/datatables-buttons/js/buttons.html5.min.js"></script>
<script src="../../plugins/datatables-buttons/js/buttons.print.min.js"></script>
<script src="../../plugins/datatables-buttons/js/buttons.colVis.min.js"></script>
<!-- AdminLTE App -->
<script src="../../dist/js/adminlte.min.js"></script>
<!-- AdminLTE for demo purposes -->
<script src="../../dist/js/demo.js"></script>
<!-- Page specific script -->
<script>
$(function () {
  $('#example1').DataTable({
    "responsive": true, "lengthChange": false, "autoWidth": false,
    "buttons": ["copy", "csv", "excel", "pdf", "print", "colvis"]
  }).buttons().container().appendTo('#example1_wrapper .col-md-6:eq(0)');
  $('#example2').DataTable({
    "paging": true,
    "lengthChange": false,
    "searching": false,
    "ordering": true,
    "info": true,
    "autoWidth": false,
    "responsive": true,
  });
});
</script>

```

```
</body>
```

```
</html>
```

```
<?php } ?>
```

PASSWORD RECOVERY

```
<?php //error_reporting(0);
```

```
include('includes/config.php');
```

```
if(isset($_POST['resetpwd']))
```

```
{
```

```
$uname=$_POST['username'];
```

```
$mobile=$_POST['mobilenno'];
```

```
$newpassword=md5($_POST['newpassword']);
```

```
$sql =mysqli_query($con,"SELECT ID FROM tbladmin WHERE AdminuserName='$uname' and MobileNumber='$mobile'");
```

```
$rowcount=mysqli_num_rows($sql);
```

```
if($rowcount >0)
```

```
{
```

```
$query=mysqli_query($con,"update tbladmin set Password='$newpassword' where AdminuserName='$uname' and MobileNumber='$mobile'");
```

```
if($query){
```

```
echo "<script>alert('Your Password succesfully changed');</script>";
```

```
echo "<script type='text/javascript'> document.location = 'index.php'; </script>";
```

```
}else {
```

```
echo "<script>alert('Email id or Mobile no is invalid');</script>";
```

```
}
```

```
}}
```

```
?>
```

```
<!DOCTYPE html>
```

```
<html lang="en">
```

```

<head>

<meta charset="utf-8">

<meta name="viewport" content="width=device-width, initial-scale=1">

<title>Restaurent Table Booking System| Password Recovery</title>

<!-- Google Font: Source Sans Pro -->

<link rel="stylesheet"
href="https://fonts.googleapis.com/css?family=Source+Sans+Pro:300,400,400i,700&display=fal
lback">

<!-- Font Awesome -->

<link rel="stylesheet" href="../plugins/fontawesome-free/css/all.min.css">

<!-- icheck bootstrap -->

<link rel="stylesheet" href="../plugins/icheck-bootstrap/icheck-bootstrap.min.css">

<!-- Theme style -->

<link rel="stylesheet" href="../dist/css/adminlte.min.css">

<script type="text/javascript">
function valid()
{
if(document.passwordrecovery.newpassword.value!=
document.passwordrecovery.confirmpassword.value)
{
alert("New Password and Confirm Password Field do not match !!");
document.passwordrecovery.confirmpassword.focus();
return false;
}
return true;
}
}
</script>

```

```

</head>

<body class="hold-transition login-page">

<div class="login-box">

  <!-- /.login-logo -->

  <div class="card card-outline card-primary">

    <div class="card-header text-center">

      <a href="../index.php" class="h1"><b>Admin</b> | PreSchool</a>

    </div>

    <div class="card-body">

      <p class="login-box-msg">Reset your password</p>

      <form name="passwordrecovery" method="post" onSubmit="return valid();">

        <div class="input-group mb-3">

          <input type="text" class="form-control" placeholder="Username" name="username"
required>

          <div class="input-group-append">

            <div class="input-group-text">

              <span class="fas fa-envelope"></span>

            </div>

          </div>

        </div>

        <div class="input-group mb-3">

          <input type="text" class="form-control" placeholder="Mobile Number" name="mobilenumber"
required>

          <div class="input-group-append">

            <div class="input-group-text">

              <span class="fas fa-phone"></span>

            </div>

          </div>

        </div>

      </form>

    </div>

  </div>

</body>

```



```

    </div>

</div>

<div class="input-group mb-3">
    <input type="password" class="form-control" placeholder="Password"
name="newpassword" id="newpassword" required>
    <div class="input-group-append">
        <div class="input-group-text">
            <span class="fas fa-lock"></span>
        </div>
    </div>
</div>

<div class="input-group mb-3">
    <input type="password" class="form-control" placeholder="Confirm Password"
name="confirmpassword" id="confirmpassword" required>
    <div class="input-group-append">
        <div class="input-group-text">
            <span class="fas fa-lock"></span>
        </div>
    </div>
</div>

<div class="row">
    <div class="col-8">
        </div>
    <!-- /.col -->
    <div class="col-4">
        <button type="submit" class="btn btn-primary btn-block"
name="resetpwd">Reset</button>
    </div>
</div>

```

```

        </div>

        <!-- /.col -->

    </div>

</form>

<p class="mb-1">
    <a href="index.php">Signin</a>

</p>
</div>

<!-- /.card-body -->

</div>

<!-- /.card -->

</div>

<!-- /.login-box -->

<!-- jQuery -->
<script src="../../plugins/jquery/jquery.min.js"></script>

<!-- Bootstrap 4 -->
<script src="../../plugins/bootstrap/js/bootstrap.bundle.min.js"></script>

<!-- AdminLTE App -->
<script src="../../dist/js/adminlte.min.js"></script>

</body>

</html>

```

PROFILE

```

<?php //error_reporting(0);
include('includes/config.php');
if(isset($_POST['resetpwd']))
{
$username=$_POST['username'];

```

```

$mobile=$_POST['mobilenno'];

$newpassword=md5($_POST['newpassword']);

$sql =mysqli_query($con,"SELECT ID FROM tbladmin WHERE AdminuserName='$uname'
and MobileNumber='$mobile'");

$rowcount=mysqli_num_rows($sql);

if($rowcount >0)

{

$query=mysqli_query($con,"update tbladmin set Password='$newpassword' where
AdminuserName='$uname' and MobileNumber='$mobile'");

if($query){

echo "<script>alert('Your Password succesfully changed');</script>";

echo "<script type='text/javascript'> document.location = 'index.php'; </script>";

}else {

echo "<script>alert('Email id or Mobile no is invalid');</script>";

}

}}

?>

<!DOCTYPE html>

<html lang="en">

<head>

<meta charset="utf-8">

<meta name="viewport" content="width=device-width, initial-scale=1">

<title>Restaurent Table Booking System| Password Recovery</title>

<!-- Google Font: Source Sans Pro -->

<link rel="stylesheet"
href="https://fonts.googleapis.com/css?family=Source+Sans+Pro:300,400,400i,700&display=fal
lback">

<!-- Font Awesome -->

<link rel="stylesheet" href="../plugins/fontawesome-free/css/all.min.css">

```

```

<!-- icode bootstrap -->
<link rel="stylesheet" href="../../plugins/icode-bootstrap/icode-bootstrap.min.css">
<!-- Theme style -->
<link rel="stylesheet" href="../../dist/css/adminlte.min.css">
<script type="text/javascript">
function valid()
{
if(document.passwordrecovery.newpassword.value!=
document.passwordrecovery.confirmpassword.value)
{
alert("New Password and Confirm Password Field do not match !!");
document.passwordrecovery.confirmpassword.focus();
return false;
}
return true;
}
</script>
</head>
<body class="hold-transition login-page">
<div class="login-box">
<!-- /.login-logo -->
<div class="card card-outline card-primary">
<div class="card-header text-center">
<a href="../../index.php" class="h1"><b>Admin</b> | PreSchool</a>
</div>
<div class="card-body">
<p class="login-box-msg">Reset your password</p>

```

```

<form name="passwordrecovery" method="post" onSubmit="return valid();">
  <div class="input-group mb-3">
    <input type="text" class="form-control" placeholder="Username" name="username"
required>
    <div class="input-group-append">
      <div class="input-group-text">
        <span class="fas fa-envelope"></span>
      </div>
    </div>
  </div>
  <div class="input-group mb-3">
    <input type="text" class="form-control" placeholder="Mobile Number" name="mobilenumber"
required>
    <div class="input-group-append">
      <div class="input-group-text">
        <span class="fas fa-phone"></span>
      </div>
    </div>
  </div>
  <div class="input-group mb-3">
    <input type="password" class="form-control" placeholder="Password"
name="newpassword" id="newpassword" required>
    <div class="input-group-append">
      <div class="input-group-text">
        <span class="fas fa-lock"></span>
      </div>
    </div>
  </div>

```

```

        </div>
    </div>
    <div class="input-group mb-3">
        <input type="password" class="form-control" placeholder="Confirm Password"
name="confirmpassword" id="confirmpassword" required>
        <div class="input-group-append">
            <div class="input-group-text">
                <span class="fas fa-lock"></span>
            </div>
        </div>
    </div>
    </div>
    <div class="row">
        <div class="col-8">
            </div>
        <!-- /.col -->
        <div class="col-4">
            <button type="submit" class="btn btn-primary btn-block"
name="resetpwd">Reset</button>
        </div>
    <!-- /.col -->
    </div>
</form>
<p class="mb-1">
    <a href="index.php">Signin</a>
</p>
</div>
<!-- /.card-body -->
</div>

```

```

<!-- /.card -->
</div>
<!-- /.login-box -->
<!-- jQuery -->
<script src="../../plugins/jquery/jquery.min.js"></script>
<!-- Bootstrap 4 -->
<script src="../../plugins/bootstrap/js/bootstrap.bundle.min.js"></script>
<!-- AdminLTE App -->
<script src="../../dist/js/adminlte.min.js"></script>
</body>
</html>

```

REJECTED BOOKINGS

```

<?php //error_reporting(0);
include('includes/config.php');
if(isset($_POST['resetpwd']))
{
$username=$_POST['username'];
$mobile=$_POST['mobilenos'];
$newpassword=md5($_POST['newpassword']);
$sql =mysqli_query($con,"SELECT ID FROM tbladmin WHERE AdminuserName='$username'
and MobileNumber='$mobile'");
$rowcount=mysqli_num_rows($sql);
if($rowcount >0)
{
$query=mysqli_query($con,"update tbladmin set Password='$newpassword' where
AdminuserName='$username' and MobileNumber='$mobile'");
if($query){
echo "<script>alert('Your Password succesfully changed');</script>";

```

```

echo "<script type='text/javascript'> document.location = 'index.php'; </script>";
} else {
echo "<script>alert('Email id or Mobile no is invalid');</script>";
}
}}
?>

<!DOCTYPE html>

<html lang="en">

<head>

    <meta charset="utf-8">

    <meta name="viewport" content="width=device-width, initial-scale=1">

    <title>Restaurent Table Booking System| Password Recovery</title>

    <!-- Google Font: Source Sans Pro -->

    <link rel="stylesheet"
href="https://fonts.googleapis.com/css?family=Source+Sans+Pro:300,400,400i,700&display=fal
lback">

    <!-- Font Awesome -->

    <link rel="stylesheet" href="../../plugins/fontawesome-free/css/all.min.css">

    <!-- icheck bootstrap -->

    <link rel="stylesheet" href="../../plugins/icheck-bootstrap/icheck-bootstrap.min.css">

    <!-- Theme style -->

    <link rel="stylesheet" href="../../dist/css/adminlte.min.css">

<script type="text/javascript">

function valid()

{

if(document.passwordrecovery.newpassword.value!=
document.passwordrecovery.confirmpassword.value)

{

```



```

alert("New Password and Confirm Password Field do not match !!");
document.passwordrecovery.confirmpassword.focus();
return false;
}
return true;
}
</script>
</head>
<body class="hold-transition login-page">
<div class="login-box">
  <!-- /.login-logo -->
  <div class="card card-outline card-primary">
    <div class="card-header text-center">
      <a href=" ../index.php" class="h1"><b>Admin</b> | PreSchool</a>
    </div>
    <div class="card-body">
      <p class="login-box-msg">Reset your password</p>
      <form name="passwordrecovery" method="post" onSubmit="return valid();">
        <div class="input-group mb-3">
          <input type="text" class="form-control" placeholder="Username" name="username"
required>
          <div class="input-group-append">
            <div class="input-group-text">
              <span class="fas fa-envelope"></span>
            </div>
          </div>
        </div>
      </form>
    </div>
  </div>

```

```

<div class="input-group mb-3">
  <input type="text" class="form-control" placeholder="Mobile Number" name="mobilenumber"
required>
  <div class="input-group-append">
    <div class="input-group-text">
      <span class="fas fa-phone"></span>
    </div>
  </div>
</div>

<div class="input-group mb-3">
  <input type="password" class="form-control" placeholder="Password"
name="newpassword" id="newpassword" required>
  <div class="input-group-append">
    <div class="input-group-text">
      <span class="fas fa-lock"></span>
    </div>
  </div>
</div>

<div class="input-group mb-3">
  <input type="password" class="form-control" placeholder="Confirm Password"
name="confirmpassword" id="confirmpassword" required>
  <div class="input-group-append">
    <div class="input-group-text">
      <span class="fas fa-lock"></span>
    </div>
  </div>
</div>
<div class="row">

```

```

        <div class="col-8">

        </div>

        <!-- /.col -->

        <div class="col-4">

            <button type="submit" class="btn btn-primary btn-block"
name="resetpwd">Reset</button>

            </div>

            <!-- /.col -->

        </div>

    </form>

    <p class="mb-1">

        <a href="index.php">Signin</a>

    </p>

</div>

<!-- /.card-body -->

</div>

<!-- /.card -->

</div>

<!-- /.login-box -->

<!-- jQuery -->

<script src="../../plugins/jquery/jquery.min.js"></script>

<!-- Bootstrap 4 -->

<script src="../../plugins/bootstrap/js/bootstrap.bundle.min.js"></script>

<!-- AdminLTE App -->

<script src="../../dist/js/adminlte.min.js"></script>

</body>

</html>

```

RESET SUBADIM PASSWORD

```
<?php //error_reporting(0);

include('includes/config.php');

if(isset($_POST['resetpwd']))

{

$username=$_POST['username'];

$mobile=$_POST['mobilenos'];

$newpassword=md5($_POST['newpassword']);

$sql =mysqli_query($con,"SELECT ID FROM tbladmin WHERE AdminuserName='$username'
and MobileNumber='$mobile'");

$rowcount=mysqli_num_rows($sql);

if($rowcount >0)

{

$query=mysqli_query($con,"update tbladmin set Password='$newpassword' where
AdminuserName='$username' and MobileNumber='$mobile'");

if($query){

echo "<script>alert('Your Password succesfully changed');</script>";

echo "<script type='text/javascript'> document.location = 'index.php'; </script>";

}else {

echo "<script>alert('Email id or Mobile no is invalid');</script>";

}

}}

?>

<!DOCTYPE html>

<html lang="en">

<head>

<meta charset="utf-8">
```

```

<meta name="viewport" content="width=device-width, initial-scale=1">

<title>Restaurent Table Booking System| Password Recovery</title>

<!-- Google Font: Source Sans Pro -->

<link rel="stylesheet"
href="https://fonts.googleapis.com/css?family=Source+Sans+Pro:300,400,400i,700&display=fal
lback">

<!-- Font Awesome -->

<link rel="stylesheet" href="../../plugins/fontawesome-free/css/all.min.css">

<!-- icheck bootstrap -->

<link rel="stylesheet" href="../../plugins/icheck-bootstrap/icheck-bootstrap.min.css">

<!-- Theme style -->

<link rel="stylesheet" href="../../dist/css/adminlte.min.css">

<script type="text/javascript">

function valid()
{
if(document.passwordrecovery.newpassword.value!=
document.passwordrecovery.confirmpassword.value)
{
alert("New Password and Confirm Password Field do not match !!");
document.passwordrecovery.confirmpassword.focus();
return false;
}
return true;
}

</script>

</head>

<body class="hold-transition login-page">

```

```

<div class="login-box">
  <!-- /.login-logo -->
  <div class="card card-outline card-primary">
    <div class="card-header text-center">
      <a href="../index.php" class="h1"><b>Admin</b> | PreSchool</a>
    </div>
    <div class="card-body">
      <p class="login-box-msg">Reset your password</p>
      <form name="passwordrecovery" method="post" onSubmit="return valid();">
        <div class="input-group mb-3">
          <input type="text" class="form-control" placeholder="Username" name="username"
required>
          <div class="input-group-append">
            <div class="input-group-text">
              <span class="fas fa-envelope"></span>
            </div>
          </div>
        </div>
        <div class="input-group mb-3">
          <input type="text" class="form-control" placeholder="Mobile Number" name="mobilenumber"
required>
          <div class="input-group-append">
            <div class="input-group-text">
              <span class="fas fa-phone"></span>
            </div>
          </div>
        </div>
      </form>
    </div>
  </div>

```

```

        <input type="password" class="form-control" placeholder="Password"
name="newpassword" id="newpassword" required>

        <div class="input-group-append">

            <div class="input-group-text">

                <span class="fas fa-lock"></span>

            </div>

        </div>

    </div>

<div class="input-group mb-3">

    <input type="password" class="form-control" placeholder="Confirm Password"
name="confirmpassword" id="confirmpassword" required>

    <div class="input-group-append">

        <div class="input-group-text">

            <span class="fas fa-lock"></span>

        </div>

    </div>

</div>

<div class="row">

    <div class="col-8">

        </div>

    <!-- /.col -->

    <div class="col-4">

        <button type="submit" class="btn btn-primary btn-block"
name="resetpwd">Reset</button>

    </div>

<!-- /.col -->

</div>

</form>

```

```

    <p class="mb-1">
        <a href="index.php">Signin</a>
    </p>
</div>

<!-- /.card-body -->
</div>

<!-- /.card -->
</div>

<!-- /.login-box -->

<!-- jQuery -->
<script src="../../plugins/jquery/jquery.min.js"></script>

<!-- Bootstrap 4 -->
<script src="../../plugins/bootstrap/js/bootstrap.bundle.min.js"></script>

<!-- AdminLTE App -->
<script src="../../dist/js/adminlte.min.js"></script>
</body>
</html>

```

BOOKING DETAILS

```

<?php session_start();
//error_reporting(0);
// Database Connection
include('admin/includes/config.php');
?>

<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="utf-8">

```



```

<meta name="viewport" content="width=device-width, initial-scale=1">

<title>Restaurent Table Booking System | Booking Details</title>

<!-- Google Font: Source Sans Pro -->

<link rel="stylesheet"
href="https://fonts.googleapis.com/css?family=Source+Sans+Pro:300,400,400i,700&display=fal
lback">

<!-- Font Awesome -->

<link rel="stylesheet" href="plugins/fontawesome-free/css/all.min.css">

<!-- DataTables -->

<link rel="stylesheet" href="plugins/datatables-bs4/css/dataTables.bootstrap4.min.css">

<link rel="stylesheet" href="plugins/datatables-responsive/css/responsive.bootstrap4.min.css">

<link rel="stylesheet" href="plugins/datatables-buttons/css/buttons.bootstrap4.min.css">

<!-- Theme style -->

<link rel="stylesheet" href="dist/css/adminlte.min.css">

</head>

<body class="hold-transition sidebar-mini">

<div class="wrapper">

  <!-- Navbar -->

  <!-- Content Wrapper. Contains page content -->

  <div>

    <!-- Content Header (Page header) -->

    <section class="content-header">

      <div class="container-fluid">

        <div class="row mb-2">

          <div class="col-sm-6">

            <h1>Booking Details</h1>

          </div>

        </div>

      </div>

```

```

        </div><!-- /.container-fluid -->
    </section>

    <!-- Main content -->
    <section class="content">

        <div class="container-fluid">

            <div class="row">

                <div class="col-12">

                    <div class="card">

                        <div class="card">

                            <div class="card-header">

                                <h3 class="card-title">Booking Details</h3>

                            </div>

                            <!-- /.card-header -->

                            <div class="card-body">

                                <table id="example1" class="table table-bordered table-striped">

                                    <tbody>

                                        <?php $bid=intval($_GET['bid']);
                                        $query=mysqli_query($con,"select * from tblbookings where id='$bid'");
                                        $cnt=1;
                                        while($result=mysqli_fetch_array($query)){
                                        ?>

                                            <tr>

                                                <th>Booking Number</th>

                                                <td colspan="3"><?php echo $result['bookingNo']?></td>

                                            </tr>

```

```

<tr>
<th> Name</th>
<td><?php echo $result['fullName']?></td>
<th>Email Id</th>
<td> <?php echo $result['emailId']?></td>
</tr>
<tr>
<th> Mobile No</th>
<td><?php echo $result['phoneNumber']?></td>
<th>No of Adults</th>
<td><?php echo $result['noAdults']?></td>
</tr>
<tr>
<th>No of Childs</th>
<td><?php echo $result['noChildrens']?></td>
<th>Booking Date / Time</th>
<td><?php echo $date=$result['bookingDate']?></?php echo
$btime=$result['bookingTime']?></td>
</tr>
<tr>
<th>Posting Date</th>
<td colspan="3"><?php echo $result['postingDate']?></td>
</tr>
<?php if($result['boookingStatus']!=""):?>
<tr>
<th>Booking Status</th>
<td><?php echo $result['boookingStatus']?></td>
<th>Updation Date</th>

```

```

        <td><?php echo $result['updateDate']?></td>
    </tr>
</tr>

    <th> Remark</th>
    <td colspan="3"><?php echo $result['adminremark']?></td>
</tr>
<?php endif;?>
    <?php $cnt++;} ?>
</tbody>

</table>
</div>
<!-- /.card-body -->
</div>
<!-- /.card -->
</div>
<!-- /.col -->
</div>
<!-- /.row -->
</div>
<!-- /.container-fluid -->
</section>
<!-- /.content -->
</div>
<!-- /.content-wrapper -->
</div>
<!-- ./wrapper -->

```

```

<!-- jQuery -->
<script src="plugins/jquery/jquery.min.js"></script>

<!-- Bootstrap 4 -->
<script src="plugins/bootstrap/js/bootstrap.bundle.min.js"></script>

<!-- DataTables & Plugins -->
<script src="plugins/datatables/jquery.dataTables.min.js"></script>
<script src="plugins/datatables-bs4/js/dataTables.bootstrap4.min.js"></script>
<script src="plugins/datatables-responsive/js/dataTables.responsive.min.js"></script>
<script src="plugins/datatables-responsive/js/responsive.bootstrap4.min.js"></script>
<script src="plugins/datatables-buttons/js/dataTables.buttons.min.js"></script>
<script src="plugins/datatables-buttons/js/buttons.bootstrap4.min.js"></script>
<script src="plugins/jszip/jszip.min.js"></script>
<script src="plugins/pdfmake/pdfmake.min.js"></script>
<script src="plugins/pdfmake/vfs_fonts.js"></script>
<script src="plugins/datatables-buttons/js/buttons.html5.min.js"></script>
<script src="plugins/datatables-buttons/js/buttons.print.min.js"></script>
<script src="plugins/datatables-buttons/js/buttons.colVis.min.js"></script>

<!-- AdminLTE App -->
<script src="../../dist/js/adminlte.min.js"></script>

<!-- AdminLTE for demo purposes -->
<script src="../../dist/js/demo.js"></script>

<!-- Page specific script -->
<script>
$(function () {
  $('#example1').DataTable({
    "responsive": true, "lengthChange": false, "autoWidth": false,
    "buttons": ["copy", "csv", "excel", "pdf", "print", "colvis"]
  })
})

```

```

    }).buttons().container().appendTo('#example1_wrapper .col-md-6:eq(0)');
    $('#example2').DataTable({
        "paging": true,
        "lengthChange": false,
        "searching": false,
        "ordering": true,
        "info": true,
        "autoWidth": false,
        "responsive": true,
    });
});
</script>
<script type="text/javascript">

```

```

//For report file
$('#rtable').hide();
$(document).ready(function(){
    $('#status').change(function(){
        if($('#status').val()=='Accepted')
        {
            $('#rtable').show();
            jQuery("#table").prop('required',true);
        }
        else{
            $('#rtable').hide();
        }
    })})

```

</script>

</body>

</html>

Database Design


The data in the system has to be stored and retrieved from database. Designing the database is part of system design. Data elements and data structures to be stored have been identified at analysis stage. They are structured and put together to design the data storage and retrieval system.

A database is a collection of interrelated data stored with minimum redundancy to serve many users quickly and efficiently. The general objective is to make database access easy, quick, inexpensive and flexible for the user. Relationships are established between the data items and unnecessary data items are removed. Normalization is done to get an internal consistency of data and to have minimum redundancy and maximum stability. This ensures minimizing data storage required, minimizing chances of data inconsistencies and optimizing for updates. The MySQL database has been chosen for developing the relevant databases.

“Restaurant Table Booking System” (rtbsdb) contains 3 MySQL tables:

- tbladmin
- tblbookings
- tblrestables


tbladmin: This tables stores admin login details.

#	Name	Type	Collation	Attributes	Null	Default	Comments	Extra
1	ID 	int(11)			No	None		AUTO_INCREMENT
2	AdminName	varchar(120)	latin1_swedish_ci		Yes	NULL		
3	AdminuserName	varchar(20)	latin1_swedish_ci		Yes	NULL		
4	MobileNumber	bigint(10)			Yes	NULL		
5	Email	varchar(120)	latin1_swedish_ci		Yes	NULL		
6	Password	varchar(120)	latin1_swedish_ci		Yes	NULL		
7	AdminRegdate	timestamp			Yes	current_timestamp()		
8	UserType	int(1)			Yes	NULL		

Indexes 

Keyname	Type	Unique	Packed	Column	Cardinality	Collation	Null	Comment
PRIMARY	BTREE	Yes	No	ID	2	A	No	

tblbookings : This table stores the details table booking which is sent by users.

#	Name	Type	Collation	Attributes	Null	Default	Comments	Extra
1	id 	int(11)			No	None		AUTO_INCREMENT
2	bookingNo	bigint(12)			Yes	NULL		
3	fullName	varchar(200)	utf8mb4_general_ci		Yes	NULL		
4	emailid	varchar(200)	utf8mb4_general_ci		Yes	NULL		
5	phoneNumber	bigint(12)			Yes	NULL		
6	bookingDate	varchar(100)	utf8mb4_general_ci		Yes	NULL		
7	bookingTime	varchar(100)	utf8mb4_general_ci		Yes	NULL		
8	noAdults	bigint(20)			Yes	NULL		
9	noChildrens	bigint(20)			Yes	NULL		
10	tableid	int(11)			Yes	NULL		
11	adminremark	varchar(255)	utf8mb4_general_ci		Yes	NULL		
12	boookingStatus	varchar(15)	utf8mb4_general_ci		Yes	NULL		
13	postingDate	timestamp			Yes	current_timestamp()		
14	updationDate	timestamp			Yes	NULL		ON UPDATE CURRENT_TIMESTAMP()

Indexes 


Keyname	Type	Unique	Packed	Column	Cardinality	Collation	Null	Comment
PRIMARY	BTREE	Yes	No	id	5	A	No	

tblrestables: This stores tables details.

#	Name	Type	Collation	Attributes	Null	Default	Comments	Extra
1	id	int(11)			No	None		AUTO_INCREMENT
2	tableNumber	varchar(100)	utf8mb4_general_ci		Yes	NULL		
3	creationDate	timestamp			Yes	current_timestamp()		
4	AddedBy	int(11)			Yes	NULL		

Keyname	Type	Unique	Packed	Column	Cardinality	Collation	Null	Comment
PRIMARY	BTREE	Yes	No	id	6	A	No	


Database Schema

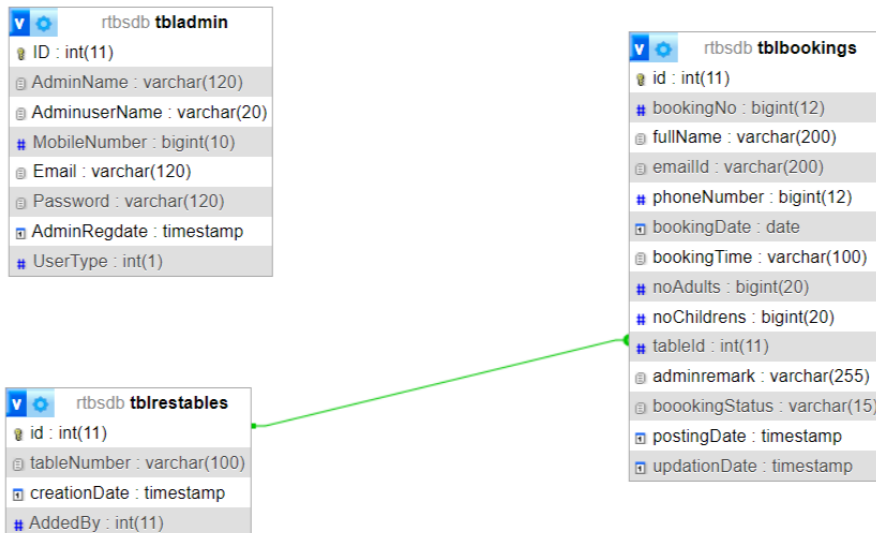

DESIGN IMPLEMENTATION AND RESULTS

Design implementation refers to the real live running of the designed program. This section consists of the program modules, showing what they do, and how the system can be deployed.


Home Page

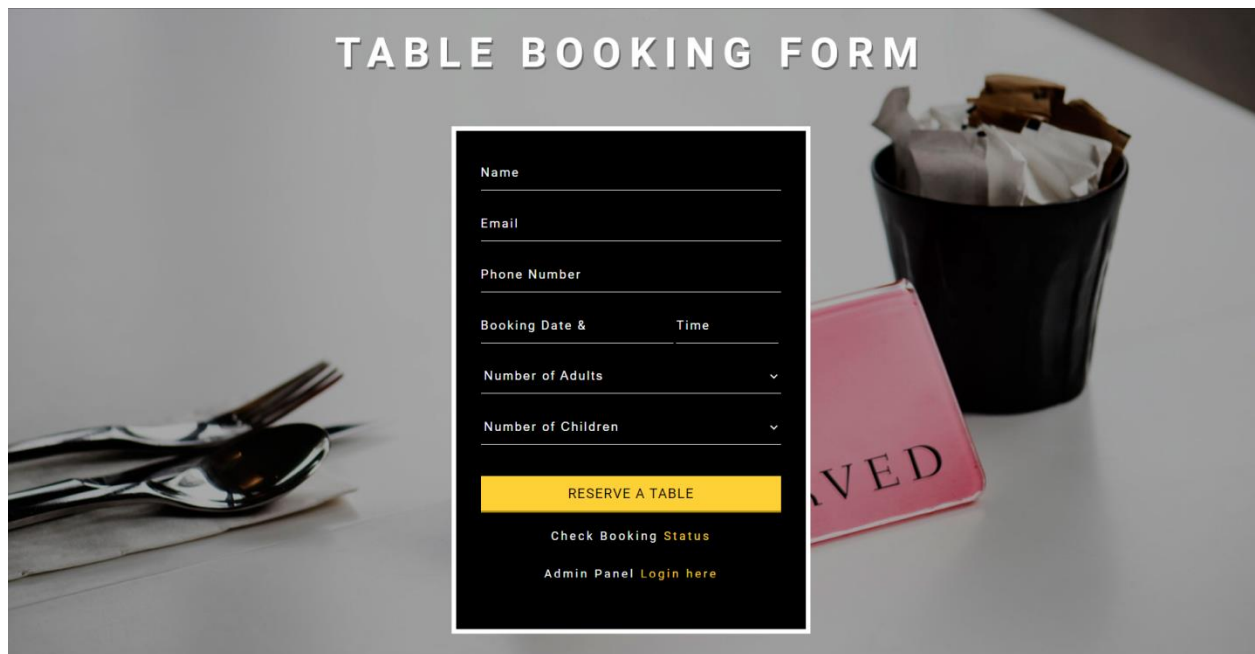

The screenshot shows a 'TABLE BOOKING FORM' overlay on a background image of a restaurant table. The table has a white tablecloth, silverware, a black cup with a napkin, and a pink 'RESERVED' sign. The form is a dark rectangle with white text and yellow buttons. It contains the following fields and options:

- Name
- Email
- Phone Number
- Booking Date & Time
- Number of Adults (with a dropdown arrow)
- Number of Children (with a dropdown arrow)
- RESERVE A TABLE (yellow button)
- Check Booking Status
- Admin Panel Login here

Booking Status Page

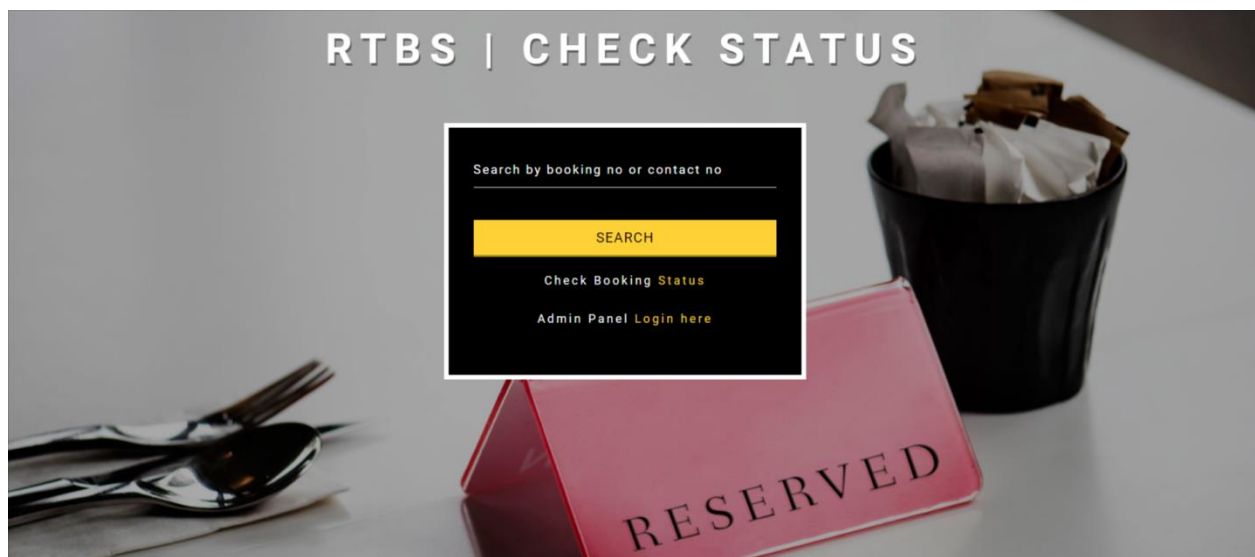

The screenshot shows an 'RTBS | CHECK STATUS' overlay on the same restaurant table background. The overlay is a dark rectangle with white text and yellow buttons. It contains the following fields and options:

- Search by booking no or contact no
- SEARCH (yellow button)
- Check Booking Status
- Admin Panel Login here

Check Booking Status

search Results against '7845123689'

Search Details

Copy

CSV

Excel

PDF

Print

Column visibility

Search:

#	Bookings No	Name	Email Id	Mobile No	No. Adults	No of Childrens	Boking Date/Time	Posting Date	Action
1	7121584923	Test	test@gmail.com	7845123689	2	1	06/10/2023/7 : 46 PM	2023-06-05 11:24:06	<div>View Details</div>
#	Bookings No	Name	Email Id	Mobile No	No. Adults	No of Childrens	Boking Date/Time	Posting Date	Action

Showing 1 to 1 of 1 entries

Previous

1

Next


View Details of Booking

Booking Details

Booking Details			
Booking Number	2163886205		
Name	Garima Singh	Email Id	gariam@test.com
Mobile No	45632145632	No of Adults	2
No of Childs	1	Booking Date / Time	06/30/2023/3 : 30 PM
Posting Date	2023-06-05 06:14:57		
Booking Status	Accepted	Updation Date	2023-06-05 06:16:47
Remark	Table Reserved		


Admin Panel

Login




The login form is titled "Admin | RTRS" and includes the instruction "Sign in to start your session". It features two input fields: "Username" with an email icon and "Password" with a lock icon. A blue "Sign In" button is positioned to the right of the password field. A link "I forgot my password" is located at the bottom left of the form.

Forgot Password

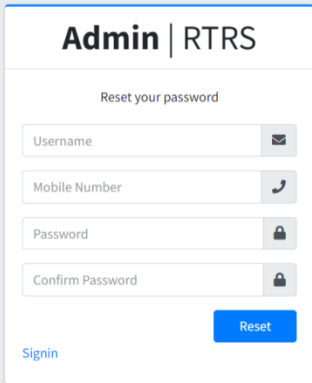

The forgot password form is titled "Admin | RTRS" and includes the instruction "Reset your password". It features four input fields: "Username" with an email icon, "Mobile Number" with a phone icon, "Password" with a lock icon, and "Confirm Password" with a lock icon. A blue "Reset" button is positioned to the right of the "Confirm Password" field. A link "Signin" is located at the bottom left of the form.

Dashboard

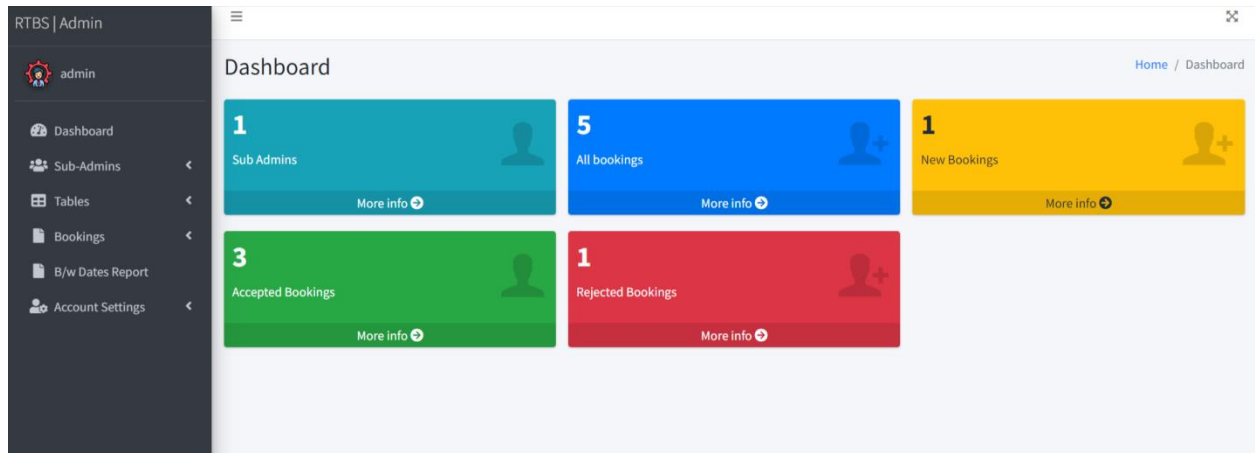

Admin Profile

The screenshot shows the 'My Profile' page in the RTBS Admin interface. The sidebar is identical to the dashboard view. The main content area is titled 'My Profile' with a breadcrumb 'Dashboard / My Profile'. A blue header bar reads 'Update the Info'. Below it is a form with the following fields:

- Username (used for login)**: Text input containing 'admin'.
- Full Name**: Text input containing 'Admin'.
- Email address**: Text input containing 'admin@gmail.com'.
- Mobile Number**: Text input containing '1234596321'.
- Registration Date**: Text input containing '2023-05-22 00:00:00'.

An 'Update' button is located at the bottom of the form. The version 'Version 1.0' is displayed in the bottom right corner.

Change Password

The screenshot shows the 'Change Password' page within the RTBS Admin interface. On the left is a dark sidebar with the 'admin' user profile and a menu containing 'Dashboard', 'Sub-Admins', 'Tables', 'Bookings', 'B/w Dates Report', and 'Account Settings'. The main content area has a light blue header with the title 'Change Password' and a breadcrumb trail 'Dashboard / Change Password'. Below the header is a white form box titled 'Change your Password' in a blue bar. The form contains three input fields: 'Current Password', 'New Password', and 'Confirm Password'. A blue 'Change' button is at the bottom of the form.

RTBS | Admin

admin

Dashboard

Sub-Admins

Tables

Bookings

B/w Dates Report

Account Settings

Change Password

Dashboard / Change Password

Change your Password

Current Password

New Password

Confirm Password

Change

Add Sub-Admin

The screenshot shows the 'Create Subadmin' page within the RTBS Admin interface. The sidebar is identical to the previous page. The main content area has a light blue header with the title 'Create Subadmin' and a breadcrumb trail 'Dashboard / Add Subadmin'. Below the header is a white form box titled 'Fill the Info' in a blue bar. The form contains five input fields: 'Username (used for login)', 'Full Name', 'Email address', 'Mobile Number', and 'Password'. A blue 'Submit' button is at the bottom of the form.

RTBS | Admin

admin

Dashboard

Sub-Admins

Tables

Bookings

B/w Dates Report

Account Settings

Create Subadmin

Dashboard / Add Subadmin

Fill the Info

Username (used for login)

Enter Sub-Admin Username

Full Name

Enter Sub-Admin Full Name

Email address

Enter email

Mobile Number

Enter email

Password

Password

Submit

Version 1.0

Manage Sub-Admin

RTBS | Admin

admin

Dashboard

Sub-Admins

Tables

Bookings

B/w Dates Report

Account Settings

Manage Sub Admins

Home / Manage Sub Admins

Sub Admin Details

Copy CSV Excel PDF Print Column visibility

Search:

#	Username	Full Name	Email ID	Mobile Number	Reg. Date	Action
1	akr305	Anuj kumar	ak@gmail.com	1234567891	2023-05-22 00:00:00	
#	Username	Full Name	Email ID	Mobile Number	Reg. Date	Action

Showing 1 to 1 of 1 entries

Previous 1 Next

Update Sub-Admin

RTBS | Admin

admin

Dashboard

Sub-Admins

Tables

Bookings

B/w Dates Report

Account Settings

Edit Subadmin Details

Dashboard / Edit Subadmin Details

Update the Info

Username (used for login)

akr305

Full Name

Anuj kumar

Email address

ak@gmail.com

Mobile Number

1234567891

Update

Version 1.0

Reset Sub-Admin Password

The screenshot shows the 'Reset Subadmin Password' page in the RTBS Admin interface. The left sidebar contains the following menu items: 'admin' (selected), 'Dashboard', 'Sub-Admins', 'Tables', 'Bookings', 'B/w Dates Report', and 'Account Settings'. The main content area has a title 'Reset Subadmin Password' and a breadcrumb trail 'Dashboard / Reset Subadmin Password'. The form is titled 'Reset the Password' and contains two input fields: 'Password' and 'Confirm Password'. A blue 'Reset' button is located at the bottom of the form. The version number 'Version 1.0' is displayed in the bottom right corner.

RTBS | Admin

admin

Dashboard

Sub-Admins

Tables

Bookings

B/w Dates Report

Account Settings

Reset Subadmin Password

Dashboard / Reset Subadmin Password

Reset the Password

Password

Confirm Password

Reset

Version 1.0

Add Table

The screenshot shows the 'Add Table' page in the RTBS Admin interface. The left sidebar contains the following menu items: 'admin' (selected), 'Dashboard', 'Sub-Admins', 'Tables', 'Bookings', 'B/w Dates Report', and 'Account Settings'. The main content area has a title 'Add Table' and a breadcrumb trail 'Dashboard / Add Table'. The form is titled 'Table Details' and contains one input field: 'Table No' with the placeholder text 'Enter Table Number'. A blue 'Submit' button is located at the bottom of the form. The version number 'Version 1.0' is displayed in the bottom right corner.

RTBS | Admin

admin

Dashboard

Sub-Admins

Tables

Bookings

B/w Dates Report

Account Settings

Add Table

Dashboard / Add Table

Table Details

Table No

Enter Table Number

Submit

Version 1.0

Manage Tables

RTBS | Admin

admin

Dashboard

Sub-Admins

Tables

Bookings

B/w Dates Report

Account Settings

Manage Tables

Home / Manage Tables

Table Details

Copy CSV Excel PDF Print Column visibility

Search:

#	Table No	Added By	Creation Date	Action
1	1	Admin	2023-05-27 09:20:35	
2	2	Admin	2023-05-27 09:20:55	
3	1A	Admin	2023-05-27 09:21:01	
4	3	Admin	2023-05-27 09:21:07	
5	3A	Admin	2023-05-27 09:21:11	
6	3B	Admin	2023-05-27 09:21:15	
#	Table No	Added By	Creation Date	Action

Showing 1 to 6 of 6 entries

Previous 1 Next

Version 1.0

New Booking

RTBS | Admin

admin

Dashboard

Sub-Admins

Tables

Bookings

B/w Dates Report

Account Settings

New Bookings

Home / New Bookings

Bookings Details

Copy CSV Excel PDF Print Column visibility

Search:

#	Bookings No	Name	Email Id	Mobile No	No. Adults	No of Childrens	Booking Date/Time	Posting Date	Action
1	7121584923	Test	test@gmail.com	7845123689	2	1	06/10/2023/7:46 PM	2023-06-05 11:24:06	<div>View Details</div>
#	Bookings No	Name	Email Id	Mobile No	No. Adults	No of Childrens	Booking Date/Time	Posting Date	Action

Showing 1 to 1 of 1 entries

Previous 1 Next

Version 1.0

View New Booking Details

RTBS | Admin

admin

Dashboard

Sub-Admins

Tables

Bookings

B/w Dates Report

Account Settings

Booking Details

Home / Booking Details

Booking Details

Booking Number	7121584923		
Name	Test	Email Id	test@gmail.com
Mobile No	7845123689	No of Adults	2
No of Childs	1	Booking Date / Time	06/10/2023/7 : 46 PM
Posting Date	2023-06-05 11:24:06		

Take Action

Accepted Bookings

RTBS | Admin

admin

Dashboard

Sub-Admins

Tables

Bookings

B/w Dates Report

Account Settings

Accepted Bookings

Home / Accepted Bookings

Bookings Details

Copy CSV Excel PDF Print Column visibility

Search:

#	Bookings No	Name	Email Id	Mobile No	No. Adults	No of Childrens	Boking Date/Time	Posting Date	Action
1	7081250186	Anuj Kumar	ak@gmail.com	1425362514	2	1	2023-06-10/14:00:00	2023-05-27 10:04:18	View Details
2	323168839	Shivani	shivani@gmail.com	4563214520	4	1	2023-06-10/14:10:00	2023-05-27 10:05:04	View Details
3	2163886205	Garima Singh	gariam@test.com	45632145632	2	1	06/30/2023/3 : 30 PM	2023-06-05 06:14:57	View Details
#	Bookings No	Name	Email Id	Mobile No	No. Adults	No of Childrens	Boking Date/Time	Posting Date	Action

Showing 1 to 3 of 3 entries

Previous 1 Next

Version 1.0

View Accepted Bookings Detail

RTBS | Admin

admin

Dashboard

Sub-Admins

Tables

Bookings

B/w Dates Report

Account Settings

Booking Details

Home / Booking Details

Booking Details

Booking Number	323168839		
Name	Shivani	Email Id	shivani@gmail.com
Mobile No	4563214520	No of Adults	4
No of Childs	1	Booking Date / Time	2023-06-10/14:10:00
Posting Date	2023-05-27 10:05:04		
Booking Status	Accepted	Updation Date	2023-06-04 22:38:10
Remark	Table booked.		

Version 1.0

Rejected Bookings

RTBS | Admin

admin

Dashboard

Sub-Admins

Tables

Bookings

B/w Dates Report

Account Settings

Rejected Bookings

Home / Rejected Bookings

Bookings Details

Copy CSV Excel PDF Print Column visibility

Search:

#	Bookings No	Name	Email Id	Mobile No	No. Adults	No of Childrens	Boking Date/Time	Posting Date	Action
1	4813244763	John Doe	johndeo@test.com	7896541230	3	1	2023-06-15/20:00:00	2023-05-27 10:05:33	View Details
#	Bookings No	Name	Email Id	Mobile No	No. Adults	No of Childrens	Boking Date/Time	Posting Date	Action

Showing 1 to 1 of 1 entries

Previous 1 Next

Version 1.0

View Rejected Bookings Details

RTBS | Admin

admin

Dashboard

Sub-Admins

Tables

Bookings

B/w Dates Report

Account Settings

Booking Details

[Home](#) / [Booking Details](#)

Booking Details

Booking Number	4813244763		
Name	John Doe	Email Id	johndeo@test.com
Mobile No	7896541230	No of Adults	3
No of Childs	1	Booking Date / Time	2023-06-15/20:00:00
Posting Date	2023-05-27 10:05:33		
Booking Status	Rejected	Updation Date	2023-06-04 22:46:35
Remark	Table not available		

Version 1.0

Between Dates Report

RTBS | Admin

admin

Dashboard

Sub-Admins

Tables

Bookings

B/w Dates Report

Account Settings

B/w Dates Report

[Dashboard](#) / [B/w Dates Report](#)

B/w Dates Booking Report

From Date

dd-mm-yyyy

To Date

dd-mm-yyyy

Submit

Version 1.0

View between Dates Report

RTBS | Admin

admin

Dashboard

Sub-Admins

Tables

Bookings

B/w Dates Report

Account Settings

B/w Dates Report Details

Home / B/w Dates Report Details

Report Details

Copy CSV Excel PDF Print Column visibility

Search:

#	Bookings No	Name	Email Id	Mobile No	No. Adults	No of Childrens	Boking Date/Time	Posting Date	Action
1	7081250186	Anuj Kumar	ak@gmail.com	1425362514	2	1	2023-06-10/14:00:00	2023-05-27 10:04:18	View Details
2	323168839	Shivani	shivani@gmail.com	4563214520	4	1	2023-06-10/14:10:00	2023-05-27 10:05:04	View Details
3	4813244763	John Doe	johndeo@test.com	7896541230	3	1	2023-06-15/20:00:00	2023-05-27 10:05:33	View Details
4	2163886205	Garima Singh	gariam@test.com	45632145632	2	1	2023-06-24/15:00:00	2023-06-05 06:14:57	View Details
5	455965462	Anuj	ak@test.com	72183126	2	1	2023-06-24/15:10:00	2023-06-05 20:06:14	View Details

Showing 1 to 5 of 5 entries

Previous 1 Next

Version 1.0

CONCLUSION

The application was designed in such a way that future modifications can be done easily. The following conclusion can be deduced from the development of the project.

- Automation of the entire system improves the efficiency.
- It provides a friendly graphical user interface which proves to be better when compared to the existing system.
- It gives appropriate access to the authorized users depending on their permissions.
- It effectively overcomes the delay in communications.

- Updating of information becomes so easier.
- System security, data security and reliability are the striking features.
- The System has adequate scope for modification in future if it is necessary.

BIBLIOGRAPHY

www.w3schools.com

- ✓ ***php.net***
- ✓ *en.wikipedia.org/wiki/**PHP***
- ✓ *www.hotscripts.com/category/**php**/*
- ✓ *www.**apache**.org*
- ✓ *www.**mysql**.com/click.php?e=35050*