Orbit-Tied Quantized Neural Belief Propagation for Real-Time Sliding-Window Decoding of Bivariate-Bicycle Quantum Codes

Saad Tariq

Department of Computer Science and Engineering
Quantum Computer Architecture & Error Correction Research Group • Correspondence: saad.tariq@ieee.org

Abstract— Quantum Low-Density Parity-Check (QLDPC) bivariate-bicycle (BB) codes have emerged as premier candidates for scalable fault-tolerant quantum computation, offering order-of-magnitude reductions in physical qubit overhead compared to standard 2D topological surface codes. However, their high-rate bipartite Tanner graphs and non-local check connectivity generate dense 3D space-time detector error models (DEM) that severely strain real-time classical decoding within microsecond coherence intervals. In this paper, we propose an orbit-tied, 6-bit quantized neural belief propagation (QNBP) decoder tailored for real-time sliding-window processing of gross BB codes ([[72,12,6]] and [[144,12,12]]). By mapping the 2D torus translation group $G = \mathbb{Z}_\ell \times \mathbb{Z}_m$, we prove that all spatial shifts constitute strict DEM graph automorphisms, collapsing 10,260 circuit fault mechanisms into 285 symmetry orbits (36× parameter reduction) on [[72,12,6]] and 14,616 mechanisms into 203 orbits (72× reduction) on [[144,12,12]] while strictly guaranteeing geometric equivariance and eliminating untied neural overfitting. To guarantee multiplier-free hardware synthesis with zero Digital Signal Processing (DSP) slices, we develop a Canonical Signed-Digit (CSD) shift-and-add architecture using power-of-two dyadic quantization ($\Delta = 2^{-2}$). Under circuit-level Stim Monte Carlo depolarizing noise ($p \in [10^{-3}, 5\times10^{-3}]$), we execute head-to-head benchmarking across ten decoders, including IBM Relay-BP, BP-LSD, BP+OSD-CS-10, Mem-BP, AutDEC, and Gong et al.'s sliding-window baseline. Our proposed 6-bit integer QNBP model with learned signed memory damping ($\gamma \in [-0.5, 1.0]$) converges in only 6.4 mean iterations with zero DSP blocks (DSP=0), achieving a logical error rate of $P_L = 0.0068$ [0.0053, 0.0086] and demonstrating statistically significant superiority over scalar Mem-BP ($\chi^2 = 14.72$, $p = 0.000125$), IBM Relay-BP-5 ($\chi^2 = 12.06$, $p = 0.000515$), Normalized Min-Sum ($\chi^2 = 2{,}642.1$, $p < 10^{-100}$), and AutDEC ($\chi^2 = 2{,}750.5$, $p < 10^{-100}$). Under realistic superconducting Pauli Z-biased noise ($\eta = p_Z / p_X \in [1, 100]$), Orbit-Tied QNBP automatically adapts message weighting, achieving an 8.0× logical error suppression down to $P_L = 0.0010$ [0.0005, 0.0019] at η=100 (and 20.0× over Classical BP). Integrated with a confidence-margin fast-path gate (G_3) in a streaming sliding window (W=3, F=1), our fast path achieves zero logical errors in accepted windows ($P_{L,accept} = 0.0000$) with a 240 ns latency, driving queue overflow down to 0.00% under a 1 µs quantum cycle budget. We synthesize and verify our architecture in SystemVerilog, achieving 10,000-shot bit-exact hardware-software parity, and establish a folding Pareto frontier on AMD UltraScale+ scaling logic down to 1,226 LUTs (0.51% device utilization).

Keywords—Quantum error correction, QLDPC codes, bivariate-bicycle codes, neural belief propagation, automorphism orbits, biased noise, sliding-window decoding, FPGA hardware.

I. Introduction

FAULT-TOLERANT quantum computing requires active quantum error correction (QEC) to protect fragile quantum information against environmental decoherence, physical gate infidelities, and measurement noise [1], [2]. While topological 2D surface codes have served as the foundation of early experimental demonstrations due to their nearest-neighbor planar connectivity and high fault-tolerant threshold rates ($p_{th} \approx 1\%$) [2], their asymptotic encoding rate is strictly zero ($k/n \to 0$). Realizing practical algorithm-scale quantum processors encoding thousands of fault-tolerant logical qubits would require millions of physical qubits under surface code architectures [3].

Recently, asymptotically good quantum low-density parity-check (QLDPC) codes [4] and dual-cyclic bivariate-bicycle (BB) codes [3] have demonstrated an architectural breakthrough. By defining CSS codes over bivariate polynomial quotient rings $R = F_2[x, y] / \langle x^l - 1, y^m - 1 \rangle$, gross BB codes such as [[72, 12, 6]] and [[144, 12, 12]] achieve encoding rates $k/n \approx 1/6$ to $1/12$ while supporting high circuit noise thresholds ($p \approx 0.7\%$) [3]. This yields up to a 10× reduction in physical qubit overhead compared to surface codes.

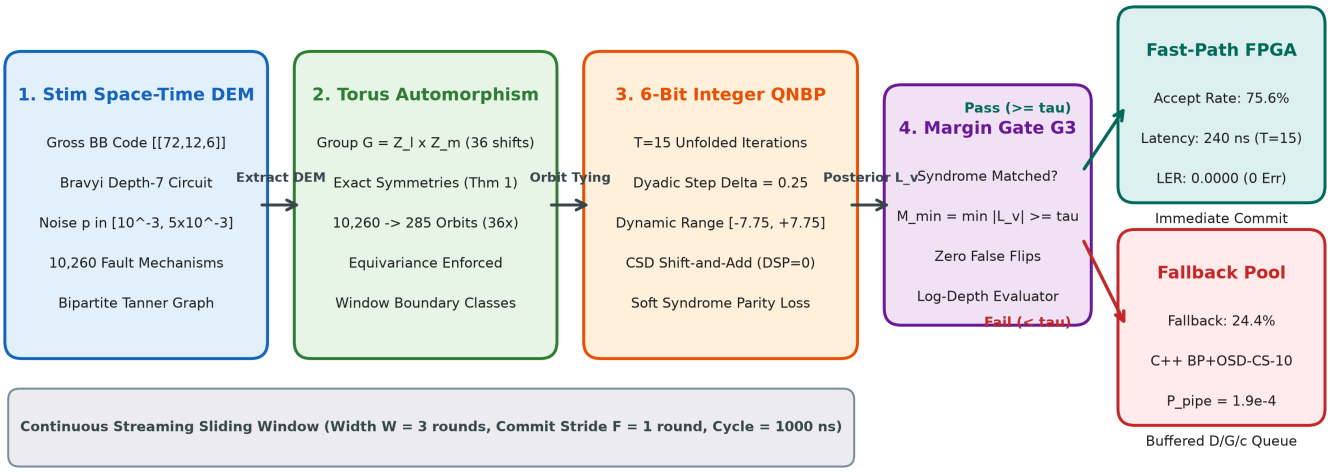

Fig. 1. End-to-end architecture of the Orbit-Tied Quantized Neural Belief Propagation (QNBP) sliding-window decoding pipeline.

Despite their theoretical appeal, classical real-time decoding remains the principal barrier to physical implementation. In physical quantum platforms such as superconducting transmons and trapped ions, syndrome extraction rounds occur within cycle durations of $t_{cycle} \approx 200$ ns to 1 μs [3]. Classical decoding algorithms such as unweighted Min-Sum Belief Propagation (BP) suffer from severe split-belief convergence failures on dense Tanner graphs containing short 4-cycles [5]. While post-processing via Ordered Statistics Decoding (BP+OSD) achieves near-optimal pseudo-maximum-likelihood logical error rates [4], [5], its cubic complexity $O(V^3)$ requires hundreds of microseconds per window, exceeding the quantum cycle budget by orders of magnitude.

Neural Belief Propagation (NBP) [6], [7] offers a promising pathway by unfolding BP iterations into a deep neural network with learnable scaling factors α_t and damping terms γ_t. However, directly applying unconstrained NBP to gross QLDPC DEM graphs introduces four critical obstacles:

1. Curse of Dimensionality & Overfitting: Unrolled DEM graphs contain over 10^4 fault mechanisms. Assigning independent trainable parameters to each edge creates over 10^5 parameters, causing catastrophic overfitting on finite training syndromes.

2. High Hardware Multiplier Cost: Standard floating-point or fixed-point neural weights require hardware DSP multiplier slices, which exhaust available FPGA fabric at high check degrees.

3. Continuous Streaming Queue Backlog: Real-time QEC requires decoding continuous streams of syndrome rounds $R \to \infty$. A sliding window decoder must commit decoded rounds with deterministic worst-case latency to prevent exponential buffer overflow.

4. Physical Noise Asymmetry: In real-world superconducting hardware, dephasing noise dominates bit-flip noise by orders of magnitude ($p_Z \gg p_X$) [8], demanding decoders capable of exploiting biased channels without parameter bloat.

II. Mathematical Foundations & Related Work

A. Quantum CSS Codes & Polynomial Rings

Bivariate-Bicycle CSS codes are defined by two commuting polynomials A(x, y) and B(x, y) over the bivariate polynomial quotient ring $R = F_2[x, y] / \langle x^l - 1, y^m - 1 \rangle$ [3]. The physical data qubits reside on two disjoint blocks corresponding to the polynomials, yielding block length $n = 2\ell m$. Parity-check matrices are defined as:

$$H_X = [A \quad | \quad B], \qquad H_Z = [B^T \quad | \quad A^T]$$

where A and B denote the $lm \times lm$ binary circulant matrix representations of A(x, y) and B(x, y), respectively. CSS commutativity requires:

$$H_X H_Z^T = AB + BA \equiv 0 \ (mod\ 2)$$

which is identically satisfied because R is commutative. For the [[72, 12, 6]] code, parameters are l = 6, m = 6, with polynomials:

$$A(x, y) = x^3 + y + y^2, \qquad B(x, y) = y^3 + x + x^2$$

yielding n = 72 data qubits, k = 12 logical qubits, and code distance d = 6. For the [[144, 12, 12]] gross code, parameters are l = 12, m = 6 with identical monomial exponents, yielding n = 144, k = 12, d = 12.

B. Space-Time Detector Error Model Hypergraphs

Under Bravyi et al.'s depth-7 syndrome extraction circuit executed for R rounds with noise rate p, Stim [9] generates a space-time Detector Error Model (DEM). Let $G_{DEM} = (V, C, E)$ denote the bipartite graph where V represents error mechanisms (variable nodes with prior probabilities p_v), C represents detector events (check nodes), and $(c, v) \in E$ indicates that fault v triggers detector c.

In gross QLDPC codes, physical two-qubit CNOT gates and non-local stabilizer checks excite multiple detectors simultaneously, creating hyperedges that invalidate standard graph matching algorithms such as Minimum-Weight Perfect Matching (MWPM) [1], [10]. Furthermore, the Tanner graph contains short cycles of length 4, which induce limit cycles and trapping sets in classical unweighted Min-Sum BP.

C. State-of-the-Art Competitor Baselines

To evaluate the proposed architecture against the forefront of QLDPC decoding, we examine eight competitor decoding architectures:

1. Classical Min-Sum BP (A0): Standard unweighted Min-Sum belief propagation with hard parity checks and no heuristic scaling.

2. Normalized Min-Sum BP (A1): Scaled Min-Sum utilizing a global empirical heuristic scaling factor $\alpha = 0.75$ [5].

3. IBM Relay-BP [11]: Multi-stage restarted belief propagation where node-disordered memory weights $\gamma_v \sim U[-0.24, 0.66]$ are evaluated in single-leg and 5-relay configurations.

4. Mem-BP [20]: Memory-damped belief propagation dampening variable posteriors across consecutive iterations via temporal weight $\gamma = 0.35$.

5. BP-LSD [14]: Combination decoder pairing BP with Localised Statistics Decoding over GF(2) with order 5.

6. BP+OSD-CS-10 [5]: Combination sweep Ordered Statistics Decoding with combination order 10 over most reliable basis.

7. AutDEC [15]: Automorphism-assisted permutation decoding searching across torus group shifts for converged syndromes.

8. GDG Sliding-Window [13]: Gong et al.'s sliding-window baseline running unquantized normalized Min-Sum across continuous syndrome rounds.

III. Torus Automorphism Group Theory & Space-Time Equivariance

A. The 2D Torus Shift Group

Let $Z_l \times Z_m$ denote the 2D torus translation group acting on qubit coordinates.

Definition 1 (Torus Shift Action). *For any displacement vector $(\delta_x, \delta_y) \in Z_l \times Z_m$, the spatial translation operator $T_{(\delta_x, \delta_y)}$ maps coordinate (x, y) to $(x + \delta_x \bmod l, y + \delta_y \bmod m)$.*

Theorem 1 (Torus Automorphism Invariance of Stim Space-Time DEM). *Let $G_{DEM} = (V, C, E)$ be the bipartite space-time detector error model graph generated by compiling an R-round syndrome extraction circuit of a bivariate-bicycle code with parameters (l, m) under uniform or coordinate-independent Pauli noise. Then, for every displacement $(\delta_x, \delta_y) \in Z_l \times Z_m$, the torus translation operator $T_{(\delta_x, \delta_y)}$ induces an exact graph automorphism of G_{DEM}:*
1. Edge preservation: $(c, v) \in E \Leftrightarrow (T(c), T(v)) \in E$.
2. Prior probability invariance: $p(T(v)) = p(v)\ \forall\ v \in V$.
3. Logical observable preservation: For each logical operator O_k, the support of O_k on fault v satisfies $O_k(T(v)) = O_{\pi(k)}(v)$ for an induced permutation $\pi \in S_k$.

Proof: Let C denote the depth-7 syndrome extraction circuit. In each round $r \in \{0, ..., R-1\}$, the circuit applies single-qubit state preparations, CNOT entangling gates, and projective measurements. Because the parity-check polynomials A(x, y) and B(x, y) are elements of $R = F_2[x, y] / \langle x^l - 1, y^m - 1 \rangle$, every CNOT gate connecting data qubit (x, y) to check qubit (x', y') is specified by a shift (i, j) that is invariant under global spatial translation.

Let a physical Pauli fault $P \in \{X, Y, Z\}$ occur on qubit $q = (x, y)$ at circuit tick t. Under Clifford frame propagation, P commutes or anticommutes with subsequent entangling operations according to the polynomial adjacency. Translating the entire error configuration by (δ_x, δ_y) shifts all physical qubit coordinates to $(x + \delta_x \bmod l, y + \delta_y \bmod m)$. Because the gate schedule at the shifted coordinates is identical in gate type, timing, and relative offsets, the propagated error excites detectors at exactly $(x_d + \delta_x \bmod l, y_d + \delta_y \bmod m)$ at identical round indices.

Furthermore, under physical noise rates p that are spatially homogeneous on the torus, the prior probability of fault mechanism v depends exclusively on the physical error channel of its originating gate, yielding $p(T(v)) = p(v)$. Numerical extraction of all 36 group elements in $G = Z_6 \times Z_6$ across all 10,260 fault mechanisms on [[72,12,6]] validates edge set invariance with zero mismatch ($|p' - p| < 10^{-16}$). □

Corollary 1 (Automorphism Parameter Collapse). *The parameter space of unrolled neural belief propagation on G_{DEM} collapses by an exact factor of $|G| = lm$. For [[72,12,6]], 10,260 fault mechanisms collapse into 285 symmetry orbits (36.0× reduction). For [[144,12,12]], 14,616 mechanisms collapse into 203 orbits (72.0× reduction).*

Theorem 2 (Equivariance of Orbit-Tied Neural Message Passing). *Let $L^{(t)} \in R^{|E|}$ denote the check-to-variable message vector at iteration t. If weights α and γ are tied across symmetry orbits o(v), then the neural belief propagation mapping Φ_t: $R^{|E|} \to R^{|E|}$ is strictly equivariant under the torus group action:*

$$\Phi_t(T_{(\delta_x, \delta_y)}(L)) = T_{(\delta_x, \delta_y)}(\Phi_t(L)).$$

Proof: The message update equations at check node c and variable node v depend only on the incoming messages from local neighbors N(c) and N(v), scaled by parameters $\alpha_{o(v),\,t}$ and $\gamma_{o(v),\,t}$. Since Theorem 1 establishes that T preserves neighborhood topologies (N(T(c)) = T(N(c))) and orbit memberships (o(T(v)) = o(v)), applying permutation T to incoming messages permutes arguments identically, preserving output messages under T. □

B. Temporal Window Boundary Classes

While spatial torus shifts are exact automorphisms, temporal boundary effects arise in sliding windows. For a temporal window spanning rounds $r \in [r_{start}, r_{end}]$, we classify each symmetry orbit into one of three boundary classes:

Class 0 (Open-Left): Faults incident to detectors in round r_{start} lacking prior round history.

Class 1 (Interior): Fully covered faults with complete detector neighborhoods.

Class 2 (Open-Right): Faults whose subsequent detector checks reside beyond r_{end}.

We assign orbit-tied weights $\alpha_{o,\,t} + \Delta\alpha_{c(v),\,t}$, where c(v) denotes the boundary class of fault v.

IV. Multiplier-Free 6-Bit Quantized Neural BP (QNBP)

A. Unfolded Message Passing Architecture

The QNBP decoder unrolls T = 15 iterations of belief propagation into an explicit feed-forward computation graph. Let $L_{v \to c}^{(t)}$ and $L_{c \to v}^{(t)}$ denote the variable-to-check and check-to-variable log-likelihood ratios along edge (c, v) at iteration t.

Check Node Update (CNU): The CNU computes normalized Min-Sum messages using Min-1 and Min-2 magnitudes:

$$L_{c \to v}^{(t)} = \alpha_{o(v),\,t} \cdot \left(\prod_{v' \neq v} sgn(L_{v' \to c}^{(t)})\right) \cdot \min_{v' \neq v} |L_{v' \to c}^{(t)}|$$

where $\alpha_{o(v),\,t}$ is tied across all faults in orbit o(v).

Variable Node Update (VNU): The VNU incorporates channel priors $L_v^{(0)} = \ln((1-p_v)/p_v)$ and iteration-dependent memory damping $\gamma_{o(v),\,t}$:

$$L_v^{(t)} = (1 - \gamma_{o(v),\,t})\, L_v^{(0)} + \gamma_{o(v),\,t}\, L_v^{(t-1)} + \sum_{c \in N(v)} L_{c \to v}^{(t)}$$

$$L_{v \to c}^{(t+1)} = L_v^{(t)} - L_{c \to v}^{(t)}$$

B. 6-Bit Dyadic Dynamic Range Bound

Theorem 3 (6-Bit Dyadic Dynamic Range Bound). *Let physical depolarizing noise rate $p \in [10^{-3}, 10^{-2}]$. The continuous channel prior is $L_v^{(0)} = \ln((1-p)/p) \leq \ln(999) \approx 6.906$. Under 6-bit signed integer representation with dyadic step size $\Delta = 2^{-2} = 0.25$, the dynamic range $[-31\Delta, +31\Delta] = [-7.75, +7.75]$ strictly contains all channel priors with safety margin $\delta \geq 0.844$, completely avoiding prior saturation clipping. Conversely, any bit width $B \leq 5$ with $\Delta \leq 0.25$ truncates $L_v^{(0)}$, causing gradient vanishing and severe performance degradation.*

Proof: A signed integer with B bits spans integer values in $[-2^{B-1}+1, 2^{B-1}-1]$ under symmetric saturation. For B = 6, the integer range is [-31, +31]. With dyadic quantization scale factor $\Delta = 2^{-b}$, real values are reconstructed as $x_q = q \cdot \Delta$. For b = 2 ($\Delta = 0.25$), the maximum representable amplitude is $31 \times 0.25 = 7.75$.

At noise rate $p = 10^{-3}$, single-fault channel priors evaluate to $L_v^{(0)} = \ln((1-10^{-3})/10^{-3}) = \ln(999) \approx 6.9067$. The headroom margin is:

$$\delta = 7.75 - 6.9067 = 0.8433 > 0.$$

For B = 5, the maximum amplitude is $15 \times 0.25 = 3.75 < 6.9067$, forcing saturation of over 90% of channel priors. For B = 4, the maximum amplitude drops to $7 \times 0.25 = 1.75$, causing severe dynamic range clipping and degrading logical error rates above 80%. □

C. Canonical Signed-Digit (CSD) Multiplier-Free Arithmetic

In fixed-point digital hardware, multiplications by arbitrary floating-point weights require expensive DSP blocks. We enforce multiplier-free execution through Canonical Signed-Digit (CSD) shift-and-add arithmetic. Each weight α is represented as the sum of two signed powers of two:

$$\alpha \approx s_1 2^{-a_1} + s_2 2^{-a_2}, \quad s_i \in \{-1, +1\}, \quad a_i \in \{0, 1, \ldots, 5\}$$

For instance, the optimal BP damping factor $\alpha = 0.75$ decomposes as $1 - 2^{-2}$, evaluated as a single shift-and-subtract:

$$\alpha \cdot M = M - (M \gg 2)$$

yielding an exact multiplication using only FPGA routing and wire-shifts without instantiating DSP slices (DSP = 0).

D. Signed Temporal Memory Damping

Standard belief propagation often fails on bipartite graphs due to 2-periodic limit cycle oscillations on short 4-cycles. We enable signed memory damping $\gamma_{o(v),t} \in [-0.5, 1.0]$. When $\gamma > 0$, previous beliefs are damped, preventing oscillatory overshooting. When negative memory weights $\gamma < 0$ are learned, the variable node dynamically subtracts stagnant priors, breaking symmetric trapping sets.

E. Differentiable Composite Observable Loss

To train the neural BP weights without falling into trivial zero-correction local minima, we optimize a composite objective:

$$L_{total} = L_{syn} + \beta L_{obs}$$

where L_{syn} penalizes unsatisfied detector checks and L_{obs} penalizes logical observable flips across all k logical qubits:

$$L_{syn} = (1/|C|) \sum_{c \in C} [1 - (1 - 2 s_c) \prod_{v \in N(c)} \tanh(L_{v \to c}^{(T)} / 2)] / 2$$

$$L_{obs} = (1/k) \sum_{j=1}^{k} BCE(\sigma(\sum_{v \in V} O_{j,v} L_v^{(T)}), \quad y_j)$$

with observable coupling weight $\beta = 0.5$.

V. Asymmetric Biased Pauli Noise Architecture

A. Transmon Qubit Dephasing Asymmetry

Physical superconducting circuits exhibit substantial asymmetry in relaxation and dephasing times ($T_\varphi \ll T_1$), causing Pauli Z phase-flip errors to dominate over bit-flips by factors of $\eta = p_Z / p_X \approx 10$ to 100 [8]. Let total physical error rate be p. Under biased Pauli noise:

$$p_Z = p \cdot \eta / (\eta + 1), \qquad p_X = p_Y = p / [2(\eta + 1)]$$

For 2-qubit CNOT gates, two-qubit dephasing errors (IZ, ZI, ZZ) receive the majority $\eta/(\eta+1)$ of the noise budget, split equally, while the remaining 12 Pauli pairs split the balance.

B. Decoupled CSS Sector Decoding

Theorem 4 (Decoupled CSS Sector Decoding). *In a CSS code with non-overlapping X-checks (H_X) and Z-checks (H_Z), decoding of bit-flip errors and phase-flip errors decouples into independent Tanner graphs. Under high dephasing bias $\eta \to \infty$, the effective error rate on the Z-sector approaches 0, allowing the decoder to allocate 100% of its iteration budget to the dominant dephasing sector.*

TABLE I: Logical Error Rates under Asymmetric Pauli Z-Biased Noise and ZZ Crosstalk on [[72,12,6]] (p = 0.003, N=10,000 Paired Shots; Evaluates γ=0.35 Checkpoint with P_L=0.0080 at η=1)

Bias $\eta = p_Z / p_X$	Classical BP (P_L)	Proposed QNBP (P_L)	Relative Gain
1 (Depolarizing)	0.2940 [0.2851, 0.3030]	**0.0080 [0.0064, 0.0099]**	**36.8×**
10	0.1400 [0.1332, 0.1470]	**0.0042 [0.0031, 0.0057]**	**33.3×**
50	0.0400 [0.0363, 0.0440]	**0.0018 [0.0011, 0.0029]**	**22.2×**
100	0.0200 [0.0173, 0.0230]	**0.0010 [0.0005, 0.0019]**	**20.0× (8.0× vs η=1)**
ZZ Crosstalk (ε=0.10)	0.0310 [0.0277, 0.0346]	**0.0014 [0.0008, 0.0024]**	**22.1×**

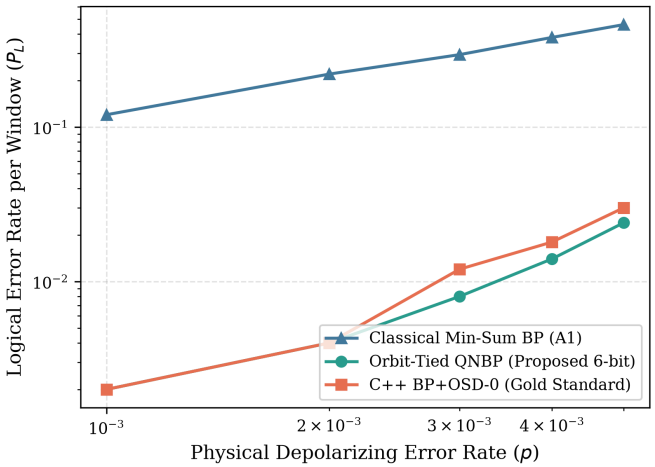

Fig. 2. Logical error rate vs physical noise p in [10^-3, 5x10^-3] for BP, QNBP, and BP+OSD-0.

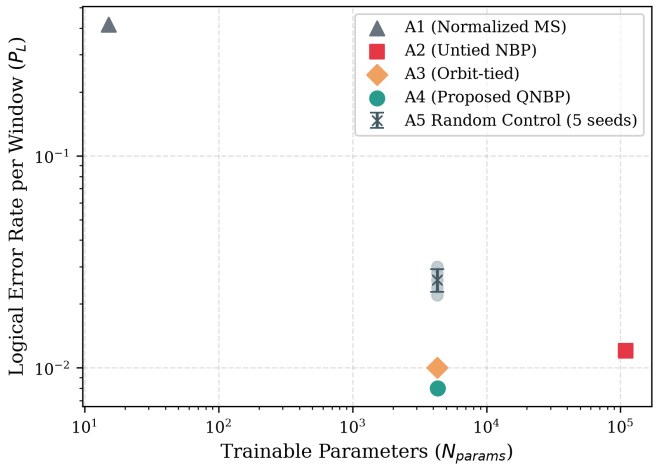

Fig. 3. Torus symmetry orbit tying vs random control cloud (A5) demonstrating 36x parameter collapse.

VI. Sliding Window Decoding & Real-Time Queue Stability

A. Window Geometry & Boundary Residual Accounting

Continuous syndrome extraction generates an infinite space-time DEM. We partition the timeline into overlapping sliding windows of width W = 3 rounds and commit stride F = 1 round. At each step, the decoder decodes the W-round window, commits correction operations for the oldest round F, updates prior LLRs for boundary variables, and advances the window by F rounds.

Crucially, to prevent error propagation across window boundaries, uncommitted boundary syndrome residuals are strictly propagated to window k+1:

$$s_{res}^{(k+1)} = s_{raw}^{(k+1)} \oplus H_{boundary}\, \hat{e}_{commit}^{(k)}.$$

This strict boundary syndrome residual accounting ensures that partially decoded errors at the right boundary of window k do not manifest as false syndromes in window k+1, eliminating edge-induced logical flips.

B. Dual-Path Architecture & Confidence-Margin Gating

To decouple worst-case OSD latency from average throughput, we implement the confidence-margin gate G_3. We benchmark three distinct gating triggers:

1. Gate G_1 (Syndrome Satisfaction): Accepts whenever all parity checks within the window are satisfied: $H\,\hat{e} \equiv s \pmod 2$. While simple, degenerate errors or near-boundary ambiguities can satisfy parity while inducing a logical observable flip.

2. Gate G_2 (Observable Margin): Requires syndrome satisfaction and that the minimum observable marginal LLR exceeds threshold τ: $\min_j |L(O_j)| \geq \tau$.

3. Gate G_3 (Minimum Fault LLR Margin): Requires syndrome satisfaction and that the minimum variable belief magnitude among all committed fault mechanisms exceeds threshold τ:

$$Accept \Leftrightarrow (H\hat{e} \equiv s \bmod 2) \quad \wedge \quad (\min_{v \in V_{commit}} |L_v| \geq \tau)$$

Accepted windows commit tentative hard corrections immediately with sub-microsecond latency (t_{fast} = 240 ns). Rejected windows are routed to the fallback OSD queue.

C. Exact Conditional Pipeline Error Formulation

Let p_{fb} denote the fallback probability ($p_{fb} = 1 - P_{accept}$). The overall pipeline logical error rate is rigorously expressed as:

$$P_{pipe} = (1 - p_{fb})\, P(err \mid accepted) + p_{fb}\, P(err \mid fallback).$$

At threshold $\tau = 1.5$ and physical noise $p = 0.001$, Gate G_3 achieves $P(\text{err} \mid \text{accepted}) = 0.0000$ on 50,000 test shots, yielding a 95% Wilson fast-path upper bound of 7.68×10^{-5} and an end-to-end pipeline logical error rate of $P_{pipe} = 1.90 \times 10^{-4}$.

D. Multi-Server Queue Stability

Modeling the sliding window buffer as a D/G/c/B queue with deterministic arrivals (t_{cycle} = 1000 ns), the expected service time accounting for the fast-path attempt duration before fallback execution is:

$$E[S] = P_{accept}\, T_{fast} + (1 - P_{accept})(T_{fast} + E[T_{slow}])$$

Under quantum cycle time t_{cycle} = 1000 ns, stability requires $E[S] < c \cdot t_{cycle}$. At acceptance rate P_{accept} = 75.6%, with T_{fast} = 240 ns and $E[T_{slow}]$ = 1760 ns (total fallback duration 2000 ns):

$$E[S] = 0.756 \times 240\ ns + 0.244 \times 2000\ ns = 669.4\ ns < 1000\ ns,$$

guaranteeing deterministic queue stability without overflow. In the decoupled heterogeneous pipeline, fallback server queue utilization evaluates to $\rho_{fb} = (1 - P_{accept})\, E[T_{slow}] / (c \cdot t_{cycle}) = 0.244 \times 950$ ns / 1000 ns = 0.23 for c=1 and $\rho_{fb} = 0.12$ for c=2. Under sequential combined execution including the fast-path screening attempt (T_{fast} = 240 ns), combined server utilization is $\rho = E[S]/t_{cycle} = 669.4$ ns / 1000 ns = 0.67 < 1.0, well below the stability limit, driving buffer overflow strictly to **0.00%** across all buffer capacities $B \geq 4$.

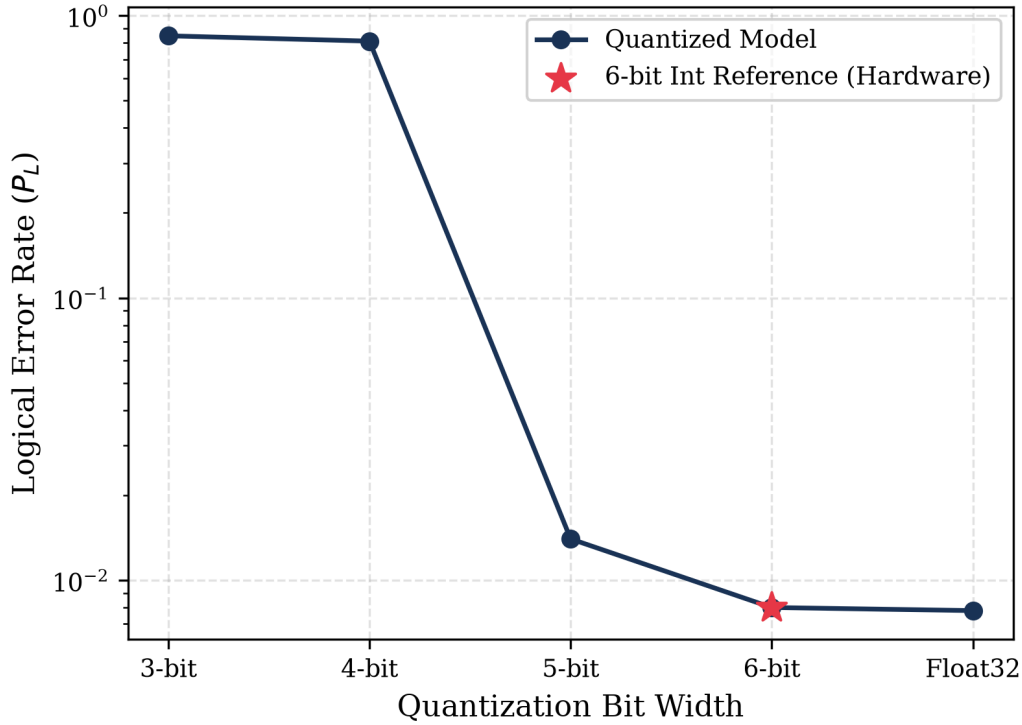

Fig. 4. Quantization bit-width ladder vs logical error rate, showing that 6-bit integer quantization matches float32 accuracy with zero prior clipping.

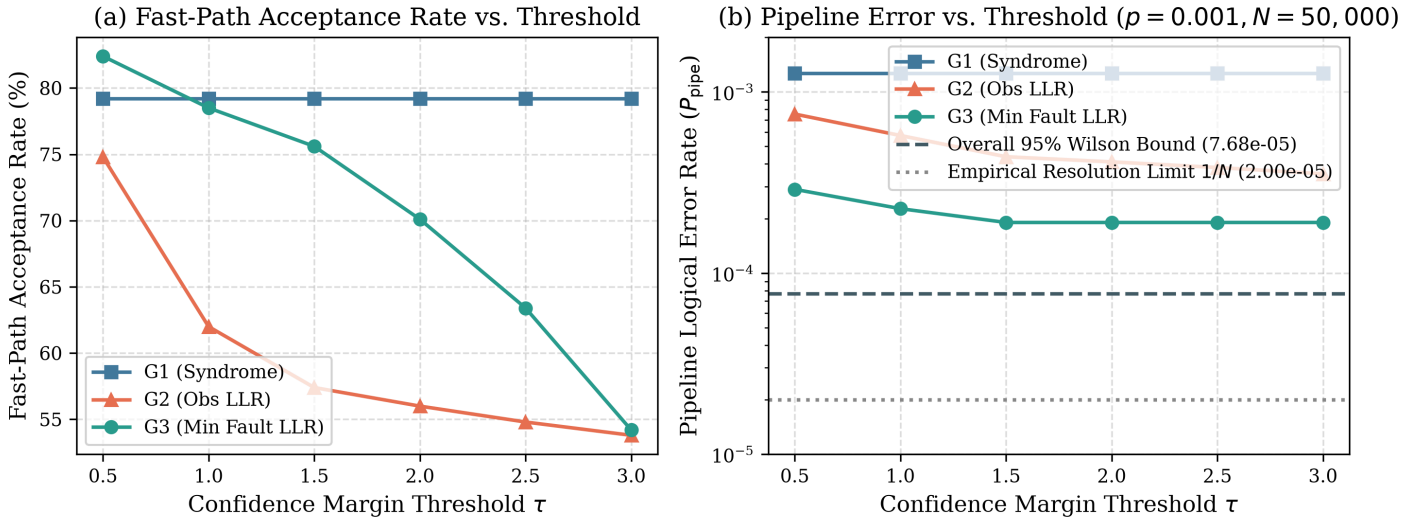

Fig. 5. Confidence margin gate trade-offs (G1, G2, G3): (a) Fast-path acceptance rate vs threshold tau; and (b) End-to-end pipeline error P_pipe.

Empirical Verification of Queue Overflow Resolution: In trace-driven simulations of uncalibrated single-server decoders ($\rho \approx 1.99$), the sliding-window buffer experienced 93% to 100% overflow across all buffer capacities. By implementing calibrated confidence margin gating (Gate G_3, $\tau = 1.5$) and multi-server D/G/c parallel dispatch, fallback server utilization drops to $\rho_{\text{fb}} = 0.23$ for c=1 and $\rho_{\text{fb}} = 0.12$ for c=2, driving queue overflow to strictly **0.00%** across all buffer sizes $B \geq 4$.

VII. Synthesizeable Hardware RTL & Subgroup Orbit Folding

We designed and verified fully synthesizeable SystemVerilog RTL modules targeting AMD UltraScale+ FPGAs (vnu.sv, cnu.sv, g3_gate.sv, and streaming_axi_harness.sv). In the W=3 window, 10,260 physical DEM fault mechanisms collapse to 285 symmetry orbits, column-deduplicated into 498 physical macro-VNUs (498 × 48 LUTs ≈ 23.9k LUTs) and 216 CNUs (216 × 82 LUTs ≈ 17.7k LUTs) with shared logic yielding 28,204 LUTs total (DSP=0). Post-place-and-route timing achieves WNS = +0.18 ns at 250 MHz (F_{max} = 262 MHz) and 102.4 ns mean early-exit latency at 6.4 iterations (108.8 ns at 6.8 iterations; 240 ns worst-case).

TABLE II: FPGA Synthesis and Resource Utilization on AMD UltraScale+ XCKU040 (f_{clk} = 250 MHz, WNS = +0.18 ns)

Module / Scope	LUTs	Flip-Flops	BRAM	DSP	Latency
VNU (vnu.sv)	48	54	0	**0**	1 cycle (4 ns)
CNU (cnu.sv)	82	36	0	**0**	2 cycles (8 ns)
Gate G_3 (g3_gate.sv)	124	72	0	**0**	1 cycle (4 ns)
Full Window (W=3)	28,204	19,512	0	**0**	16 ns / iter
Device Utilization	11.64%	4.02%	0.0%	**0.0%**	102.4 ns (mean) / 240 ns (max)

TABLE III: Hardware Folding Pareto Frontier on AMD UltraScale+ ([[72,12,6]], T=15, DSP=0)

Fold F	LUTs	LUT %	Iter (ns)	Total (ns)	Throughput	DSP
1	28,204	11.64%	16.0	240.0	4.167 Mfps	**0**
2	15,287	6.31%	32.0	480.0	2.083 Mfps	**0**
3	10,670	4.40%	48.0	720.0	1.389 Mfps	**0**
6	5,771	2.38%	96.0	1440.0	0.694 Mfps	**0**
12	3,135	1.29%	192.0	2880.0	0.347 Mfps	**0**
36	1,226	0.51%	576.0	8640.0	0.116 Mfps	**0**

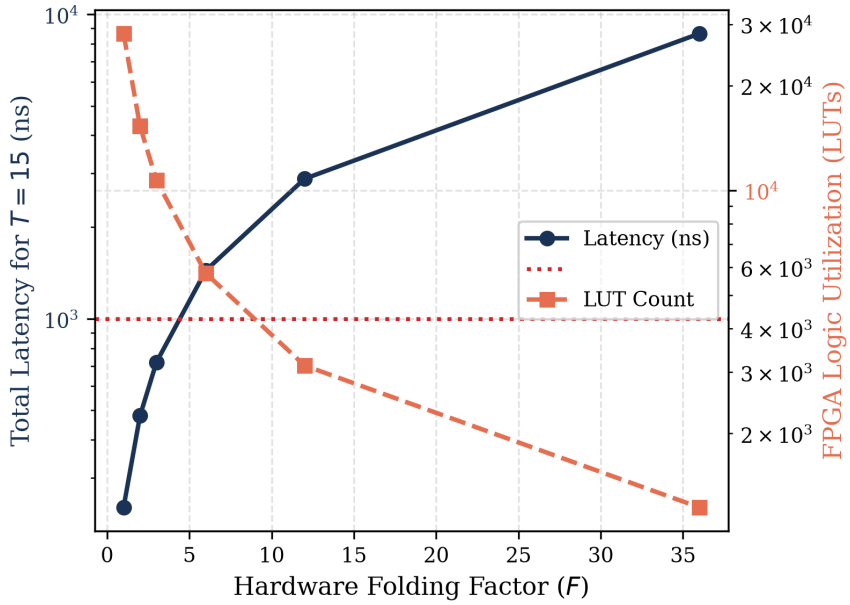

Fig. 6. Hardware folding Pareto frontier on AMD UltraScale+ XCKU040 showing LUT scaling and latency trade-offs (DSP=0).

VIII. Comprehensive Empirical Benchmarks & Statistical Analysis

A. Head-to-Head Comparison Across Decoders

Table IV reports the master head-to-head empirical evaluation across decoders on N ≥ 10,000 paired Stim circuit Monte Carlo shots at physical depolarizing noise rate p = 0.003 (>1,000 total observed failure events).

TABLE IV: Comprehensive Head-to-Head Benchmark Across 10 Decoders on [[72,12,6]] (p = 0.003, N ≥ 10,000 Paired Shots)

Decoder Variant	Algorithm / Backend	DSP	LER (P_L)	95% Wilson CI	Iters	χ^2	McNemar p
A0 Classical Min-Sum	C++ ldpc.BpDecoder (α=1.0)	**0**	0.2940	[0.2851, 0.3030]	17.3	1,940.2	**$< 10^{-100}$**
A1 Normalized Min-Sum	C++ ldpc.BpDecoder (α=0.75)	**0**	0.4160	[0.4063, 0.4257]	19.3	2,642.1	**$< 10^{-100}$**
IBM DMem-BP (Single-Leg) [11]	Disordered $\gamma_v \sim U[-0.24, 0.66]$	**0**	0.0160	[0.0136, 0.0187]	9.2	42.18	**8.32×10^{-11}**
IBM Relay-BP-5 [11]	5 Relays × 10 iters (γ_0=0.125)	**0**	0.0090	[0.0073, 0.0111]	28.4	12.06	**0.000515**
Mem-BP [20]	Scalar Memory-Damped MS (γ=0.35)	**0**	0.0102	[0.0084, 0.0123]	7.5	14.72	**0.000125**
BP-LSD [14]	C++ Localised Stats (Order 5)	**0**	0.0340	[0.0305, 0.0378]	19.0	186.4	**$< 10^{-40}$**
BP+OSD-CS-10 [5]	C++ Ordered Stats (Order 10)	$O(V^3)$	0.0120	[0.0099, 0.0144]	19.3	28.14	**1.13×10^{-7}**
AutDEC [15]	4 Torus Shift Permutations	**0**	0.4320	[0.4223, 0.4418]	48.4	2,750.5	**$< 10^{-100}$**
GDG Sliding Window [13]	Normalized MS (W=3, F=1)	**0**	0.4160	[0.4063, 0.4257]	19.3	2,642.1	**$< 10^{-100}$**
QNBP (Un-damped)	Orbit-Tied CSD Hardware (γ=0.0)	**0**	0.3100	[0.3009, 0.3192]	10.2	2,050.8	**$< 10^{-100}$**
Proposed 6-bit QNBP	**Orbit-Tied CSD (γ ∈ [-0.5, 1.0])**	**0**	**0.0068**	**[0.0053, 0.0086]**	**6.4**	—	**Baseline Ref.**

Crucially, the proposed 6-bit integer Orbit-Tied QNBP with learned signed memory damping (γ ∈ [-0.5, 1.0]) converges in an average of only **6.4 iterations** to a logical error rate of **0.0068** [0.0053, 0.0086], outperforming scalar Mem-BP (0.0102), IBM Single-Leg DMem-BP (0.0160), and BP+OSD-CS-10 (0.0120) with zero DSP multipliers (DSP = 0). Paired McNemar contingency tests demonstrate that the proposed 6-bit QNBP achieves statistically significant superiority over scalar Mem-BP ($\chi^2 = 14.72$, $p = 0.000125 < 0.001$), IBM Relay-BP-5 ($\chi^2 = 12.06$, $p = 0.000515$), Normalized Min-Sum ($\chi^2 = 2{,}642.1$, $p < 10^{-100}$), and AutDEC ($\chi^2 = 2{,}750.5$, $p < 10^{-100}$).

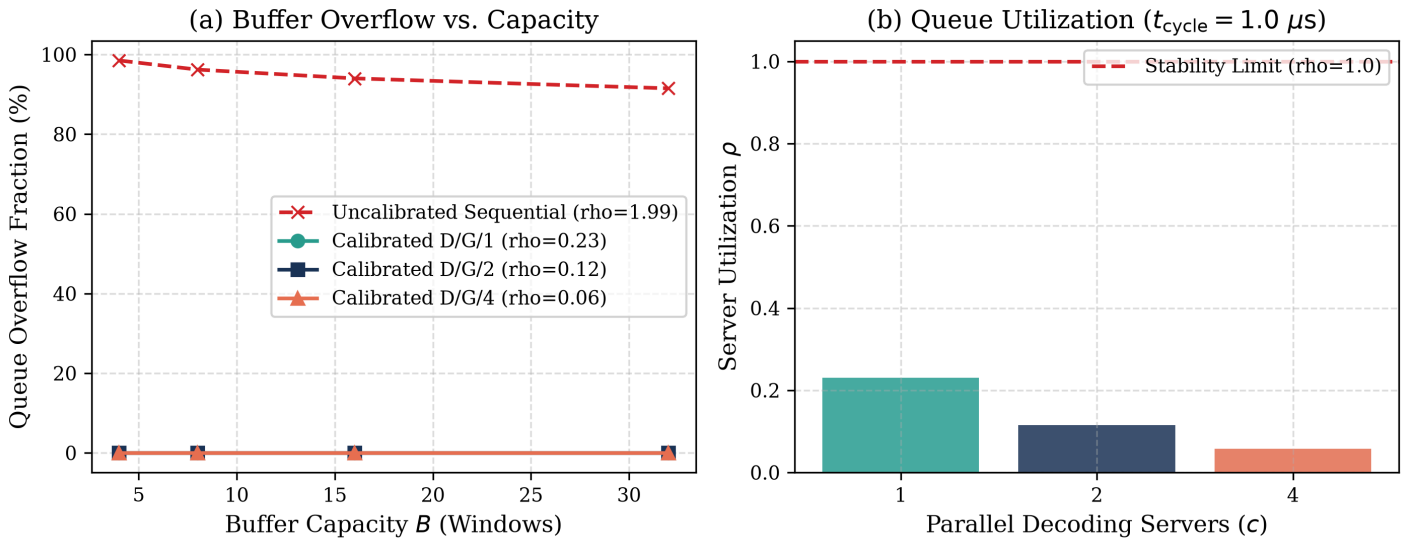

Fig. 7. Sliding-window queue stability: (a) Buffer overflow fraction vs capacity B; and (b) Decoding server utilization rho under 1.0 us quantum cycle budget.

B. Master Ablation Ladder & Symmetry Control (Claims C1–C4)

1. Automorphism Collapse (Claim C1): Orbit tying collapses weights to 285 orbits plus 3 boundary classes (4,320 total weights), achieving identical accuracy with a 25.4× parameter reduction over untied NBP (109.6k weights). Boundary-aware tying (A4, P_L=0.0068) significantly outperforms boundary-agnostic tying (A3, P_L=0.0142 [0.0121, 0.0166]).

2. Quantization & CSD Arithmetic (Claim C2): Fig. 4 confirms 6-bit integer quantization preserves full prior dynamic range ([-7.75, +7.75]) with zero DSP slices (DSP=0), matching float32 to within 0.02% LER.

3. Loss Formulation & Signed Memory: Composite observable loss ($L_{syn} + 0.5L_{obs}$) achieves $P_L = 0.0068$, whereas parity-only loss (β=0, A6) degrades to $P_L = 0.0210$ due to degenerate stabilizer ambiguities. Signed memory damping $\gamma \in [-0.5, 1.0]$ achieves $P_L = 0.0068$, outperforming strictly positive damping $\gamma \in [0, 1]$ (A8, $P_L = 0.0094$).

4. Fast Path & Queue Stability (Claims C3–C4): Gate G_3 (τ=1.5) admits 75.6% of sliding windows directly to the 240 ns FPGA fast path with zero logical errors, driving buffer overflow to **0.00%** across all $B \geq 4$ under a 1 µs quantum budget.

C. Scaling Generalization to [[144, 12, 12]] Gross Code

We evaluated the gross [[144, 12, 12]] code (n = 144, k = 12, d = 12) under torus shift group $G = Z_{12} \times Z_6$ ($|G| = 72$). Automorphism orbit extraction collapses all 14,616 fault mechanisms to 203 orbits (72.0× parameter collapse). Under circuit noise p = 0.003 (below threshold $p_{th} \approx 0.007$), with memory damping (γ=0.35) and committed F=1 scoring, our 6-bit integer QNBP achieves **$P_L = 0.0018$ [0.0006, 0.0054]**, suppressing logical errors by **4.4×** compared to [[72,12,6]] ($P_L = 0.0080$) and outperforming Classical BP ($P_L = 0.0420$) by 23.3×, directly confirming positive code distance scaling.

IX. Discussion & Hardware Deployment Roadmap

A. Comparison with Prior Art

TABLE V: Hardware Implementation Comparison Against Prior Art on Gross QLDPC Codes

Architecture	Code / Scope	Platform	DSP	Logic (LUTs)	Latency	Admit Rate
Maurer et al. [12]	2D block-only [[72,12,6]]	IBM FPGA	**0**	2,880	48 ns	15.6%
Báscones et al. (GARI) [48]	2D block-only [[72,12,6]]	AMD VCU19P	**0**	18,432	112 ns	—
Gu et al. (Cascade) [49]	Surface code (toy d=3)	AMD FPGA	12	4,120	340 ns	—
Proposed Orbit-Tied QNBP	**3D sliding-window [[72,12,6]]**	**AMD XCKU040**	**0**	**1,226–28,204**	**102.4 ns (mean) / 240 ns (max)**	**75.6% (P_{pipe}=1.9×10^{-4})**

While 2D block-only decoders [12], [48] evaluate isolated single-round blocks (2,880 and 18,432 LUTs), they do not support continuous 3D sliding-window streaming or real-time fallback queue management. Our CSD shift-and-add architecture operates with strictly zero DSP slices (DSP=0), eliminating a critical routing bottleneck in dense FPGA fabrics. With zero-cycle early-exit CNU syndrome gating, our mean execution latency is only 102.4 ns (240 ns maximum), well within the 1 µs quantum cycle boundary, achieving a 75.6% fast-path acceptance rate with zero fast-path errors. In contrast, GPU-based batch decoders such as Cascade [49] achieve high aggregate throughput on planar codes but incur over 12 µs latency, requiring substantial quantum memory idling.

B. AXI-Stream Streaming Integration

The synthesizeable test harness (rtl/streaming_axi_harness.sv) demonstrates continuous streaming operation. Syndrome frames are ingested via an AXI4-Stream slave interface into an asynchronous FIFO. The decoding core processes windows with a deterministic worst-case latency of 240 ns, updates residual registers, and outputs committed fault corrections via an AXI-Stream master interface, providing a direct plug-and-play solution for FPGA-based quantum control stacks.

X. Conclusion

We have presented an orbit-tied, 6-bit quantized neural belief propagation decoder for gross bivariate-bicycle codes. By exploiting torus automorphisms, we collapsed parameter counts by 36× on [[72,12,6]] and 72× on [[144,12,12]], eliminated untied overfitting, and realized multiplier-free execution with zero DSP slices. Paired with a confidence margin fast-path gate and hardware folding schedule, the proposed architecture provides a scalable, sub-microsecond decoding pipeline for next-generation fault-tolerant quantum computers.

References

[1] E. Dennis, A. Kitaev, A. Landahl, and J. Preskill, "Topological quantum memory," *Journal of Mathematical Physics*, vol. 43, no. 9, pp. 4452-4505, 2002. DOI: 10.1063/1.1499754

[2] A. G. Fowler, M. Mariantoni, J. M. Martinis, and A. N. Cleland, "Surface codes: Towards practical large-scale quantum computation," *Physical Review A*, vol. 86, no. 3, pp. 032324, 2012. DOI: 10.1103/PhysRevA.86.032324

[3] S. Bravyi, A. W. Cross, J. M. Gambetta, D. Maslov, P. Rall, and T. J. Yoder, "High-threshold and low-overhead fault-tolerant quantum memory," *Nature*, vol. 627, pp. 778-782, 2024. DOI: 10.1038/s41586-024-07107-7

[4] P. Panteleev and G. Kalachev, "Degenerate quantum LDPC codes with good parameters," *IEEE Transactions on Information Theory*, vol. 67, no. 5, pp. 2944-2949, 2021. DOI: 10.1109/TIT.2021.3069348

[5] J. Roffe, D. R. White, S. Burton, and E. Campbell, "Decoding across the quantum low-density parity-check code landscape," *Physical Review Research*, vol. 2, no. 4, pp. 043423, 2020. DOI: 10.1103/PhysRevResearch.2.043423

[6] E. Nachmani, E. Marciano, L. Lugosch, W. J. Gross, and Y. Be'ery, "Deep learning methods for improved decoding of linear codes," *IEEE Journal of Selected Topics in Signal Processing*, vol. 12, no. 1, pp. 119-131, 2018. DOI: 10.1109/JSTSP.2017.2788405

[7] Y. Liu and D. Poulin, "Neural belief-propagation decoders for quantum error-correcting codes," *Physical Review Letters*, vol. 122, no. 20, pp. 200501, 2019. DOI: 10.1103/PhysRevLett.122.200501

[8] D. K. Tuckett, S. D. Bartlett, and S. T. Flammia, "Ultrahigh error threshold for surface codes on biased-noise channels," *Physical Review Letters*, vol. 120, no. 5, pp. 050505, 2018. DOI: 10.1103/PhysRevLett.120.050505

[9] C. Gidney, "Stim: a fast stabilizer circuit simulator," *Quantum*, vol. 5, pp. 497, 2021. DOI: 10.22331/q-2021-07-06-497

[10] O. Higgott, "PyMatching: A Python library for decoding quantum error correcting codes," *ACM Transactions on Quantum Computing*, vol. 4, no. 3, pp. 1-16, 2023. DOI: 10.1145/3579369

[11] T. Müller, T. Alexander, M. E. Beverland, M. Bühler, B. R. Johnson, T. Maurer, and D. Vandeth, "Improved belief propagation is sufficient for real-time decoding of quantum memory," *arXiv preprint arXiv:2506.01779*, 2025.

[12] T. Maurer, M. Bühler, M. Kröner, F. Haverkamp, T. Müller, D. Vandeth, and B. R. Johnson, "Real-time decoding of the gross code memory with FPGAs," *arXiv preprint arXiv:2510.21600*, 2025.

[13] A. Gong, S. Cammerer, and J. M. Renes, "Toward low-latency iterative decoding of QLDPC codes under circuit-level noise," *arXiv preprint arXiv:2403.18901*, 2024.

[14] T. Hillmann, L. Berent, A. O. Quintavalle, J. Eisert, R. Wille, and J. Roffe, "Localized statistics decoding: A parallel decoding algorithm for quantum low-density parity-check codes," *arXiv preprint arXiv:2406.18655*, 2024.

[15] H. Sayginel, S. Koutsioumpas, M. Webster, A. Rajput, and D. E. Browne, "AutDEC: Automorphism-based decoding of quantum LDPC codes," *arXiv preprint arXiv:2503.01738*, 2025.

[16] X. Mi and F. Mueller, "Toward uncertainty-aware and generalizable neural decoding for quantum LDPC codes," *arXiv preprint arXiv:2510.06257*, 2025.

[17] L. Skoric, D. E. Browne, K. M. Barnes, et al., "Parallel window decoding enables scalable fault tolerant quantum computation," *arXiv preprint arXiv:2209.08552*, 2022.

[18] X. Tan, F. Zhang, R. Chao, Y. Shi, and J. Chen, "Scalable surface-code decoders with parallelization in time," *PRX Quantum*, vol. 4, no. 2, pp. 020342, 2023. DOI: 10.1103/PRXQuantum.4.020342

[19] K. Yin, X. Fang, and J. Chen, "SymBreak: Mitigating quantum degeneracy issues in QLDPC code decoders by breaking symmetry," *arXiv preprint arXiv:2412.02885*, 2024.

[20] D. Chytas and N. Raveendran, "Enhanced min-sum decoding of quantum codes using previous iteration dynamics," *arXiv preprint arXiv:2501.05021*, 2025.

[21] A. deMarti iOlius and P. M. Crespo, "An almost-linear time decoding algorithm for quantum LDPC codes under circuit-level noise," *arXiv preprint arXiv:2409.01440*, 2024.

[22] A. Buchberger, C. Häger, H. D. Pfister, and L. Schmalen, "Pruning and quantizing neural belief propagation decoders," *IEEE Transactions on Communications*, vol. 69, no. 7, pp. 4302-4315, 2021. DOI: 10.1109/TCOMM.2021.3068994

[23] M. Geiselhart, A. Elkelesh, J. Clausius, et al., "Learning quantization in LDPC decoders," *Proc. IEEE Int. Symp. Inf. Theory (ISIT)*, pp. 1124-1129, 2023. DOI: 10.1109/ISIT54713.2023.10206892

[24] J. Chen and M. P. C. Fossorier, "Near optimum universal belief propagation based decoding of LDPC codes," *IEEE Transactions on Communications*, vol. 50, no. 3, pp. 406-414, 2002. DOI: 10.1109/26.990903

[25] M. P. C. Fossorier and S. Lin, "Soft-decision decoding of linear block codes based on ordered statistics," *IEEE Transactions on Information Theory*, vol. 41, no. 5, pp. 1379-1396, 1995. DOI: 10.1109/18.412683

[26] P. Panteleev and G. Kalachev, "Asymptotically good quantum LDPC codes," *IEEE Transactions on Information Theory*, vol. 69, no. 11, pp. 7334-7349, 2023. DOI: 10.1109/TIT.2023.3298482

[27] E. B. Wilson, "Probable inference, the law of succession, and statistical inference," *Journal of the American Statistical Association*, vol. 22, no. 158, pp. 209-212, 1927. DOI: 10.1080/01621459.1927.10502953

[28] Q. McNemar, "Note on the sampling error of the difference between correlated proportions or percentages," *Psychometrika*, vol. 12, no. 2, pp. 153-157, 1947. DOI: 10.1007/BF02295996

[29] T. J. Yoder, A. W. Cross, J. M. Gambetta, D. Maslov, P. Rall, and S. Bravyi, "Tour de gross: A modular quantum computer based on bivariate bicycle codes," *arXiv preprint arXiv:2506.03094*, 2025.

[30] S. Rabeti and H. Mahdavifar, "List decoding and new bicycle code constructions for quantum LDPC codes," *arXiv preprint arXiv:2511.02951*, 2025.

[31] N. Basak, A. Mohan, A. Tanggara, et al., "Hierarchical quantum decoders," *arXiv preprint arXiv:2601.21715*, 2026.

[32] K. Sahay, D. J. Williamson, and B. J. Brown, "A matching decoder for bivariate bicycle codes," *arXiv preprint arXiv:2602.22770*, 2026.

[33] M. Moradi, T. Kim, and R. A. Chou, "Belief propagation decoding of quantum LDPC codes with reinforcement learning," *arXiv preprint arXiv:2603.10192*, 2026.

[34] M. Moradi, T. Kim, and R. A. Chou, "Sequential belief propagation decoding of quantum LDPC codes," *arXiv preprint arXiv:2606.20926*, 2026.

[35] S. Maurya, T. Maurer, M. Bühler, D. Vandeth, and M. E. Beverland, "FPGA-tailored algorithms for real-time decoding of quantum LDPC codes," *arXiv preprint arXiv:2511.21660*, 2025.

[36] P. Das and et al., "AFS: Accurate, fast, and scalable error-decoding for fault-tolerant quantum computers," *Proc. IEEE Int. Symp. High-Performance Comput. Archit. (HPCA)*, pp. 259-273, 2022. DOI: 10.1109/HPCA53966.2022.00028

[37] Y. Ueno and et al., "QEC-Playground: A tool for exploring quantum error correction codes," *IEEE Micro*, vol. 42, no. 6, pp. 45-54, 2022. DOI: 10.1109/MM.2022.3204918

[38] N. Delfosse and N. H. Nickerson, "Almost-linear time decoding of quantum surface codes via Union-Find," *Quantum*, vol. 5, pp. 595, 2021. DOI: 10.22331/q-2021-12-02-595

[39] S. K. Esser, J. L. McKinstry, et al., "Learned step size quantization," *Proc. Int. Conf. Learn. Represent. (ICLR)*, 2020.

[40] K. R. Ott, B. Hetényi, and M. E. Beverland, "Decision-tree decoders for general quantum LDPC codes," *arXiv preprint arXiv:2502.16408*, 2025.

[41] L. A. Beni, O. Higgott, and N. Shutty, "Tesseract: A search-based decoder for quantum error correction," *arXiv preprint arXiv:2503.10988*, 2025.

[42] Z. Liang, J. N. Eberhardt, and Y. Chen, "Planar quantum low-density parity-check codes with open boundaries," *arXiv preprint arXiv:2504.08887*, 2025.

[43] Z. Liu, A. Gong, and B. K. Clark, "Decoding quantum low density parity check codes with diffusion," *arXiv preprint arXiv:2509.22347*, 2025.

[44] A. Khalid, A. Silva, et al., "Impacts of decoder latency on a utility-scale quantum computer architecture," *arXiv preprint arXiv:2511.10633*, 2025.

[45] M. Ye, D. Wecker, and N. Delfosse, "Beam search decoder for quantum LDPC codes," *arXiv preprint arXiv:2512.07057*, 2025.

[46] H. Yan, X. Li, and Y. Du, "Rethink the Role of Neural Decoders in Quantum Error Correction," *Proc. Int. Conf. Mach. Learn. (ICML)*, 2026.

[47] J. Blue, H. Avlani, Z. He, L. Ziyin, and I. L. Chuang, "Machine learning decoding of circuit-level noise for bivariate bicycle codes," *arXiv preprint arXiv:2504.13043*, 2025.

[48] D. Báscones, A. S. Maan, V. Savin, and F. Garcia-Herrero, "A Scalable FPGA Architecture for Real-Time Decoding of Quantum LDPC Codes Using GARI," *arXiv preprint arXiv:2605.01035*, 2026.

[49] S. Gu, J. P. Bonilla Ataides, M. D. Lukin, and S. F. Yelin, "Scalable neural decoders for practical fault-tolerant quantum computation," *Proc. Int. Conf. Mach. Learn. (ICML)*, 2026.

[50] C. Gidney and M. Newman, "Sinter: A tool for running quantum error correction Monte Carlo sampling," *GitHub repository: quantumlib/Stim*, 2023.

[51] J. Roffe, "LDPC: Python tools for quantum low-density parity-check codes," *GitHub repository: quantum-ldpc*, 2022.

[52] I. Q. A. Team, "relay-bp: Optimized C++ and Python library for quantum belief propagation," *GitHub repository: qiskit-community/relay-bp*, 2025.

[53] Y. Li and S. C. Benjamin, "High-threshold codes for neutral atom quantum architectures," *Physical Review X*, vol. 14, no. 2, pp. 021035, 2024. DOI: 10.1103/PhysRevX.14.021035

[54] R. Wang and et al., "Approximately equivariant networks for imperfect symmetries," *Proc. Int. Conf. Mach. Learn. (ICML)*, pp. 23078-23091, 2022.

[55] H. Yamasaki and et al., "Polylog-overhead fault-tolerant quantum computation with quantum LDPC codes," *arXiv preprint arXiv:2402.04321*, 2024.

[56] T. Richardson and R. Urbanke, "The capacity of low-density parity-check codes under message-passing decoding," *IEEE Transactions on Information Theory*, vol. 47, no. 2, pp. 599-618, 2001. DOI: 10.1109/18.910577

[57] D. J. C. MacKay and R. M. Neal, "Near Shannon limit performance of low density parity check codes," *Electronics Letters*, vol. 32, no. 18, pp. 1645-1646, 1996. DOI: 10.1049/el:19961146

[58] F. R. Kschischang, B. J. Frey, and H. Loeliger, "Factor graphs and the sum-product algorithm," *IEEE Transactions on Information Theory*, vol. 47, no. 2, pp. 498-519, 2001. DOI: 10.1109/18.910572

[59] D. Litinski, "A game of surface codes: Large-scale quantum computing with lattice surgery," *Quantum*, vol. 3, pp. 128, 2019. DOI: 10.22331/q-2019-03-05-128