

1. Crear una nueva tarea (Solicitud POST):

The screenshot shows a REST client interface for MongoDB. The request is a POST to `http://localhost:3000/task` with a JSON body. The response is a 201 Created status with a JSON body indicating the task was successfully created.

Request:

```
POST http://localhost:3000/task
```

Body:

```
{
  "title": "Prueba crear tarea",
  "description": "Esto es una prueba para crear una tarea en la base de mongoDb Atlas.",
  "priority": "high"
}
```

Response:

```
{
  "acknowledged": true,
  "insertedId": "659c8a2204d650e5be8b39f5"
}
```

Status: 201 Created, Time: 1753 ms, Size: 301 B

2. Buscar las tareas actuales (Solicitud GET):

The screenshot shows a REST client interface for MongoDB. The request is a GET to `http://localhost:3000/tasks`. The response is a 201 Created status with a JSON array body containing two task objects.

Request:

```
GET http://localhost:3000/tasks
```

Response:

```
[
  {
    "_id": "659c7247aa965d4d24d9c262",
    "title": "tarea 1",
    "description": "description 1",
    "priority": "medium"
  },
  {
    "_id": "659c8a2204d650e5be8b39f5",
    "title": "Prueba crear tarea",
    "description": "Esto es una prueba para crear una tarea en la base de mongoDb Atlas.",
    "priority": "high",
    "completed": false
  }
]
```

Status: 201 Created, Time: 1530 ms, Size: 531 B

3. Solicitud para modificar una tarea (Solicitud PUT):

The screenshot shows a REST client interface for MongoDB. The request method is **PUT** and the URL is `http://localhost:3000/task/659c8a2204d650e5be8b39f5`. The request body is a JSON object: `{ "completed": true }`. The response status is **302 Found** with a time of 1555 ms and a size of 262 B. The response body is `Task data updated successfully.`

```
PUT http://localhost:3000/task/659c8a2204d650e5be8b39f5

{ "completed": true }
```

Status: 302 Found Time: 1555 ms Size: 262 B

```
Task data updated successfully.
```

4. Solicitud para buscar una tarea por el id (Solicitud GET):


The screenshot shows a REST client interface for MongoDB. The request method is **GET** and the URL is `http://localhost:3000/task/659c8a2204d650e5be8b39f5`. The response status is **200 OK** with a time of 1490 ms and a size of 419 B. The response body is a JSON object representing a task.

```
GET http://localhost:3000/task/659c8a2204d650e5be8b39f5
```

Status: 200 OK Time: 1490 ms Size: 419 B


```
{
  "_id": "659c8a2204d650e5be8b39f5",
  "title": "Prueba crear tarea",
  "description": "Esto es una prueba para crear una tarea en la base de mongoDb Atlas.",
  "priority": "high",
  "completed": true
}
```

5. Solicitud para eliminar una tarea (Solicitud DELETE):

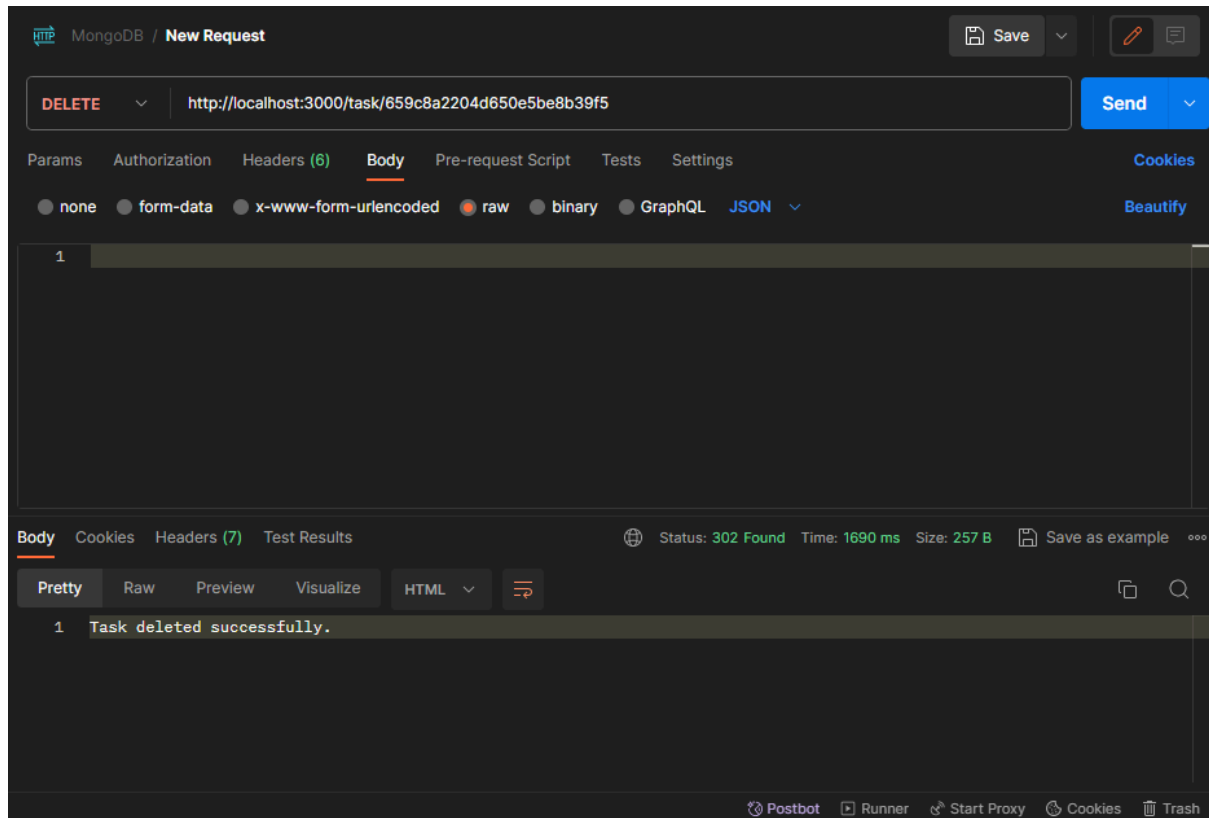

Colecciones en mongoDB Atlas:

- Tasks:

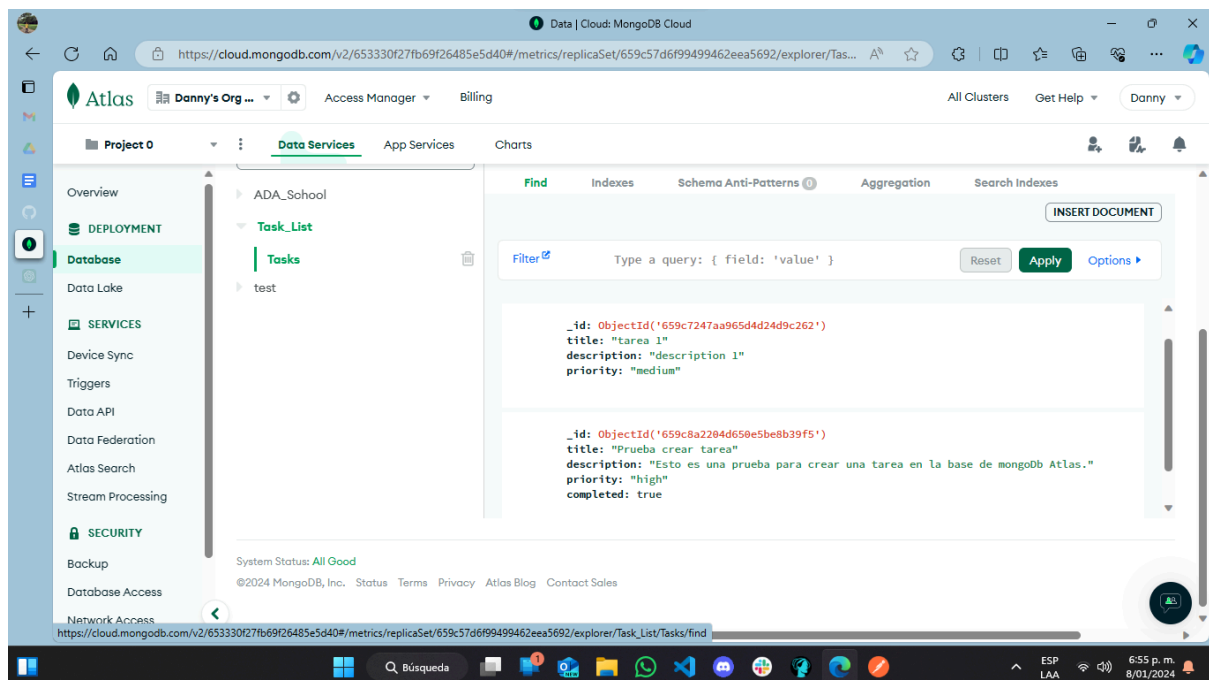

- Users:

