

CH.DURGA PRASANNA KUMAR

[Gmail-2300031112cseh2@gmail.com](mailto:2300031112cseh2@gmail.com)

GIT – ACTIVITY

Step -1

```
MINGW64~/c/Users/nanic
nanic@NANI MINGW64 ~
$ git config --global user.name "Durga Prasanna"

nanic@NANI MINGW64 ~
$ git config --global user.email "2300031112cseh2@gmail.com"

nanic@NANI MINGW64 ~
$ git config --global --list
user.email=2300031112cseh2@gmail.com
user.name=Durga Prasanna

nanic@NANI MINGW64 ~
$ ^C

nanic@NANI MINGW64 ~
$ git config --global user.email "2300031112cseh2@gmail.com"

nanic@NANI MINGW64 ~
$ git config --global --list
user.email=2300031112cseh2@gmail.com
user.name=Durga Prasanna

nanic@NANI MINGW64 ~
$ |
```

Step -2

```
C:\Users\nanic\bashrc - Notepad++
File Edit Search View Encoding Language Settings Tools Macro Run Plugins Window ?
new2.txt new.html new.1 code.1 WEB1.HTML new 1.txt new 2.txt new 3.txt sqlinsertionprogram.r
1 alias notepad++="/c/Program Files/Notepad++/notepad++.exe"
```


Step – 3

```
MINGW64:/c/Users/nanic

nanic@NANI MINGW64 ~
$ alias notepad++="/c/Program Files/Notepad++/notepad++.exe"

nanic@NANI MINGW64 ~
$ notepad++ ~/.bashrc
```

Step – 4

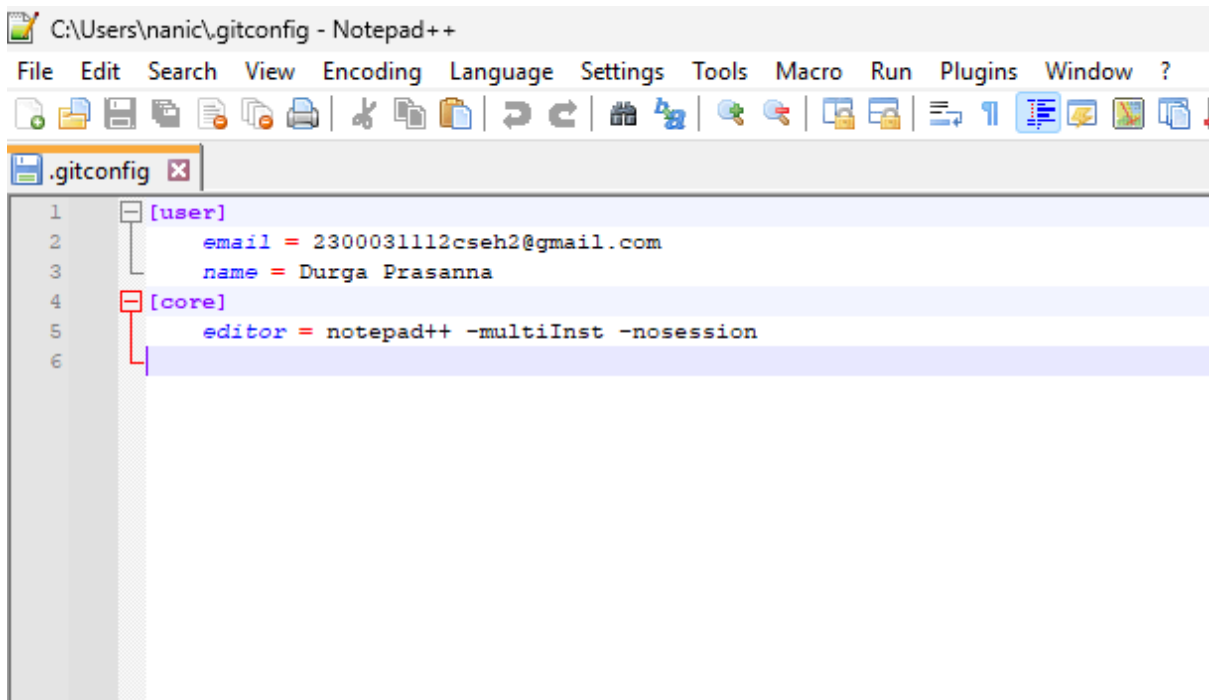

The screenshot shows the Notepad++ application window titled "C:\Users\nanic\.gitconfig - Notepad++". The menu bar includes File, Edit, Search, View, Encoding, Language, Settings, Tools, Macro, Run, Plugins, Window, and ?. The toolbar contains various icons for file operations and editing. The editor displays the content of the .gitconfig file, which is structured as follows:

```
1 [user]
2     email = 2300031112cseh2@gmail.com
3     name = Durga Prasanna
4 [core]
5     editor = notepad++ -multiInst -nosession
6
```

Step – 5

```

nanic@NANI MINGW64 ~/GitDemo/GitDemo (master)
$ https://gitlab.com/2300031112cseh2-star/GitDemo.git
bash: https://gitlab.com/2300031112cseh2-star/GitDemo.git: No such file or directory

nanic@NANI MINGW64 ~/GitDemo/GitDemo (master)
$ git remote -v
origin https://gitlab.com/your-username/GitDemo.git (fetch)
origin https://gitlab.com/your-username/GitDemo.git (push)

nanic@NANI MINGW64 ~/GitDemo/GitDemo (master)
$ git push -u origin master
info: please complete authentication in your browser...
remote: The project you were looking for could not be found or you don't have permission to view it.
fatal: repository 'https://gitlab.com/your-username/GitDemo.git/' not found

nanic@NANI MINGW64 ~/GitDemo/GitDemo (master)
$ ^C

nanic@NANI MINGW64 ~/GitDemo/GitDemo (master)
$ https://gitlab.com/2300031112cseh2-star/gitdemo.git
bash: https://gitlab.com/2300031112cseh2-star/gitdemo.git: No such file or directory

nanic@NANI MINGW64 ~/GitDemo/GitDemo (master)
$ https://gitlab.com/2300031112cseh2-star/gitdemo.git^C

nanic@NANI MINGW64 ~/GitDemo/GitDemo (master)
$ git remote set-url origin https://gitlab.com/2300031112cseh2-star/GitDemo.git


nanic@NANI MINGW64 ~/GitDemo/GitDemo (master)
$ git push -u origin master
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Writing objects: 100% (3/3), 240 bytes | 240.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
remote:
remote: To create a merge request for master, visit:
remote:   https://gitlab.com/2300031112cseh2-star/gitdemo/-/merge_requests/new?merge_request%5Bsource_branch%5D=master
remote:
To https://gitlab.com/2300031112cseh2-star/GitDemo.git
 * [new branch]      master -> master
branch 'master' set up to track 'origin/master'.

nanic@NANI MINGW64 ~/GitDemo/GitDemo (master)
$ ^C

nanic@NANI MINGW64 ~/GitDemo/GitDemo (master)
$

```

Step – 6

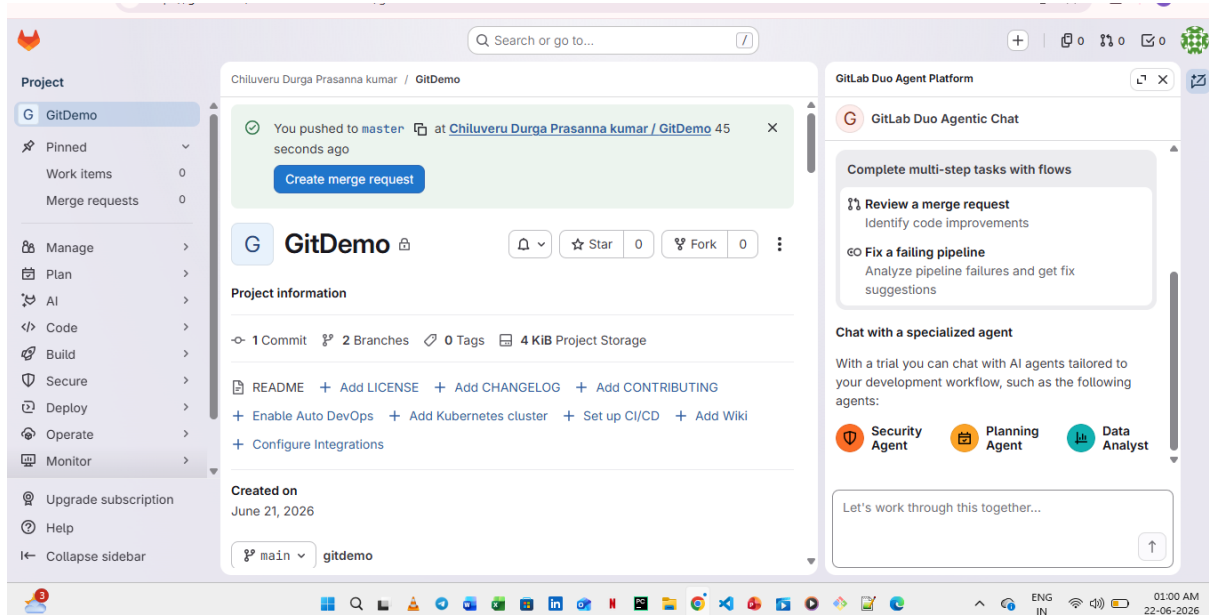

COMPLETED.