

ASSIGNMENT-11.1

NAME: CH.Pranay Sai

H.TNO: 2303A52212

BATCH:36

Task Description #1 – Stack Implementation

Task: Use AI to generate a Stack class with push, pop, peek, and is_empty methods.


Sample Input Code: class

Stack:

pass

Expected Output:

- A functional stack implementation with all required methods and docstrings.

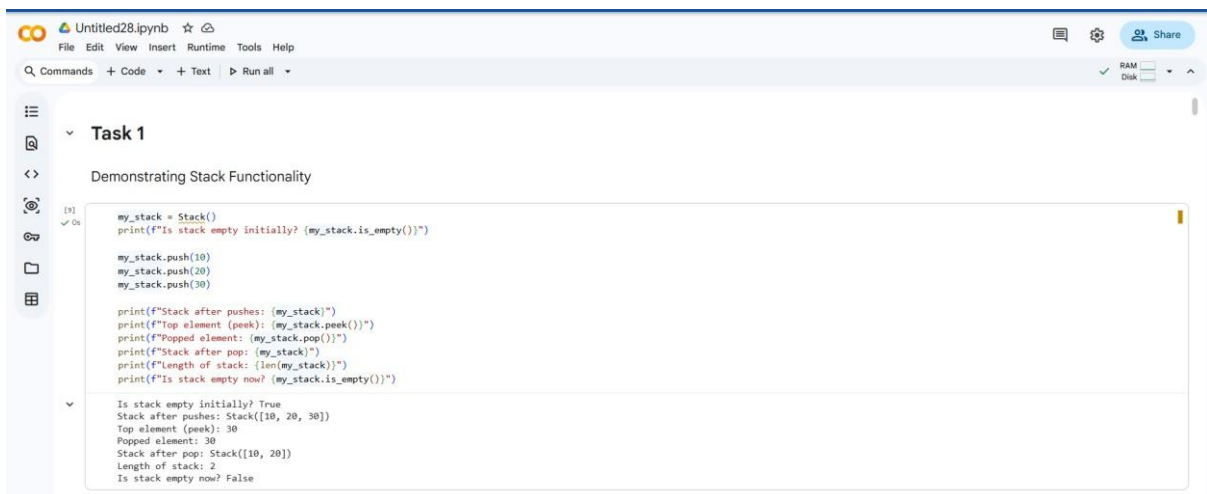

The screenshot shows a Jupyter Notebook interface with a file named 'Untitled28.ipynb'. The notebook contains a single cell titled 'Task 1' with the subtitle 'Demonstrating Stack Functionality'. The code in the cell defines a Stack class and demonstrates its functionality. The output of the code is displayed below the code cell.

```
my_stack = Stack()
print(f"Is stack empty initially? {my_stack.is_empty()}")

my_stack.push(10)
my_stack.push(20)
my_stack.push(30)

print(f"Stack after pushes: {my_stack}")
print(f"Top element (peek): {my_stack.peek()}")
print(f"Popped element: {my_stack.pop()}")
print(f"Stack after pop: {my_stack}")
print(f"Length of stack: {len(my_stack)}")
print(f"Is stack empty now? {my_stack.is_empty()}")
```

Is stack empty initially? True
Stack after pushes: Stack([10, 20, 30])
Top element (peek): 30
Popped element: 30
Stack after pop: Stack([10, 20])
Length of stack: 2
Is stack empty now? False

EXPLANATION:

A stack follows the principle LIFO (Last In, First Out).

The last element inserted is the first one removed.

We use a Python list (self.items) to store elements.

Task Description #2 – Queue Implementation

Task: Use AI to implement a Queue using Python lists.


Sample Input Code: class

Queue:

pass

Expected Output:

- FIFO-based queue class with enqueue, dequeue, peek, and size methods.

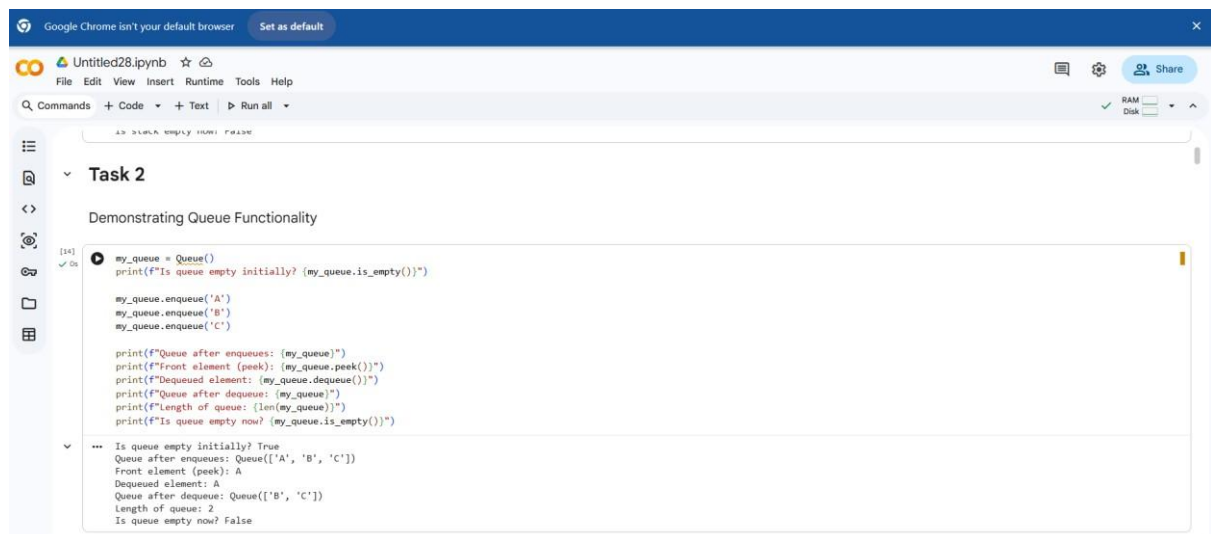

The screenshot shows a Jupyter Notebook interface with a file named 'Untitled28.ipynb'. The notebook is titled 'Task 2' and contains a code cell with the following Python code:

```
my_queue = Queue()
print(f"Is queue empty initially? {my_queue.is_empty()}")

my_queue.enqueue('A')
my_queue.enqueue('B')
my_queue.enqueue('C')

print(f"Queue after enqueues: {my_queue}")
print(f"Front element (peek): {my_queue.peek()}")
print(f"Dequeued element: {my_queue.dequeue()}")
print(f"Queue after dequeue: {my_queue}")
print(f"Length of queue: {len(my_queue)}")
print(f"Is queue empty now? {my_queue.is_empty()}")
```

The output of the code cell is displayed below the code:

```
Is queue empty initially? True
Queue after enqueues: Queue(['A', 'B', 'C'])
Front element (peek): A
Dequeued element: A
Queue after dequeue: Queue(['B', 'C'])
Length of queue: 2
Is queue empty now? False
```

EXPLANATION:

A queue works on the principle FIFO (First In, First Out).

The first element inserted is the first one removed.

We use a Python list called self.items to store elements.

Task Description #3 – Linked List

Task: Use AI to generate a Singly Linked List with insert and display methods.

Sample Input Code: class

Node:

pass class


LinkedList:

pass

Expected Output:

- A working linked list implementation with clear method

Documentation.

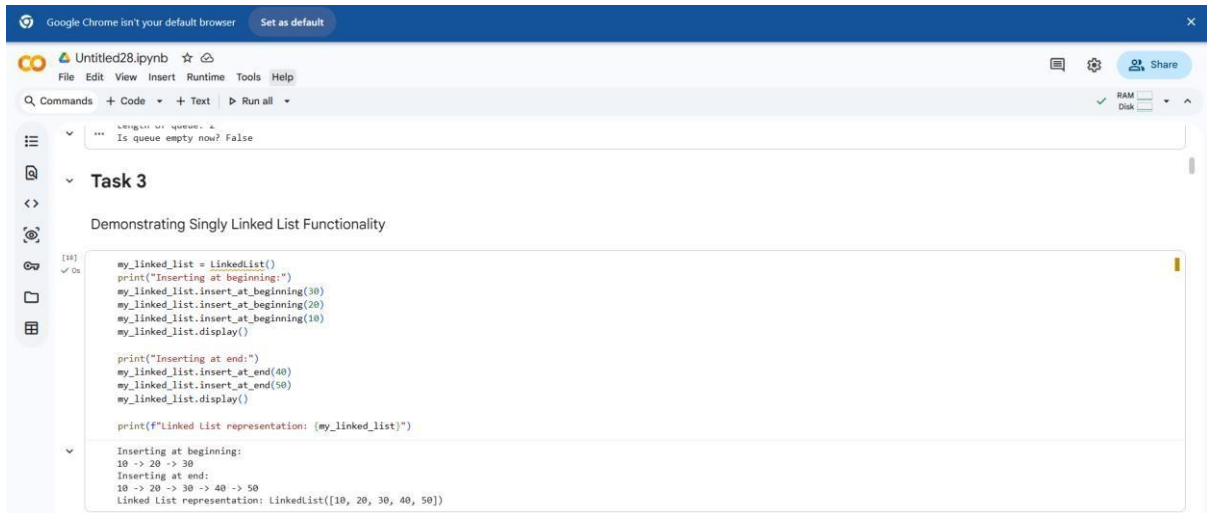

```
my_linked_list = LinkedList()
print("Inserting at beginning:")
my_linked_list.insert_at_beginning(30)
my_linked_list.insert_at_beginning(20)
my_linked_list.insert_at_beginning(10)
my_linked_list.display()

print("Inserting at end:")
my_linked_list.insert_at_end(40)
my_linked_list.insert_at_end(50)
my_linked_list.display()

print(f"Linked List representation: {my_linked_list}")
```

Inserting at beginning:
10 -> 20 -> 30
Inserting at end:
10 -> 20 -> 30 -> 40 -> 50
Linked List representation: LinkedList([10, 20, 30, 40, 50])

EXPLANATION (Linked List):

A singly linked list is a collection of nodes where:

Each node stores data

And a reference to the next node

1 insert(data)

Creates a new node

Traverses to the last node

Task Description #4 – Binary Search Tree (BST)

Task: Use AI to create a BST with insert and in-order traversal methods.

Sample Input Code: class

BST:

pass

Expected Output:

- BST implementation with recursive insert and traversal methods.

The screenshot shows a Jupyter Notebook interface in Google Chrome. The notebook has two cells. The first cell contains a linked list representation: `10 -> 20 -> 30 -> 40 -> 50` and its `LinkedList` representation: `LinkedList([10, 20, 30, 40, 50])`. The second cell is titled 'TASK 4' and 'Demonstrating Binary Search Tree (BST) Functionality'. It contains Python code to create a `BST` object, insert elements (50, 30, 70, 20, 40, 60, 80), and print the in-order traversal and the `BST` representation. The output shows the in-order traversal as `[20, 30, 40, 50, 60, 70, 80]` and the `BST` representation as `BST([20, 30, 40, 50, 60, 70, 80])`.

EXPLANATION:

A Binary Search Tree (BST) stores values such that:

Left child contains smaller values

Right child contains larger values

Insert (recursive):

If the tree is empty, the first value becomes the root.

Otherwise, compare the value with the current node:

Go left if smaller

Go right if larger

Repeat this process recursively until an empty spot is found and insert there.

In-order traversal:

Visits nodes in the order: Left → Root → Right. This prints the elements in sorted order. So, the BST keeps data ordered and allows efficient insertion and sorted traversal.

Task Description #5 – Hash Table

Task: Use AI to implement a hash table with basic insert, search, and

delete methods. Sample Input Code: `class HashTable:`

`pass`

Expected Output:

- Collision handling using chaining, with well-commented methods.

EXPLANATION:

A hash table stores data using a key-value pair.

A hash function converts the key into an index.

Task Description #6 – Graph Representation

Task: Use AI to implement a graph using an adjacency list.

Sample Input Code: class


Graph:

pass

Expected Output:

- Graph with methods to add vertices, add edges, and display

Connections.

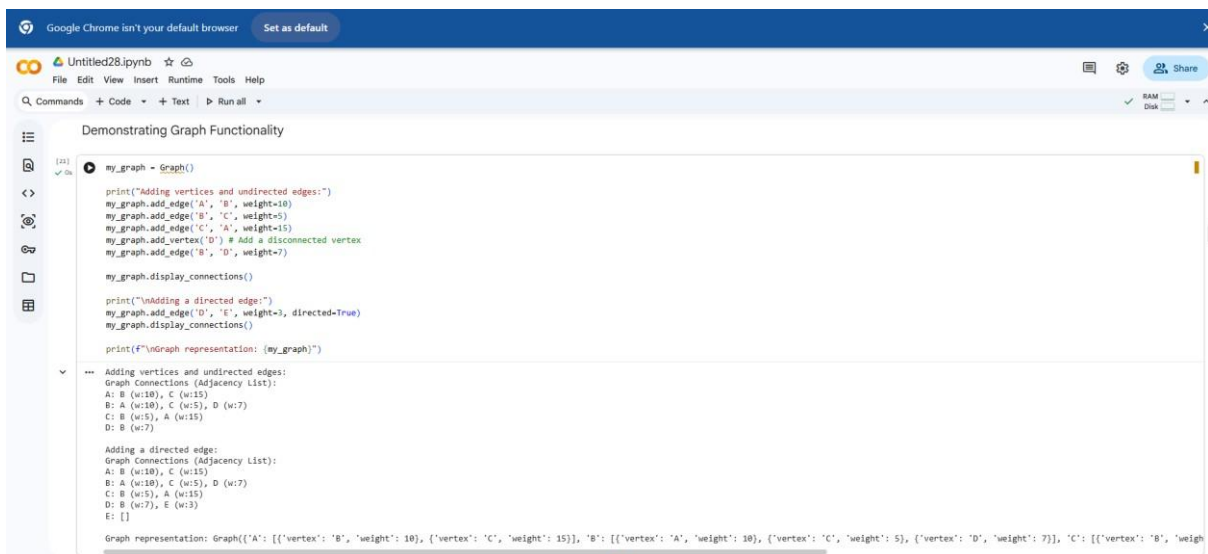

```
my_graph = Graph()

print("Adding vertices and undirected edges:")
my_graph.add_edge('A', 'B', weight=10)
my_graph.add_edge('A', 'C', weight=5)
my_graph.add_edge('C', 'A', weight=15)
my_graph.add_vertex('D') # Add a disconnected vertex
my_graph.add_edge('B', 'D', weight=7)

my_graph.display_connections()

print("\nAdding a directed edge:")
my_graph.add_edge('D', 'E', weight=3, directed=True)
my_graph.display_connections()

print(f"\nGraph representation: {my_graph}")
```

Adding vertices and undirected edges:
Graph Connections (Adjacency List):
A: B (w:10), C (w:15)
B: A (w:10), C (w:5), D (w:7)
C: B (w:5), A (w:15)
D: B (w:7)

Adding a directed edge:
Graph Connections (Adjacency List):
A: B (w:10), C (w:15)
B: A (w:10), C (w:5), D (w:7)
C: B (w:5), A (w:15)
D: B (w:7), E (w:3)
E: []

Graph representation: Graph({'A': [{'vertex': 'B', 'weight': 10}, {'vertex': 'C', 'weight': 15}], 'B': [{'vertex': 'A', 'weight': 10}, {'vertex': 'C', 'weight': 5}, {'vertex': 'D', 'weight': 7}], 'C': [{'vertex': 'B', 'weight': 5}, {'vertex': 'A', 'weight': 15}], 'D': [{'vertex': 'B', 'weight': 7}], 'E': []})

EXPLANATION:

A graph consists of:

Vertices (nodes)

Edges (connections)

Using an adjacency list, each vertex stores a list of its connected vertices.

Task Description #7 – Priority Queue

Task: Use AI to implement a priority queue using Python's heapq module.

Sample Input Code: class

PriorityQueue:

pass

Expected Output:

- Implementation with enqueue (priority), dequeue (highest priority), and display methods.

```
my_pq = PriorityQueue()

print(f"Is Priority Queue empty initially? {my_pq.is_empty()}")

print("Enqueuing items with priorities:")
my_pq.enqueue('Task A', 3)
my_pq.enqueue('Task B', 1)
my_pq.enqueue('Task C', 2)
my_pq.enqueue('Task D', 1) # Same priority as Task B
my_pq.display()
print(f"Length of Priority Queue: {len(my_pq)}")

print("\nDequeuing highest priority items:")
print(f"Dequeued: {my_pq.dequeue()}") # Should be Task B or D (due to tie-breaking)
my_pq.display()
print(f"Length of Priority Queue: {len(my_pq)}")

print(f"Dequeued: {my_pq.dequeue()}") # Should be the other one with priority 1
my_pq.display()
print(f"Length of Priority Queue: {len(my_pq)}")

print(f"Dequeued: {my_pq.dequeue()}") # Should be Task C
my_pq.display()
print(f"Length of Priority Queue: {len(my_pq)}")
```

```
print(f"Length of Priority Queue: {len(my_pq)}")

print(f"Dequeued: {my_pq.dequeue()}") # Should be Task C
my_pq.display()
print(f"Length of Priority Queue: {len(my_pq)}")

print(f"Is Priority Queue empty now? {my_pq.is_empty()}")

print(f"\nPriority Queue representation: {my_pq}")

...
Is Priority Queue empty initially? True
Enqueuing items with priorities:
Priority Queue (priority, item):
  (1, Task B)
  (1, Task D)
  (2, Task C)
  (3, Task A)
Length of Priority Queue: 4

Dequeuing highest priority items:
Dequeued: Task B
Priority Queue (priority, item):
  (1, Task D)
  (2, Task C)
  (3, Task A)
Length of Priority Queue: 3
Dequeued: Task D
Priority Queue (priority, item):
  (2, Task C)
  (3, Task A)
Length of Priority Queue: 2
Dequeued: Task C
Priority Queue (priority, item):
  (3, Task A)
Length of Priority Queue: 1
Is Priority Queue empty now? False

Priority Queue representation: PriorityQueue([(3, 'Task A')])
```

EXPLANATION:

A priority queue stores elements with a priority value.

The element with the highest priority is removed first.

Python's `heapq` provides a min-heap, so to get highest priority first, we:

Store priority as negative value.

This makes larger priorities come out first.

Task Description #8 – Deque

Task: Use AI to implement a double-ended queue using `collections.deque`.


Sample Input Code: class

DequeDS:

pass

Expected Output:

- Insert and remove from both ends with docstrings.

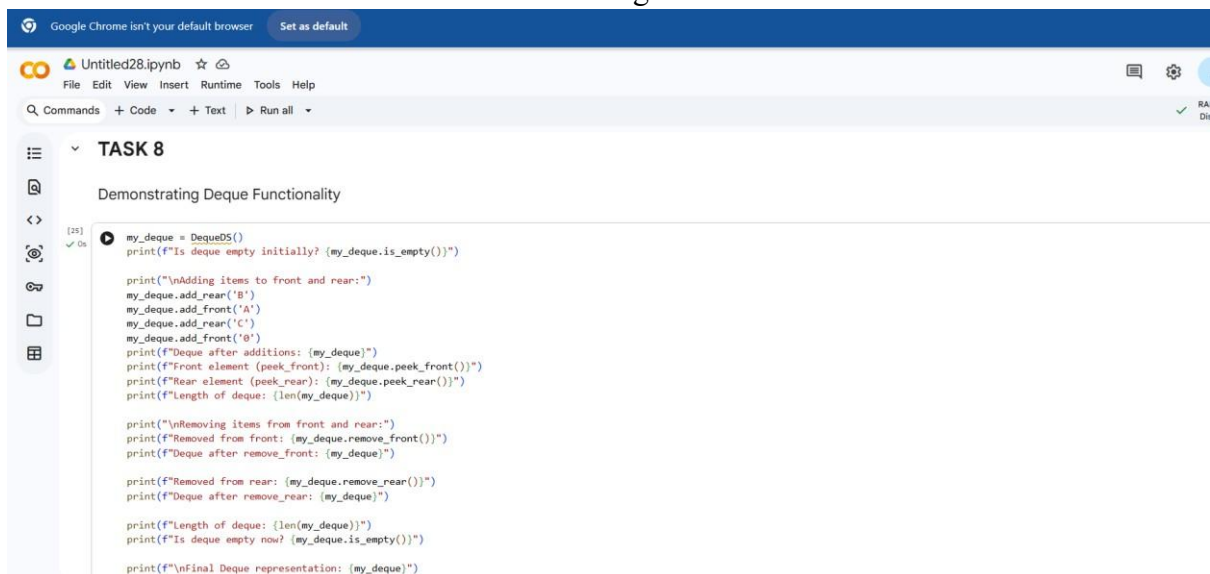

```
class DequeDS:
    """A double-ended queue implemented using collections.deque"""
    def __init__(self):
        self.deque = deque()
        print(f"Is deque empty initially? {self.is_empty()}")

    def add_rear(self, item):
        self.deque.append(item)

    def add_front(self, item):
        self.deque.appendleft(item)

    def remove_rear(self):
        return self.deque.pop()

    def remove_front(self):
        return self.deque.popleft()

    def peek_rear(self):
        return self.deque[-1]

    def peek_front(self):
        return self.deque[0]

    def is_empty(self):
        return len(self.deque) == 0

    def __str__(self):
        return str(self.deque)


# Demonstrate Deque Functionality
my_deque = DequeDS()
print(f"Adding items to front and rear:")
my_deque.add_rear('B')
my_deque.add_front('A')
my_deque.add_rear('C')
my_deque.add_front('0')
print(f"Deque after additions: {my_deque}")
print(f"Front element (peek_front): {my_deque.peek_front()}")
print(f"Rear element (peek_rear): {my_deque.peek_rear()}")
print(f"Length of deque: {len(my_deque)}")

print(f"Removing items from front and rear:")
print(f"Removed from front: {my_deque.remove_front()}")
print(f"Deque after remove_front: {my_deque}")

print(f"Removed from rear: {my_deque.remove_rear()}")
print(f"Deque after remove_rear: {my_deque}")

print(f"Length of deque: {len(my_deque)}")
print(f"Is deque empty now? {my_deque.is_empty()}")

print(f"Final Deque representation: {my_deque}")
```

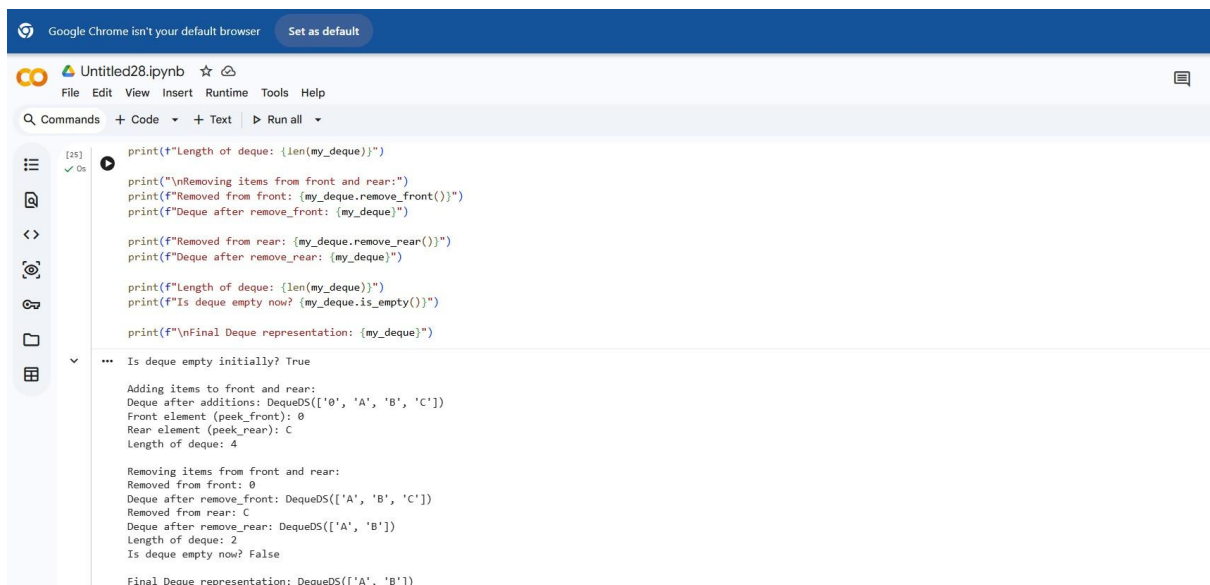

```
print(f"Length of deque: {len(my_deque)}")

print(f"Removing items from front and rear:")
print(f"Removed from front: {my_deque.remove_front()}")
print(f"Deque after remove_front: {my_deque}")

print(f"Removed from rear: {my_deque.remove_rear()}")
print(f"Deque after remove_rear: {my_deque}")

print(f"Length of deque: {len(my_deque)}")
print(f"Is deque empty now? {my_deque.is_empty()}")

print(f"Final Deque representation: {my_deque}")

...
Is deque empty initially? True

Adding items to front and rear:
Deque after additions: DequeDS(['0', 'A', 'B', 'C'])
Front element (peek_front): 0
Rear element (peek_rear): C
Length of deque: 4

Removing items from front and rear:
Removed from front: 0
Deque after remove_front: DequeDS(['A', 'B', 'C'])
Removed from rear: C
Deque after remove_rear: DequeDS(['A', 'B'])
Length of deque: 2
Is deque empty now? False

Final Deque representation: DequeDS(['A', 'B'])
```

EXPLANATION:

A Deque (Double-Ended Queue) allows:

Insertion at front and rear

Deletion from front and rear

It is more flexible than a normal queue.

Using collections.deque:

appendleft() → insert front

append() → insert rear

popleft() → remove front

pop() → remove rear

All operations are $O(1)$ (efficient).

Task Description #9 Real-Time Application Challenge – Choose the

Right Data Structure Scenario:

Your college wants to develop a Campus Resource Management System that handles:

1. Student Attendance Tracking – Daily log of students entering/exiting the campus.
2. Event Registration System – Manage participants in events with quick search and removal.
3. Library Book Borrowing – Keep track of available books and their due dates.
4. Bus Scheduling System – Maintain bus routes and stop connections.
5. Cafeteria Order Queue – Serve students in the order they arrive.

Student Task:

- For each feature, select the most appropriate data structure from the list below:

o Stack o Queue o Priority Queue o Linked List o

Binary Search Tree (BST) o Graph o Hash Table

o Deque

- Justify your choice in 2–3 sentences per feature.
- Implement one selected feature as a working Python program with AI-assisted code generation.

Expected Output:

- A table mapping feature → chosen data structure → justification. • A functional Python program implementing the chosen feature with comments and docstrings.

Commands
+ Code
+ Text
Run all

I'll start by generating the table for **Feature-Data Structure Mapping and Justification**.

```
%%write_and_execute_cell
# Feature-Data Structure Mapping and Justification

print("### Campus Feature to Data Structure Mapping")
print("Below is a table outlining common campus features, the most suitable data structure for each, and a brief justification for each choice.")
print("\n| Campus Feature | Data Structure | Justification |")
print("|-----|-----|-----|")
print("| Cafeteria Order Queue | Queue | Orders are processed in a First-In, First-Out (FIFO) manner. A Queue ensures that orders are served in the order they are received, preventing starvation and ensuring fairness for all students waiting for food.")
print("| Student Management System | Hash Table | Enables quick insertion, deletion, and retrieval of student records based on unique identifiers like student IDs or usernames.")
print("| Course Enrollment System | Graph | Course prerequisites and dependencies can be effectively modeled and managed using a directed graph structure, allowing for efficient pathfinding and validation of prerequisites.")
print("| Campus Navigation (Shortest Path) | Graph | The campus layout (buildings, paths) can be represented as a graph, where nodes represent locations and edges represent paths, enabling efficient shortest path algorithms like Dijkstra's or A* to be applied.")
print("| Book Lending System (Library) | Binary Search Tree | Books can be stored and retrieved efficiently by unique identifier (e.g., ISBN) using a Binary Search Tree structure, allowing for fast lookup and organized storage.")
print("| Event Scheduling (Priority) | Priority Queue | Events often have different levels of urgency or importance. A Priority Queue allows for scheduling events based on their priority, ensuring high-priority events are handled first.")
print("| Undo/Redo Functionality | Stack | Actions are added and removed in a Last-In, First-Out (LIFO) manner, which is perfectly suited for implementing Undo/Redo functionality using a Stack data structure.")
print("| Recent Activity Feed | Deque | New activities are added to one end, and older activities can be efficiently removed from the other end, making a Deque a suitable choice for a recent activity feed.")
```

[26]
0s

```
class CafeteriaOrderQueue:
    """Simulates a cafeteria order queue using the Queue data structure."""

    def __init__(self):
        self.order_queue = Queue()
        print("Cafeteria Order Queue initialized.")

    def place_order(self, order_details):
        """Adds a new order to the queue."""
        print(f"Placing order: {order_details}")
        self.order_queue.enqueue(order_details)
        self.display_queue_status()

    def fulfill_order(self):
        """Removes and returns the next order to be fulfilled."""
        if not self.order_queue.is_empty():
            fulfilled_order = self.order_queue.dequeue()
            print(f"Fulfilling order: {fulfilled_order}")
            self.display_queue_status()
            return fulfilled_order
        else:
            print("No orders in the queue to fulfill.")
            return None

    def display_queue_status(self):
        """Prints the current status of the order queue."""
        print(f"Current orders in queue (length {len(self.order_queue)}): {self.order_queue}")
        if not self.order_queue.is_empty():
            print(f"Next order to be fulfilled: {self.order_queue.peek()}")
        print("-----")

# --- Simulation of Cafeteria Order Process ---
print("\n--- Simulating Cafeteria Order Process ---")
my_cafeteria = CafeteriaOrderQueue()
```

```
my_cafeteria = CafeteriaOrderQueue()

# Students placing orders
my_cafeteria.place_order("Student A - Pizza with Coke")
my_cafeteria.place_order("Student B - Burger with Fries")
my_cafeteria.place_order("Student C - Salad with Water")
my_cafeteria.place_order("Student D - Pasta")

# Cafeteria fulfilling orders
print("\n--- Fulfilling Orders ---")
my_cafeteria.fulfill_order()
my_cafeteria.fulfill_order()

# Another student places an order while others are being served
my_cafeteria.place_order("Student E - Sandwich")

my_cafeteria.fulfill_order()
my_cafeteria.fulfill_order()
my_cafeteria.fulfill_order()

# Try to fulfill an order when the queue is empty
my_cafeteria.fulfill_order()

...

--- Simulating Cafeteria Order Process ---
Cafeteria Order Queue initialized.
Placing order: Student A - Pizza with Coke
Current orders in queue (length 1): Queue(['Student A - Pizza with Coke'])
Next order to be fulfilled: Student A - Pizza with Coke
-----
Placing order: Student B - Burger with Fries
Current orders in queue (length 2): Queue(['Student A - Pizza with Coke', 'Student B - Burger with Fries'])
Next order to be fulfilled: Student A - Pizza with Coke
-----
Placing order: Student C - Salad with Water
Current orders in queue (length 3): Queue(['Student A - Pizza with Coke', 'Student B - Burger with Fries', 'Student C - Salad with Water'])
Next order to be fulfilled: Student A - Pizza with Coke
-----
Placing order: Student D - Pasta
Current orders in queue (length 4): Queue(['Student A - Pizza with Coke', 'Student B - Burger with Fries', 'Student C - Salad with Water', 'Student D - Pasta'])
Next order to be fulfilled: Student A - Pizza with Coke
-----

--- Fulfilling Orders ---
Fulfilling order: Student A - Pizza with Coke
Current orders in queue (length 3): Queue(['Student B - Burger with Fries', 'Student C - Salad with Water', 'Student D - Pasta'])
Next order to be fulfilled: Student B - Burger with Fries
-----
Fulfilling order: Student B - Burger with Fries
Current orders in queue (length 2): Queue(['Student C - Salad with Water', 'Student D - Pasta'])
Next order to be fulfilled: Student C - Salad with Water
-----
Placing order: Student E - Sandwich
Current orders in queue (length 3): Queue(['Student C - Salad with Water', 'Student D - Pasta', 'Student E - Sandwich'])
Next order to be fulfilled: Student C - Salad with Water
-----
Fulfilling order: Student C - Salad with Water
Current orders in queue (length 2): Queue(['Student D - Pasta', 'Student E - Sandwich'])
Next order to be fulfilled: Student D - Pasta
-----
Fulfilling order: Student D - Pasta
Current orders in queue (length 1): Queue(['Student E - Sandwich'])
Next order to be fulfilled: Student E - Sandwich
-----
Fulfilling order: Student E - Sandwich
Current orders in queue (length 0): Queue([])
-----
No orders in the queue to fulfill.
```

EXPLANATION:

The cafeteria system uses a Queue because it follows the First In, First Out (FIFO) rule.

Students who arrive first are served first.

The program supports adding orders, serving orders, and displaying pending orders.

Task Description #10: Smart E-Commerce Platform – Data Structure Challenge

An e-commerce company wants to build a Smart Online Shopping System with:

1. Shopping Cart Management – Add and remove products

dynamically.

2. Order Processing System – Orders processed in the order they are placed.

3. Top-Selling Products Tracker – Products ranked by sales count.

4. Product Search Engine – Fast lookup of products using product ID. 5.

Delivery Route Planning – Connect warehouses and delivery locations.

Student Task:

- For each feature, select the most appropriate data structure from the list below:

- o Stack o Queue o Priority

- Queue o Linked List o

- Binary Search Tree (BST) o

- Graph o Hash Table o


- Deque

- Justify your choice in 2–3 sentences per feature.

- Implement one selected feature as a working Python program with AI-assisted code generation.

Expected Output:

- A table mapping feature → chosen data structure → justification. • A functional Python program implementing the chosen feature with comments and docstrings.

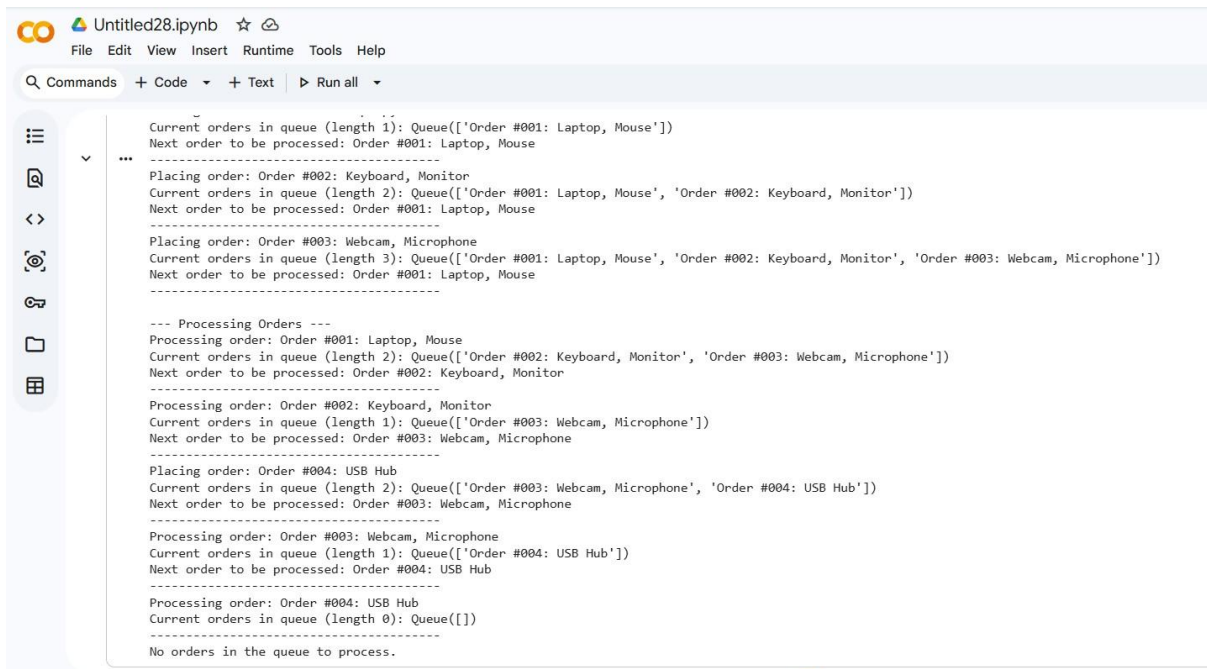

```
Untitled28.ipynb
File Edit View Insert Runtime Tools Help

Commands + Code + Text Run all

Current orders in queue (length 1): Queue(['Order #001: Laptop, Mouse'])
Next order to be processed: Order #001: Laptop, Mouse
-----
Placing order: Order #002: Keyboard, Monitor
Current orders in queue (length 2): Queue(['Order #001: Laptop, Mouse', 'Order #002: Keyboard, Monitor'])
Next order to be processed: Order #001: Laptop, Mouse
-----
Placing order: Order #003: Webcam, Microphone
Current orders in queue (length 3): Queue(['Order #001: Laptop, Mouse', 'Order #002: Keyboard, Monitor', 'Order #003: Webcam, Microphone'])
Next order to be processed: Order #001: Laptop, Mouse
-----

--- Processing Orders ---
Processing order: Order #001: Laptop, Mouse
Current orders in queue (length 2): Queue(['Order #002: Keyboard, Monitor', 'Order #003: Webcam, Microphone'])
Next order to be processed: Order #002: Keyboard, Monitor
-----
Processing order: Order #002: Keyboard, Monitor
Current orders in queue (length 1): Queue(['Order #003: Webcam, Microphone'])
Next order to be processed: Order #003: Webcam, Microphone
-----
Placing order: Order #004: USB Hub
Current orders in queue (length 2): Queue(['Order #003: Webcam, Microphone', 'Order #004: USB Hub'])
Next order to be processed: Order #003: Webcam, Microphone
-----
Processing order: Order #003: Webcam, Microphone
Current orders in queue (length 1): Queue(['Order #004: USB Hub'])
Next order to be processed: Order #004: USB Hub
-----
Processing order: Order #004: USB Hub
Current orders in queue (length 0): Queue([])
-----
No orders in the queue to process.
```

EXPLANATION:

The product search system uses a Hash Table because product IDs can be used as keys for instant lookup.

Insertion, search, and deletion operations are very fast (average $O(1)$).

This makes it suitable for large-scale e-commerce platforms with thousands of products.