


Quantum Computing Assignment

Nole Stites

March 2025

1 Complexity Theory Review

Recall that, in complexity theory, PSPACE is the class of problems solvable with polynomial space but unlimited time. Considering the complexity class diagram below, why does the class PSPACE encapsulate everything?

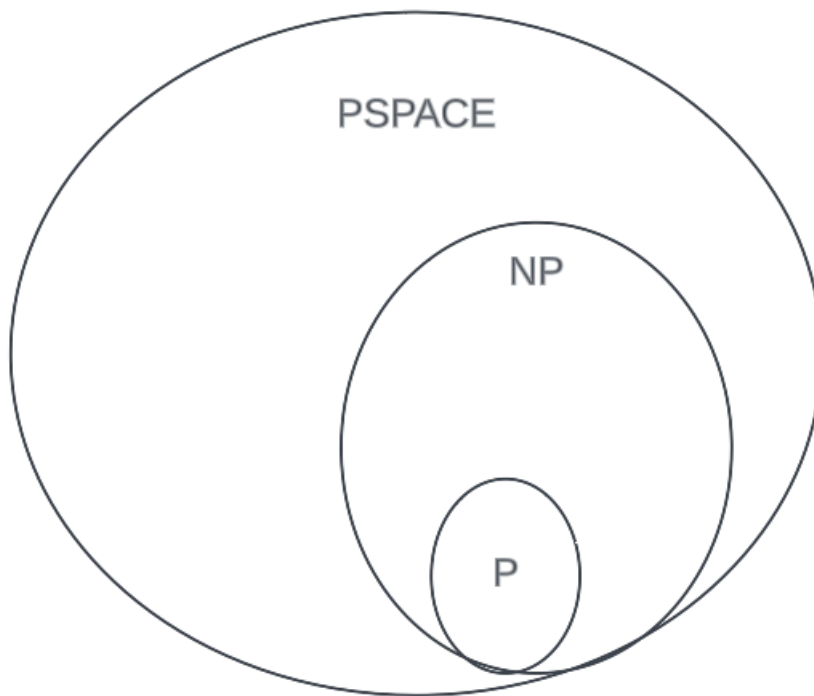

2 Dirac Notation


Answer the following questions using Dirac notation. Assume that all qubits are initialized to the zero state ($|0\rangle$).

Hint: To verify your answers, relate them to coin flips.

- Write the state of a one-qubit computer after applying the Hadamard gate.
- Write the combined state of a two-qubit computer after applying the Hadamard gate to each qubit.
- Write the combined state of a three-qubit computer after applying the Hadamard gate to each qubit.

3 Quantum Circuit

Use the circuit below to answer the following questions.

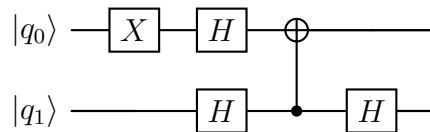

- What is the depth of the circuit?
- What is the space (width) of the circuit?
- How many total gates are there in the circuit?
- In Dirac notation, give the final state of the computer after the circuit has been executed. Assume that each qubit is initialized to the zero state.

4 Extra Credit

Consider the 2-qubit state

$$|\phi\rangle = \frac{1}{\sqrt{2}}|00\rangle + \frac{1}{\sqrt{2}}|11\rangle.$$

Show that this state is entangled by proving that there are no possible values $\alpha_0, \alpha_1, \beta_0, \beta_1$ such that

$$|\phi\rangle = (\alpha_0 |0\rangle + \alpha_1 |1\rangle)(\beta_0 |0\rangle + \beta_1 |1\rangle).$$

Hint: It may help to create a system of equations.