



# SIRC-1

## Architecture Reference Manual

*Featuring the SIRCIS Instruction Set*

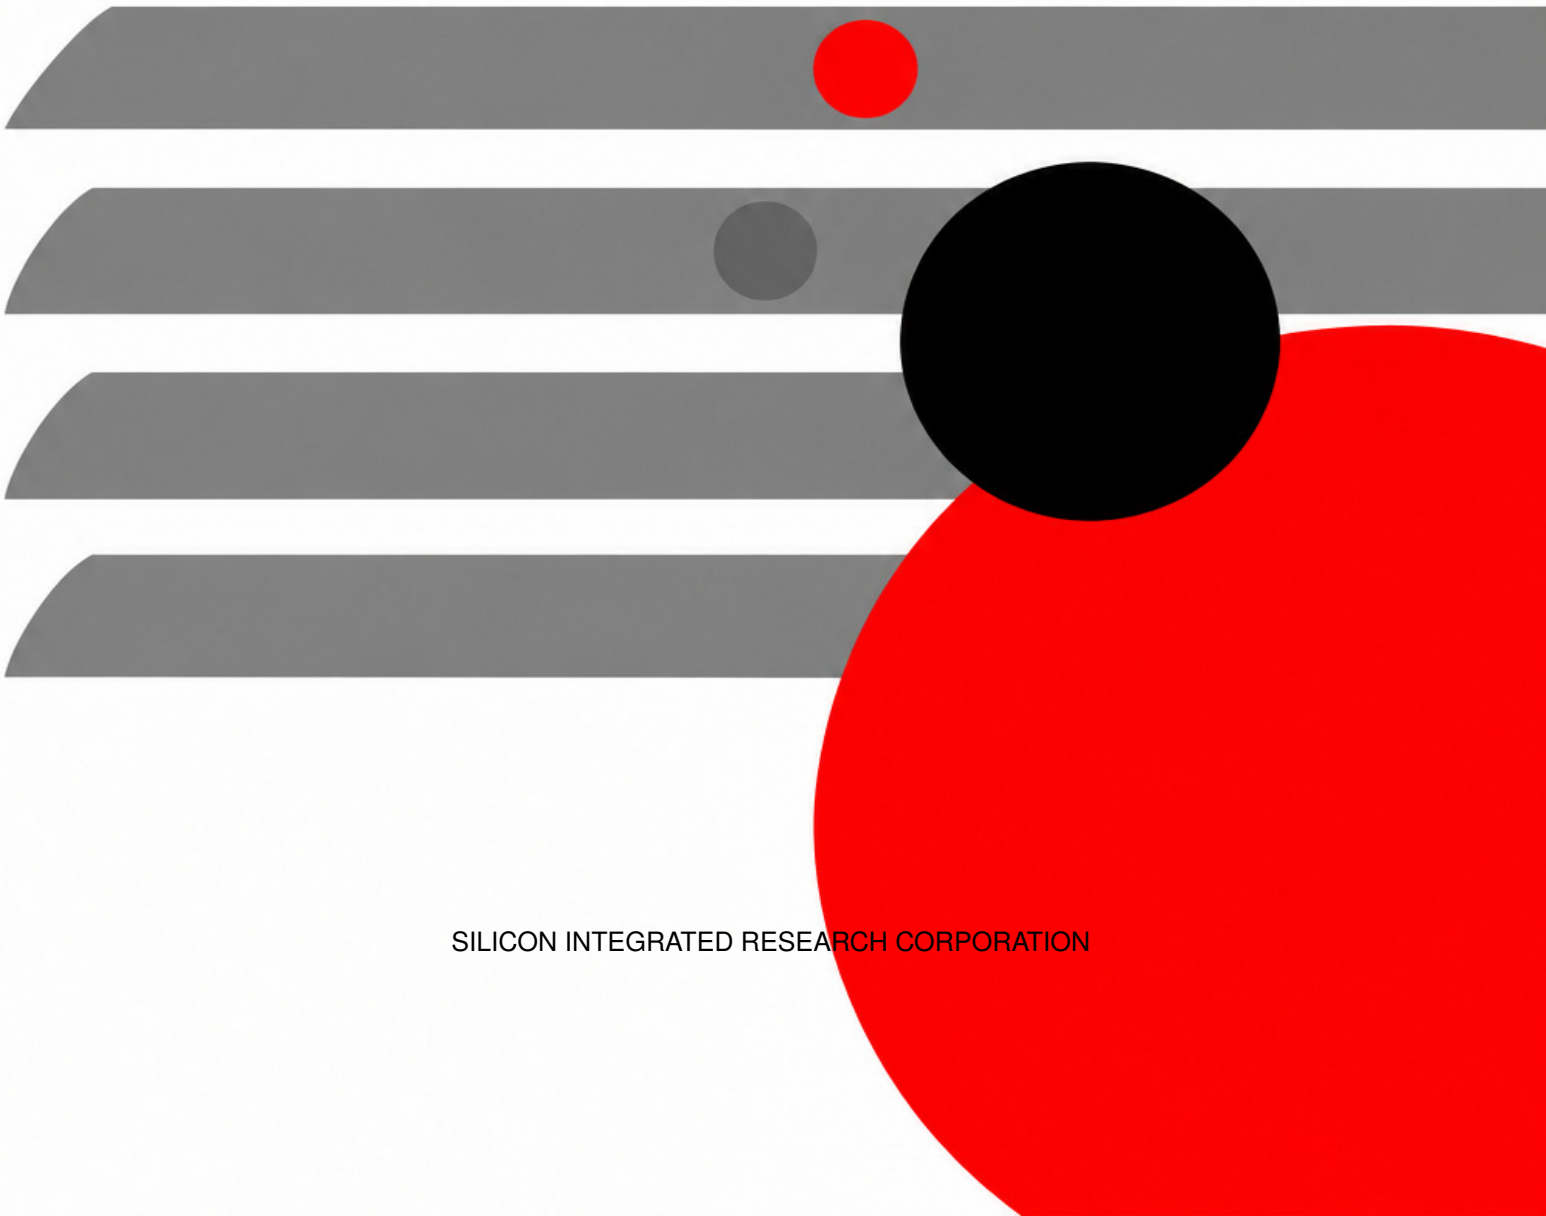

SILICON INTEGRATED RESEARCH CORPORATION

# Preface

## About This Manual

This architecture reference manual documents the SIRC-1 CPU architecture and the SIRCIS (SIRC Instruction Set) instruction set completely enough that an assembler, compiler backend, emulator, or hardware implementation can be built.

It is written for:

- Assembly language programmers
- Compiler and toolchain developers
- Hardware designers and implementers
- Emulator and simulator authors
- System software developers

## Assumed Knowledge

This manual assumes the reader is already familiar with general computer architecture concepts: registers, memory addressing, binary and hexadecimal number representation, and assembly-language programming in general. It teaches the SIRC-1 architecture specifically; it does not teach these prerequisites from first principles.

## How to Read This Manual

Part I introduces the architecture as a whole: registers, data representation, the status register, and exception handling. Part II covers the instruction encoding formats, addressing modes, shift operations, and condition codes that every instruction is built from. Part III is the instruction reference itself, one dedicated entry per instruction; Chapter 11 explains the fields every entry uses (Opcodes, Syntax, Operands, Operation, Flags, Exceptions, Timing, Privilege, and so on) before the entries begin, and is worth reading first even for a reader who intends to use the rest of the manual only as a lookup reference. The appendices collect quick lookups (the complete opcode map, timing figures, undocumented-opcode notes, worked examples, and an alphabetical mnemonic index) that restate information from the main chapters in a faster-to-scan form.

## Scope

This manual defines the SIRC-1 architecture: the instruction set and its encodings, the canonical assembly notation, the register model and other programmer-visible state, exceptions and interrupts, and the coprocessor interface. It does not cover the physical chip, which is the subject of the companion hardware manual, nor software conventions built on top of the architecture — register usage conventions, calling conventions, stack frame layout, or object/binary file format — which are the concern of the (forthcoming) SIRC-1 ABI and Toolchain documentation.

The SIRC-1 documentation is divided into three manuals:

| Manual | Scope |
|---|---|
| SIRC Architecture Reference Manual | ISA, instruction encodings, canonical assembly notation, exceptions, programmer-visible state |
| SIRC Assembly Programmer's Manual | Complete assembly syntax, directives, macros, pseudoinstructions |
| SIRC Hardware Reference Manual | Pinout, bus interface, timing, electrical characteristics |

Table 1: The SIRC manual set (this manual is the first)

## Revision Status

This is Version 1.0 of the SIRC-1 Architecture Reference Manual, issued in draft for internal review and not for external distribution. Except where an entry explicitly notes otherwise, every instruction, register, and behavior described here applies to *SIRC-1, all revisions*.

# Contents

**Preface** iii

**Notation and Glossary** xix

**I Architecture Overview** 1

**1 Introduction** 3
1.1 Overview . . . 3
1.2 Design Philosophy . . . 3
1.2.1 Design Principles . . . 3
1.2.2 Design Goals . . . 3
1.2.3 Applications . . . 3
1.3 Key Features . . . 4
1.3.1 Architecture Characteristics . . . 4
1.3.2 Execution Model . . . 4
1.3.3 Coprocessors . . . 4
1.3.4 Privilege Levels . . . 5
1.4 Memory Organization . . . 5
1.4.1 Address Space . . . 5
1.4.2 Memory Map . . . 5
1.4.3 Alignment . . . 6
1.5 Document Organization . . . 6

**2 CPU Architecture** 7
2.1 Overview . . . 7
2.2 Six-Stage Execution Phases . . . 7
2.3 Architectural Components . . . 8
2.3.1 Control Unit (CU) . . . 8
2.3.2 Coprocessors and the Coprocessor Select Register . . . 8
2.3.3 Arithmetic Logic Unit (ALU) . . . 10
2.3.4 Addressing Unit (AU) . . . 10
2.3.5 Register File . . . 10
2.3.6 Barrel Shifter . . . 10
2.3.7 Exception Coprocessor . . . 11
2.4 Design Characteristics . . . 11
2.4.1 Hardwired Control Implementation . . . 11
2.4.2 Fixed Execution Sequence . . . 11
2.4.3 Parallel Functional Units . . . 11
2.5 External Interface . . . 12

**3 Register Model** 13
3.1 Overview . . . 13
3.2 Programming Model . . . 13
3.3 General-Purpose Registers . . . 14
3.3.1 Register Set . . . 14
3.3.2 Usage Conventions . . . 15

3.4 Address Register Pairs . . . 15
3.4.1 Overview . . . 15
3.4.2 Link Register (l) . . . 15
3.4.3 Address Register (a) . . . 15
3.4.4 Stack Pointer (s) . . . 16
3.4.5 Program Counter (p) . . . 16
3.5 Status Register . . . 16
3.6 Privilege Restrictions . . . 17
3.6.1 High Address Register Restrictions . . . 17
3.6.2 Summary of Privilege Checks . . . 17
3.7 Register Addressing . . . 19
3.8 Usage Examples . . . 19

**4 Data Representation and Memory Model 21**
4.1 Overview . . . 21
4.2 Word and Byte Ordering . . . 21
4.3 Address Values . . . 21
4.4 Instruction Storage . . . 22
4.5 Exception Vector Storage . . . 22
4.6 Immediate Values . . . 22
4.7 Software Layout Conventions . . . 23
4.8 Arithmetic and Address Wraparound . . . 23
4.9 Memory Ordering . . . 23

**5 Status Register 25**
5.1 Overview . . . 25
5.2 Status Register Layout . . . 25
5.3 Condition Flags (Non-Privileged) . . . 25
5.3.1 Zero Flag (Z) – Bit 0 . . . 25
5.3.2 Negative Flag (N) – Bit 1 . . . 25
5.3.3 Carry Flag (C) – Bit 2 . . . 25
5.3.4 Overflow Flag (V) – Bit 3 . . . 26
5.3.5 Reserved Flags – Bits 4–7 . . . 26
5.4 Control Flags (Privileged) . . . 26
5.4.1 Protected Mode (P) – Bit 8 . . . 26
5.4.2 Hardware Interrupt Enable Bits (E1-E4) – Bits 9–12 . . . 26
5.4.3 Exception Active (EA) – Bit 13 . . . 27
5.4.4 Trap on Address Overflow (A) – Bit 14 . . . 27
5.4.5 Trace Mode (T) – Bit 15 . . . 27
5.5 Status Register Updates . . . 28
5.5.1 Automatic Updates . . . 28
5.5.2 Manual Updates . . . 28
5.6 Reading the Status Register . . . 29
5.7 Exception Handling Effects . . . 29
5.8 Usage Examples . . . 29

**6 Exception and Interrupt Handling 31**
6.1 Overview . . . 31
6.1.1 Exception Levels and Priority . . . 31
6.1.2 Vector Table . . . 33
6.1.3 Instructions Used in This Chapter . . . 33
6.2 Faults . . . 34
6.2.1 Fault Categories . . . 34

6.2.2 Bus Fault . . . 35
6.2.3 Bus Protection Fault . . . 35
6.2.4 Alignment Fault . . . 35
6.2.5 Segment Overflow Fault . . . 35
6.2.6 Invalid Opcode Fault . . . 36
6.2.7 Privilege Violation Fault . . . 36
6.2.8 Instruction Trace Fault . . . 36
6.2.9 Level Five Hardware Exception Conflict . . . 36
6.2.10 Double Fault . . . 37
6.3 Hardware Exceptions (Interrupts) . . . 38
6.3.1 Hardware Interrupt Enable Bits . . . 38
6.3.2 Pending Hardware Interrupts . . . 38
6.3.3 Interrupt Recognition and Latency . . . 38
6.3.4 Level 5 NMI-like Behavior . . . 39
6.4 User Exceptions (Traps) . . . 40
6.5 Exception Registers . . . 41
6.5.1 Link Registers . . . 41
6.5.2 Fault Metadata Register Format . . . 42
6.6 Exception Processing . . . 43
6.6.1 Exception Entry . . . 43
6.7 Return from Exception . . . 45
6.7.1 Accessing Link Registers . . . 45
6.8 Reset and Startup . . . 45
6.8.1 Reset State . . . 46
6.8.2 Reset Output Hold . . . 46
6.8.3 Reset Vector Fetch . . . 46
6.9 Exception Coprocessor Instructions . . . 47
6.9.1 Internal Instructions . . . 47
6.9.2 Coprocessor Select Register (CSR) . . . 48
6.10 Exception Quick Reference . . . 49

**II Instruction Set Architecture 51**

**7 Instruction Formats 53**
7.1 Overview . . . 53
7.2 Format Overview . . . 53
7.3 Common Fields . . . 53
7.4 Immediate Format . . . 53
7.4.1 Structure . . . 53
7.4.2 Encoding Examples . . . 55
7.5 Short Immediate Format (with Shift) . . . 55
7.5.1 Structure . . . 55
7.5.2 Encoding Examples . . . 56
7.6 Register Format . . . 57
7.6.1 Structure . . . 57
7.6.2 Register Operand Semantics . . . 57
7.6.3 Encoding Examples . . . 58
7.7 Operand Encoding Details . . . 58
7.7.1 Condition Codes . . . 59
7.7.2 Shift Types . . . 59
7.8 Opcode Encoding Patterns . . . 59

7.8.1 Opcode Groups . . . 59
7.8.2 Test vs. Save . . . 60
7.9 Decode Trees . . . 60
7.10 Instruction Fetch and Alignment . . . 64
7.10.1 Fetch Process . . . 64
7.10.2 Alignment Requirements . . . 64
7.11 Format Selection Guidelines . . . 65

**8 Addressing Modes 67**
8.1 Overview . . . 67
8.2 Addressing Mode Matrix . . . 68
8.3 Legal Modes by Instruction Family . . . 68
8.4 Zero-Displacement Shorthand . . . 69
8.5 Operand Categories . . . 69
8.6 Common Address Calculation Rules . . . 70
8.7 Per-Mode Encoding Reference . . . 70
8.8 Address Register Selection . . . 73
8.9 Addressing Mode Examples . . . 73
8.10 Addressing Mode Restrictions . . . 74
8.10.1 Privilege Mode Restrictions . . . 74
8.10.2 Alignment . . . 74

**9 Shift Operations 75**
9.1 Overview . . . 75
9.2 Shift Types . . . 75
9.2.1 Shift Type Encoding . . . 75
9.3 Shift Syntax . . . 75
9.4 Shift Type Details . . . 76
9.4.1 Logical Shift Left (LSL) . . . 76
9.4.2 Logical Shift Right (LSR) . . . 76
9.4.3 Arithmetic Shift Left (ASL) . . . 77
9.4.4 Arithmetic Shift Right (ASR) . . . 77
9.4.5 Rotate Left (RTL) . . . 78
9.4.6 Rotate Right (RTR) . . . 78
9.5 Shift Operands . . . 79
9.5.1 Mode 0: Shift by Immediate . . . 79
9.5.2 Mode 1: Shift by Register Count . . . 79
9.6 Shift Count . . . 79
9.7 Status Flag Effects . . . 80
9.7.1 Default Behavior . . . 80
9.7.2 Carry Flag . . . 80
9.7.3 Zero Flag . . . 80
9.7.4 Negative Flag . . . 80
9.7.5 Overflow Flag . . . 80
9.8 Common Use Cases . . . 80
9.9 Multi-Word Shifts . . . 81
9.10 Performance Considerations . . . 82
9.11 Limitations . . . 82
9.12 Status Flag Update Control . . . 82
9.12.1 Status Override Syntax . . . 82
9.12.2 Examples . . . 83
9.12.3 Use Cases . . . 83

9.12.4 Assembler Syntax Notes . . . 84

**10 Condition Codes** **85**
10.1 Overview . . . 85
10.2 Condition Code Encoding . . . 85
10.3 Condition Code Categories . . . 85
10.3.1 Simple Conditions . . . 85
10.3.2 Unsigned Comparisons . . . 86
10.3.3 Signed Comparisons . . . 86
10.3.4 Special Conditions . . . 86
10.4 Assembly Syntax . . . 87
10.5 Usage with Compare Instructions . . . 87
10.6 Condition Code Truth Tables . . . 88
10.6.1 Unsigned Comparison (CMPR rA, rB) . . . 88
10.6.2 Signed Comparison (CMPR rA, rB) . . . 88
10.7 Advanced Usage . . . 89
10.8 Condition Code Selection Guide . . . 90
10.9 Performance Considerations . . . 90
10.10Common Pitfalls . . . 90

**III SIRCIS Instruction Reference** **91**

**11 Reading Instruction Descriptions** **93**
11.1 Instruction Entry Fields . . . 93
11.2 Notation . . . 95
11.3 Status Flag Effect Symbols . . . 95
11.4 Conditional Execution . . . 96
11.5 Status Update Overrides . . . 96

**12 Instruction Summary** **97**
12.1 Overview . . . 97
12.2 Complete Instruction List . . . 98
12.3 Instruction Grouping Patterns . . . 98
12.3.1 Opcode Organization . . . 99
12.3.2 Save vs. Test Variants . . . 99
12.4 Meta-Instructions . . . 99
12.5 Instruction Timing . . . 100
12.6 Next Chapters . . . 100

**13 ALU Instructions** **103**
13.1 Overview . . . 103
13.2 ALU Instruction Families . . . 103
13.2.1 Arithmetic Instructions . . . 103
13.2.2 Logical Instructions . . . 103
13.2.3 Data Movement . . . 103
13.2.4 Test and Compare . . . 103
13.3 Legal Forms . . . 104
13.4 Common ALU Semantics . . . 105
13.5 Status Flag Updates . . . 105
13.5.1 Flag Computation Formulas . . . 106
13.5.2 Manual Flag Update Control . . . 107
SHFT – Shift with Status Update Meta-Instruction . . . 108

ADDI / ADDR – Add Immediate / Add Register . . . 110
ADCI / ADCR – Add with Carry . . . 112
SUBI / SUBR – Subtract Immediate / Subtract Register . . . 114
SBCI / SBCR – Subtract with Carry . . . 116
ANDI / ANDR – AND Immediate / AND Register . . . 118
ORRI / ORRR – OR Immediate / OR Register . . . 120
XORI / XORR – XOR Immediate / XOR Register . . . 122
MOVI / MOVR – Move Immediate / Move Register . . . 124
CMNI / CMNR – Compare Negative Immediate / Compare Negative Register . . . 126
CNCI / CNCR – Compare Negative with Carry Immediate / Register . . . 128
CMPI / CMPR – Compare Immediate / Compare Register . . . 130
CPCI / CPCR – Compare with Carry Immediate / Register . . . 132
TSAI / TSAR – Test AND Immediate / Test AND Register . . . 134
TSOI / TSOR – Test OR Immediate / Test OR Register . . . 136
TSXI / TSXR – Test XOR Immediate / Test XOR Register . . . 138
13.6 Summary . . . 139

**14 Memory Access Instructions 141**
14.1 Overview . . . 141
14.2 Effective Address Calculation . . . 141
14.3 Legal Forms . . . 142
14.4 Common Memory Semantics . . . 143
14.5 Status Flag Effects . . . 144
LOAD – Load from Memory . . . 145
STOR – Store to Memory . . . 147
14.6 Common Memory Access Patterns . . . 148
14.6.1 Structure Field Access . . . 149
14.6.2 Array Iteration . . . 149
14.6.3 Stack Operations . . . 149
14.7 Shift Operations with Memory Instructions . . . 149
14.7.1 STOR with Shift . . . 149
14.7.2 Supported Shift Types . . . 149
14.7.3 Shift Limitations . . . 150
14.7.4 Use Cases . . . 150
14.7.5 Status Flags . . . 150

**15 Control Flow Instructions 151**
15.1 Overview . . . 151
15.2 Legal Forms . . . 151
15.3 Common Semantics . . . 153
15.4 Status Flag Effects . . . 153
15.5 Branch Meta-Instructions . . . 154
BRAN – Branch Meta-Instruction . . . 155
BRSR – Branch to Subroutine Meta-Instruction . . . 156
RETS – Return from Subroutine Meta-Instruction . . . 158
15.6 Load Effective Address . . . 158
LDEA – Load Effective Address . . . 159
LDEL – Load Effective Address and Link . . . 161
15.7 Long Jump Meta-Instructions . . . 162
LJMP – Long Jump Meta-Instruction . . . 163
LJSR – Long Jump to Subroutine Meta-Instruction . . . 165
15.8 Control Flow Patterns . . . 166

15.8.1 If-Then-Else . . . 166
15.8.2 While Loop . . . 166
15.8.3 Switch/Jump Table . . . 167

**16 Coprocessor Instructions 169**
16.1 Overview . . . 169
16.2 Legal Forms . . . 169
16.3 Common Semantics . . . 170
COPI/COPR – Coprocessor Call . . . 172
16.4 Coprocessor Compatibility . . . 173
16.4.1 Model and Revision Policy . . . 174
16.5 Exception Unit (Coprocessor 1) . . . 174
16.5.1 Common Operations . . . 174
16.6 Exception Unit Meta-Instructions . . . 175
EXCP – User Exception Meta-Instruction . . . 176
WAIT – Wait for Interrupt Meta-Instruction . . . 177
RETE – Return from Exception Meta-Instruction . . . 178
RSET – System Reset Meta-Instruction . . . 179
ETFR/ETTR – Exception Link Transfer Meta-Instructions . . . 180
16.7 DMA Unit (Coprocessor 2) . . . 181
16.7.1 DMA Operations . . . 181
16.7.2 Segment Overflow . . . 182
16.7.3 Retrying After a Fault . . . 182
DMAR – DMA Read To Registers Meta-Instruction . . . 186
DMAW – DMA Write From Registers Meta-Instruction . . . 188
DMAT – DMA Memory Transfer Meta-Instruction . . . 190
16.8 Integer Maths Unit (Coprocessor 3) . . . 191
16.8.1 Maths Operations . . . 192
MULU/MULS – Integer Multiply Meta-Instructions . . . 193
DIVU/DIVS – Integer Divide Meta-Instructions . . . 195

**17 Meta-Instructions 197**
17.1 Overview . . . 197
NOOP – No Operation . . . 198

**A Opcode Map 199**
A.1 Complete Opcode Reference . . . 199
A.2 Opcode Patterns . . . 200
A.2.1 Format Identification . . . 200
A.2.2 Save vs. Test . . . 200
A.2.3 Memory Operations Decoding . . . 201
A.3 Undocumented Instructions . . . 201
A.4 Quick Lookup Table . . . 201

**B Instruction Timing 203**
B.1 Overview . . . 203
B.2 Six-Stage Execution Phases . . . 203
B.3 Timing Characteristics . . . 203
B.3.1 Exception and Fault Timing . . . 204
B.4 Conditional Execution . . . 204
B.5 Program Timing Examples . . . 204
B.5.1 Simple Loop . . . 204
B.5.2 Function Call Overhead . . . 204

B.5.3 Conditional Block . . . 205
B.6 Performance Considerations . . . 205
B.6.1 No Pipeline Stalls . . . 205
B.6.2 Memory Access . . . 205
B.6.3 Optimization Guidelines . . . 205
B.7 Theoretical Performance . . . 206

**C Undocumented Instructions 207**
C.1 Overview . . . 207
C.2 Undefined Operand Combinations . . . 207
C.2.1 Aliased Address-Register Writes . . . 207
C.3 Undocumented Opcode List . . . 207
C.4 Implementation Notes . . . 207
C.4.1 Implementation Behavior . . . 207
C.5 Why Undocumented? . . . 207
C.6 Recommendations . . . 208
C.6.1 For Application Developers . . . 208
C.6.2 For Compiler Writers . . . 208
C.6.3 For Hardware Implementers . . . 208
C.7 Future Standardization . . . 208
C.8 Opcode Space for Expansion . . . 208

**D Example Programs 209**
D.1 Program Conventions . . . 209
D.2 Byte Sieve . . . 209
D.3 Faults . . . 210
D.4 Hardware Exception . . . 217
D.5 Software Exception . . . 221
D.6 Store Load . . . 222

**E Quick Reference 227**
E.1 Instruction Mnemonic Index . . . 227
E.2 Status Register Bit Reference . . . 229
E.3 Bus Access Type (BAT) Reference . . . 230
E.4 Where to Find Other Tables . . . 231

# List of Tables


1 The SIRC manual set (this manual is the first) . . . iv
2 Manual-Wide Typographic Conventions . . . xix
3 Operand forms . . . xx

1.1 SIRC-1 CPU Specifications . . . 4
1.2 List of coprocessors . . . 5
1.3 Exception Vector Table Regions . . . 6

3.1 Register Encoding . . . 19

4.1 External Byte Order for 16-bit Words . . . 21
4.2 Address Register Pair Interpretation . . . 21
4.3 Immediate Field Interpretation . . . 22

6.1 Fault-Inside-L5-Handler Timeline . . . 40
6.2 Exception Link Register Assignment . . . 42
6.3 Reset State . . . 46
6.4 Exception Coprocessor Instruction Summary . . . 47
6.5 Exception Quick Reference . . . 49

7.1 Instruction Format Summary . . . 53
7.2 Immediate Format Encoding Examples . . . 55
7.3 Short Immediate Format Encoding Examples . . . 56
7.4 Register Format Encoding Examples . . . 58
7.5 Condition Code Encoding . . . 59
7.6 Shift Type Encoding . . . 59
7.7 Save and Test-Only ALU Instructions . . . 60
7.8 Format Selection Examples . . . 65

8.1 Addressing Modes Summary . . . 67
8.2 Assembler Operand Forms Mapped to Addressing Modes . . . 67
8.3 Addressing Mode Side Effects and Legal Instruction Families . . . 68
8.4 Addressing Mode Legality by Instruction Family . . . 69
8.5 Zero-Displacement Shorthand . . . 69
8.6 Address Register Encoding . . . 73

9.1 Shift Type Encoding . . . 75
9.2 Examples of first source operands . . . 76
9.3 Shift Operand Modes . . . 79
9.4 Status Flag Override Modifiers . . . 82

10.1 Condition Code Encoding . . . 85
10.2 Unsigned Comparison Results . . . 88
10.3 Signed Comparison Results . . . 88
10.4 Condition Code Selection Guide . . . 90

11.1 Instruction Description Notation . . . 95
11.2 Status Flag Effect Symbols . . . 96
11.3 Status Update Source Encoding . . . 96

12.1 Complete SIRCIS Instruction Set . . . 98
12.2 Meta-Instructions . . . 100

13.1 Legal ALU Instruction Forms . . . 104
13.2 Common ALU Semantics . . . 105
13.3 ALU Status Flag Effects . . . 106
13.4 Carry and Overflow Flag Formulas . . . 107

14.1 Legal Memory Instruction Forms . . . 142
14.2 Common Memory Instruction Semantics . . . 143
14.3 Memory Instruction Status Flag Effects . . . 144

15.1 Legal Control-Flow and Effective-Address Forms . . . 151
15.2 Common Control-Flow Instruction Semantics . . . 153
15.3 Control-Flow Instruction Status Flag Effects . . . 154

16.1 Legal Coprocessor Instruction Forms . . . 169
16.2 Common Coprocessor Instruction Semantics . . . 170
16.3 Standard Coprocessor IDs . . . 173
16.4 Exception Unit Operations . . . 174
16.5 DMA Unit Operations . . . 181
16.6 Integer Maths Unit Operations . . . 192
16.7 Maths Status Word in `r3` . . . 192

17.1 Meta-Instruction Cross-Reference . . . 197

A.1 Complete SIRCIS Opcode Map . . . 199
A.2 Instruction Variant Quick Reference . . . 201

B.1 Instruction Timing . . . 203

C.1 Undocumented Instruction Opcodes . . . 207

E.1 Alphabetical Mnemonic Index . . . 227
E.2 Status Register Bit Summary . . . 230
E.3 Bus Access Type (BAT) Encoding . . . 230
E.4 Reference Table Locations . . . 231

# List of Figures


2.1 SIRC-1 CPU Execution Phase Architecture . . . . . 9

3.1 Register Programming Model . . . . . 14
3.2 Address Register Pair Formation . . . . . 15
3.3 Privilege Checks in Protected Mode . . . . . 18

5.1 Status Register Bit Layout . . . . . 25

6.1 SIRC-1 Exception Handling Overview . . . . . 32
6.2 Exception Link Register Saved-State Layout . . . . . 41
6.3 Fault Metadata Register Status Field Layout . . . . . 42
6.4 SIRC-1 Exception Entry and Return . . . . . 44

7.1 Immediate Instruction Format . . . . . 54
7.2 Short Immediate with Shift Format . . . . . 56
7.3 Register Instruction Format . . . . . 57
7.4 Decode tree for the immediate ALU group (`0x0_`) . . . . . 61
7.5 Decode tree for the short immediate ALU group (`0x2_`) . . . . . 62
7.6 Decode tree for the register ALU group (`0x3_`) . . . . . 63
7.7 Decode tree for the memory and control group (`0x1_`) . . . . . 64

9.1 Logical Shift Left . . . . . 76
9.2 Logical Shift Right . . . . . 76
9.3 Arithmetic Shift Left . . . . . 77
9.4 Arithmetic Shift Right . . . . . 77
9.5 Rotate Left . . . . . 78
9.6 Rotate Right . . . . . 78

# List of Examples


3-1 Basic Register Operations . . . 19
3-2 Address Register Usage . . . 20
3-3 Subroutine Call . . . 20
5-1 Enabling Protected Mode . . . 29
5-2 Saving and Restoring Status . . . 30
8-1 Structure Access . . . 73
8-2 Array Iteration . . . 74
8-3 Stack Frame . . . 74
9-1 Constant Multiply and Bit Set (LSL) . . . 76
9-2 Unsigned Divide and Byte Extraction (LSR) . . . 77
9-3 Signed Multiply by 2 (ASL) . . . 77
9-4 Signed Divide and Averaging (ASR) . . . 77
9-5 Rotating a Value Left (RTL) . . . 78
9-6 Rotating a Value Right and Testing a Bit (RTR) . . . 78
9-7 Multiplication by Constants . . . 80
9-8 Division by Powers of 2 . . . 81
9-9 Bit Field Extraction . . . 81
9-10 Bit Manipulation . . . 81
9-11 32-bit Left Shift . . . 81
9-12 32-bit Right Shift (Unsigned) . . . 82
9-13 32-bit Right Shift (Signed) . . . 82
9-14 Default Behavior (ALU flags) . . . 83
9-15 Shift Flag Override . . . 83
9-16 No Flag Update . . . 83
10-1 Unsigned Comparison . . . 87
10-2 Signed Comparison . . . 87
10-3 Equality Testing . . . 87
10-4 Conditional Assignment . . . 89
10-5 Conditional Increment . . . 89
10-6 Conditional Function Call . . . 89
10-7 Loop Construction . . . 89
13-1 Manual Status Flag Update Control . . . 107
13-2 Shifting and Testing with SHFT . . . 108
13-3 Basic and Scaled Addition . . . 111
13-4 32-bit Addition with Carry Propagation . . . 113
13-5 Basic Subtraction and Loop Counting . . . 115
13-6 32-bit Subtraction with Borrow Propagation . . . 117
13-7 Bit Masking and Clearing with AND . . . 119
13-8 Setting Bits with OR . . . 121
13-9 Bit Toggling, Equality Testing, and XOR Swap . . . 123
13-10 Moving Constants and Copying Registers . . . 125
13-11 Testing Sums Without Writing Them . . . 127
13-12 Testing 32-bit Sums Without Writing Them . . . 129
13-13 Comparisons and Range Checking . . . 131
13-14 32-bit Comparison with Borrow Propagation . . . 133
13-15 Bit Testing with TSA . . . 135
13-16 Testing Two Values at Once with TSO . . . 137

13-17 Equality and Pattern Testing with TSX . . . 139
14-1 Indirect, Post-Increment, and Register-Offset Loads . . . 146
14-2 Indirect, Shifted, and Pre-Decrement Stores . . . 148
15-1 Unconditional and Conditional Branching . . . 155
15-2 Calling and Returning with BRSR/RETS . . . 157
15-3 Returning from a Subroutine . . . 158
15-4 Pointer Arithmetic and Computed Jumps with LDEA . . . 160
15-5 Calling Through a Register with LDEL . . . 162
15-6 Jumping Through a Register with LJMP . . . 164
15-7 Calling Through a Register with LJSR . . . 166
16-1 Direct Coprocessor Calls . . . 173
16-2 Triggering a Software Exception . . . 176
16-3 Idling Until an Interrupt . . . 177
16-4 Returning from an Interrupt Handler . . . 178
16-5 Requesting a Software Reset . . . 179
16-6 Correcting a Faulting Return Address . . . 181
16-7 A Retry-Safe DMA Copy Routine . . . 185
16-8 Reading a Memory Block into Registers . . . 187
16-9 Writing Registers to a Memory Block . . . 189
16-10 Copying a Memory Block with DMAT . . . 191
16-11 Unsigned 16x16 Multiply . . . 194
16-12 Unsigned Divide . . . 196
17-1 Timing Delay with NOOP . . . 198
D-1 Byte sieve . . . 209
D-2 Fault handling . . . 210
D-3 High-address fault handling . . . 216
D-4 Hardware exception . . . 217
D-5 Hardware exception data . . . 221
D-6 Software exception . . . 221
D-7 Store/load . . . 222

# Notation and Glossary

This section collects the typographic conventions, normative vocabulary, and architectural terminology used throughout the manual, in one place. Instruction-entry-specific notation (`rD`, `rS1`, `shift`, and similar placeholder names used only inside instruction descriptions) is defined separately in Chapter 11, Table 11.1, alongside the status-flag-effect symbols (Table 11.2); this section does not repeat those, only the conventions that apply manual-wide.

## Typographic Conventions

| Convention | Meaning |
|---|---|
| `r1`, `sr`, `ph` | Register names appear in typewriter font, whether general-purpose, address-pair, or status. |
| `0x1A` | A literal instruction-opcode byte value, written `0x` followed by two uppercase hex digits. |
| `#123` | A concrete immediate value written as an operand, prefixed with `#`. Can be decimal or hexadecimal. |
| `0x0002` | A concrete memory address or vector target. |
| **`ADDI`** | An instruction mnemonic, always bold typewriter and always uppercase. |
| `SR.X` | A field or bit of the status register, named by its bit label (for example `SR.A`, `SR.T`); see Chapter 5 for the full bit layout. |
| `(#4, a)` | Parentheses denote indirection through an address-register pair; a leading `-` denotes pre-decrement and a trailing `+` denotes post-increment, for example `-(0, a)` and `(0, a)+`. |

Table 2: Manual-Wide Typographic Conventions

Other conventions that do not have a dedicated style:

- **Hex literals** that aren't a register, opcode, immediate, or address value in one of the forms above (status-word values, encoded field values, bit patterns, coprocessor command words) are written `0x` followed by uppercase hex digits, for example `0x1A` rather than `0x1a`.
- **Binary literals** in tables are written as a bare digit group with no prefix, for example `00`, `10`, `111` rather than `0b10`.
- **Bit numbers** are written as plain text: "bit 15", "bits 4–7". Bit 15, or the highest-numbered bit of whatever field is under discussion, is always the most significant bit, and is always drawn on the left in every bit-field diagram.
- **Numeric ranges** use an en dash, for example `0x00–0x0F` or "bits 5–4", both in prose and in tables.
- **Word size**: "16-bit word" is stated once per chapter or major section on first use, then shortened to plain "word" for the rest of that section.

# Assembly Language Summary

Instruction entries in this manual use the canonical SIRC assembly notation. This summary is enough to read and write the listings in the manual. The complete language, including every directive and the tools that process it, is described in the *SIRC Assembly Programmer's Manual*.

## Source Format

- A **comment** starts with `;` and runs to the end of the line.
- A **label** is written `:name` before the next instruction or directive, and referred to as `@name`. Names use letters, digits and underscores. The colon is written before the name, not after it.
- **Numbers** used as values are prefixed with `#`: decimal (`#42`, `#-3`), hexadecimal (`#0x2A`) or binary (`#0b0010_1010`). Underscores may be used to separate digits.
- **Mnemonics** and condition codes are uppercase; register names are lowercase.
- A named constant is defined with `.EQU $NAME #value` and used as `$NAME`, without a `#`.

## Instruction Syntax

An instruction is written as a mnemonic, an optional status update source, an optional condition, and its operands:

```
MNEMONIC[S]|cond operand, operand, ...
```

**Status update source** `[N]`, `[A]` or `[S]` selects what updates the status flags (Chapter 11). It may be omitted.

**Condition** `|cond` makes the instruction conditional, with one of `AL` (always, the default), `==`, `!=`, `CS`, `CC`, `NS`, `NC`, `OS`, `OC`, `HI`, `LO`, `>=`, «, », `<=` or `NV` (Table 7.5).

**Destination first** In every operand list the destination is written first, on the left.

| Operand | Written as | Example |
|---|---|---|
| Immediate value | `#n`, `@label` or `$NAME` | `MOVI r1, #0x20` |
| Register | `r1`–`r7`, `sr`, address halves | `MOVR r2, r1` |
| Address register pair | `a`, `s`, `p`, `l` | `LJMP a` |
| Indirect, immediate offset | `(#n, addr)` | `LOAD r1, (#4, a)` |
| Indirect, register offset | `(rO, addr)` | `LOAD r1, (r2, a)` |
| Post-increment | `(#n, addr)+` or `(rO, addr)+` | `LOAD r1, (#0, a)+` |
| Pre-decrement | `-(#n, addr)` or `-(rO, addr)` | `STOR -(#0, s), r1` |
| Shift | `type #count` or `type rC` | `ADDR r1, r2, LSL #2` |

Table 3: Operand forms

The address register halves are `ah`, `al`, `sh`, `sl`, `ph`, `pl`, `lh` and `ll`. A shift type is one of `NUL`, `LSL`, `LSR`, `ASL`, `ASR`, `RTL` or `RTR` (Table 7.6), and an immediate count is `0`–`15`. Chapter 11 defines the placeholder names (`rD`, `rS1`, `#imm16` and so on) used in instruction entries.

## Directives and Symbol References

**`.ORG addr`** Sets the word address at which subsequent instructions and data are assembled. The address is a bare hexadecimal (`0x`-prefixed) or decimal number, without the `#` used elsewhere for immediate operands. It must be even (2-word aligned), since instructions and data directives each occupy a 2-word slot. `.ORG` can appear more than once in a file, to place code or data at specific fixed addresses such as the reset and exception vector table described in Chapter 6.

**`.DB #value`, `.DW #value`, `.DQ #value`** Reserve one program slot and initialize it with a numeric value, or, written as `.DB @label`, `.DW @label` or `.DQ @label`, with a label's full 24-bit address. *Despite their names, all three directives occupy exactly one 4-byte (2-word) program slot, the same size as an instruction.* `.DB #0xAB` assembles to the bytes `00 00 00 AB` (value in the low byte), `.DW #0xABCD` to `00 00 AB CD` (value in the low word), and `.DQ #0xABCD1234` to `AB CD 12 34` (value fills the slot). A label reference always fills the whole slot, so any of the three directives can hold an address anywhere in the 24-bit address space.

**`.EQU $NAME #value`** Defines a named constant, usable anywhere a `#immediate` operand is accepted by writing `$NAME` in its place.

**`@label`** References a label declared anywhere in the program, before or after the reference; references are resolved at link time. In **`BRAN`** or **`BRSR`** it resolves to a 16-bit signed word displacement from the instruction to the label. In any other instruction operand (**`MOVI`**, **`LOAD`**, **`STOR`**, **`LDEA`**, **`LDEL`**, **`LJMP`**, **`LJSR`**) it resolves to the label's low word only. In a `.DB`, `.DW` or `.DQ` directive it resolves to the label's full 24-bit address. An explicit suffix overrides this default: `@label.r` forces the PC-relative displacement form, `@label.l` the low word, and `@label.u` the high word.

```
1     .EQU $ANSWER #42
2
3     .ORG 0x0000
4     .DQ @start ; reset vector: CPU begins by loading this pointer
5
6     .ORG 0x0080
7     .DQ @level2_handler ; vector 0x40: level 2 hardware exception vector
8
9  :start
10    MOVI al, @lookup ; @label defaults to the low word for MOVI
11    LOAD r1, (#0, a) ; r1 = lookup[0]
12    CMPI r1, $ANSWER ; constants defined with .EQU are used without '#'
13    BRAN|== @start ; @label defaults to a PC-relative offset for BRAN/BRSR
14
15 :level2_handler
16    RETE
17
18 :lookup
19    .DW #10
20    .DW #20
21    .DW #30
```

The reset vector in the listing is not optional: per Chapter 6, the CPU begins execution by reading a stored pointer from word addresses `0x000000`–`0x000001`, not by executing whatever instruction happens to be placed there.

## Normative Vocabulary

The following words carry a specific technical meaning whenever they appear in this manual, distinct from their everyday English sense:

**must / must not** A mandatory architectural requirement. Hardware or software that does not comply is not a conformant SIRC-1 implementation.

**may** A permitted option. The CPU, the assembler, or the programmer is free to choose either way.

**should / should not** A recommendation, not a conformance requirement.

**reserved** A field, opcode, or coprocessor ID that is not currently assigned a meaning. Software must not assume any particular value when reading a reserved field, and must not rely on any behaviour it may have. A future CPU revision may assign a reserved field a meaning.

**architecturally undefined** The architecture does not specify the result. It may vary by CPU implementation, by revision, or even between two executions of the identical instruction on the identical CPU; software must never depend on any particular outcome.

**implementation-defined** Behavior that is fixed and consistent within one particular CPU implementation or model, but that may differ between models – for example, the extra cycles an optional maths coprocessor takes to complete a multiply. This is a stronger guarantee than *architecturally undefined*: a given implementation's behavior is at least self-consistent, even though the manual does not pin down what that behavior is.

## Signals, Requests and Pins

This manual describes the architecture, not a particular chip. It uses three terms for the CPU's external interface:

**Signal** A logical input or output of the CPU, such as `BERR`, `RSTI` or `TRCE`. The manual names a signal only where the architectural behaviour is defined by it. Signal names are written in typewriter font.

**Request / event** What a signal means architecturally: an *interrupt request*, a *reset request*, a bus error. A request is raised, recognised and withdrawn; the manual describes what the CPU does when that happens, and when requests are recognised, but not how the request physically reaches the CPU.

**Pin** A physical connection on a particular package. Pins, electrical levels and timing are implementation details and are documented in the *SIRC-1 Hardware Reference Manual*, not here.

A simulator or other implementation may carry the same signals by other means (a software call, an interrupt controller) and still conform to this manual.

## Register Name Conventions

SIRC-1 has sixteen 16-bit registers: seven general-purpose registers `r1`–`r7`, four address register pairs (`l`, `a`, `s`, `p`), and the status register `sr`. Each address register pair splits into a high and low half, named by appending `h`/`l` to the pair name – `lh`/`ll`, `ah`/`al`, `sh`/`sl`, `ph`/`pl` – so that either half can be addressed as an ordinary 16-bit register on its own, or the pair addressed together as a 24-bit address. See Chapter 3 for the full register model, encoding, and privilege rules.

# Glossary of Architectural Terms

**Coprocessor** One of the specialized execution units a **COPI**/**COPR** call can dispatch to – the processing unit itself (coprocessor `0x0`), the exception unit (`0x1`), the optional DMA unit (`0x2`), and the optional integer maths unit (`0x3`). See Chapter 16.

**Coprocessor select register (CSR)** The 16-bit internal register that holds the next coprocessor command: coprocessor ID, operation and operand. The CU dispatches to the coprocessor it selects. See Section 2.3.2.

**Displacement** A signed value added to an address register's low word to compute an effective address, as used by memory and effective-address instructions. Distinct from *offset*, which this manual reserves for memory/structure offsets.

**Exception** The general term for any event that diverts program flow to a vector: a *fault*, a *hardware exception*, or a *software exception*. See Chapter 6.

**Exception level** The priority level of the exception currently being serviced (0 when not handling any exception). A new exception can only preempt the current one if its priority is strictly higher.

**Fault** A priority-7 exception raised by the CPU itself in response to an error condition (for example, a bus error or a privilege violation) or a debug event (instruction trace). Faults cannot be masked or deferred, though two of them are conditional on whether they are raised at all: Segment Overflow requires `SR.A`, and Instruction Trace requires `SR.T` or the force-trace request (`TRCE`).

**General-purpose register** Any of `r1`–`r7`. The CPU does not enforce a usage convention among them.

**Hardware exception** An exception signaled by an external interrupt. Also informally called an *interrupt* at the hardware level (interrupt requests, interrupt priority, interrupt enable) – the two terms are synonymous.

**Meta-instruction** An assembler-level mnemonic (for example **BRAN**, **NOOP**, **LJSR**) that assembles to a specific CPU instruction encoding rather than having an opcode of its own. See the relevant instruction-family chapter for each meta-instruction's lowering.

**Protected mode** The non-privileged CPU mode (`SR.P` set). Most privileged operations fault if attempted in protected mode; see Chapter 5. The inverse of supervisor mode.

**Retryable fault** A fault whose triggering operation does not take effect, so that returning with **RETE** safely retries it. See Chapter 6 for the full retryable set.

**Software exception** An exception raised deliberately by executing **EXCP**. Also called a *trap*.

**Supervisor mode** The privileged CPU mode (`SR.P` clear). All operations are available. The inverse of protected mode.

**Word address** SIRC-1 addresses memory in units of 16-bit words, not 8-bit bytes; incrementing an address register by one advances by one word. See Chapter 4 for the boundary between this architectural word addressing and any external byte-level representation.

# Part I

# Architecture Overview

CHAPTER 1

# Introduction

## 1.1 Overview

The SIRC-1 is a 16-bit RISC processor ideal for general-purpose computing.
It implements the SIRCIS (SIRC Instruction Set) instruction set architecture, which provides a powerful set of operations while still ensuring simplicity of CPU implementation.

## 1.2 Design Philosophy

### 1.2.1 Design Principles

The SIRC-1 design was guided by Reduced Instruction Set Computer (RISC) design principles:

- **Load/Store Architecture:** All ALU operations work exclusively on registers. Memory access is performed only through dedicated load and store instructions.
- **Fixed Instruction Length:** All instructions are exactly 32 bits (2 words) in length, simplifying instruction fetch and decode logic.
- **Simple Instruction Formats:** Only three instruction formats are supported: Immediate, Short Immediate with Shift, and Register.
- **Register-Rich:** Sixteen addressable registers provide ample workspace for computations without frequent memory access.
- **Simple Execution Model:** The SIRC-1 uses a regular instruction set designed for straightforward hardware implementation without microcode. Most instructions execute in six clock cycles, corresponding to six fixed execution phases, excluding bus wait states. DMA commands require additional transfer cycles.

### 1.2.2 Design Goals

The SIRC-1 was designed with several key goals in order of importance:

**Simplicity** The CPU should be simple enough to be implemented in hardware without requiring complex microcode engines or multi-level instruction decoders.

**Developer Ergonomics** Powerful instruction encodings, including conditional execution and bit shifting, should reduce the number of instructions and branches a program must track.

**Performance** While simple, the design should allow for reasonable performance through efficient instruction encoding and the potential for future enhancements like pipelining.

**Memory Protection** Basic privilege levels and memory segmentation provide rudimentary protection for system software.

### 1.2.3 Applications

The SIRC-1 is designed for general-purpose computing, such as the core of a microcomputer.
It should not be used in memory-constrained environments, as fixed-length instructions and the lack of byte addressing can result in larger program sizes.

## 1.3 Key Features

### 1.3.1 Architecture Characteristics

| Feature | Specification |
|---|---|
| Data Width | 16-bit |
| Addressing | Word Addressing |
| Address Bus | 24-bit word address |
| Instruction Size | 32-bit fixed |
| General-Purpose Registers | 7 (r1–r7) |
| Address Register Pairs | 4 (l, a, s, p – link, address, stack pointer, program counter) |
| Total Addressable Registers | 16 |
| Instruction Formats | 3 |
| Addressing Modes | 7 (see Table 8.1) |
| Condition Codes | 16 |

Table 1.1: SIRC-1 CPU Specifications

### 1.3.2 Execution Model

The SIRC-1 executes every instruction through six sequential execution phases (normally one phase per clock cycle). For a full description of each phase, see Chapter 2.

This fixed six-stage model means that ordinary processing-unit instructions take 6 clock cycles to complete when bus operations do not require wait states, regardless of their complexity. Every coprocessor call (**`COPI`**, **`COPR`**, and every meta-instruction that assembles to one) takes a second complete 6-cycle dispatch slot, for 12 cycles in total, before the next instruction is fetched. DMA commands add further cycles on top of that: the DMA unit holds instruction fetch after dispatch until its transfer has completed, so their total cost scales with the transfer size. A bus device may hold the current phase by delaying bus acknowledgement, adding wait cycles without adding execution phases. While having a fixed 6-cycle instruction execution model may seem wasteful for simple register operations that do not require memory access, it dramatically simplifies the hardware design by eliminating the need for variable-length execution sequences or microcode.

### 1.3.3 Coprocessors

The SIRC-1 is made up of multiple coprocessors (also known as modules) that all share the same address/data bus and register file. Only one coprocessor can be active at a time.

The primary coprocessor is the "processing unit" (coprocessor `0x0`) which is active the majority of the time and executes SIRCIS instructions. The CPU will revert to this coprocessor at power on, after a reset and when another coprocessor is done and returns control to it.

Other coprocessors are usually activated using the **`COPI`** or **`COPR`** coprocessor-call instructions (see Chapter 16), except for the "exception unit," which can also be activated when external interrupt requests are raised. Activating a coprocessor using the coprocessor-call instructions is also known as "dispatching" to a coprocessor.

All implementations of the SIRC-1 will have the "processing unit" (coprocessor `0x0`) and the "exception unit" (coprocessor `0x1`). Every other coprocessor, including the DMA unit (coprocessor `0x2`), is optional and may not be present in some SIRC-1 models. The instruction set supports up to 16 coprocessors. The coprocessor IDs are stable between models, so that programs are cross-compatible. For example, coprocessor `0x3` will always be the Integer Maths Unit, whether or not a given CPU model implements it. This means that if a CPU model is missing an optional

coprocessor and a program requires it, the CPU can raise an invalid-opcode fault so that the behavior can be emulated in software where practical.

| ID | Name | Optional | Purpose |
|---|---|---|---|
| `0x0` | Processing Unit | No | Executes instructions |
| `0x1` | Exception Unit | No | Handles interrupts and exceptions |
| `0x2` | DMA Unit | Yes | Transfers blocks of data via the bus |
| `0x3` | Integer Maths Unit | Yes | Multiplies and divides integer values |
| `0x4–0xF` | Reserved/model use | Yes | Defined by future or model-specific manuals |

Table 1.2: List of coprocessors

Each coprocessor can execute 16 opcodes: the first 8 (`0x0–0x7`) can be called in any mode, and the last 8 (`0x8–0xF`) can be called only in supervisor mode.

Note: You will generally not want to dispatch to the the "processing unit" (coprocessor `0x0`) like you would with the other coprocessors, as it is the default coprocessor, and will automatically regain control when the other coprocessors are finished. Using **`COPI`** or **`COPR`** with coprocessor 0x0 is technically valid, but any operand passed into **`COPI`** or **`COPR`** will be ignored. It is effectively a no-op.

### 1.3.4 Privilege Levels

The SIRC-1 supports two privilege levels:

**Supervisor Mode** Full access to all registers and instructions. Can set the high address-register components, access privileged status register bits, and execute privileged coprocessor operations.

**Protected Mode** Restricted access for user programs. Cannot write to the high address-register components (providing memory segmentation/protection), cannot access privileged status register bits, and cannot execute privileged coprocessor instructions.

The privilege level is controlled by the protected mode bit in the status register.

## 1.4 Memory Organization

### 1.4.1 Address Space

The SIRC-1 uses word addressing, where each address refers to a 16-bit word. With a 24-bit address space, this allows access to $2^{24}$ = 16,777,216 words, or 32 megabytes of external byte storage. Addresses are formed by combining the low 8 bits of the high address-register component with the full 16-bit low address-register component:

$$\text{Address} = (\text{RegHigh}[7:0] \ll 16) \mid \text{RegLow}[15:0] \tag{1.1}$$

The high 8 bits of the high register (bits 15–8) are not used for addressing but are available for storage, enabling techniques such as tagged pointers.

For normative byte order, multi-word storage, exception vector layout, immediate interpretation, and wraparound rules, see Chapter 4.

### 1.4.2 Memory Map

The CPU expects the exception vector table to begin at word address `0x000000`. Each vector-table entry occupies two consecutive 16-bit words: the target address high word followed by the target address low word.

| Region | Vector IDs | Word addresses | Purpose |
|---|---|---|---|
| Reset | `0x00` | `0x000000–0x000001` | Initial program counter after reset |
| Faults | `0x01–0x0F` | `0x000002–0x00001F` | Fault and reserved privileged exception vectors |
| Hardware | `0x10`, `0x20`, `0x30`, `0x40`, `0x50` | `0x000020–0x0000A1` | Hardware exception vectors, spaced by vector ID |
| User traps | `0x60–0xFF` | `0x0000C0–0x0001FF` | User software exception vectors |

Table 1.3: Exception Vector Table Regions

Beyond these reserved regions, the memory layout is flexible and can be defined by system software.

### 1.4.3 Alignment

- All memory addresses refer to 16-bit words.
- There are no alignment restrictions for general memory I/O.
- All instructions span 2 words and must begin at an even word address.
- Unaligned instruction fetches (odd word address) trigger an alignment fault.

## 1.5 Document Organization

This manual is organized into three main parts:

**Part I: Architecture Overview** Covers the register model, status register, and overall CPU architecture.

**Part II: Instruction Set Architecture** Details instruction formats, addressing modes, shift operations, and condition codes.

**Part III: SIRCIS Instruction Reference** Provides detailed documentation for each instruction, including encoding, operation, and examples.

Appendices provide quick reference materials including complete opcode maps, instruction timing, notes on undocumented instructions, and an alphabetical instruction index.

CHAPTER 2

# CPU Architecture

## 2.1 Overview

The SIRC-1 CPU architecture takes advantage of the regularity of the SIRCIS instruction set to execute ordinary instructions through a common six-phase execution sequence.

Control signals are generated directly from the decoded instruction and current execution phase, eliminating the need for separate microprograms for individual instructions.

This approach is intended to support compact, hardwired control logic, potentially reducing transistor count and die area compared with microprogrammed implementations. Eliminating microinstruction fetch delays may also permit higher clock frequencies.

## 2.2 Six-Stage Execution Phases

Most SIRC-1 instructions follow a six-phase execution model and complete in 6 clock cycles when no bus wait states are required.

A phase that performs a bus operation may be held until the bus acknowledges it. DMA commands dispatch through the normal six-phase coprocessor-call path and then hold instruction fetch while the DMA unit completes its transfer.

Each address-register pair, including `p`, splits into a high half and a low half, written `Xh` and `Xl` (for example `ph` and `pl`); Chapter 3 describes this split in detail.

**Phase 0: Instruction Fetch (High Word)** – 1 cycle

- Fetch bits 31–16 from memory address in `p`
- `p` is unchanged

**Phase 1: Instruction Fetch (Low Word)** – 1 cycle

- Fetch bits 15–0 from memory address in `p` + 1
- Instruction is now fully available for decode
- `p` is unchanged

**Phase 2: Decode and Register Fetch** – 1 cycle

- Decode instruction opcode and operands
- Read source registers (optionally shifted)
- Evaluate condition codes
- Advance `pl` by 2 to the address of the next instruction (`ph` is unchanged)

**Phase 3: Execute and Address Calculation** – 1 cycle

- Perform ALU operation, and/or
- Calculate effective memory address

**Phase 4: Memory Access** – 1 cycle

- Read from memory (LOAD), or
- Write to memory (STOR), or

- No operation (register-only instructions)

**Phase 5: Write Back** – 1 cycle

- Write result to destination register
- Update status register flags if applicable
- Update address registers for post-increment/pre-decrement

## 2.3 Architectural Components

The architecture is composed of several key functional units that work together to fetch, decode, execute, and complete instructions.

Figure 2.1 illustrates the major functional units within the SIRC-1 CPU and their interconnections.

### 2.3.1 Control Unit (CU)

The Control Unit sits at the heart of the SIRC-1 CPU, coordinating all other functional units throughout the instruction execution phases. It decodes instructions and generates control signals that orchestrate data movement and operations across the CPU.

Key responsibilities include:

- Instruction fetch and decode
- Execution phase coordination
- Control signal generation for all functional units
- Condition code evaluation for conditional execution
- Fetching exception vectors on behalf of the exception coprocessor
- Dispatching coprocessor commands through the coprocessor select register (CSR)

### 2.3.2 Coprocessors and the Coprocessor Select Register

Operations are carried out by coprocessors. The processing unit (coprocessor `0x0`) executes ordinary instructions using the ALU, AU and barrel shifter described below. Other coprocessors, such as the exception coprocessor (`0x1`), carry out specialized operations on request. Every coprocessor reaches the register file and the bus interface through the coprocessor interface, and only one is active at a time.

The coprocessor select register (CSR) holds the pending coprocessor command: it tells the CU which coprocessor runs next and what it should do. It is a 16-bit internal register: bits 15–12 hold the coprocessor ID, bits 11–8 the coprocessor operation, and bits 7–0 an operand or vector. A **`COPI`** or **`COPR`** instruction writes its command operand to the CSR during write-back. The CU consumes the CSR by dispatching the command to the selected coprocessor in a further six-phase slot, and that coprocessor stays active until the command completes. While nothing is pending the CSR is `0x0000`, which selects the processing unit, so the CPU carries on running the program. Chapter 16 describes the instructions and Section 6.9.2 the register's layout.

The exception coprocessor never overwrites a pending command. It keeps its own record of the exception it wants to service, and loads the CSR with it only when the CSR is empty and no coprocessor is active. A coprocessor call is therefore part of its instruction: its dispatch slot, and the command it starts, complete before any pending interrupt or instruction trace fault is taken (Section 6.3.3).

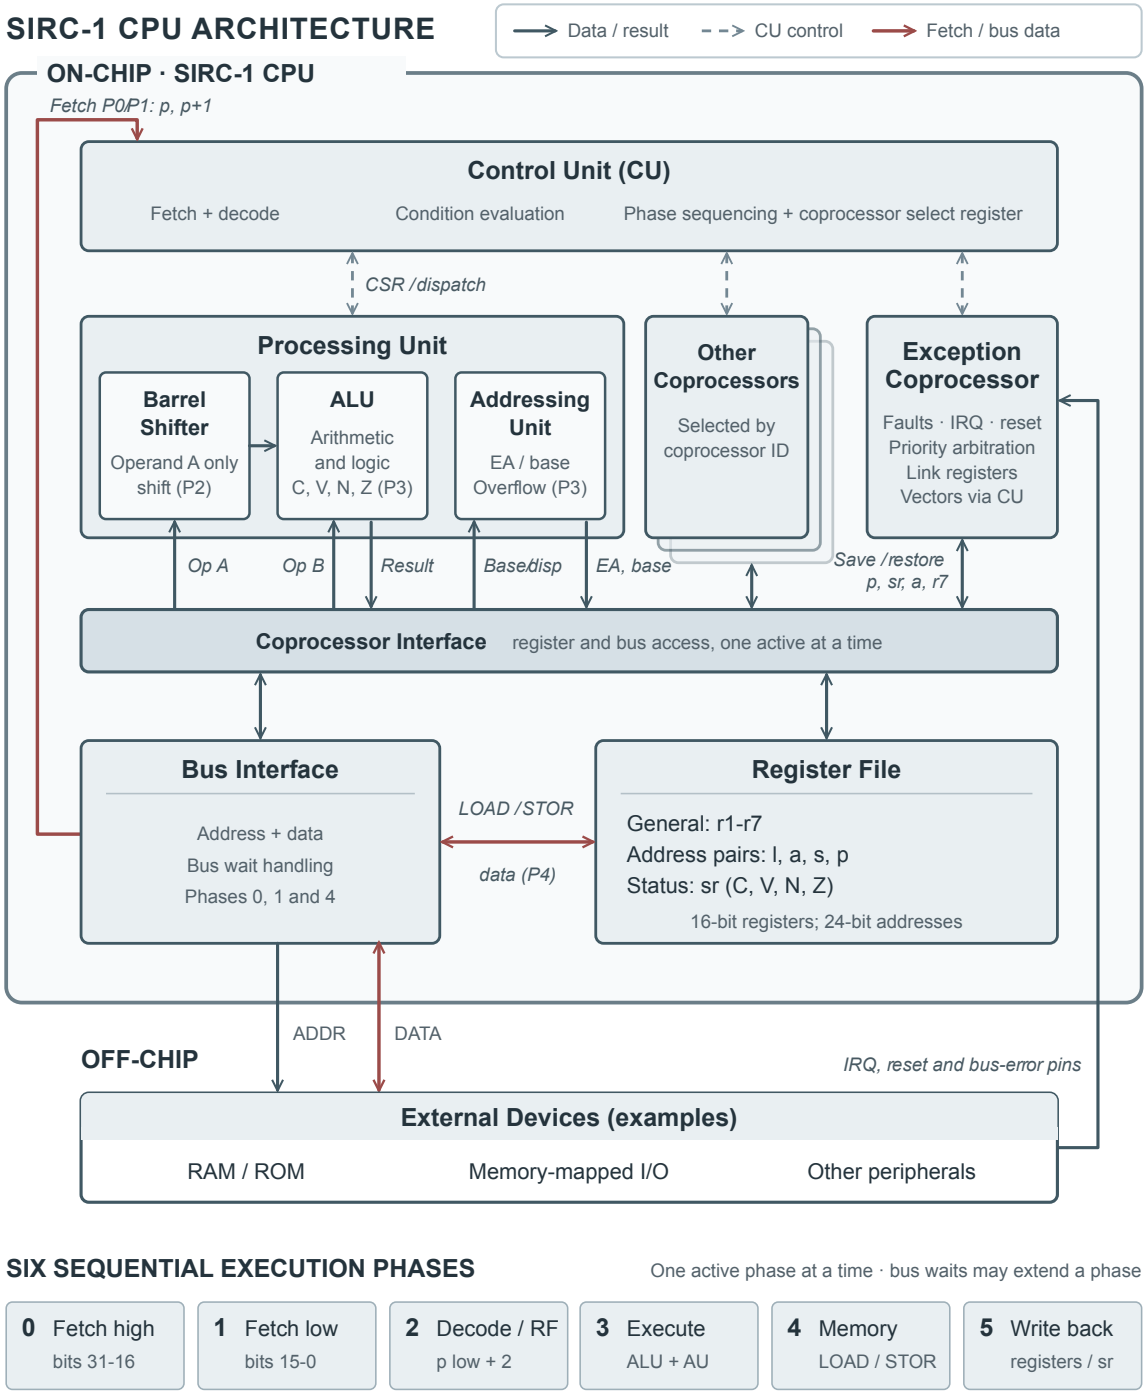



Figure 2.1: SIRC-1 CPU Execution Phase Architecture

### 2.3.3 Arithmetic Logic Unit (ALU)

The ALU performs all arithmetic and logical operations on register values. It supports the following operations:

- **Arithmetic:** Addition, Subtraction (with and without carry)
- **Logical:** AND, OR, XOR
- **Comparison:** Test and compare operations
- **Status Flag Generation:** Carry, Overflow, Negative, Zero

The ALU operates on data from the Register File (after optional shifting), along with immediate constants decoded from instructions and outputs results back to the Register File. It cannot operate on data stored in memory directly.

### 2.3.4 Addressing Unit (AU)

The Addressing Unit calculates memory addresses and manages address-related operations. It is responsible for:

- Computing effective addresses from base + displacement
- Computing the updated base address for pre-decrement and post-increment
- Detecting segment overflow in the address calculation
- Presenting calculated addresses to the address bus

The AU works in parallel with the ALU during the execution phase, allowing address calculation to occur simultaneously with ALU operations.

### 2.3.5 Register File

The Register File contains all CPU registers organized into three categories:

- **General Purpose Registers:** `r1`–`r7`
- **Address Register Pairs:** `l` (link), `a` (address), `s` (stack), `p` (program counter)
- **Status Register:** `sr`

The Register File allows the ALU, AU, and Control Unit to read and write registers as needed during each execution phase. All registers are 16 bits wide, though address register pairs can be combined to form 24-bit addresses.

### 2.3.6 Barrel Shifter

A barrel shifter sits between the Register File and the ALU, enabling efficient bit manipulation operations.

The barrel shifters support logical shift left (**`LSL`**), logical shift right (**`LSR`**), arithmetic shift left (**`ASL`**), arithmetic shift right (**`ASR`**), rotate left (**`RTL`**), and rotate right (**`RTR`**). Shift amounts can be specified as immediate values or dynamically from register contents.

The shift is applied to the first source operand when fetching the source registers for an instruction. Shifts cannot be applied to the result or any other source operand.

### 2.3.7 Exception Coprocessor

The Exception Coprocessor (coprocessor ID `0x1`) manages faults, hardware interrupts, software exceptions and reset. When an exception is pending, it takes control of the processor and diverts execution to the handler through a vector. It is responsible for:

- Receiving faults, interrupt requests and reset
- Comparing each exception's priority with the current exception level
- Cancelling an instruction that raises a retryable fault, so its remaining phases run as no-ops
- Holding the link registers that save the return address, status register and exception level
- Writing the exception to service into the coprocessor select register (CSR)

The Control Unit runs the resulting entry sequence through the normal execution phases. The exception instructions (**`EXCP`**, **`RETE`**, **`WAIT`**, **`RSET`**, **`ETFR`** and **`ETTR`**) reach the coprocessor as coprocessor calls. Chapter 6 describes exception handling in detail.

## 2.4 Design Characteristics

### 2.4.1 Hardwired Control Implementation

The SIRC-1 is designed to support hardwired control logic without requiring a microcode engine.

A six-phase state machine coordinates instruction execution, with combinational logic performing instruction decoding, arithmetic, address calculation and control signal generation. Clocked registers retain architectural and intermediate execution state between phases.

Combined with the regularity of the SIRCIS instruction set, this approach offers several potential advantages:

- A deterministic, fixed execution sequence
- Reduced control logic complexity and hardware requirements
- Predictable instruction behaviour and execution timing

### 2.4.2 Fixed Execution Sequence

Ordinary instructions execute in exactly 6 phases, regardless of instruction type or operands, and complete in 6 clock cycles when no bus wait states are required. This design choice reduces the complexity of instruction sequencing and simplifies execution timing.

The sequence is never cut short. If a retryable fault cancels an instruction, its remaining phases still run, but as no-ops that access no bus and commit no results, and the exception dispatch begins at the next phase 0. Hardware interrupts, software exceptions and the instruction trace fault let the current instruction finish before they are dispatched.

Coprocessor calls are the exception: the processing-unit instruction takes six cycles and the coprocessor dispatch usually takes a further six. Some coprocessors like the DMA coprocessor can additionally hold instruction fetch until the operation completes.

### 2.4.3 Parallel Functional Units

The ALU and AU operate in parallel during phase 3 (Execute and Address Calculation), allowing address calculation to proceed simultaneously with arithmetic operations. This parallelism enables efficient execution of memory reference instructions without additional clock cycles.

## 2.5 External Interface

The SIRC-1 CPU communicates with memory and peripherals over an external bus, and receives interrupt and reset requests from external hardware. How those signals are carried (the package, pinout, electrical characteristics and bus timing) is implementation-specific and is described in the *SIRC-1 Hardware Reference Manual*. One architectural fact the rest of this chapter relies on: when the reset request (`RSTI`) is raised the CPU aborts the current instruction or bus wait and restarts at phase 0, as described in the six execution phases above.

CHAPTER 3

# Register Model

## 3.1 Overview

The SIRC-1 CPU provides sixteen 16-bit registers, classified into three categories:

- General-purpose registers (`r1`–`r7`)
- Address register pairs (`l`, `a`, `s`, `p`)
- Status register (`sr`)

All programmer-visible registers are 16 bits wide. Address registers can be used in pairs to form 24-bit addresses for memory operations.

Only `sr` (cleared to zero) and the `p` pair (loaded from the reset vector) have defined values after reset; all other registers are architecturally undefined. See Chapter 6.

## 3.2 Programming Model

Figure 3.1 shows the complete sixteen-register programming model: the seven general-purpose registers, both words of each of the four address register pairs, and `sr`. The high word of each address register pair, marked $^{*}$, is read-only in protected mode: a protected-mode program can read its real value but a direct write faults. `sr`'s high byte, marked $^{\dagger}$, is stricter still: in protected mode it is hidden even from reads, which are redacted to zero, and writes to it are silently ignored rather than faulting. Its low byte, shown in italics, is the one truly unrestricted half of `sr` and remains fully accessible in both modes. See Section 3.6 below for the full read/write privilege rules.

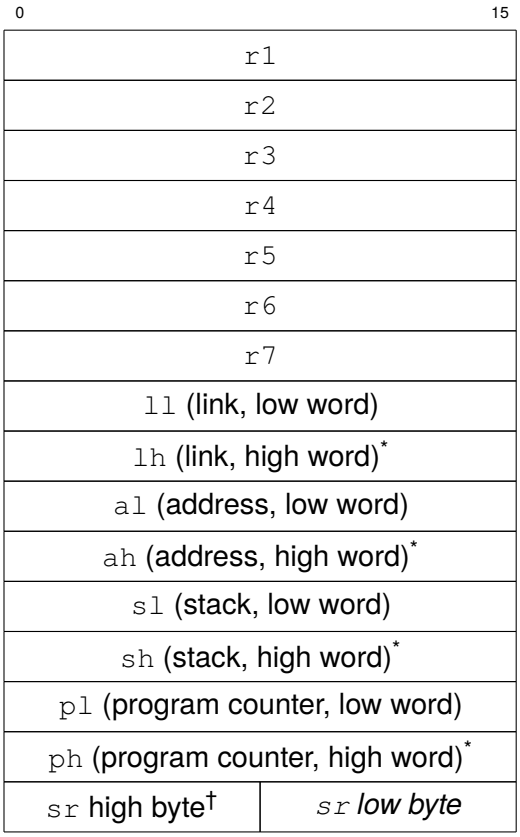



Figure 3.1: Register Programming Model

*Read-only in protected mode: reads return the real value, but direct writes trigger a privilege violation fault (address-register-pair write-back is still allowed, provided it would leave this word unchanged). †Hidden in protected mode: reads are redacted to zero rather than the real value, and writes to it are silently ignored (no fault). The *italicized* `sr` low byte is the odd one out among these: despite sharing a row with a hidden half, it is unprivileged and fully accessible in both modes.

Table 3.1 below lists every register's encoding and states exactly which ones are privileged; see Section 3.6 for the full read/write privilege rules.

## 3.3 General-Purpose Registers

### 3.3.1 Register Set

The SIRC-1 provides seven general-purpose registers:

| Register | Description |
|---|---|
| `r1` | General-purpose register 1 |
| `r2` | General-purpose register 2 |
| `r3` | General-purpose register 3 |
| `r4` | General-purpose register 4 |
| `r5` | General-purpose register 5 |
| `r6` | General-purpose register 6 |
| `r7` | General-purpose register 7 |

The programmer may use these registers for any purpose. They hold 16-bit values and may be used as source or destination operands for all ALU instructions.

### 3.3.2 Usage Conventions

The CPU does not enforce any register-usage convention among `r1`–`r7`; all seven registers are equally general purpose. Calling conventions and register-preservation rules are outside the scope of this document and are addressed in the SIRC-1 ABI and Toolchain documentation.

## 3.4 Address Register Pairs

### 3.4.1 Overview

The SIRC-1 provides four address register pairs, each consisting of a high and low 16-bit register. When used together, these pairs form 24-bit addresses by combining the low 8 bits of the high register with the full 16 bits of the low register.

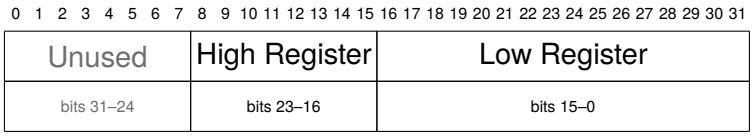



Figure 3.2: Address Register Pair Formation

The high 8 bits (bits 31–24) of the high register are not used for addressing but remain available for storage, enabling techniques such as tagged pointers.

The exact address composition and stored-address layout are specified in Chapter 4.

Although each address register pair has a specific name and a suggested usage by convention, **`STOR`** and **`LOAD`** instructions treat all four pairs identically, and any pair may be used for indirect addressing.

Loading a value directly into the `p` pair performs a jump.

The link register pair updates automatically when **`LDEL`**, **`LJSR`**, or **`BRSR`** executes. The program counter pair increments after every instruction.

### 3.4.2 Link Register (l)

| Component | Register |
|---|---|
| High Register | `lh` (privileged) |
| Low Register | `ll` |

The link register pair stores return addresses for subroutine calls. When a subroutine is called using **`LDEL`**, **`LJSR`**, or **`BRSR`**, the return address is automatically saved to this register pair.

**Typical Use:**

- Storing return addresses from subroutine calls
- Alternate storage for general memory addressing

### 3.4.3 Address Register (a)

| Component | Register |
|---|---|
| High Register | `ah` (privileged) |
| Low Register | `al` |

This general-purpose address register pair is used for pointer operations and memory access.

**Typical Use:**

- Base pointer for data structures

- Array indexing
- General memory addressing

### 3.4.4 Stack Pointer (s)

| Component | Register |
|---|---|
| High Register | `sh` (privileged) |
| Low Register | `sl` |

The stack pointer register pair points to the current top of the stack. Pre-decrement and post-increment addressing modes are particularly useful with this register.

**Typical Use:**

- Stack operations (push/pop)
- Local variable allocation
- Function parameter passing

### 3.4.5 Program Counter (p)

| Component | Register |
|---|---|
| High Register | `ph` (privileged) |
| Low Register | `pl` |

The program counter register pair points to the instruction currently being fetched. It is not modified during either fetch phase; the low word `pl` advances by 2 during the Decode and Register Fetch phase, and `ph` is never incremented, so an overflow stays inside the segment.

**Typical Use:**

- Automatically updated during normal execution
- Modified by branch and jump instructions
- Used for position-independent code

## 3.5 Status Register

The status register (`sr`) is a special 16-bit register that contains CPU status flags and control bits. It is divided into two bytes:

- **Low Byte (bits 7–0):** Condition flags, readable and writable in both modes; optionally updated as a side effect of ALU instructions in both modes.
- **High Byte (bits 15–8):** Control and privileged state

In protected mode, reads of `sr` are redacted to the low byte (high byte reads as zero), and direct writes to `sr` update only the low byte: bits 15–8 are left unchanged, silently and without a fault. In supervisor mode, a direct write to `sr` updates all 16 bits, except that it cannot change the Exception Active (EA) bit.

The status register is discussed in detail in Chapter 5.

## 3.6 Privilege Restrictions

### 3.6.1 High Address Register Restrictions

The high component of each address register pair (`lh`, `ah`, `sh`, `ph`) is privileged:

- In **supervisor mode**: Reading and writing are both allowed.
- In **protected mode**:
  - Reading is allowed.
  - Direct writes trigger a privilege exception.
  - Address-register-pair write-back is allowed only when the high word would remain unchanged; otherwise it triggers a privilege exception.

This restriction provides a form of memory segmentation and protection. User programs running in protected mode cannot modify the segment portion of addresses, preventing them from accessing memory outside their designated segment. Instructions such as **`LDEA`**, **`LDEL`**, **`BRAN`**, **`BRSR`**, **`LJMP`**, **`LJSR`**, and **`RETS`** remain usable in protected mode when they stay within the current segment. If their address-register-pair write-back would alter a high word, the CPU raises a privilege violation fault.

The status register differs slightly from the high address registers:

- High address registers (`lh`, `ah`, `sh`, `ph`) remain readable in protected mode, but direct writes trigger a privilege violation fault.
- The status register's privileged byte is hidden on reads in protected mode, and direct writes in protected mode silently leave it unchanged instead of faulting.

### 3.6.2 Summary of Privilege Checks

Figure 3.3 shows where the CPU applies each privilege check as an instruction moves through decode, execute, and write-back. The checks apply to different kinds of instruction, so an instruction is only affected by the check for its own kind. Every violation raises the same Privilege Violation Fault (vector `0x05`), which is retryable (Chapter 6).

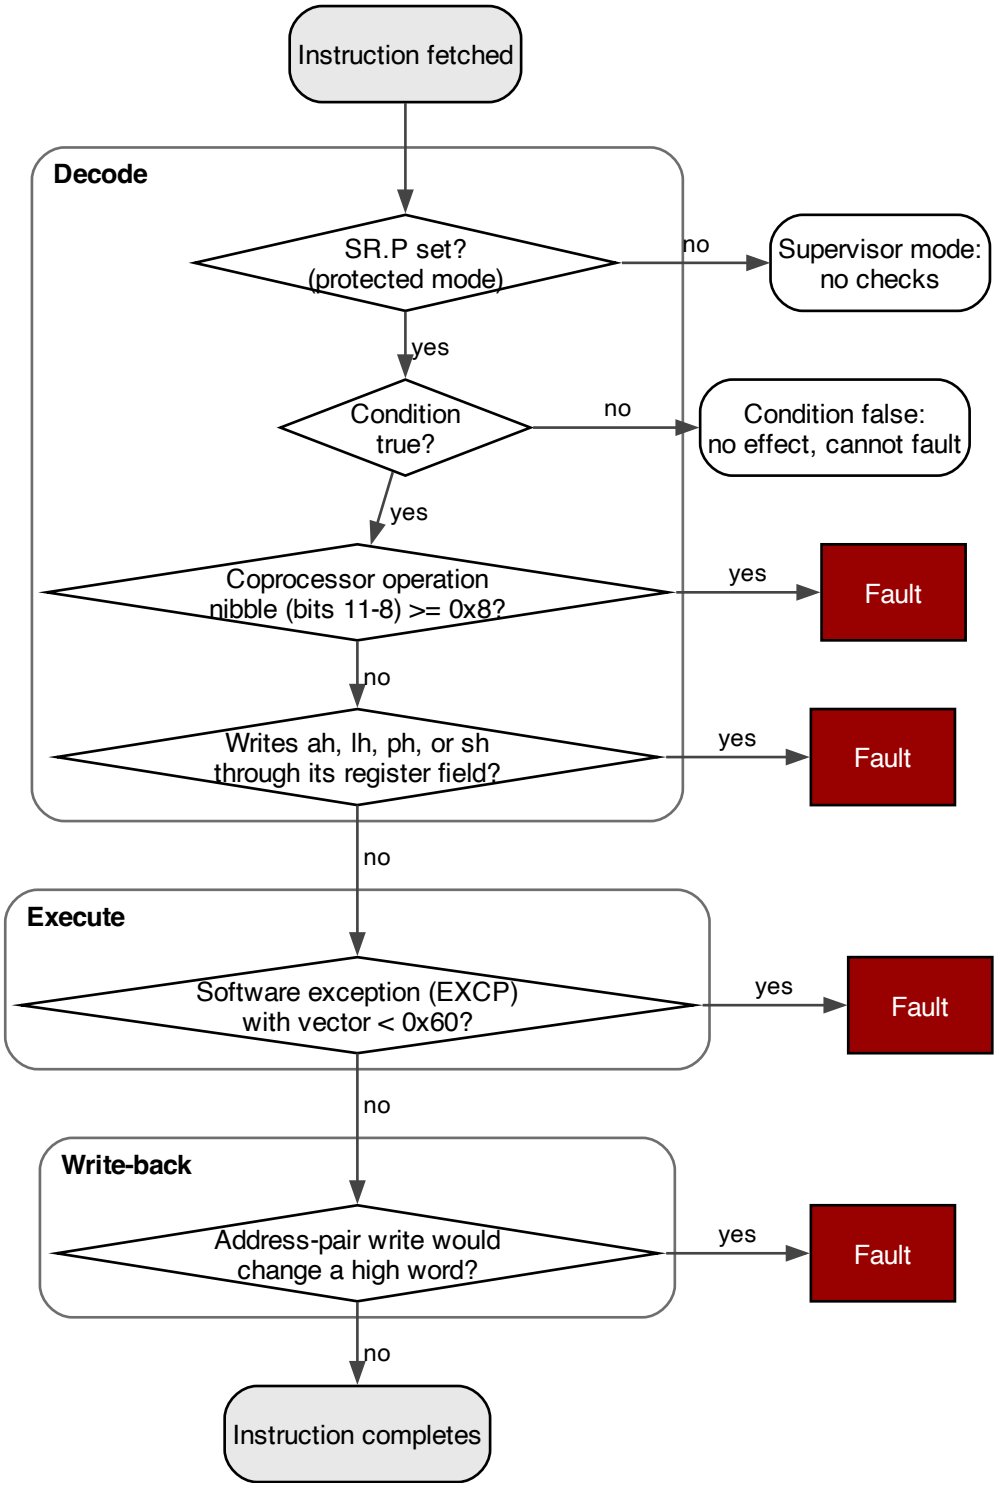



Figure 3.3: Privilege Checks in Protected Mode

The following are not violations in protected mode:

- Writing `sr`: only bits 7–0 are written, and bits 15–8 are ignored.

- Reading `sr`: bits 15–8 read as zero.
- Compare, test, and store instructions, which only read the register named by their register field.
- Reading any register, including `ah`, `lh`, `ph`, and `sh`.

## 3.7 Register Addressing

Registers are addressed using 4-bit register identifiers in instruction encoding:

| ID | Register | Privileged |
|---|---|---|
| 0x0 | r1 | No |
| 0x1 | r2 | No |
| 0x2 | r3 | No |
| 0x3 | r4 | No |
| 0x4 | r5 | No |
| 0x5 | r6 | No |
| 0x6 | r7 | No |
| 0x7 | sr | Reads: high byte redacted. Writes: high byte ignored |
| 0x8 | lh | Yes |
| 0x9 | ll | No |
| 0xA | ah | Yes |
| 0xB | al | No |
| 0xC | sh | Yes |
| 0xD | sl | No |
| 0xE | ph | Yes |
| 0xF | pl | No |

Table 3.1: Register Encoding

## 3.8 Usage Examples

```
; Move immediate value into r1
MOVI r1, #100

; Add 2 to the value stored in r1 and store the result into r2
MOVR r2, r1
ADDI r2, #2

; Add r1 and r2, store in r3
ADDR r3, r1, r2
```

Example 3-1: Basic Register Operations

```
; Load value from memory at address in 'a' register pair
LOAD r1, (a)

; Store r1 to memory at address (a + 8)
STOR (#8, a), r1

; Push r1 onto stack (pre-decrement)
STOR -(s), r1

; Pop stack into r2 (post-increment)
LOAD r2, (s)+
```

Example 3-2: Address Register Usage

```
; Call subroutine at address in 'a' register
; Return address saved to 'l' register automatically
LJSR a

; ...subroutine code...

; Return from subroutine
; Copies 'l' register to 'p' register
RETS
```

Example 3-3: Subroutine Call

CHAPTER 4

# Data Representation and Memory Model

## 4.1 Overview

This chapter defines the representation rules used by registers, memory, program images, exception vectors, and multi-word values. These rules are architectural: assemblers, loaders, emulators, hardware implementations, and debuggers must agree on them.

## 4.2 Word and Byte Ordering

The SIRC-1 is a word-addressed processor. Each architectural memory address names one 16-bit word. Byte addressing is not provided by the CPU instruction set.

When a word is represented outside the CPU as bytes, such as in a ROM image or debugger dump, the word is stored in big-endian byte order: the most significant byte appears first.

| Value | First byte | Second byte |
|---|---|---|
| `0x1234` | `0x12` | `0x34` |
| `0xFF80` | `0xFF` | `0x80` |

Table 4.1: External Byte Order for 16-bit Words

Multi-word quantities are stored with the most significant word at the lowest word address. This applies to instructions, exception vectors, saved addresses, and any software-defined multi-word integer convention that chooses to use the architectural order.

## 4.3 Address Values

Architectural addresses are 24-bit word addresses. The four address-register pairs (`l`, `a`, `s`, and `p`) represent an address by combining the low byte of the high register with the full low register:

$$\text{Address} = ((\text{HighRegister} \mathbin{\&} \texttt{0x00FF}) \ll 16) \mid \text{LowRegister} \tag{4.1}$$

Bits 15–8 of the high register are not driven on the address bus. They are ignored by address calculation and are carried unchanged when an address pair is copied, loaded or stored. They will be preserved unless a direct write to the high register of an address register pair overwrites them. They can be used to store metadata with addresses and allow techniques like tagged pointers.

| Pair value | High register | Low register | Address bus value |
|---|---|---|---|
| `ah:al` | `0x0012` | `0x3456` | `0x123456` |
| `ah:al` | `0xAB12` | `0x3456` | `0x123456` |
| `ph:pl` | `0x0000` | `0x0100` | `0x000100` |

Table 4.2: Address Register Pair Interpretation

When an address pair is stored in memory as a 32-bit quantity, the high word is stored first and the low word second.

## 4.4 Instruction Storage

Every instruction is 32 bits, stored as two consecutive 16-bit words:

- Word at `p`: instruction bits 31–16
- Word at `p`+1: instruction bits 15–0

Instruction fetch reads the high word from the address in `p` and the low word from that address plus one. `p` itself is not modified during the fetch; it advances by two words during instruction decode, so an instruction that reads or uses `p` as an address register sees the address of the instruction itself. Instruction addresses must be even word addresses. Fetching from an odd word address raises an alignment fault.

## 4.5 Exception Vector Storage

Each exception vector table entry is a stored 32-bit pointer with contains a 24-bit address and eight bits of metadata as described in Section 4.3.

The vector table begins at word address `0x000000`, so vector entry `v` starts at word address `v * 2`:

- Word at `v * 2`: target address high word
- Word at `v * 2 + 1`: target address low word

For example, vector `0x06` occupies word addresses `0x00000C` and `0x00000D`. To jump to `0x123456`, those two words should contain `0x0012` and `0x3456`.

## 4.6 Immediate Values

Immediate fields are encoded as raw two's-complement bit patterns. The consuming instruction defines whether the field is interpreted as signed, unsigned, or bitwise data.

| Use | Width | Interpretation |
|---|---|---|
| ALU arithmetic immediate | 16 bits | Two's-complement operand; result is truncated to 16 bits |
| ALU arithmetic short immediate | 8 bits | Zero-extended operand in the range `0x00`–`0xFF` |
| ALU logical immediates | 16 or 8 bits | Bit mask; no sign interpretation is applied by the logical operation |
| Memory displacements | 16 bits | Two's-complement displacement added to the low address word; see Section 4.8 for the overflow trap |
| Coprocessor operands | 16 bits | Coprocessor-defined command or parameter bits |

Table 4.3: Immediate Field Interpretation

Short immediates occupy an 8-bit field and are zero-extended before use by ALU arithmetic. They are therefore suitable for compact non-negative constants and bit masks, not for encoding negative arithmetic operands.

Short immediates are not used for memory, effective-address, branch, jump, or subroutine-call displacements. Those forms use 16-bit immediate displacements, register displacements, or assembler-resolved full-width branch offsets.

## 4.7 Software Layout Conventions

The architectural storage order for multi-word quantities is high word first. The SIRC-1 reference manual does not otherwise define a complete ABI, stack-frame layout, argument-passing convention, or software integer library format. Where examples show structures, arrays, saved registers, or stack use, offsets are word offsets and each push or pop moves the stack pointer by one 16-bit word.

Software standards may build on the architectural high-word-first rule for wider integers and stored addresses, but those conventions are non-normative unless a separate ABI or toolchain document says otherwise.

## 4.8 Arithmetic and Address Wraparound

General-purpose register arithmetic is performed modulo $2^{16}$. Arithmetic condition flags describe the truncated 16-bit result: C records unsigned carry or borrow, and V records signed overflow.

Address calculation for memory, effective-address, branch, jump, and auto-update operations adds displacements to the low word of the selected address register pair. The high address-register word is not changed by ordinary displacement, pre-decrement, or post-increment calculation. If the low word overflows or underflows and `SR.A` (Trap on Address Overflow)[1] is set, the instruction raises a segment-overflow fault. If the bit is clear, the low word wraps modulo $2^{16}$. Displacements are signed two's-complement, and the trap fires only when the low-word calculation wraps, whether the displacement is positive or negative.

The program counter follows the same low-word wrap rule during normal instruction fetch. Since instructions are two words long and must begin at even word addresses, a fetch that would begin from an odd `pl` value raises an alignment fault. If the program counter wraps the low word while `SR.A` is set, a segment-overflow fault is raised at the next instruction fetch, not on the instruction that caused the wrap.

## 4.9 Memory Ordering

The SIRC-1 has no architectural cache, store buffer, memory reordering, or speculative memory access. Bus reads and writes issued by the CPU are externally visible in program order. A bus device may delay completion by withholding bus acknowledgement, but this stalls the current execution phase rather than allowing later bus accesses to pass it.

[1] `SR.`*X* denotes bit or field *X* of the status register; see Chapter 5 for the bit layout and Chapter 11 for the full notation convention.

CHAPTER 5

# Status Register

## 5.1 Overview

The Status Register (`sr`) is a 16-bit special-purpose register that contains condition flags and control bits for the CPU. It is divided into two bytes with different privilege levels:

- **Low Byte (bits 7–0):** Condition flags (bits 3–0) and reserved bits (bits 7–4) – readable and directly writable in both modes, and optionally updated as a side effect of ALU instructions in both modes
- **High Byte (bits 15–8):** Control and mode flags – accessible only in supervisor mode; in protected mode it reads as zero and direct writes to it are silently ignored, with no fault

## 5.2 Status Register Layout

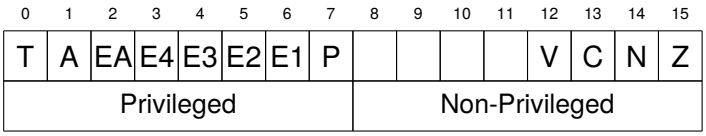



Figure 5.1: Status Register Bit Layout

## 5.3 Condition Flags (Non-Privileged)

These flags reflect the results of ALU operations and comparisons. They can be read at any privilege level and are updated by ordinary instruction execution at any privilege level. A direct write to `sr` can also set them at any privilege level (see Section 5.5.2).

### 5.3.1 Zero Flag (Z) – Bit 0

**Set when:** The result of an operation is zero

**Cleared when:** The result of an operation is non-zero

**Tested by:** Equal (`==`), Not Equal (`!=`) condition codes

### 5.3.2 Negative Flag (N) – Bit 1

**Set when:** The result of an operation is negative (bit 15 = 1) when interpreted as a signed two's complement value

**Cleared when:** The result is positive or zero (bit 15 = 0)

**Tested by:** Negative Set (`NS`), Negative Clear (`NC`), and signed comparison condition codes

### 5.3.3 Carry Flag (C) – Bit 2

**Set when:** An addition produces a carry out of bit 15, or a subtraction requires a borrow

**Cleared when:** No carry/borrow occurs

**Tested by:** Carry Set (`CS`), Carry Clear (`CC`), Unsigned Higher (`HI`), Unsigned Lower or Same (`LO`) condition codes

**Note:** For unsigned comparisons, the carry flag acts as an unsigned overflow/borrow indicator

### 5.3.4 Overflow Flag (V) – Bit 3

**Set when:** A signed arithmetic operation produces a result that cannot be represented in 16 bits (signed overflow)

**Cleared when:** No signed overflow occurs

**Tested by:** Overflow Set (`OS`), Overflow Clear (`OC`), and signed comparison condition codes

**Note:** Overflow occurs when adding two positive numbers yields a negative result, or adding two negative numbers yields a positive result

### 5.3.5 Reserved Flags – Bits 4–7

Bits 4 through 7 of the lower byte are reserved for future use; software must not rely on them. They can be read/written to but the value of these bits after any instruction that updates the condition flags is undefined.

Consequently, it is recommended to test specific bits with instructions such as **`TSAR`**/**`TSAI`**, rather than do a comparison of the whole status register word with something like **`CMPR`**/**`CMPI`**.

## 5.4 Control Flags (Privileged)

These flags control CPU behavior and can only be modified directly in supervisor mode. In protected mode, a direct write to `sr` leaves these bits unchanged: the write is silently ignored for bits 15–8 and does not raise a fault.

### 5.4.1 Protected Mode (P) – Bit 8

**When Clear (0):** CPU operates in supervisor mode with full privileges

**When Set (1):** CPU operates in protected mode with restricted access to:

- High address-register components (`lh`, `ah`, `sh`, `ph`)
- High byte of status register (reads as zero; writes are silently ignored)
- Privileged coprocessor operations (command-word operation nibble `0x8`–`0xF`, bits 11–8)
- Software exceptions targeting a vector below `0x60` (see Chapter 6)

**Note:** This bit provides basic memory protection by preventing user code from changing memory segments. Performing a restricted operation raises a privilege violation fault, with the exception of writes to the high byte of the status register, which are silently ignored.

### 5.4.2 Hardware Interrupt Enable Bits (E1-E4) – Bits 9–12

These four bits individually control whether each of the four maskable hardware interrupt lines is enabled:

- **E1 (Bit 9):** Enable Hardware Interrupt Line 1 (Level 1, lowest maskable priority)
- **E2 (Bit 10):** Enable Hardware Interrupt Line 2 (Level 2)
- **E3 (Bit 11):** Enable Hardware Interrupt Line 3 (Level 3)
- **E4 (Bit 12):** Enable Hardware Interrupt Line 4 (Level 4, highest maskable priority)

**Note:** Hardware Interrupt Line 5 (Level 5) is a Non-Maskable Interrupt (NMI) and is always enabled. It cannot be disabled via the status register.

When a bit is set to 1, the corresponding hardware interrupt is enabled and can trigger an exception when requested. When cleared to 0, interrupts on that line are disabled and are not serviced.

**Important behavior:**

- Disabled interrupts are not queued while the enable bit is 0.
- Hardware interrupt lines 1-4 are level-sensitive, not edge-triggered. If an interrupt request remains active, it will be serviced again as soon as the current handler is finished.
- Hardware interrupts can only interrupt execution if their priority level is higher than the currently executing exception level
- This prevents the same interrupt from re-triggering while its handler is executing
- Lower priority interrupts that occur while handling a higher priority interrupt are queued and serviced after the current handler completes (after RETE)

These bits are typically managed by the operating system's interrupt handling code. At reset, all interrupt enable bits are cleared (interrupts disabled).

Interrupt handling is discussed in detail in Chapter 6.

### 5.4.3 Exception Active (EA) – Bit 13

**When Set (1):** The CPU is currently executing an exception handler (`current_exception_level != 0`)

**When Clear (0):** The CPU is executing normal code (`current_exception_level == 0`)

**Automatically Set:** When any exception is entered (software, hardware, or fault)

**Automatically Cleared:** When returning to exception level 0 via **`RETE`**

**Purpose:** Allows software to detect whether it is running within an exception handler context

**Typical Use:** OS code can check this bit to determine appropriate behavior, for example avoiding re-enabling interrupts during nested exception handling

**Note:** This bit reflects the internal `current_exception_level` state. Programs can read this bit but cannot directly modify it – it is managed automatically by the exception handling hardware.

### 5.4.4 Trap on Address Overflow (A) – Bit 14

**When Set (1):** An effective-address calculation or a program-counter advance that wraps the low word raises a segment overflow fault (vector `0x03`). For a program-counter wrap the fault is raised at the following instruction fetch

**When Clear (0):** Address overflows wrap around without any side effects

**Purpose:** When set, helps detect pointer errors during development or can be used to increment/decrement the current segment if the address goes out of bounds of the segment.

**Typical Use:** Enabled during debugging, disabled in production for performance

### 5.4.5 Trace Mode (T) – Bit 15

**When Set (1):** An instruction trace fault (vector `0x06`) is generated after every instruction

**When Clear (0):** Normal execution

**Purpose:** Allows debuggers to single-step through code

**Note:** Used by SIRCIT (SIRC Instruction Tracer) for debugging

## 5.5 Status Register Updates

### 5.5.1 Automatic Updates

The condition flags (Z, N, C, V) are automatically updated by most ALU instructions, unless explicitly disabled:

- **Arithmetic Instructions** (**ADDI**, **SUBI**, **ADCI**, **SBCI**): Update all four condition flags
- **Logical Instructions** (**ANDI**, **ORRI**, **XORI**): Update Z and N flags; C and V flags are cleared
- **Compare Instructions** (**CMNI**, **CMNR**, **CNCI**, **CNCR**, **CMPI**, **CMPR**, **CPCI**, **CPCR**): Same as Arithmetic Instructions but does not update destination
- **Test Instructions** (**TSAI**, **TSAR**, **TSOI**, **TSOR**, **TSXI**, **TSXR**): Same as Logical Instructions but does not update destination
- **Move Instructions** (**MOVI**, **MOVR**): Same as Logical Instructions. They do not accept `[S]`, since they have no shifted operand; an encoding of the opcode with AF `10`, not reachable from public assembly syntax, leaves all four flags architecturally undefined (`U U U U`).
- **Load Instructions** (**LOAD**, **LDEA**): Never update the condition flags and have no status source encoding to override.
- **ALU Instructions with a Shift Operand**: The flags come from the ALU result by default. They come from the shift instead when the `[S]` status override modifier is used, or with the **SHFT** meta instruction.

### 5.5.2 Manual Updates

In supervisor mode, the status register can be directly manipulated like any other register:

```
1  ; Set protected mode bit (only in supervisor mode)
2  ORRI sr, #0x0100
3
4  ; Enable all maskable hardware interrupts (set bits 9-12)
5  ; Note: Hardware interrupt line 5 is an NMI and is always enabled
6  ORRI sr, #0x1E00
7
8  ; Disable all maskable hardware interrupts (clear bits 9-12)
9  ANDI sr, #0xE1FF
10
11 ; Restore status register saved to stack
12 LOAD sr, (s)+
```

An ALU instruction that targets `sr` writes its result to `sr` and then overwrites bits 7–0 with the flags produced by that same instruction, so only bits 15–8 can be set this way. To write the low byte, suppress the flag update with the `[N]` status source (for example **ORRI[N]** `sr`, `#0x0003`) or use **MOVR[N]** `sr`, `rN`. A direct write to `sr` also preserves the current value of bit 13 (`EA`); only **RETE** restores it, so the **LOAD** `sr`, (s)+ restore above does not reproduce the exception-active state saved at the time of the original write.

**Important:** When running in protected mode, a direct write to `sr` updates only the low byte (bits 7–0). Bits 15–8 – including the Protected Mode bit itself – are left unchanged, silently and without a fault, so a protected-mode program cannot leave protected mode or alter the interrupt-enable, trace, or address-overflow bits this way. Because bits 15–8 read as zero in protected mode, a read-modify-write of `sr` behaves consistently: the high byte is never disturbed. This applies to every instruction that names `sr` as its destination, including the flag-only comparison and test instructions (**CMNI**, **CMNR**, **CNCI**, **CNCR**, **CMPI**, **CMPR**, **CPCI**, **CPCR**, **TSAI**, **TSAR**, **TSOI**, **TSOR**, **TSXI**, **TSXR**), which do not write their destination and are therefore unaffected.

## 5.6 Reading the Status Register

In supervisor mode, reading `sr` returns the full 16-bit value. In protected mode, reading `sr` returns the lower byte in bits 7–0, with bits 15–8 masked to zero (to hide supervisor-only state).

```
; In supervisor mode - gets full 16 bits
MOVR r1, sr ; r1 = 0xXXXX (all bits)

; In protected mode - high byte masked
MOVR r1, sr ; r1 = 0x00XX (high byte forced to 0)
```

## 5.7 Exception Handling Effects

When an exception occurs:

1. The current status register is saved
2. Protected mode bit (P) is cleared (entering supervisor mode)
3. Trace mode bit (T) is cleared (disabling single-stepping in exception handler)
4. The hardware interrupt enable bits are not changed. A pending interrupt is serviced during a handler only if its priority level is higher than the current exception level

When returning from an exception with **`RETE`**, the saved status register is restored.

## 5.8 Usage Examples

The SIRC-1 provides syntax to manually control how status flags are updated during ALU instructions, including those with a shift operand. This is particularly useful for advanced control flow and flag preservation. See Section 9.12 in Chapter 9 for complete details and worked examples.

Condition-code-driven branching and conditional execution (comparing registers, testing bits, and acting on the result) are a property of the condition flags this chapter defines, but the idioms themselves belong to Chapter 10 and the individual instruction entries (for example, **`TSAI`**/**`TSAR`** in Chapter 13), which cover them in more depth than a status-register-focused example could.

```
; Entering protected mode (from supervisor mode)
ORRI sr, #0x0100 ; Set protected mode bit
; Now running in protected mode

; Attempting to write privileged register will fault
; ADDI ah, #0x05 ; This would cause exception!
```

Example 5-1: Enabling Protected Mode

```
; Save status register (supervisor mode only -- see Section~\ref{sec:sr-manual-updates})
MOVR r7, sr

; Do some operations that change flags
ADDR r1, r2, r3
CMPI r1, #100

; Restore original status ([N] stops the flag update overwriting the low byte)
MOVR[N] sr, r7
```

Example 5-2: Saving and Restoring Status

As with the stack restore in Section 5.5.2, this restore does not reproduce bit 13 (EA); only **RETE** restores it.

CHAPTER 6

# Exception and Interrupt Handling

## 6.1 Overview

An exception is an event that causes the program flow to be diverted to an address stored in a predefined vector.

Some are directly caused by an instruction, some are a side effect of an instruction, and some are asynchronously caused by external hardware.

They are managed by the exception coprocessor, which takes control of the processor when an exception is pending. Figure 6.1 shows how the pieces fit together; each is described in the sections that follow.

### 6.1.1 Exception Levels and Priority

Exceptions are prioritized as follows (highest to lowest):

1. Priority 7: Faults
2. Priority 6: Level 5 hardware exceptions (NMI-like)
3. Priority 5: Level 4 hardware exceptions
4. Priority 4: Level 3 hardware exceptions
5. Priority 3: Level 2 hardware exceptions
6. Priority 2: Level 1 hardware exceptions
7. Priority 1: Software exceptions (traps)

Faults have priority over all hardware interrupts. If a fault is pending at the same instruction boundary as one or more hardware interrupts, the fault is dispatched first and the hardware interrupts remain pending. This includes instruction trace faults: when trace mode raises a post-instruction fault, that trace fault is serviced before pending hardware interrupts at the next boundary.

**Hierarchical Exception Handling:**

Exceptions in SIRC-1 are strictly hierarchical. A hardware interrupt can only interrupt the current execution if its priority level (exception level) is *higher* than the currently active exception level. This prevents:

- An interrupt handler from being interrupted by its own interrupt (same level)
- Lower priority interrupts from interrupting higher priority handlers
- Software exceptions from running during any hardware interrupt (would corrupt link register 0)

The exception unit maintains a `current_exception_level` field that tracks the active exception level (0–7). When not handling any exception, this is 0. When handling an exception at level N, only exceptions at level > N can interrupt.

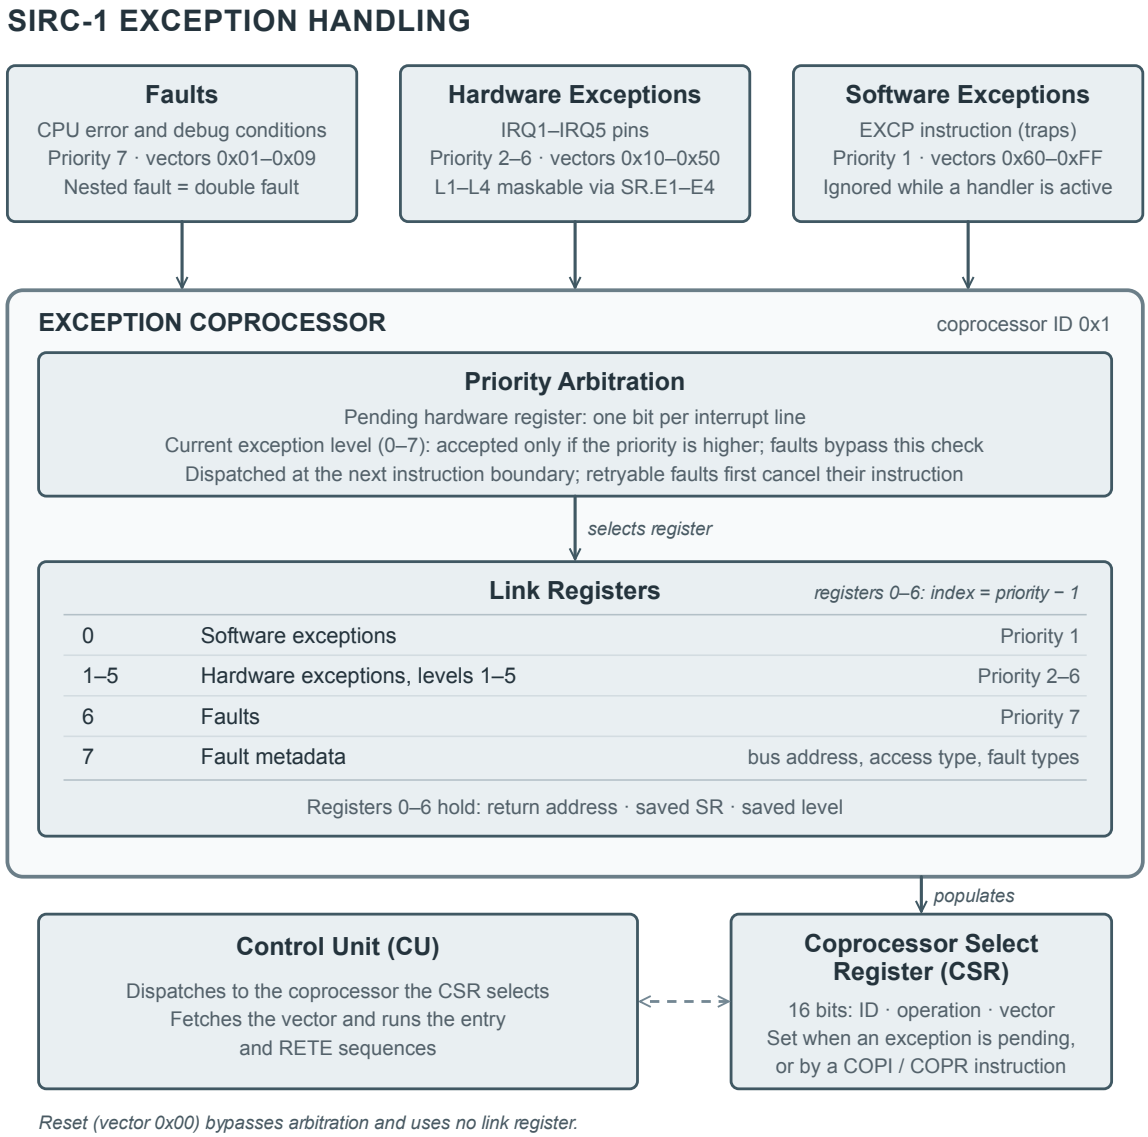



Figure 6.1: SIRC-1 Exception Handling Overview

### 6.1.2 Vector Table

The exception vectors are stored starting at address `0x0`. Each vector is a 24-bit target address stored as two consecutive 16-bit words in the address format described in Section 4.5. The high word is stored first at `vector * 2`, followed by the low word at `vector * 2 + 1`. The vector table has 256 entries. Vectors `0x00`–`0x5F` (96 entries) are reserved for the CPU; vectors `0x60`–`0xFF` (160 entries) are user trap vectors. The vector table layout is:

- **`0x00`:** Reset vector
- **`0x01`:** Bus fault
- **`0x02`:** Alignment fault
- **`0x03`:** Segment overflow fault
- **`0x04`:** Invalid opcode fault
- **`0x05`:** Privilege violation fault
- **`0x06`:** Instruction trace fault
- **`0x07`:** Level five hardware exception conflict
- **`0x08`:** Double fault
- **`0x09`:** Bus protection fault
- **`0x0A`–`0x0F`:** Reserved for future privileged exceptions
- **`0x10`:** Level 5 hardware exception vector
- **`0x20`:** Level 4 hardware exception vector
- **`0x30`:** Level 3 hardware exception vector
- **`0x40`:** Level 2 hardware exception vector
- **`0x50`:** Level 1 hardware exception vector
- **`0x11`–`0x5F` (excluding `0x20`, `0x30`, `0x40`, `0x50`):** Reserved
- **`0x60`–`0xFF`:** User exception vectors (160 user-accessible trap vectors)

### 6.1.3 Instructions Used in This Chapter

This chapter refers to several exception-coprocessor instructions before their full reference entries appear. Briefly:

**`EXCP`** Triggers a software exception (trap).

**`RETE`** Returns from an exception handler, restoring the saved program counter, status register, and exception level.

**`WAIT`** Halts the CPU until an enabled interrupt or reset occurs.

**`RSET`** Performs the reset sequence and jumps to the reset vector.

**`ETFR`** Copies the saved return address and/or status register from a link register into `a` and/or `r7`.

**`ETTR`** Copies `a` and/or `r7` into a link register's saved return address and/or status register.

**`EXCP`**, **`RETE`**, **`WAIT`**, **`RSET`**, **`ETFR`**, and **`ETTR`** are meta-instructions that assemble to **`COPI`** (coprocessor call) forms addressed to the exception coprocessor (coprocessor `0x1`); Section 6.9 in this chapter lists their opcodes, and Chapter 16 gives the full syntax, operation, flags, and legal forms for each.

## 6.2 Faults

Faults are priority 7 exceptions raised by the CPU itself in response to error conditions or debug events. They use vectors in the `0x01`–`0x0F` range. Unlike hardware and software exceptions, faults cannot be masked or deferred: once a fault condition is raised, the fault is dispatched at the next instruction boundary regardless of the current exception level. Two faults are conditional on whether they are raised at all: Segment Overflow requires `SR.A`, and Instruction Trace requires `SR.T` or the force-trace request (`TRCE`).

### 6.2.1 Fault Categories

Not all faults behave the same way with respect to the faulting instruction and the RETE return address. There are three categories:

#### Retryable faults

The operation that triggered the fault does not take effect. For most faults this means the instruction takes no architectural effect (the exceptions to this are listed below). The link register stores the address of the faulting instruction. RETE returns to that instruction so it can be retried, typically after the fault handler has corrected the condition that caused the fault.

Examples of how a handler can correct the cause of a fault:

- Remapping or paging in a device for a bus fault
- Switching to supervisor mode for a bus protection fault or privilege violation
- Bringing an out-of-range address back into range for a segment overflow
- Emulating the missing operation for an invalid opcode fault

Every fault in this category follows the same pattern: a handler is always free to advance past the faulting instruction with **`ETFR`**/**`ETTR`** instead of retrying it. For Invalid Opcode Fault this is usually the right choice – simply retrying an unemulated invalid opcode will raise the same fault again.

Two cases do not follow the pattern of the instruction being cancelled before it commits:

- An alignment fault is raised by the instruction fetch itself, so there is no decoded instruction to cancel.
- A DMA burst (**`DMAR`**, **`DMAW`**, **`DMAT`**) performs several bus accesses per instruction; a fault partway through can leave some of those accesses already committed; see the individual fault descriptions below and Section 16.7.3.

The retryable faults are: *Alignment Fault; Bus Fault; Bus Protection Fault; Invalid Opcode Fault; Privilege Violation Fault; Segment Overflow Fault.*

#### Post-instruction faults

The instruction completes normally and its effects are committed before the fault fires. The link register stores the address of the *next* instruction. RETE advances to that instruction; the traced instruction is not re-executed.

The only post-instruction fault is the *Instruction Trace Fault*.

#### Exception dispatch faults

Raised during the exception handling machinery itself, not during normal instruction execution. The link register stores the program counter at the point the fault was detected within the exception handler. Recovery may require careful state management; these faults often indicate a hardware misconfiguration or a programming error in an exception handler.

The exception dispatch faults are: *Level Five Hardware Exception Conflict, Double Fault.*

### 6.2.2 Bus Fault

*(Retryable)* — Raised when the external memory system reports a bus transaction as failed by signalling a bus error (`BERR`).

This could happen, for example, if an unmapped address is presented by the CPU and another device detects this and raises an error. The instruction is cancelled before it takes effect, and the link register stores the address of the *faulting* instruction, so a handler implementing virtual memory can map in the missing page and return with **`RETE`** to retry the same instruction.

Because ALU results and status-register updates are only committed during the write-back phase (Chapter 2), which runs after the memory-access phase where a bus fault is detected but does nothing for a cancelled instruction, a bus fault can never leave a partial status-register or register update behind for an ordinary single-access instruction.

This atomicity does not extend to a DMA burst: **`DMAR`**, **`DMAW`**, and **`DMAT`** are each one instruction that performs multiple bus accesses in sequence, so a bus fault partway through a burst leaves the words already transferred in effect – retrying with **`RETE`** does not undo them. The fault metadata register's DMA read/write burst bus-access-type codes (Section 6.5.2) let a handler recognize this case. See Section 16.7.3 for what a handler can safely do about it.

### 6.2.3 Bus Protection Fault

*(Retryable)* — Raised when the external memory system reports a bus protection error (`BPER`) in response to a bus transaction.

This indicates that the requested address and device are valid, but the operation is disallowed. Examples include writing to ROM or accessing a protected memory region while the CPU is in protected mode. The instruction is cancelled before it takes effect, and the link register stores the address of the faulting instruction, so a handler can make the necessary corrections and retry with **`RETE`**.

As with Bus Fault, this applies cleanly to an ordinary single-access instruction; a DMA burst (**`DMAR`**, **`DMAW`**, **`DMAT`**) can raise this fault partway through, in which case words already transferred before the fault remain in effect. See Section 16.7.3 for what a handler can safely do about it.

### 6.2.4 Alignment Fault

*(Retryable)* — Raised when fetching instructions if the program counter contains an odd word address.

This is to simplify fetching: the second word of an instruction is always at `pl | 0x1`, which ensures that instructions can never overflow a segment boundary. The saved return address is itself odd; a fault handler must correct `p` (for example, by clearing bit 0) before returning with **`RETE`**, or the CPU raises the same fault again immediately.

### 6.2.5 Segment Overflow Fault

*(Retryable)* — Raised when a computed address would fall outside the current segment.

Only raised if `SR.A` (Trap on Address Overflow) is set, since some programs intentionally rely on address wrap-around. Also raised if the program counter overflows; the captured bus address and bus access type in the fault metadata register help identify where the overflow occurred. The link register stores the address of the faulting instruction, whether the overflow occurred in the program counter or in any other address computation, so a handler can bring the address back into range and retry with **`RETE`**.

The same DMA-burst caveat as Bus Fault and Bus Protection Fault applies here: a segment-overflow fault raised partway through a **`DMAR`**, **`DMAW`**, or **`DMAT`** burst does not undo words already transferred before the fault. See Section 16.7.2 for where a DMA burst checks for overflow and Section 16.7.3 for what a handler can safely do about it.

### 6.2.6 Invalid Opcode Fault

*(Retryable)* — Raised when a coprocessor call targets a coprocessor ID not implemented by the selected CPU model.

Can be used for forward compatibility: programs written for a future coprocessor (for example, a floating-point unit) will trap on older hardware, and the handler can emulate the operation in software. Because this fault is retryable, the link register stores the address of the faulting instruction; a handler that has emulated the operation must use **`ETFR`**/**`ETTR`** to redirect the return address to the instruction following the trapped call before returning with **`RETE`** – retrying the instruction unmodified will simply raise the same fault again.

Note that this fault is specific to coprocessor instructions. Other instruction encodings outside the documented instruction set are reserved or architecturally undefined, and are not required to raise an invalid-opcode fault.

### 6.2.7 Privilege Violation Fault

*(Retryable)* — Raised when a privileged operation is attempted while not in supervisor mode:

1. Directly writing to the high word of any address register
2. Address-register-pair write-back that would change a high address-register word
3. Executing a supervisor-only coprocessor operation
4. Triggering a software exception with a vector below `0x60`

Figure 3.3 (Chapter 3) shows where each of these checks is made.

The illegal instruction never takes effect: it is cancelled before it writes anything, and the link register stores its own address so **`RETE`** returns to it directly. This matters because a supervisor-mode handler needs to be able to inspect the exact instruction that faulted, decide how to respond (deny it, emulate its effect, or promote the caller), and then either retry it or use **`ETFR`**/**`ETTR`** to redirect the return address elsewhere. None of that is possible if the illegal instruction had already been allowed to run.

### 6.2.8 Instruction Trace Fault

*(Post-instruction)* — Raised after every instruction completes when the `TraceMode` SR bit is set, or when the force-trace request (`TRCE`) is active at the instruction boundary (see the Force Trace Mode Input in the *SIRC-1 Hardware Reference Manual*).

Used for single-step debugging. The fault fires after the instruction commits; for a coprocessor call, that includes the call's dispatch slot (Section 6.3.3). RETE returns to the instruction *following* the traced one. The T bit is cleared on entry to the fault handler (as with all exceptions), so the handler itself is not traced. RETE restores the saved SR, which re-enables tracing unless the handler explicitly clears T from the saved status register via `ETTR` before returning. `SR.T` is sampled once at the start of each instruction, before that instruction can modify it, so a write to `SR.T` takes effect starting with the next instruction boundary; exception-unit dispatches are never traced.

### 6.2.9 Level Five Hardware Exception Conflict

*(Exception dispatch)* — Raised when a level five hardware exception cannot be handled normally because it collides with another one. There are two cases:

- A level five hardware exception is dispatched while one is already being serviced (exception level 6).
- The exception unit is about to dispatch a queued level five hardware exception, but one or more further level five requests arrived while it was queued and could not be queued as well (the *L5 overrun* described in Section 6.3.4).

The exception unit has no spare link register above level 6, and the pending hardware exceptions register holds only one bit per line, so a second L5 cannot be handled normally. Rather than silently dropping it (which could mask a hardware misconfiguration), the CPU raises this fault. Level 5 interrupts should be treated as NMIs.

A program that does not care about conflicting L5 requests can install a handler for this fault that consists of a single **RETE**; the fault is not retryable, so **RETE** resumes the code that was running when the fault was raised. A program that does care can use the handler to log the overrun or take corrective action.

### 6.2.10 Double Fault

*(Exception dispatch)* — Raised when a fault occurs while another fault is already being handled.

When the CPU is already at fault level (priority 7) and another fault occurs, there is no additional banked link register available. The fault link register (register 6) is overwritten with the new return address, losing the original fault's return address. The fault metadata register (register 7) is also overwritten; it encodes a double-fault flag along with both the current and original fault types.

The CPU jumps to vector `0x08`. This is typically a last-chance handler that dumps registers and resets. If another fault occurs while the CPU is already at fault level, the CPU attempts to dispatch vector `0x08` again. There is no limit to the number of times vector `0x08` is dispatched. A double fault handler that causes a fault may cause an infinite loop without special handling from the programmer. If the double-fault vector fetch itself fails, the CPU will reset. If two fault conditions are detected within the same instruction before either has been dispatched, the resulting behavior is architecturally undefined.

#### Link Register Preservation

**Important:** Link registers can be overwritten when a fault occurs during the handling of another fault (a double fault). In this case, the fault link register (register 6) and the fault metadata register (register 7) are overwritten. This means the original return address is lost.

There is no way to fully recover from a double fault: the valid response is to declare the CPU state invalid, perform some last-chance error handling (for example, dumping the registers), and reset the CPU.

A fault handler that wants a better chance of capturing useful diagnostics before that reset should still save the link register contents early – before doing anything else that might fault again – using the **ETFR** instruction, so the original fault's return address and status register can be included in whatever gets dumped.

**ETFR** only transfers the return address and status register of link registers 6 and 7; the saved exception level is not accessible to software through it, nor can **ETTR** write it back. This is not just a missing diagnostic field: **RETE** always restores `current_exception_level` directly from whatever value is currently latched in the link register, and after a double fault that value is the fault level (7), not the level that was active before the original fault. Even a handler that perfectly restores the return address and status register and attempts **RETE** anyway would leave the CPU stuck at exception level 7 – unable to service any hardware interrupt or software exception, including Level 5, since nothing outranks the highest priority level. New faults still dispatch normally regardless of the stuck level (faults bypass the priority check), so the CPU would keep running rather than visibly failing; it would simply be deaf to every interrupt and trap for the rest of the program's life. This is the underlying reason reset, not **RETE**, is the only valid response to a double fault.

The values can be stored on the stack but since the stack pointer may be corrupted, a more robust implementation stores and loads from hardcoded memory addresses that are known to always be valid, instead of relying on the stack pointer.

## 6.3 Hardware Exceptions (Interrupts)

A hardware exception occurs when external hardware raises an interrupt request. These are also referred to as "interrupts". When a hardware exception occurs, the current instruction is completed, and control is transferred to different vectors based on the interrupt "priority". The vectors for hardware exceptions are in the `0x10`–`0x50` range.

The return address stored in the exception link register is the address of the instruction that would have executed next, not the interrupted one – so once the handler returns via **`RETE`**, the interrupted program resumes normally as if nothing happened.

### 6.3.1 Hardware Interrupt Enable Bits

The status register contains 4 individual enable bits (bits 9–12 in the privileged byte) that control whether each maskable hardware interrupt line can trigger an exception:

- Bit 9 (E1): Hardware Interrupt Line 1 (Level 1, lowest maskable priority)
- Bit 10 (E2): Hardware Interrupt Line 2 (Level 2)
- Bit 11 (E3): Hardware Interrupt Line 3 (Level 3)
- Bit 12 (E4): Hardware Interrupt Line 4 (Level 4, highest maskable priority)

**Note:** Hardware Interrupt Line 5 (Level 5) is a Non-Maskable Interrupt (NMI) and cannot be disabled. It will always trigger an exception when requested, regardless of the enable bit settings. Bit 13 is used for the Exception Active flag instead.

When an interrupt line is disabled (bit = 0), interrupts on that line are completely ignored and not queued. When enabled (bit = 1), the interrupt can trigger an exception if its priority is higher than the currently executing exception level.

### 6.3.2 Pending Hardware Interrupts

Interrupt requests at levels 1–4 are level-sensitive; Level 5 is edge-triggered and is described separately in Section 6.3.4. When an enabled level-sensitive interrupt request is observed active, the corresponding bit is set in the pending hardware-exceptions register. Requests at disabled maskable levels are ignored at this sampling point and are not latched for later service.

For the level-sensitive lines, the pending register stores one bit per hardware interrupt line, so repeated requests at the same level coalesce into a single pending interrupt. If the request is still active after the interrupt is serviced, it may be sampled again and become pending again.

At an instruction boundary, the exception unit selects the highest-priority pending hardware interrupt whose priority is higher than the current exception level. The selected bit is cleared as the handler is dispatched. Pending lower-priority interrupts remain latched and are considered again after the current handler returns with **`RETE`**. If the highest-priority pending interrupt's enable bit has been cleared since it was latched, it does not block dispatch of any other pending, enabled interrupt of lower priority.

### 6.3.3 Interrupt Recognition and Latency

Exceptions are recognized only at an instruction boundary, and only when the CSR is empty and no coprocessor is active (Section 2.3.2). A coprocessor call (**`COPI`**, **`COPR`**, or a meta-instruction that assembles to one) is part of its instruction: its dispatch slot, and the command it starts, complete before a pending hardware interrupt or an instruction trace fault is taken. Nothing is lost by the wait. Level-sensitive requests stay asserted, a Level 5 request stays in its pending bit, and a trace fault is still raised. A fault raised by the call itself, such as a privilege violation or a failed DMA bus access, is serviced as soon as it occurs.

The worst-case wait for an interrupt is therefore the remainder of the current instruction, plus the dispatch slot of a pending coprocessor call, plus the time a running coprocessor command takes,

plus the dispatch slot of the interrupt itself. A DMA transfer cannot be interrupted, including by Level 5 (Section 16.7). Appendix B gives the cycle counts.

### 6.3.4 Level 5 NMI-like Behavior

Level 5 hardware exceptions behave similarly to a Non-Maskable Interrupt (NMI). Unlike interrupt levels 1–4, which are level-sensitive (recognised for as long as the request remains active), Level 5 is edge-triggered: it fires once when the request becomes active, regardless of how long it is held, and must be withdrawn and raised again to fire again. This avoids spurious Level Five Hardware Exception Conflict faults from a request that simply stays active. Level 5 cannot be disabled via the interrupt enable bits in the status register, and will preempt any lower-priority exception handler. However, Level 5 is *not* fully non-maskable. Because faults carry priority 7 (higher than Level 5's priority 6), an L5 interrupt that arrives while a fault is being handled is *queued* in the pending hardware exceptions register rather than serviced immediately.

Once the fault handler returns via `RETE` and the exception level drops back below 6, the pending L5 interrupt fires normally.

The pending hardware exceptions register holds a single bit for L5, so only one L5 request can be queued. If a further L5 request arrives while the L5 pending bit is already set (for example, during a long fault handler), the request is lost, and the exception unit records the loss in an internal *L5 overrun* flag. This flag is not part of the status register or any other software-visible register. When the exception unit next selects L5 for dispatch and the L5 overrun flag is set, it clears the flag and raises a Level Five Hardware Exception Conflict fault (Section 6.2.9) instead of dispatching L5. The L5 pending bit remains set. Because that fault is not retryable, **`RETE`** from its handler resumes the code that was running, and the still-pending L5 interrupt is then dispatched normally. Any number of lost L5 requests while one is queued are reported by a single conflict fault. The L5 pending bit and the L5 overrun flag are both cleared by reset.

This means Level 5 response latency is not deterministic when a fault is in progress. For timing-critical use of the NMI line, fault handlers should be kept as short as possible.

If a second L5 interrupt arrives *while the CPU is already executing an L5 handler* (exception level 6), it is not queued. It will raise a Level Five Hardware Exception Conflict fault instead. See Section 6.2.9.

These two rules compose in a non-obvious way when a fault is raised *inside* an L5 handler while a second L5 interrupt is pending. Table 6.1 walks through the sequence step by step.

| Step | Event | Exception Level | Link Register Used |
|---|---|---|---|
| 1 | CPU is executing inside the L5 handler. | 6 | Link register 5 (holds the L5 handler's return state) |
| 2 | A fault condition is raised inside the L5 handler. Priority 7 exceeds the current level (6), so the fault preempts it. | 6 → 7 | Link register 6 receives the L5 handler's return address, status register, and saved level (6) |
| 3 | A second L5 interrupt is requested while the fault handler runs. Priority 6 does not exceed the current level (7), so it is not serviced. | 7 | Not dispatched; latched as pending in the pending hardware-exceptions register |
| 4 | The fault handler executes **RETE**, restoring the return address, status register, and saved level (6) from link register 6. | 7 → 6 | Link register 6 (restored, not overwritten) |
| 5 | Back at level 6, the exception unit reconsiders the pending L5 interrupt. Its priority (6) is not *higher* than the current level (6), so it is not dispatched normally. | 6 | — |
| 6 | The CPU raises a Level Five Hardware Exception Conflict fault instead, because the pending L5 collides with the still-active L5 handler. | 6 → 7 | Link register 6 receives the dispatch point as the return address |

Table 6.1: Fault-Inside-L5-Handler Timeline

In short: the fault (priority 7) blocks the second L5 (priority 6) from firing while the fault handler runs. Once **RETE** returns to level 6, the queued L5 collides with the still-active outer L5 handler, and a Level Five Hardware Exception Conflict fault is raised then, not during the inner fault handler.

## 6.4 User Exceptions (Traps)

A user exception occurs when the program executes an **EXCP** instruction that signals the exception coprocessor that it should trigger an exception. They are usually used by programs running in protected mode to switch to supervisor mode in a controlled way. They are also referred to as "traps". The vectors for user exceptions are in the `0x60–0xFF` range.

As with hardware exceptions, the return address stored in the link register is the instruction

following the **EXCP** call, so **RETE** resumes the calling program immediately after the trap.

Software exceptions are only accepted from normal execution. If an **EXCP** instruction is executed while any exception or fault handler is already active, the software exception is ignored, is not queued, and does not fetch its vector.

## 6.5 Exception Registers

The SIRC-1 exception coprocessor maintains several special-purpose registers for exception handling.

### 6.5.1 Link Registers

The exception unit uses banked link registers to store the processor state when an exception occurs. There are eight link registers in total, indexed 0–7:

- Register 0: Software exceptions (traps)
- Registers 1–5: Hardware exceptions (interrupts), one for each priority level
- Register 6: Faults
- Register 7: Fault metadata (stores bus address and bus access type information, see Section 6.5.2 for the format)

For registers 0–6 the link register index is the exception's priority minus one, so each priority level has its own link register. This is what lets a higher-priority exception interrupt a lower-priority handler without software saving the return address first: the new exception saves its state in its own link register and leaves the interrupted handler's untouched.

Link registers 0–6 each store three pieces of information; register 7 uses the same layout to hold fault metadata (Section 6.5.2):

- **Return Address:** The 32-bit value copied verbatim from the `p` register pair at the time of the exception.
- **Return Status Register:** The 16-bit status register value at the time of the exception
- **Saved Exception Level:** The exception level that was active when the exception was taken; **RETE** restores it into `current_exception_level`

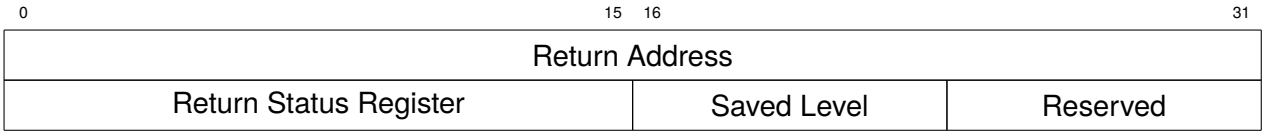



Figure 6.2: Exception Link Register Saved-State Layout

The Saved Level and Reserved fields are shown for illustration only: **ETFR** and **ETTR** transfer only the Return Address and the Return Status Register between a link register and `a`/`r7`. The saved exception level is not accessible to software through these instructions.

When an exception occurs, the appropriate link register (determined by the exception priority level) is populated with the current program counter and status register values. For faults in the retryable category (Alignment Fault, Bus Fault, Bus Protection Fault, Invalid Opcode Fault, Privilege Violation Fault, and Segment Overflow Fault), the return address is the address of the faulting instruction, so it can be retried. For regular exceptions (hardware and software exceptions) and Instruction Trace Fault, the return address is the address after the current instruction; see

Section 6.2.1 for the exception-dispatch faults (Level Five Hardware Exception Conflict, Double Fault), which instead store the program counter at the point the fault was detected.

| Register | Exception Source | Priority Level |
|---|---|---|
| 0 | Software exceptions | 1 |
| 1 | Level 1 hardware | 2 |
| 2 | Level 2 hardware | 3 |
| 3 | Level 3 hardware | 4 |
| 4 | Level 4 hardware | 5 |
| 5 | Level 5 hardware | 6 |
| 6 | Faults | 7 |
| 7 | Fault metadata | n/a |

Table 6.2: Exception Link Register Assignment

### 6.5.2 Fault Metadata Register Format

The fault metadata register (register 7) stores additional information about faults beyond just the return address. The return_status_register field is used to encode fault-specific metadata in the following format:





Figure 6.3: Fault Metadata Register Status Field Layout

- **Bits 0–2:** Bus access type (BAT) captured when the fault was raised (3 bits)
  - `0x0`: None
  - `0x1`: Instruction fetch
  - `0x2`: Data read
  - `0x3`: Data write
  - `0x4`: Exception vector fetch
  - `0x5`: DMA read burst
  - `0x6`: DMA write burst
  - `0x7`: Reserved
- **Bit 3:** Double fault flag (1 bit) — set to 1 if this is a double fault
- **Bits 4–7:** Current fault type (4 bits) — the type of fault that occurred
- **Bits 8–11:** Original fault type (4 bits) — only meaningful for double faults, indicates the fault that triggered the escalation to a double fault (the second fault, not the one already being handled when it occurred)
- **Bits 12–15:** Unused (reserved for future use)

Fault types use the following values:

- **`0x01`:** Bus fault
- **`0x02`:** Alignment fault

- **0x03:** Segment overflow fault
- **0x04:** Invalid opcode fault
- **0x05:** Privilege violation fault
- **0x06:** Instruction trace fault
- **0x07:** Level five hardware exception conflict
- **0x08:** Double fault
- **0x09:** Bus protection fault

The return_address field of register 7 stores the bus address that was being accessed when the fault occurred (for faults that involve memory access). For coprocessor invalid-opcode faults that occur during coprocessor dispatch before bus access, the low word of this field stores the 16-bit coprocessor command that could not be dispatched, and the high word is zero. This lets an invalid-opcode handler emulate missing optional coprocessor operations.

Exception handlers can use the **ETFR** instruction to read the fault metadata register and decode this information to determine how to handle the fault appropriately.

## 6.6 Exception Processing

Figure 6.4 shows how an exception is entered and returned from. This section gives the rules the figure does not: which exceptions are accepted, what is preserved, and what happens when entry fails. Section 6.7 describes the return.

### 6.6.1 Exception Entry

**Acceptance.** Acceptance is decided before the exception-vector fetch, so an exception that is not accepted has no side effects.

- A hardware interrupt is accepted only if its line is enabled in the status register and its priority is higher than the current exception level. Otherwise it does not fetch its vector. A disabled interrupt is ignored and not queued; one that is only outranked remains pending, according to the rules in Section 6.3.2.
- A level 5 hardware exception that collides with another one raises a Level Five Hardware Exception Conflict fault instead (Section 6.2.9).
- A software exception is accepted only when no exception handler is active.

**Selection and commit.** An exception is selected only when the CSR is empty and no coprocessor is active (Section 6.3.3). The exception unit then fetches the high word and then the low word of the handler address from the vector table. The state updates shown in the figure commit as one architectural action, and only after the vector fetch has succeeded. The condition flags, reserved lower status bits, interrupt-enable bits and `SR.A` are preserved in the live status register.

The status register saved in the link register is the value from before entry, with `SR.P`, `SR.T` and `SR.EA` unmodified. **RETE** restores it, so a handler can inspect or edit the saved value with **ETFR** and **ETTR** before returning. `SR.T` is cleared on entry to every handler, including fault handlers, so trace faults cannot fire inside handlers; if it was set before the exception, tracing resumes after **RETE**.

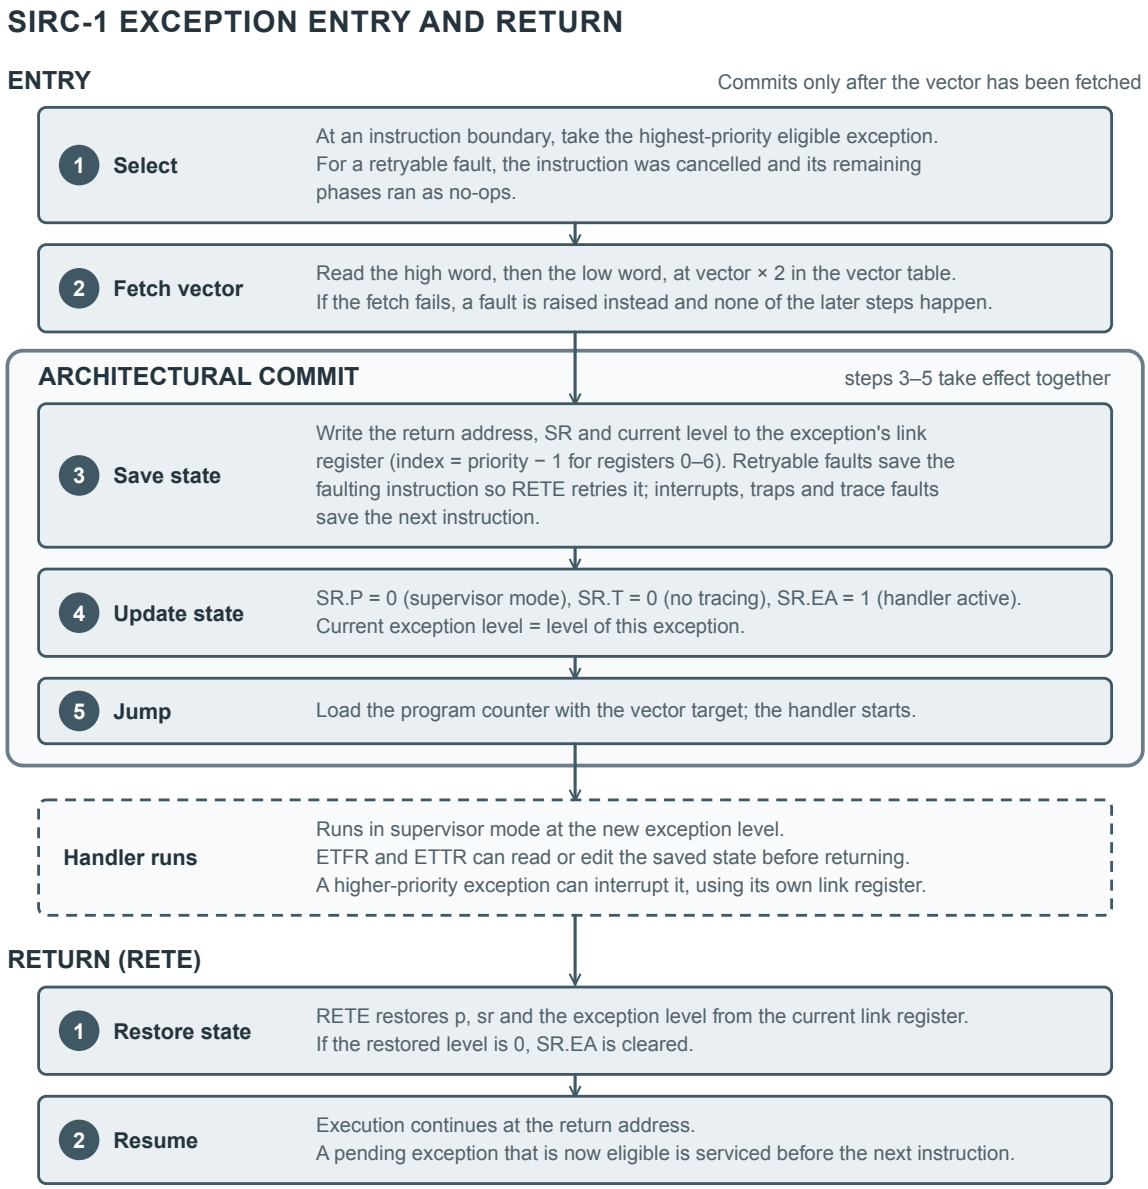



Figure 6.4: SIRC-1 Exception Entry and Return

**Vector fetch failure.** If a bus or protection fault occurs during an exception-vector fetch, the original exception does not enter and the remaining phases of its dispatch slot run as no-ops (Section B.3.1). The CPU raises the corresponding fault with the bus access type set to `ExceptionVectorFetch`. If a fault-vector fetch itself fails, the CPU escalates to a double fault. If the double-fault vector fetch fails, the CPU resets.

## 6.7 Return from Exception

To return from an exception handler, the **RETE** (Return from Exception) instruction restores the saved state from the current link register:

1. The return address is loaded from the link register into the program counter
2. The saved status register value is restored (including interrupt enable bits)
3. The saved exception level is restored to `current_exception_level`
4. If the restored exception level is 0, `SR.EA` is cleared; otherwise the restored value of `SR.EA` stands
5. Execution resumes at the return address

After RETE, any pending interrupts that are now eligible to run (higher priority than the restored exception level and enabled) will be serviced before the next instruction executes.

Executing **RETE** while the current exception level is 0 is architecturally undefined.

For faults in the retryable category (Alignment Fault, Bus Fault, Bus Protection Fault, Invalid Opcode Fault, Privilege Violation Fault, and Segment Overflow Fault), **RETE** returns to the faulting instruction, allowing it to be retried. This retry is not always a clean undo for a DMA burst (**DMAR**, **DMAW**, **DMAT**), since it performs several bus accesses per instruction; see Section 16.7.3. For all other faults and for regular exceptions, **RETE** returns to the instruction following the one that was executing when the exception occurred.

### 6.7.1 Accessing Link Registers

The exception coprocessor provides instructions to transfer data to and from the link registers:

- **ETFR (Exception Transfer From Register):** Copies the return address and/or status register from a link register to the address register and/or `r7`
- **ETTR (Exception Transfer To Register):** Copies the address register and/or `r7` to a link register's return address and/or status register

These instructions allow exception handlers to examine or modify the saved processor state before returning, enabling features like system calls, context switching, and debuggers.

## 6.8 Reset and Startup

Reset can be initiated externally by raising the reset request (`RSTI`), or in software by executing the privileged **RSET** meta-instruction. Both paths converge on the same reset-vector sequence: the CPU holds reset output active, then the exception unit fetches vector `0x00` and loads the fetched target address into the program counter.

### 6.8.1 Reset State

| State | Reset Behavior |
|---|---|
| Instruction phase | Set to phase 0. |
| Pending bus request | Cleared; an in-progress stalled bus request is abandoned. |
| Halt state | Cleared. |
| Wait-for-exception state | Cleared. |
| Current exception level | Cleared to 0. The CPU leaves reset outside any exception handler. |
| Status register | Cleared to `0x0000` when the reset operation is executed by the exception unit. |
| Program counter | Loaded from reset vector `0x00`. |
| General registers | Not architecturally cleared by reset. Software should treat their contents as undefined after reset. |
| Address register pairs | Not architecturally cleared by reset. |
| Exception link registers | Not architecturally cleared by reset. |
| Pending hardware exceptions and faults | Cleared. Interrupt requests that remain active after reset may be sampled again according to the normal interrupt rules. |
| Coprocessor select register (CSR) | Set internally to the reset operation until the reset vector sequence completes. |

Table 6.3: Reset State

Because the status register is cleared to `0x0000` as part of the reset sequence, hardware interrupt lines 1–4 are masked immediately after reset – their enable bits, `SR.E1`–`SR.E4` (Section 6.3.1), are all cleared to 0. The Level 5 (NMI) line is architecturally non-maskable and remains enabled regardless of `sr`'s contents. Note also that the status register is not cleared the instant reset is requested: it is cleared during the reset-vector fetch sequence (Section 6.8.3), once that sequence reaches its execute phase.

### 6.8.2 Reset Output Hold

While reset is active, the CPU asserts the reset output (`RSTO`) and performs no bus cycles. This gives external devices that share the reset signal time to complete their own reset sequence before the CPU resumes.

For hardware reset, raising `RSTI` immediately aborts any current instruction, exception handler, exception dispatch, or pending bus wait, then asserts `RSTO`. If `RSTI` remains active, `RSTO` remains asserted and the CPU does not advance. After `RSTI` is withdrawn, the reset hold completes before the CPU resumes. The reset assertion cycle counts as the first reset-output cycle; after release, five additional countdown cycles occur before the exception unit starts the reset-vector fetch.

For software reset, **`RSET`** completes as a normal coprocessor meta-instruction. When its write-back phase commits the reset command, the CPU requests reset and `RSTO` is asserted for six cycles before the reset-vector fetch begins.

### 6.8.3 Reset Vector Fetch

The reset vector is vector `0x00` in the exception vector table. After the reset-output hold, the exception unit performs an exception-vector fetch with bus access type `ExceptionVectorFetch`:

1. Read the high word of the reset target address from `0x0000`.
2. Read the low word of the reset target address from `0x0001`.
3. Clear the status register to `0x0000`.
4. Load the fetched target address into `p`.

These four steps are not one clock cycle each. Steps 1 and 2 each occupy their own fetch cycle, an instruction-decode cycle follows between step 2 and step 3 (not itemized above), and steps 3 and 4 then happen together in a single execute cycle – four clock cycles of substantive work. Like every other exception-unit dispatch, though, the reset-vector fetch runs through the same fixed six-phase instruction pipeline described in Chapter 2, so it still occupies two further cycles – a memory-access phase and a write-back phase – in which reset has nothing left to do. The reset-vector fetch therefore takes six clock cycles in total, not four, separate from and following the reset-output hold described in Section 6.8.2.

Step 3's status-register clear is listed here, rather than only in the Reset State table (Table 6.3), because it marks the specific point in the pipeline where the clear actually happens – useful for anyone modeling cycle-accurate timing. Table 6.3 instead documents the eventual, settled reset state; no other register is touched during the reset-vector fetch itself, so it is the only state change covered both here and there.

If a bus or protection fault occurs during the reset-vector fetch, the reset target is not loaded. The CPU raises the corresponding fault with the bus access type set to `ExceptionVectorFetch`. From that point the normal exception-vector fetch fault rules apply: a fault-vector fetch failure escalates to double fault, and a double-fault vector fetch failure will reset the CPU.

## 6.9 Exception Coprocessor Instructions

The exception coprocessor (coprocessor ID `0x1`) provides several specialized instructions for exception handling and system control.

| Instruction | Opcode | Privilege | Purpose |
|---|---|---|---|
| **EXCP** | `0x1` | User | Trigger a software exception (trap) |
| **WAIT** | `0x9` | Supervisor | Enter wait state until an enabled interrupt or reset occurs |
| **RETE** | `0xA` | Supervisor | Return from an exception handler |
| **RSET** | `0xB` | Supervisor | Perform reset sequence and jump to reset vector |
| **ETFR** | `0xC` | Supervisor | Copy saved exception state from a link register |
| **ETTR** | `0xD` | Supervisor | Write CPU register state back to a link register |

Table 6.4: Exception Coprocessor Instruction Summary

Exception coprocessor opcodes `0x2`–`0x8` are reserved; issuing one is architecturally undefined. For full syntax, operation details, and worked examples, see Chapter 16.

### 6.9.1 Internal Instructions

The following opcodes are used internally by the exception unit and are not directly accessible via user instructions:

- **Fault (`0xE`):** Automatically invoked when a fault condition is detected
- **HardwareException (`0xF`):** Automatically invoked when a hardware interrupt is signaled
- **None (`0x0`):** No operation, used when no exception is pending

These internal operations follow the standard exception handling flow described in Section 6.6. Issuing opcode `0xE` or `0xF` directly, for example via a supervisor-mode **`COPI`** instruction, is architecturally undefined.

### 6.9.2 Coprocessor Select Register (CSR)

The coprocessor select register (CSR) is a 16-bit internal register used to select the target coprocessor and coordinate exception handling. Section 2.3.2 describes how it is used when dispatching. It has the following structure:

- **Bits 15–12 (First Nibble):** Coprocessor ID (`0x1` for exception unit, `0x0` for processing unit)
- **Bits 11–8 (Second Nibble):** Coprocessor opcode (the operation to execute)
- **Bits 7–0 (Third and Fourth Nibbles):** Vector or parameter value

The exception unit loads the CSR when a pending exception needs to be serviced, but only when the CSR is empty and no coprocessor is active, so an exception never replaces a command written by **`COPI`** or **`COPR`** (Section 6.3.3). The priority of exceptions is determined by the high nibble of the vector ID, calculated as 7 minus the value of that nibble (for example, `0x00` is priority 7, `0x40` is priority 3, and `0x60` and above are all priority 1).

A CSR value of `0x0000` – the value left in place once the reset sequence has completed, and whenever no exception is pending – selects coprocessor ID `0x0`, the processing unit, so the CPU simply continues executing the program normally in the absence of any exception activity.

## 6.10 Exception Quick Reference

| Vector | Address | Priority | Source | Maskability | Return Address | Metadata | P Mode |
|---|---|---|---|---|---|---|---|
| 0x00 | 0x0000–0x0001 | n/a | Reset | Not maskable | n/a | None | Yes |
| 0x01 | 0x0002–0x0003 | 7 | Bus fault | Not maskable | Faulting instruction | Fault metadata | Yes |
| 0x02 | 0x0004–0x0005 | 7 | Alignment fault | Not maskable | Faulting instruction | Fault metadata | Yes |
| 0x03 | 0x0006–0x0007 | 7 | Segment overflow | SR.A gated | Faulting instruction | Fault metadata | Yes |
| 0x04 | 0x0008–0x0009 | 7 | Invalid opcode | Not maskable | Faulting instruction | Fault metadata | Yes |
| 0x05 | 0x000A–0x000B | 7 | Privilege fault | Not maskable | Faulting instruction | Fault metadata | Yes |
| 0x06 | 0x000C–0x000D | 7 | Trace fault | SR.T or TRCE gated | Next instruction | Fault metadata | Yes |
| 0x07 | 0x000E–0x000F | 7 | L5 conflict | Not maskable | Dispatch point | Fault metadata | Yes |
| 0x08 | 0x0010–0x0011 | 7 | Double fault | Not maskable | Dispatch point | Fault metadata | Yes |
| 0x09 | 0x0012–0x0013 | 7 | Bus protection | Not maskable | Faulting instruction | Fault metadata | Yes |
| 0x0A–0x0F | 0x0014–0x001F | 7 | Reserved faults | Reserved | Reserved | Reserved | Reserved |
| 0x10 | 0x0020–0x0021 | 6 | Level 5 hardware | Not maskable | Next instruction | Link register 5 | Yes |
| 0x20 | 0x0040–0x0041 | 5 | Level 4 hardware | SR.E4 | Next instruction | Link register 4 | Yes |
| 0x30 | 0x0060–0x0061 | 4 | Level 3 hardware | SR.E3 | Next instruction | Link register 3 | Yes |
| 0x40 | 0x0080–0x0081 | 3 | Level 2 hardware | SR.E2 | Next instruction | Link register 2 | Yes |
| 0x50 | 0x00A0–0x00A1 | 2 | Level 1 hardware | SR.E1 | Next instruction | Link register 1 | Yes |
| 0x11–0x5F | 0x0022–0x00BF | n/a | Reserved | Reserved | Reserved | Reserved | Reserved |
| 0x60–0xFF | 0x00C0–0x01FF | 1 | Software trap | Priority gated | Next instruction | Link register 0 | Yes |

Table 6.5: Exception Quick Reference

# Part II

# Instruction Set Architecture

CHAPTER 7

# Instruction Formats

## 7.1 Overview

All SIRCIS instructions are exactly 32 bits (4 bytes, or 2 words) in length. This fixed instruction size simplifies instruction fetch and decode logic, though it may result in larger code size compared to variable-length instruction sets.

The SIRC-1 supports three distinct instruction formats:

1. Immediate
2. Short Immediate (with Shift)
3. Register

**Note:** Operandless assembler meta-instructions such as **`NOOP`** still assemble to one of these three CPU instruction formats.

Each format is optimized for different types of operations and addressing modes.

## 7.2 Format Overview

| Format | Typical Use |
|---|---|
| Immediate | Operations with a 16-bit constant value |
| Short Immediate | Operations with an 8-bit constant with optional shift |
| Register | Operations on multiple registers with optional shift |

Table 7.1: Instruction Format Summary

## 7.3 Common Fields

All instruction formats share some common fields:

**Opcode (6 bits)** Identifies the operation to perform. With 6 bits, up to 64 distinct operations can be encoded.

**Condition Flags (4 bits)** Specifies the conditions under which the instruction executes. See Chapter 10 for details.

**Additional Flags (2 bits)** Used in memory operations to specify address register pairs (`l`, `a`, `s`, `p`) and in ALU operations to specify how the status register is updated.

## 7.4 Immediate Format

### 7.4.1 Structure

The immediate format encodes a full 16-bit immediate value within the instruction.

**Note:** Due to the large 16-bit operand, shift is not supported in this format.





Figure 7.1: Immediate Instruction Format

**Opcode (bits 31–26)** 6-bit operation code

**Register (bits 25–22)** 4-bit destination/source register identifier. For **LDEA** and **LDEL** (opcodes `0x18`–`0x1F`), this field instead holds a 2-bit address-register-pair index in bits 23–22 (00 = `l`, 01 = `a`, 10 = `s`, 11 = `p`) naming the destination pair, using the same encoding as the AF field. Bits 25–24 are reserved for these opcodes: always write them as zero. The CPU's behaviour with a non-zero value is architecturally undefined, and a future revision may give them a meaning.

**Immediate (bits 21–6)** 16-bit signed or unsigned immediate value

**Additional Flags (bits 5–4)** 2-bit address register pair selector (for memory operations)

- 00 = `l` (link register)
- 01 = `a` (address register)
- 10 = `s` (stack pointer)
- 11 = `p` (program counter)

or 2-bit status register update source selector (for ALU operations)

- 00 = Status register not updated
- 01 = Status register updated from ALU operation
- 10 = Status register updated from shift operation
- 11 = Reserved for future use

**Condition (bits 3–0)** 4-bit condition code

### 7.4.2 Encoding Examples

| Instruction | Opcode | Reg | Immediate | AF | Cond | Hex |
|---|---|---|---|---|---|---|
| `ADDI r1, #100` | 0x00 (000000) | 0x0 (0000) | 0x0064 (0000 0000 0110 0100) | 01 (01) | 0x0 (0000) | `0x00001910` |
| `CMPI r2, #0x8000` | 0x0A (001010) | 0x1 (0001) | 0x8000 (1000 0000 0000 0000) | 01 (01) | 0x0 (0000) | `0x28600010` |
| `LOAD r3, (#16, a)` | 0x14 (010100) | 0x2 (0010) | 0x0010 (0000 0000 0001 0000) | 01 (01) | 0x0 (0000) | `0x50800410` |
| `STOR (#-2, s), r4` | 0x10 (010000) | 0x3 (0011) | 0xFFFE (1111 1111 1111 1110) | 10 (10) | 0x0 (0000) | `0x40FFFFA0` |
| `LDEA a, (#4, s)` | 0x18 (011000) | 0x1 (0001) | 0x0004 (0000 0000 0000 0100) | 10 (10) | 0x0 (0000) | `0x60400120` |
| `LDEA a, -(#0, s)` | 0x1A (011010) | 0x1 (0001) | 0x0000 (0000 0000 0000 0000) | 10 (10) | 0x0 (0000) | `0x68400020` |
| `LDEL p, (#0, a)` | 0x1C (011100) | 0x3 (0011) | 0x0000 (0000 0000 0000 0000) | 01 (01) | 0x0 (0000) | `0x70C00010` |
| `LDEL p, (#0, a)+` | 0x1E (011110) | 0x3 (0011) | 0x0000 (0000 0000 0000 0000) | 01 (01) | 0x0 (0000) | `0x78C00010` |
| `BRAN #4` | 0x18 (011000) | 0x3 (0011) | 0x0004 (0000 0000 0000 0100) | 11 (11) | 0x0 (0000) | `0x60C00130` |
| `BRSR #4` | 0x1C (011100) | 0x3 (0011) | 0x0004 (0000 0000 0000 0100) | 11 (11) | 0x0 (0000) | `0x70C00130` |
| `ADDI\|== r5, #42` | 0x00 (000000) | 0x4 (0100) | 0x002A (0000 0000 0010 1010) | 01 (01) | 0x1 (0001) | `0x01000A91` |
| `SUBI\|>= r6, #10` | 0x02 (000010) | 0x5 (0101) | 0x000A (0000 0000 0000 1010) | 01 (01) | 0xB (1011) | `0x0940029B` |

Table 7.2: Immediate Format Encoding Examples

**Notes:**

- Condition code examples: `0x0` (0000) = Always, `0x1` (0001) = Equal (==), `0xB` (1011) = Signed >=
- AF field for memory ops: 00=`l`, 01=`a`, 10=`s`, 11=`p`; for ALU ops: 00=no update, 01=update from ALU, 10=update from shift
- Negative immediates use two's complement (`#-2` = `0xFFFE`)

## 7.5 Short Immediate Format (with Shift)

### 7.5.1 Structure

The short immediate format sacrifices immediate value width to include shift information, allowing for more powerful single-instruction operations.

This format is supported only for ALU instructions; it cannot be used with branching or load/store instructions.





Figure 7.2: Short Immediate with Shift Format

**Opcode (bits 31–26)** 6-bit operation code

**Register (bits 25–22)** 4-bit destination/source register identifier

**Immediate (bits 21–14)** 8-bit unsigned immediate value, zero-extended to 16 bits before use

**Shift Operand (bit 13)** Determines how the shift amount field is interpreted

- 0 = Shift amount field contains the literal shift amount
- 1 = Shift amount field refers to register that contains shift amount

**Shift Type (bits 12–10)** Type of shift operation (see Table 7.6 for encoding details)

**Shift Amount (bits 9–6)** Shift amount (or register containing shift amount)

**Additional Flags (bits 5–4)** 2-bit status register update source selector

- 00 = Status register not updated
- 01 = Status register updated from ALU operation
- 10 = Status register updated from shift operation
- 11 = Reserved for future use

**Condition (bits 3–0)** 4-bit condition code

### 7.5.2 Encoding Examples

| Instruction | Op | Reg | Imm | SO | ST | SA | AF | Cond | Hex |
|---|---|---|---|---|---|---|---|---|---|
| `ADDI r1, #2, LSL #3` | 0x20 (100000) | 0x0 (0000) | 0x02 (00000010) | 0 (0) | 001 (001) | 0x3 (0011) | 01 (01) | 0x0 (0000) | `0x800084D0` |
| `ORRI r2, #1, LSL #10` | 0x25 (100101) | 0x1 (0001) | 0x01 (00000001) | 0 (0) | 001 (001) | 0xA (1010) | 01 (01) | 0x0 (0000) | `0x94404690` |
| `ANDI r3, #7, ASR #2` | 0x24 (100100) | 0x2 (0010) | 0x07 (00000111) | 0 (0) | 100 (100) | 0x2 (0010) | 01 (01) | 0x0 (0000) | `0x9081D090` |
| `SUBI r4, #5, LSL r2` | 0x22 (100010) | 0x3 (0011) | 0x05 (00000101) | 1 (1) | 001 (001) | 0x1 (0001) | 01 (01) | 0x0 (0000) | `0x88C16450` |
| `XORI\|!= r7, #15, LSR #4` | 0x26 (100110) | 0x6 (0110) | 0x0F (00001111) | 0 (0) | 010 (010) | 0x4 (0100) | 01 (01) | 0x2 (0010) | `0x9983C912` |
| `CMPI\|NS r1, #8, RTL r3` | 0x2A (101010) | 0x0 (0000) | 0x08 (00001000) | 1 (1) | 101 (101) | 0x2 (0010) | 01 (01) | 0x5 (0101) | `0xA8023495` |
| `SHFT r3, RTR #5` | 0x25 (100101) | 0x2 (0010) | 0x00 (00000000) | 0 (0) | 110 (110) | 0x5 (0101) | 10 (10) | 0x0 (0000) | `0x94801960` |

Table 7.3: Short Immediate Format Encoding Examples

**Notes:**

- SO (Shift Operand): 0 = literal shift amount, 1 = register contains shift amount (see rows 4 and 6)
- ST (Shift Type): 000=none, 001=LSL, 010=LSR, 011=ASL, 100=ASR, 101=RTL, 110=RTR
- AF field for ALU: 00=no update, 01=update from ALU, 10=update from shift (see SHFT row 7)
- Condition code examples: `0x0` = Always, `0x2` = Not Equal (!=), `0x5` = Negative (<0)
- SHFT is a meta-instruction using ORRI opcode `0x25` with AF=10

## 7.6 Register Format

### 7.6.1 Structure

The register format allows operations on up to three registers with optional shift.





Figure 7.3: Register Instruction Format

**Opcode (bits 31–26)** 6-bit operation code

**Register 1 (bits 25–22)** 4-bit destination register. For **`LDEA`** and **`LDEL`** (opcodes `0x18`–`0x1F`), this field instead holds a 2-bit address-register-pair index in bits 23–22 (00 = `l`, 01 = `a`, 10 = `s`, 11 = `p`) naming the destination pair, using the same encoding as the AF field. Bits 25–24 are reserved for these opcodes: always write them as zero. The CPU's behaviour with a non-zero value is architecturally undefined, and a future revision may give them a meaning.

**Register 2 (bits 21–18)** 4-bit source A register

**Register 3 (bits 17–14)** 4-bit source B register

**Shift Operand (bit 13)** Determines how the shift amount field is interpreted

- 0 = Shift amount field contains the literal shift amount
- 1 = Shift amount field refers to register that contains shift amount

**Shift Type (bits 12–10)** Type of shift operation (see Table 7.6 for encoding details)

**Shift Amount (bits 9–6)** Shift amount (or register containing shift amount)

**Additional Flags (bits 5–4)** 2-bit address register pair selector (for memory operations)

- 00 = `l` (link register)
- 01 = `a` (address register)
- 10 = `s` (stack pointer)
- 11 = `p` (program counter)

or 2-bit status register update source selector (for ALU operations)

- 00 = Status register not updated
- 01 = Status register updated from ALU operation
- 10 = Status register updated from shift operation
- 11 = Reserved for future use

**Condition (bits 3–0)** 4-bit condition code

### 7.6.2 Register Operand Semantics

For most three-operand instructions:

- R1 = Destination
- R2 = First source operand
- R3 = Second source operand (optional)

**Note:** If only two register operands are given, the assembler uses R1 as both destination and first source operand when encoding the instruction:

```
1 ADDR r1, r2, r3 ; r1 = r2 + r3
2 ADDR r1, r2 ; r1 = r1 + r2 (R2 implicitly = R1)
```

### 7.6.3 Encoding Examples

| Instruction | Op | R1 | R2 | R3 | SO | ST | SA | AF | Cond | Hex |
|---|---|---|---|---|---|---|---|---|---|---|
| ADDR r1, r2, r3 | 0x30 (110000) | 0x0 (0000) | 0x1 (0001) | 0x2 (0010) | 0 (0) | 000 (000) | 0x0 (0000) | 01 (01) | 0x0 (0000) | 0xC0048010 |
| ADDR r1, r2, r3, LSL #2 | 0x30 (110000) | 0x0 (0000) | 0x1 (0001) | 0x2 (0010) | 0 (0) | 001 (001) | 0x2 (0010) | 01 (01) | 0x0 (0000) | 0xC0048490 |
| LOAD r1, (r2, a) | 0x15 (010101) | 0x0 (0000) | 0x0 (0000) | 0x1 (0001) | 0 (0) | 000 (000) | 0x0 (0000) | 01 (01) | 0x0 (0000) | 0x54004010 |
| STOR -(r2, s), r1 | 0x13 (010011) | 0x0 (0000) | 0x0 (0000) | 0x1 (0001) | 0 (0) | 000 (000) | 0x0 (0000) | 10 (10) | 0x0 (0000) | 0x4C004020 |
| LDEA a, (r2, s) | 0x19 (011001) | 0x1 (0001) | 0x0 (0000) | 0x1 (0001) | 0 (0) | 000 (000) | 0x0 (0000) | 10 (10) | 0x0 (0000) | 0x64404020 |
| LDEA a, -(r2, s) | 0x1B (011011) | 0x1 (0001) | 0x0 (0000) | 0x1 (0001) | 0 (0) | 000 (000) | 0x0 (0000) | 10 (10) | 0x0 (0000) | 0x6C404020 |
| LDEL p, (r2, a) | 0x1D (011101) | 0x3 (0011) | 0x0 (0000) | 0x1 (0001) | 0 (0) | 000 (000) | 0x0 (0000) | 01 (01) | 0x0 (0000) | 0x74C04010 |
| LDEL p, (r2, a)+ | 0x1F (011111) | 0x3 (0011) | 0x0 (0000) | 0x1 (0001) | 0 (0) | 000 (000) | 0x0 (0000) | 01 (01) | 0x0 (0000) | 0x7CC04010 |
| LJMP a, r2 | 0x19 (011001) | 0x3 (0011) | 0x0 (0000) | 0x1 (0001) | 0 (0) | 000 (000) | 0x0 (0000) | 01 (01) | 0x0 (0000) | 0x64C04010 |
| LJSR a, r2 | 0x1D (011101) | 0x3 (0011) | 0x0 (0000) | 0x1 (0001) | 0 (0) | 000 (000) | 0x0 (0000) | 01 (01) | 0x0 (0000) | 0x74C04010 |
| CMPR r4, r5 | 0x3A (111010) | 0x3 (0011) | 0x3 (0011) | 0x4 (0100) | 0 (0) | 000 (000) | 0x0 (0000) | 01 (01) | 0x0 (0000) | 0xE8CD0010 |
| XORR r2, r3, r4, RTR #1 | 0x36 (110110) | 0x1 (0001) | 0x2 (0010) | 0x3 (0011) | 0 (0) | 110 (110) | 0x1 (0001) | 01 (01) | 0x0 (0000) | 0xD848D850 |
| SUBR\|» r1, r2, r3, ASR r4 | 0x32 (110010) | 0x0 (0000) | 0x1 (0001) | 0x2 (0010) | 1 (1) | 100 (100) | 0x3 (0011) | 01 (01) | 0xD (1101) | 0xC804B0DD |
| ANDR\|CS r5, r6, r7, LSL r1 | 0x34 (110100) | 0x4 (0100) | 0x5 (0101) | 0x6 (0110) | 1 (1) | 001 (001) | 0x0 (0000) | 01 (01) | 0x3 (0011) | 0xD115A413 |

Table 7.4: Register Format Encoding Examples

**Notes:**

- When only two register operands are given, R2 is encoded as a copy of R1 and the second operand is encoded in R3, for example `ADDR r4, r5` uses R1=`0x3`, R2=`0x3`, R3=`0x4`
- SO (Shift Operand): 0 = literal shift amount, 1 = register contains shift amount (see the `SUBR|»` and `ANDR|CS` rows)
- ST (Shift Type): 000=none, 001=LSL, 010=LSR, 011=ASL, 100=ASR, 101=RTL, 110=RTR
- AF for memory ops: 00=`l`, 01=`a`, 10=`s`, 11=`p`; for ALU ops: 00=no update, 01=update from ALU, 10=update from shift
- Condition code examples: `0x0` = Always, `0xD` = Signed > (»), `0x3` = Carry Set (CS)

## 7.7 Operand Encoding Details

### 7.7.1 Condition Codes

| Code | Mnemonic | Condition |
|---|---|---|
| 0000 | AL (or none) | Always (unconditional) |
| 0001 | == | Equal (Z = 1) |
| 0010 | != | Not Equal (Z = 0) |
| 0011 | CS | Carry Set (C = 1) |
| 0100 | CC | Carry Clear (C = 0) |
| 0101 | NS | Negative Set (N = 1) |
| 0110 | NC | Negative Clear (N = 0) |
| 0111 | OS | Overflow Set (V = 1) |
| 1000 | OC | Overflow Clear (V = 0) |
| 1001 | HI | Unsigned Higher (C = 0 AND Z = 0) |
| 1010 | LO | Unsigned Lower or Same (C = 1 OR Z = 1) |
| 1011 | >= | Signed Greater or Equal (N = V) |
| 1100 | « | Signed Less Than (N $\neq$ V) |
| 1101 | » | Signed Greater Than (Z = 0 AND N = V) |
| 1110 | <= | Signed Less or Equal (Z = 1 OR N $\neq$ V) |
| 1111 | NV | Never (never executes) |

Table 7.5: Condition Code Encoding

For more details on condition codes see Chapter 10.

### 7.7.2 Shift Types

| Code | Type | Mnemonic |
|---|---|---|
| 000 | None (no shift) | NUL |
| 001 | Logical Shift Left | LSL |
| 010 | Logical Shift Right | LSR |
| 011 | Arithmetic Shift Left | ASL |
| 100 | Arithmetic Shift Right | ASR |
| 101 | Rotate Left | RTL |
| 110 | Rotate Right | RTR |
| 111 | Reserved | – |

Table 7.6: Shift Type Encoding

For more details on shift operations see Chapter 9.

## 7.8 Opcode Encoding Patterns

The SIRCIS instruction set uses systematic opcode patterns to simplify decoding:

### 7.8.1 Opcode Groups

- `0x0_`: Immediate operand

- **0x1_**: Memory operations
- **0x2_**: Short immediate with shift
- **0x3_**: Register operand

### 7.8.2 Test vs. Save

This pattern applies to the ALU groups 0x0_, 0x2_, and 0x3_ only. Each ALU operation has both a "save result" and a "test only" variant:

- **0x_0–0x_6**: Save result to destination
- **0x_8–0x_E**: Test only (update flags, do not save the result)
- **0x_F**: Coprocessor call (**COPI**/**COPR**), not a test-only form

Adding 0x8 to a "save result" opcode in the range 0x_0–0x_6 gives its "test only" form. Opcode 0x_7 (**MOVI**/**MOVR**) has no test-only form. Opcodes 0x27 and 0x2F are exceptions to this pattern: they are undocumented opcodes (see Appendix C), not a "save result" operation or a coprocessor call.

| Operation | Save result | Test only | Opcodes (Imm / Short / Reg) |
|---|---|---|---|
| Add | **ADDI** / **ADDR** | **CMNI** / **CMNR** | 0x08 / 0x28 / 0x38 |
| Add with carry | **ADCI** / **ADCR** | **CNCI** / **CNCR** | 0x09 / 0x29 / 0x39 |
| Subtract | **SUBI** / **SUBR** | **CMPI** / **CMPR** | 0x0A / 0x2A / 0x3A |
| Subtract with carry | **SBCI** / **SBCR** | **CPCI** / **CPCR** | 0x0B / 0x2B / 0x3B |
| AND | **ANDI** / **ANDR** | **TSAI** / **TSAR** | 0x0C / 0x2C / 0x3C |
| OR | **ORRI** / **ORRR** | **TSOI** / **TSOR** | 0x0D / 0x2D / 0x3D |
| XOR | **XORI** / **XORR** | **TSXI** / **TSXR** | 0x0E / 0x2E / 0x3E |


Table 7.7: Save and Test-Only ALU Instructions

For example:

- 0x04: **ANDI** – AND immediate, save result
- 0x0C: **TSAI** – Test AND immediate (does not save the result)

## 7.9 Decode Trees

The opcode alone determines how the rest of a 32-bit instruction is decoded. The figures in this section show that process as a decision tree for each opcode group. In every figure the top strip is the instruction word, drawn to scale. The shaded boxes are the opcode bits consulted at each level of the tree, with the same shading on the matching tree node, and the unshaded boxes are operand fields, whose interpretation is given in the box below the tree. op[n] means opcode bit n, which is instruction bit n + 26. Appendix A lists every opcode in a single table.

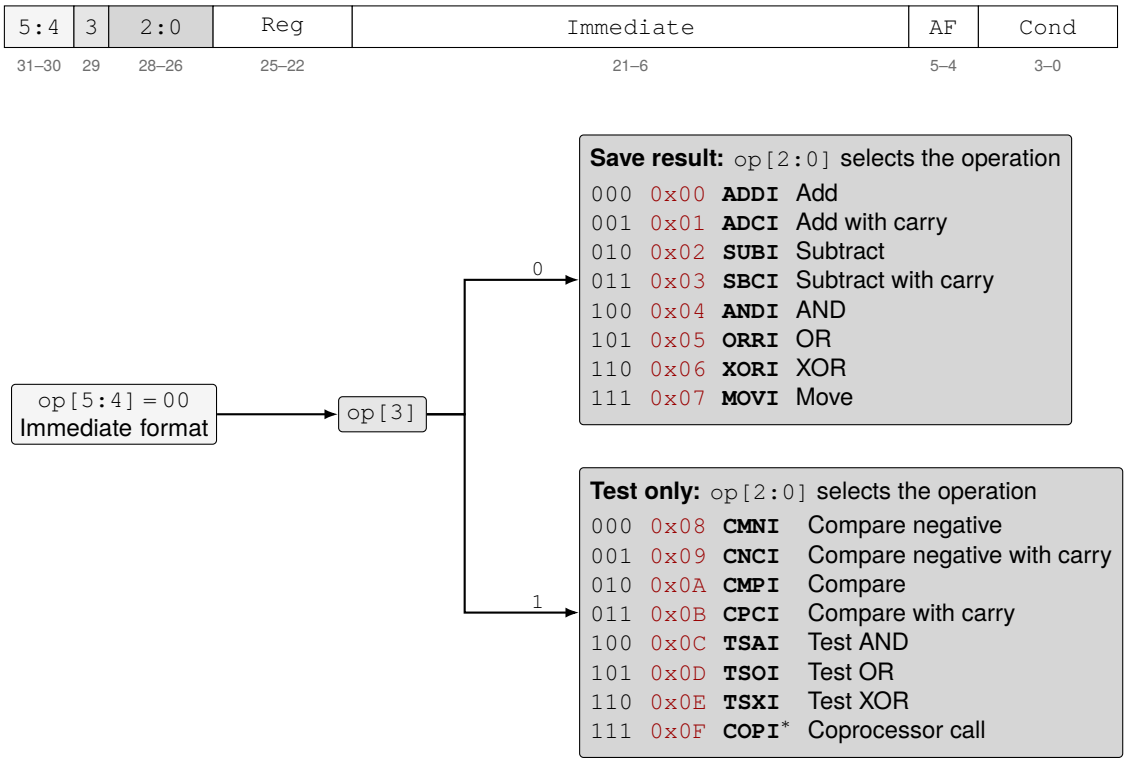



**Operand fields** (read the same way for every opcode above, unless noted)

| | |
|---|---|
| Reg (25–22) | `rD`, the destination, for save forms; `rS`, the register tested, for test-only forms |
| Immediate (21–6) | 16-bit value. This format has no shift fields |
| AF (5–4) | Status update source: `00` none, `01` ALU result, `10` shifter result, `11` reserved |
| Cond (3–0) | One of 16 condition codes (Table 7.5) |

*`COPI` is a coprocessor call, not a test form; its fields are described in Chapter 16.


Figure 7.4: Decode tree for the immediate ALU group (`0x0_`)

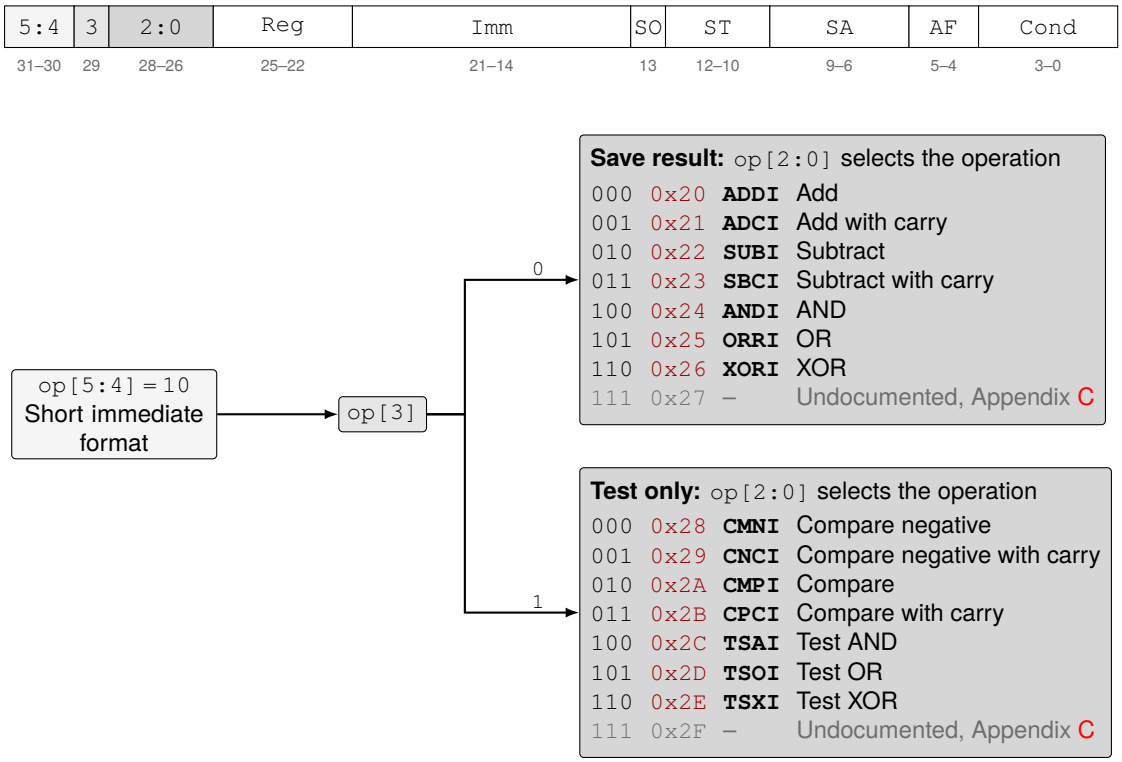


**Operand fields** (read the same way for every opcode above, unless noted)

| | |
|---|---|
| Reg (25–22) | `rD`, the destination, for save forms; `rS`, the register tested, for test-only forms |
| Imm (21–14) | 8-bit unsigned value, zero-extended to 16 bits |
| SO, ST, SA (13–6) | `ST` selects the shift type (Table 7.6). If `SO` is 0, `SA` is the literal shift count; if 1, `SA` names the register holding the count. The shift applies to the register operand, never the immediate |
| AF (5–4) | Status update source: `00` none, `01` ALU result, `10` shifter result, `11` reserved |
| Cond (3–0) | One of 16 condition codes (Table 7.5) |

Figure 7.5: Decode tree for the short immediate ALU group (`0x2_`)

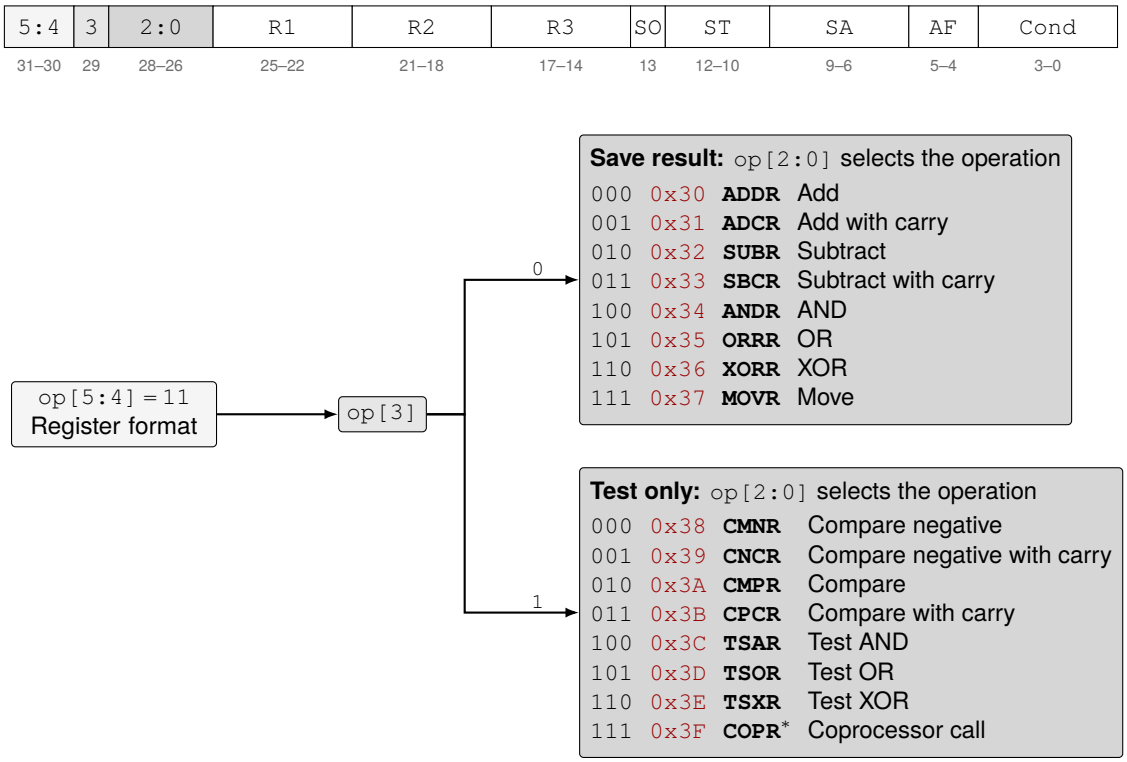



**Operand fields** (read the same way for every opcode above, unless noted)

| | |
|---|---|
| R1 (25–22) | `rD`, the destination, for save forms; ignored by test-only forms |
| R2 (21–18) | `rS1`, the left operand. **MOVR** does not use it |
| R3 (17–14) | `rS2`, the right operand (for **MOVR**, the source) |
| SO, ST, SA (13–6) | `ST` selects the shift type (Table 7.6). If `SO` is 0, `SA` is the literal shift count; if 1, `SA` names the register holding the count. The shift applies to `rS1` |
| AF (5–4) | Status update source: `00` none, `01` ALU result, `10` shifter result, `11` reserved |
| Cond (3–0) | One of 16 condition codes (Table 7.5) |

*COPR is a coprocessor call, not a test form; its fields are described in Chapter 16.

Figure 7.6: Decode tree for the register ALU group (`0x3_`)

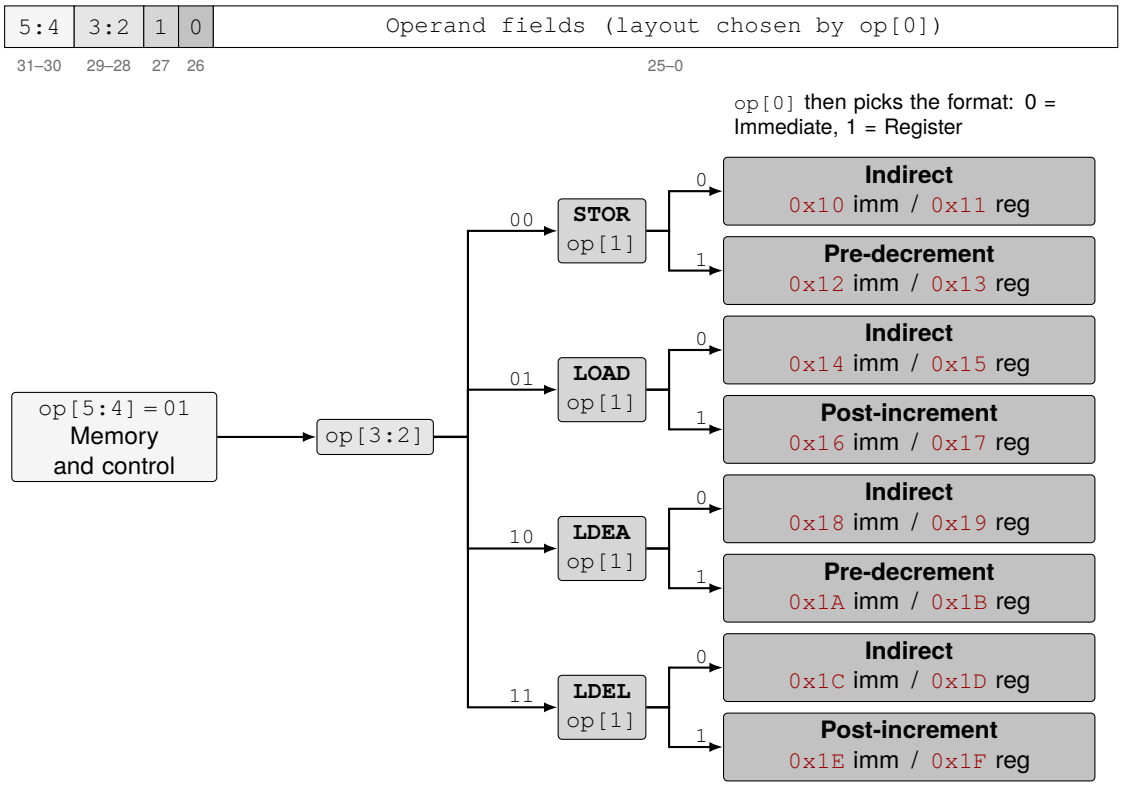


| **Operand fields** (chosen by op[0]) | | |
|---|---|---|
| | **Immediate** (op[0] = 0) | **Register** (op[0] = 1) |
| 25–22 | rD for **LOAD**, rS for **STOR**. **LDEA** and **LDEL** put the destination pair in bits 23–22 (25–24 are zero) | As for the immediate format, except that **STOR** leaves them unused |
| 21–6 | 16-bit offset added to the address register pair | rO, the offset register (17–14). **STOR** also uses rS (21–18) and a shift of rO (SO, ST, SA); those fields are zero for the other three |
| 5–4 (AF) | Address register pair used for the effective address: 00 l, 01 a, 10 s, 11 p | |
| 3–0 | Condition code | |

Figure 7.7: Decode tree for the memory and control group (0x1_)

## 7.10 Instruction Fetch and Alignment

### 7.10.1 Fetch Process

Since instructions are 32 bits and the data bus is 16 bits wide, each instruction requires two fetch cycles:

1. Fetch the high word from the address in pl.
2. Fetch the low word from pl + 1.
3. After decode, pl advances by 2.

pl still holds the address of the instruction being executed while it is decoded, because address calculations that select p use that value.

### 7.10.2 Alignment Requirements

Instructions span two consecutive words and must begin at an even word address. The program counter (pl) must always be even.

Fetching an instruction from an odd word address raises an alignment fault.

## 7.11 Format Selection Guidelines

When writing assembly code, the assembler automatically selects the appropriate format based on operands:

| Assembly | Format Used | Notes |
|---|---|---|
| `ADDI r1, #1000` | Immediate | Full 16-bit immediate |
| `ADDI r1, #10, LSL #2` | Short Immediate | 8-bit immediate + shift |
| `ADDR r1, r2, r3` | Register | Three register operands |

Table 7.8: Format Selection Examples

The choice of format affects instruction encoding but is generally transparent to the programmer, as the assembler handles the details.

CHAPTER 8

# Addressing Modes

## 8.1 Overview

The SIRC-1 CPU supports seven addressing modes that specify how operands are accessed. These modes determine whether an operand is an immediate value, register contents, an address-register pair named directly, or data in memory at a computed address. The 8-bit short-immediate encoding used by ALU shift-and-add forms is an encoding-width variant of Immediate addressing, not a separate mode; Table 8.2 maps every operand form the assembler accepts onto one of the seven modes.

| Mode | Description |
|---|---|
| Immediate | Operand is a constant value encoded in the instruction |
| Register Direct | Operand is the contents of a specified register |
| Address Register Direct | Operand names an address-register pair directly, with no indirection |
| Indirect Immediate | Memory address = address register + immediate offset |
| Indirect Register | Memory address = address register + register offset |
| Post-Increment | Indirect register, then increment address register |
| Pre-Decrement | Decrement address register, then use as indirect |

Table 8.1: Addressing Modes Summary

| Assembler operand form | Example | Addressing mode |
|---|---|---|
| Immediate | `#100` | Immediate |
| Immediate, 8-bit shift-qualified | `#10, LSL #2` | Immediate (encoding-width variant; see Short Immediate Addressing) |
| Register Direct | `r1` | Register Direct |
| Address Register Direct | `a` | Address Register Direct |
| Indirect Register Displacement | `(r2, a)` | Indirect Register |
| Indirect Immediate Displacement | `(#8, a), (a)` | Indirect Immediate |
| Indirect Register Displacement, Post-Increment | `(r2, s)+` | Post-Increment |
| Indirect Immediate Displacement, Post-Increment | `(#2, s)+, (s)+` | Post-Increment |
| Indirect Register Displacement, Pre-Decrement | `-(r2, s)` | Pre-Decrement |
| Indirect Immediate Displacement, Pre-Decrement | `-(#2, s), -(s)` | Pre-Decrement |
| Shift Definition | `LSL #2` | Not an addressing mode; modifies the register operand it follows (Chapter 9) |

Table 8.2: Assembler Operand Forms Mapped to Addressing Modes

## 8.2 Addressing Mode Matrix

| Mode | Syntax | Effective value or address | Memory access | Legal families |
|---|---|---|---|---|
| Immediate | `#imm16`, or `#imm8, shift` (short-immediate width variant) | 16-bit encoded value; the 8-bit short-immediate form is zero-extended, and its shift applies to the register operand | None | ALU, MOVI, COPI, branch meta-instructions |
| Register Direct | `rN` | 16-bit register value | None | ALU, MOVR, COPR, register-offset forms |
| Address Register Direct | `addr` | `addr.high : addr.low`, used directly | None | LJMP/LJSR src, LDEA/LDEL dest |
| Indirect Immediate | `(#offset, addr)`, `(addr)` | `addr.high : (addr.low + offset)` | LOAD reads; STOR writes; LDEA/LDEL none | Memory, LDEA, LDEL |
| Indirect Register | `(rO, addr)` | `addr.high : (addr.low + rO)` | LOAD reads; STOR writes; LDEA/LDEL none | Memory, LDEA, LDEL |
| Post-Increment | `(#offset, addr)+`, `(addr)+`, `(rO, addr)+` | Address is calculated from original `addr`; `addr.low += 1` after access | LOAD reads; LDEL none | LOAD, LDEL, LJSR (assembles to LDEL) |
| Pre-Decrement | `-(#offset, addr)`, `-(addr)`, `-(rO, addr)` | `addr.low -= 1`; address then uses decremented `addr.low + offset` | STOR writes; LDEA none | STOR, LDEA (and LDEA-derived meta-instructions) |

Table 8.3: Addressing Mode Side Effects and Legal Instruction Families

## 8.3 Legal Modes by Instruction Family

Table 8.3 answers "what does this addressing-mode syntax mean, and which instruction families can use it in general?" Table 8.4 answers the reverse question, "for this specific instruction, exactly which operand forms are legal?" The two tables must agree; consult the one that matches the question you are asking.

| Instruction family | Legal operand forms | Explicit exclusions and notes |
|---|---|---|
| ALU result instructions | `OPI rD, #imm16`; `OPI rD, #imm8, shift`; `OPR rD, rS1, rS2[, shift]`; register shorthand `OPR rD, rS2`. | No memory operands. Full 16-bit immediate forms do not encode shifts. |
| ALU test instructions | `CMNI/CNCI/CMPI/CPCI/TSAI/TSOI/TSXI rS, #imm16`; `CMNI/CNCI/CMPI/CPCI/TSAI/TSOI/TSXI rS, #imm8, shift`; `CMNR/CNCR/CMPR/CPCR/TSAR/TSOR/TSXR rS1, rS2[, shift]`. | No destination write-back. No memory operands. |
| ALU move instructions | `MOVI rD, #imm16`; `MOVR rD, rS`. | No public short-immediate **`MOVI`** syntax. Direct register-copy forms do not accept shift suffixes. |
| LOAD memory | `LOAD rD, (#offset, addr)`; `LOAD rD, (rO, addr)`; `LOAD rD, (#offset, addr)+`; `LOAD rD, (rO, addr)+`. | No pre-decrement LOAD form. No shift suffix on any **`LOAD`** form. |
| STOR memory | `STOR (#offset, addr), rS`; `STOR (rO, addr), rS[, shift]`; `STOR -(#offset, addr), rS`; `STOR -(rO, addr), rS[, shift]`. | No post-increment STOR form. Shift suffix is only available on register-displacement **`STOR`** forms. |
| LDEA | `LDEA dest, (#offset, src)`; `LDEA dest, (rO, src)`; `LDEA dest, -(#offset, src)`; `LDEA dest, -(rO, src)`. | No post-increment LDEA form. No shift suffixes. |
| LDEL | `LDEL dest, (#offset, src)`; `LDEL dest, (rO, src)`; `LDEL dest, (#offset, src)+`; `LDEL dest, (rO, src)+`. | No pre-decrement LDEL form. No shift suffixes. |
| Control-flow meta-instructions | `BRAN/BRSR #disp`; `BRAN/BRSR @label`; `RETS`; `LJMP src[, #offset\|rO]`; `LJSR src[, #offset\|rO]`; `LJSR (#offset, src)+`; `LJSR (rO, src)+`. | `LJMP (src)` and `LJSR (src)` are not public syntax; use `LJMP src` or `LJSR src` for zero displacement. |
| Coprocessor | `COPI #imm16`; `COPR rS`; standard coprocessor meta-instructions as documented in Chapter 16. | No hidden destination register syntax, no memory operands, no shifts, and no status-update override suffixes. |

Table 8.4: Addressing Mode Legality by Instruction Family

## 8.4 Zero-Displacement Shorthand

Immediate-displacement indirect forms may omit the displacement when it is zero. The following forms are exact assembler-level equivalents:

| Shorthand | Canonical form | Meaning |
|---|---|---|
| `(addr)` | `(#0, addr)` | Use the selected address register |
| `(addr)+` | `(#0, addr)+` | Use the address, then increment |
| `-(addr)` | `-(#0, addr)` | Decrement, then use the address |

Table 8.5: Zero-Displacement Shorthand

The shorthand does not change which instruction families are legal. For example, `LOAD r1, (a)+` is legal because **`LOAD`** has a post-increment immediate-displacement form, but `STOR (a)+, r1` is not legal because **`STOR`** has no post-increment form. Likewise, `STOR -(s), r1` is legal because **`STOR`** has a pre-decrement form, but the corresponding pre-decrement **`LOAD`** form is not legal.

Register-displacement forms do not have a corresponding shorthand: `(rO, addr)`, `(rO, addr)+`, and `-(rO, addr)` always name the displacement register explicitly.

## 8.5 Operand Categories

Instruction descriptions use these operand categories:

**Register value** A 16-bit general-purpose, status, or address-component register operand used directly by an ALU, load, store, or coprocessor instruction.

**Immediate value** A constant encoded in the instruction. Full immediates are 16 bits; short immediates are 8 bits.

**Memory source** An effective address read by **LOAD**.

**Memory destination** An effective address written by **STOR**.

**Branch target** An effective address written to the program-counter pair `p`.

**Address destination** An address-register pair written by **LDEA** or **LDEL**.

**Alterable destination** Any destination register, address-register pair, or memory location that the instruction can modify when its condition is true.

## 8.6 Common Address Calculation Rules

For indirect, post-increment, pre-decrement, branch, jump, and effective-address forms, address arithmetic is performed on the low word of the selected address-register pair. The high word supplies the segment and is preserved unless the instruction explicitly writes an address-register pair destination.

Post-increment and pre-decrement change the selected address register by exactly one word. The displacement or index register participates only in the effective address calculation; it does not change the auto-update amount.

When `p` is used as the source address register, the value used for address calculation is the address of the instruction currently executing. PC-relative displacements are therefore relative to the address of the branch instruction itself, not to the next instruction; a displacement of 2 targets the following instruction and a displacement of 0 re-executes the branch. **BRSR** and **LDEL** still link to `pl` + 2.

## 8.7 Per-Mode Encoding Reference

Every SIRC-1 instruction is a fixed 32-bit (2-word) quantity regardless of addressing mode – unlike architectures with variable-length extension words per mode, there is no mode whose word count differs from any other's. Each box below states this explicitly for completeness against that comparison point, alongside the generation formula, assembler syntax, and field encoding for that mode.

### Immediate Addressing

**Generation:** Operand = the 16-bit value encoded directly in the instruction.
**Assembler Syntax:**

```
1 ADDI r1, #100 ; 16-bit immediate
2 ADDI r2, #-50 ; Signed 16-bit immediate
```

**Field Encoding:** Immediate format; Immediate field, bits 21–6 (16 bits, arithmetic instructions interpret this field according to Chapter 4); Register field, bits 25–22 (destination).
**Instruction Word Count:** 2 words (fixed).
**Usage:** Loading constant values; arithmetic with known values; bit manipulation with masks.

### Register Direct Addressing

**Generation:** Operand = the 16-bit value currently stored in the specified register. This is the most common mode for ALU operations in a load/store architecture.
**Assembler Syntax:**

```
ADDR r1, r2, r3 ; r1 = r2 + r3
ADDR r4, r5 ; r4 = r4 + r5
```

**Field Encoding:** Register format; Register 1, bits 25–22 (destination); Register 2, bits 21–18 (source A); Register 3, bits 17–14 (source B).
**Instruction Word Count:** 2 words (fixed).
**Usage:** All ALU operations between registers; register-to-register data movement; testing register values.

### Address Register Direct Addressing

**Generation:** Operand = the full 32-bit contents (high word and low word) of the named address-register pair (`l`, `a`, `s`, or `p`), with no indirection. **`LDEA`** and **`LDEL`** use this form to select the destination pair that receives the computed address; **`LJMP`** and **`LJSR`** use it to select the source pair whose contents become the new value of `p`.
**Assembler Syntax:**

```
LDEA a, (#4, s) ; a = s + 4 (destination named directly)
LJMP a ; p = a (source named directly)
```

**Field Encoding:** For **`LDEA`**/**`LDEL`** (opcodes `0x18`–`0x1F`), a 2-bit address-register-pair index in bits 23–22 of the Register (Immediate format) or R1 (Register format) field (00 = l, 01 = a, 10 = s, 11 = p). Bits 25–24 are reserved and always written as zero. **`LJMP`**/**`LJSR`** are meta-instructions that lower to this same encoding with `p` as the named pair.
**Instruction Word Count:** 2 words (fixed).
**Usage:** Selecting which address-register pair an effective-address instruction writes; jumping or calling through an address already held in a register pair.

### Indirect Immediate Addressing

**Generation:**

$$\text{EA} = \text{AddressRegister.high} : (\text{AddressRegister.low} + \text{Offset})$$

The address register can be `l` (link), `a` (address), `s` (stack), or `p` (program counter). Offset is a signed two's-complement value. When `SR.A` (Trap on Address Overflow) is set, the Segment Overflow Fault (Chapter 6) fires only if the low-word addition wraps; a negative offset that keeps the sum within the low word's range does not fault.
**Assembler Syntax:**

```
LOAD r1, (#8, a) ; Load from address (a + 8)
STOR (#-4, s), r2 ; Store to address (s - 4)
LDEA p, (#100, p) ; Jump relative (pc = pc + 100)
```

**Field Encoding:** Immediate format, an even opcode in `0x10`–`0x1F`; base address-register pair in AF, bits 5–4; 16-bit signed immediate offset in bits 21–6.
**Instruction Word Count:** 2 words (fixed).
**Usage:** Accessing structure fields (fixed offset from base); array element access (constant index); stack frame access (local variables); position-independent code (PC-relative addressing).

## Indirect Register Addressing

**Generation:**

$$\text{EA} = \text{AddressRegister.high} : (\text{AddressRegister.low} + \text{IndexRegister})$$

Identical to Indirect Immediate Addressing except the offset is taken from a register at run time instead of being encoded as an immediate value.
**Assembler Syntax:**

```
1 LOAD r1, (r2, a) ; Load from address (a + r2)
2 STOR (r4, s), r3 ; Store to address (s + r4)
```

**Field Encoding:** Register format, an odd opcode in 0x10–0x1F; base address-register pair in AF, bits 5–4; index register in R3, bits 17–14. R2, bits 21–18, is unused for **LOAD** and holds the (shifted) source register for **STOR**.
**Instruction Word Count:** 2 words (fixed).
**Usage:** Array indexing with a variable index; table lookups; dynamic offset calculations.

## Post-Increment Addressing

**Generation:**

1. Compute EA = AddressRegister.high : (AddressRegister.low + Offset)
2. Perform the memory operation (load)
3. AddressRegister.low = AddressRegister.low + 1

Particularly useful for iterating through arrays or implementing stack operations.
**Assembler Syntax:**

```
1 LOAD r1, (r2, s)+ ; Load from (s + r2), then s = s + 1
2 LOAD r1, (#2, s)+ ; Load from (s + 2), then s = s + 1
```

**Field Encoding:** Selected by the opcode itself, not a separate operand field: opcode bit 1 = 1 selects auto-update, and bit 0 selects an immediate (0x16) or register (0x17) offset.
**Instruction Word Count:** 2 words (fixed).
**Usage:** Stack pop operations; forward array traversal; buffer reading.

## Pre-Decrement Addressing

**Generation:**

1. AddressRegister.low = AddressRegister.low - 1
2. Compute EA = AddressRegister.high : (AddressRegister.low + Offset)
3. Perform the memory operation (store)

The complement of post-increment; useful for stack push operations.
**Assembler Syntax:**

```
1 STOR -(r2, s), r1 ; s = s - 1, then store to (s + r2)
2 STOR -(#2, s), r3 ; s = s - 1, then store to (s + 2)
```

**Field Encoding:** Selected by the opcode itself, not a separate operand field: opcode bit 1 = 1 selects auto-update, and bit 0 selects an immediate (0x12) or register (0x13) offset.

**Instruction Word Count:** 2 words (fixed).
**Usage:** Stack push operations; backward array traversal; buffer writing.

### Short Immediate Addressing

**Generation:** Operand = an 8-bit value encoded in the instruction, zero-extended to 16 bits before ALU arithmetic. This is a width variant of Immediate addressing, not a separate addressing mode; see Table 8.2. The shift applies to the register operand, not to the immediate constant.
**Assembler Syntax:**

```
1 ADDI r1, #10, LSL #2 ; r1 = (r1 << 2) + 10
2 SUBI r2, #1, LSL #8 ; r2 = (r2 << 8) - 1
```

**Field Encoding:** Short-Immediate-with-Shift format; Immediate field, bits 21–14 (8 bits); Register field, bits 25–22 (destination).
**Instruction Word Count:** 2 words (fixed).
**Usage:** Loading constant values; arithmetic with known values; bit manipulation with masks.

## 8.8 Address Register Selection

Many addressing modes require specifying which address register pair to use. The 2-bit address register field encodes:

| Bits | Symbol | Register Pair |
|---|---|---|
| 00 | l | Link Register (lh, ll) |
| 01 | a | Address Register (ah, al) |
| 10 | s | Stack Pointer (sh, sl) |
| 11 | p | Program Counter (ph, pl) |

Table 8.6: Address Register Encoding

## 8.9 Addressing Mode Examples

```
1 ; Assume 'a' points to a struct:
2 ; struct Point {
3 ; word 0: int16_t x
4 ; word 1: int16_t y
5 ; }
6
7 LOAD r1, (#0, a) ; r1 = point.x
8 LOAD r2, (#1, a) ; r2 = point.y
```

Example 8-1: Structure Access

```
; Iterate array of 16-bit values
; Assume 'a' points to array start
; r7 = counter
:loop
  LOAD r1, (#0, a)+ ; Load element, advance by 1
  ; ... process r1 ...
  SUBI r7, #1
  BRAN|!= @loop
```

Example 8-2: Array Iteration

```
:begin_subroutine

; Function prologue - save registers
STOR -(#0, s), r1
STOR -(#0, s), r2
STOR -(#0, s), r3

; Access parameters (above saved regs)
LOAD r4, (#3, s) ; First parameter
LOAD r5, (#4, s) ; Second parameter

; Function epilogue - restore registers
LOAD r3, (#0, s)+
LOAD r2, (#0, s)+
LOAD r1, (#0, s)+
RETS
```

Example 8-3: Stack Frame

## 8.10 Addressing Mode Restrictions

### 8.10.1 Privilege Mode Restrictions

Protected mode restricts writes to the high word of an address register:

- **Direct high-register writes**: Trigger a privilege violation fault
- **Address-register-pair write-back**: Allowed only when the high word would remain unchanged; otherwise triggers a privilege violation fault
- **Post-increment/Pre-decrement**: Always allowed in protected mode; the auto-update writes only the low word of the pair and never carries into the high word

### 8.10.2 Alignment

- All memory addresses refer to 16-bit words
- There are no alignment restrictions for general memory I/O
- All instructions span 2 words and must begin at an even word address
- Unaligned instruction fetches (odd word address) trigger an alignment fault exception

CHAPTER 9

# Shift Operations

## 9.1 Overview

The SIRC-1 CPU supports powerful shift operations that can be applied to operands in many instructions. Shifts can multiply or divide values by powers of 2, extract bit fields, or perform bit rotations.

Shift operations are encoded within Short Immediate and Register format instructions, allowing a value to be shifted before being used in an ALU operation—all within a single instruction.

Shift operations are only applied to source operands. A shift cannot be applied to the result of an operation before register writeback.

**Note:** By default, when shifts are used with ALU instructions (apart from the **SHFT** meta-instruction), the status register flags are updated based on the ALU operation result, not the shift. This behavior can be overridden using the status override syntax (see Section 9.12).

## 9.2 Shift Types

### 9.2.1 Shift Type Encoding

| Code | Mnemonic | Type | Description |
|---|---|---|---|
| 000 | NUL | – | No shift performed |
| 001 | LSL | Logical Shift Left | Shift left, fill with zeros |
| 010 | LSR | Logical Shift Right | Shift right, fill with zeros |
| 011 | ASL | Arithmetic Shift Left | Same data result as LSL; sets V on signed overflow |
| 100 | ASR | Arithmetic Shift Right | Shift right, preserving sign bit |
| 101 | RTL | Rotate Left | Rotate left within the operand |
| 110 | RTR | Rotate Right | Rotate right within the operand |
| 111 | – | Reserved | Reserved for future use |

Table 9.1: Shift Type Encoding

**NUL** is the no-shift form: it leaves the operand unchanged but still routes it through the shifter, so `SHFT rD, NUL #0` is a legal way to drive the status flags from the unshifted value of `rD`.

## 9.3 Shift Syntax

A shift suffix may follow the ALU short-immediate and ALU register forms, the **SHFT** meta-instruction, and the register-displacement **LOAD**/**STOR** forms. It is rejected on **MOVR rD, rS**, on **LDEA**/**LDEL**, and on coprocessor instructions.

For ALU instructions, the shift is applied in the "Decode and Register Fetch" phase, before the ALU operation. In register-format instructions the shifted operand is R2 (first source); in short-immediate instructions it is the register named by the Reg field (first source, since the short-immediate format has no separate source register). In register-displacement **STOR** forms it is applied to the

source register before its value is written to memory. **LOAD** has no shift: its shift fields are reserved (see Chapter 14).

If using the three-operand form of an instruction, the shifted operand is the second operand. If using the two-operand form, the second operand is inferred to be the same as the destination.

See this table for some examples of which operand is shifted:

| Instruction | How the CPU Interprets It | First Source Operand |
|---|---|---|
| ADDR r1, r2, r3, LSL #1 | ADDR r1, r2, r3, LSL #1 | r2 |
| ADDR r1, r2, LSL #1 | ADDR r1, r1, r2, LSL #1 | r1 |
| ADDI r1, #2, LSL #1 | ADDI r1, r1, #2, LSL #1 | r1 |

Table 9.2: Examples of first source operands

## 9.4 Shift Type Details

### 9.4.1 Logical Shift Left (LSL)

**Operation:** Shift bits to the left, filling vacated bits with zeros.





Figure 9.1: Logical Shift Left

- The last bit shifted out of bit 15 (bit 16-n for a count of n) is placed in the carry flag
- Bit 0 receives 0
- Equivalent to multiplying by $2^n$ where $n$ is the shift count

```
; Multiply r1 by 4
ADDI r1, #0, LSL #2 ; r1 = (r1 << 2) = r1 * 4

; Set bit 10 (16-bit immediate form)
ORRI r3, #0x0400 ; r3 |= 0x0400
```

Example 9-1: Constant Multiply and Bit Set (LSL)

### 9.4.2 Logical Shift Right (LSR)

**Operation:** Shift bits to the right, filling vacated bits with zeros.




Figure 9.2: Logical Shift Right

- The last bit shifted out of bit 0 (bit n-1 for a count of n) is placed in the carry flag
- Bit 15 receives 0
- Equivalent to unsigned division by $2^n$
- Use for unsigned values only

```
; Divide unsigned value by 8
ADDI r1, #0, LSR #3 ; r1 = (r1 >> 3) = r1 / 8 (unsigned)

; Extract high byte
ADDI r3, #0, LSR #8 ; r3 = (r3 >> 8)
```

Example 9-2: Unsigned Divide and Byte Extraction (LSR)

### 9.4.3 Arithmetic Shift Left (ASL)

**Operation:** Produces the same data result as LSL, but sets the overflow flag if the sign bit changes.





Figure 9.3: Arithmetic Shift Left

- Equivalent to signed multiplication by $2^n$
- Can cause signed overflow if sign bit changes
- Overflow flag is set if sign bit changes during shift

```
; Multiply signed value by 2
ADDI r1, #0, ASL #1 ; r1 = (r1 << 1) = r1 * 2 (signed)
```

Example 9-3: Signed Multiply by 2 (ASL)

### 9.4.4 Arithmetic Shift Right (ASR)

**Operation:** Shift bits to the right, preserving the sign bit (bit 15).





Figure 9.4: Arithmetic Shift Right

- The last bit shifted out of bit 0 (bit n-1 for a count of n) is placed in the carry flag
- Bit 15 (sign bit) is replicated into all bits vacated by the shift
- Equivalent to signed division by $2^n$ (rounds toward negative infinity)
- Use for signed values only

```
; Divide signed value by 4
ADDI r1, #0, ASR #2 ; r1 = (r1 >> 2) = r1 / 4 (signed)

; Average two signed values
ADDR r3, r4, r5
ADDI r3, #0, ASR #1 ; r3 = (r3 >> 1) = (r4 + r5) / 2
```

Example 9-4: Signed Divide and Averaging (ASR)

### 9.4.5 Rotate Left (RTL)

**Operation:** Rotate bits to the left within the 16-bit operand. The bit that wraps from bit 15 to bit 0 is also copied into the carry flag. The incoming carry flag is not used as an input.





Figure 9.5: Rotate Left

- Bit 15 wraps into bit 0 and is copied into the carry flag
- The previous carry flag value is ignored
- No data is lost
- Useful for bit manipulation, circular buffers, and cyclic bit patterns

```
; Rotate r1 left by 1
SHFT r1, RTL #1

; Circular rotate of one word
SHFT r3, RTL #4
```

Example 9-5: Rotating a Value Left (RTL)

### 9.4.6 Rotate Right (RTR)

**Operation:** Rotate bits to the right within the 16-bit operand. The bit that wraps from bit 0 to bit 15 is also copied into the carry flag. The incoming carry flag is not used as an input.





Figure 9.6: Rotate Right

- Bit 0 wraps into bit 15 and is copied into the carry flag
- The previous carry flag value is ignored
- No data is lost

```
; Rotate r1 right by 1
SHFT r1, RTR #1

; Check if bit 0 is set
SHFT r2, RTR #1 ; Bit 0 -> carry
; Now branch on carry to test the old bit 0
```

Example 9-6: Rotating a Value Right and Testing a Bit (RTR)

## 9.5 Shift Operands

The Shift Operand (SO) bit determines what value is shifted:

| SO Bit | Mode | Description |
|---|---|---|
| 0 | Shift by Immediate | The first source operand (Register format: R2; Short Immediate format: the Reg field) is shifted by a literal amount |
| 1 | Shift Count in Register | The first source operand (Register format: R2; Short Immediate format: the Reg field) is shifted by the amount in the shift count register |

Table 9.3: Shift Operand Modes

### 9.5.1 Mode 0: Shift by Immediate

The first source operand (R2) is shifted by a literal amount before the ALU operation.

```
1 ; Multiply r1 by 4 and add 1
2 ADDI r1, #1, LSL #2 ; r1 = (r1 << 2) + 1
3                       ; SO=0: r1 is shifted by literal 2
```

### 9.5.2 Mode 1: Shift by Register Count

The shift count is taken from the shift amount field (interpreted as a register), allowing variable-length shifts. R2 (first source) is still what gets shifted.

```
1 ; Variable shift
2 ; Shift amount register contains shift count
3 ADDR r1, r2, r3, LSL r4 ; r1 = (r2 << r4) + r3
4                         ; SO=1: shift r2 by value in r4
5
6 ; Barrel shifter emulation
7 ADDR r4, r5, r6, ASR r7 ; r4 = (r5 >> r7) + r6 (arithmetic)
```

## 9.6 Shift Count

The shift count is 0–15 when specified as an immediate (SO = 0); the field is 4 bits wide, and both the assembler and the encoder enforce this range, so a count greater than 15 can never occur through the immediate path. When the shift count is taken from a register (SO = 1), the full 16-bit register value is available as a count, and a count greater than 15 is well defined:

- Shift count of 0 means no shift is performed
- Maximum immediate shift count is 15
- For **LSL**, **LSR**, and **ASL**, a register-supplied count of 16 or more produces the same result as a count of exactly 16: every original bit is shifted out, giving `0x0000`. The carry flag reflects the last bit shifted out at count 16, as for any other count.
- For **ASR**, a register-supplied count of 16 or more sign-extends fully: `0xFFFF` if the original value was negative, `0x0000` if it was positive or zero. This is the same rule as any other count, just carried to its limit – every vacated bit is the sign bit.
- **RTL** and **RTR** have no vacated bits to define, since a rotate never discards data; a register-supplied count is used modulo 16, so a count of 16 behaves as a count of 0, a count of 17 behaves as a count of 1, and so on.

## 9.7 Status Flag Effects

### 9.7.1 Default Behavior

When shift operations are used with ALU instructions, the status flags are **by default** updated based on the **ALU operation result**, not the shift operation. For example, in `CMPI r2, #1, LSL #2`, the flags reflect the comparison result, not the shift.

To update flags based on the shift operation instead, use the `[S]` status override modifier (see Section 9.12), or use the **`SHFT`** meta-instruction documented in Chapter 13.

### 9.7.2 Carry Flag

For all shifts and rotates:

- The last bit shifted out is placed in the carry flag
- For shifts of more than 1 position, only the final bit shifted out matters
- A shift count of 0 leaves the operand unchanged and clears the carry flag. When the status register is updated from the shifter, all four condition flags are written, so no flag survives a shift-sourced update; to preserve flags across a shift, use the `[N]` status override

### 9.7.3 Zero Flag

Set if the result after shifting is zero.

### 9.7.4 Negative Flag

Set if bit 15 of the result is 1 (result is negative when interpreted as signed).

### 9.7.5 Overflow Flag

- For **ASL**: Set if the sign bit changes during the shift (signed overflow)
- For other shifts: Cleared to 0

## 9.8 Common Use Cases

```
1 ; Multiply by 2
2 ADDI r1, #0, LSL #1 ; r1 = (r1 << 1) = r1 * 2
3
4 ; Multiply by 3
5 ADDR r1, r2, r2, LSL #1 ; r1 = (r2 << 1) + r2 = r2 * 3
6
7 ; Multiply by 5
8 ADDR r1, r2, r2, LSL #2 ; r1 = (r2 << 2) + r2 = r2 * 5
```

Example 9-7: Multiplication by Constants

```
; Unsigned divide by 4
MOVR r1, r2 ; r1 = r2
ADDI r1, #0, LSR #2 ; r1 = (r1 >> 2) = r1 / 4 (unsigned)

; Signed divide by 8
MOVR r1, r2 ; r1 = r2
ADDI r1, #0, ASR #3 ; r1 = (r1 >> 3) = r1 / 8 (signed)
```

Example 9-8: Division by Powers of 2

```
; Extract bits 8-11 from r1
MOVR r2, r1 ; r2 = r1
ADDI r2, #0, LSR #8 ; Shift down
ANDI r2, #0x0F ; Mask to 4 bits

; Extract and sign-extend bit 7
MOVR r2, r1 ; r2 = r1
ADDI r2, #0, LSL #8 ; Shift bit 7 to bit 15
ADDI r2, #0, ASR #8 ; Arithmetic shift to sign-extend
```

Example 9-9: Bit Field Extraction

```
; Set bit N (where N is in r2)
MOVI r3, #1 ; r3 = 1
ADDI r3, #0, LSL r2 ; r3 = (r3 << r2) = 1 << N
ORRR r1, r3 ; r1 |= (1 << N)

; Clear bit N
MOVI r3, #1
ADDI r3, #0, LSL r2 ; r3 = (r3 << r2) = 1 << N
MOVI r4, #0xFFFF
XORR r3, r4, r3 ; r3 = 0xFFFF ^ (1 << N) = ~(1 << N)
ANDR r1, r1, r3 ; r1 = r1 & ~(1 << N)

; Test bit N
MOVI r3, #1
ADDI r3, #0, LSL r2 ; r3 = (r3 << r2) = 1 << N
TSAR r1, r3 ; Test r1 & (1 << N)
BRAN|!= @bit_was_set ; Branch if bit set
```

Example 9-10: Bit Manipulation

## 9.9 Multi-Word Shifts

For operations on values larger than 16 bits, shifts and rotates can be combined:

```
; Shift 32-bit value in r1:r2 left by 1
; r1 = high word, r2 = low word
SHFT r2, LSL #1 ; Shift low, MSB -> carry
ADCI r1, #0, LSL #1 ; Shift high and add carry into bit 0
```

Example 9-11: 32-bit Left Shift

```
; Shift 32-bit value in r1:r2 right by 1 (unsigned)
SHFT r1, LSR #1 ; Shift high, LSB -> carry
ORRI[N] r2, #0, LSR #1 ; Shift low while preserving carry from high word
ORRI|CS r2, #0x8000 ; If old high bit 0 was set, insert it into low bit 15
```

Example 9-12: 32-bit Right Shift (Unsigned)

```
; Shift 32-bit value in r1:r2 right by 1 (signed)
SHFT r1, ASR #1 ; Arithmetic shift high, LSB -> carry
ORRI[N] r2, #0, LSR #1 ; Shift low while preserving carry from high word
ORRI|CS r2, #0x8000 ; If old high bit 0 was set, insert it into low bit 15
```

Example 9-13: 32-bit Right Shift (Signed)

## 9.10 Performance Considerations

- All shift operations complete in the same number of cycles regardless of shift count
- Shifts can be performed "for free" as part of another instruction (no extra cycles)
- Using shifts for multiplication/division by powers of 2 is much faster than using a multiply/divide instruction (if one existed)
- Barrel shifter implementation in hardware allows any shift count in constant time

## 9.11 Limitations

- The immediate shift count is limited to 0–15 (4-bit field)
- For an immediate shift greater than 15 positions, use multiple shift instructions with immediate counts
- Rotates do not consume the carry flag; **`RTL`** and **`RTR`** rotate only within the 16-bit operand
- The reserved shift type (111) has architecturally undefined behavior

## 9.12 Status Flag Update Control

By default, ALU instructions with shift operations update the status register flags based on the **ALU operation result**, not the shift operation. However, the SIRC-1 provides manual control over which operation updates the flags.

### 9.12.1 Status Override Syntax

A status override modifier can be added immediately after an instruction mnemonic using square brackets:

| Modifier | Meaning | Description |
|---|---|---|
| [A] | ALU | Update flags from ALU result (default) |
| [S] | Shift | Update flags from shift result, not ALU |
| [N] | None | Do not update status flags at all |

Table 9.4: Status Flag Override Modifiers

### 9.12.2 Examples

```
; Without override, flags reflect the ALU addition result
ADDI r2, #1, LSL #2 ; r2 = (r2 << 2) + 1
                    ; Flags: based on addition result
```

Example 9-14: Default Behavior (ALU flags)

```
; Update flags based on shift result instead of ALU
ADDI[S] r2, #1, LSL #2 ; r2 = (r2 << 2) + 1
                       ; Flags: based on (r2 << 2), not the +1

; Check if shifted value is zero
CMPI[S] r3, #0, LSR #4 ; Compare (r3 >> 4) with 0
                       ; Flags: based on shift, not comparison
```

Example 9-15: Shift Flag Override

```
; Perform operation without affecting status flags
ADDI[N] r1, #5, LSL #1 ; r1 = (r1 << 1) + 5
                       ; Flags: unchanged

; Useful when preserving flags from previous operation
CMPR r4, r5 ; Set flags based on comparison
ADDI[N] r6, #1 ; Increment r6 without changing flags
BRAN|== @equal_branch ; Branch using flags from CMPR
```

Example 9-16: No Flag Update

### 9.12.3 Use Cases

#### Testing Shift Results

To determine properties of a shifted value without performing a subsequent comparison:

```
; Check if r1 << 3 would be negative
ADDI[S] r1, #0, LSL #3 ; r1 = r1 << 3, flags from shift
BRAN|NS @overflow_detected ; Branch if sign bit set
```

#### Preserving Flags

When performing operations that should not affect condition codes:

```
; Test condition
CMPR r1, r2 ; Compare r1 and r2

; Do some work without affecting flags
ADDI[N] r3, #1 ; Increment counter (flags unchanged)
LOAD r4, (#0, a)+ ; Load next value (LOAD never updates flags)

; Branch using original comparison flags
BRAN|>= @r1_was_greater
```

#### SHFT Meta-Instruction

The **SHFT** meta-instruction is the ALU-family shorthand for this common case:

```
1 SHFT r1, LSL #3 ; ORRI[S] r1, #0, LSL #3
```

See Chapter 13 for the full **SHFT** instruction entry.

### 9.12.4 Assembler Syntax Notes

- The status override modifier must appear immediately after the instruction mnemonic with no spaces: `ADDI[S]`
- The modifier is optional; omitting it defaults to [A] (ALU flag updates)
- The override applies to the entire instruction, including any conditional execution
- Explicit [A] is rarely needed but can improve code readability

CHAPTER 10

# Condition Codes

## 10.1 Overview

Every SIRC-1 instruction can be executed conditionally based on the state of the condition flags in the status register. This allows for efficient implementation of conditional logic without requiring explicit branch instructions.

The 4-bit condition code field in each instruction specifies the conditions under which the instruction executes. If the condition is not met, the instruction has no architectural effect beyond the normal two-word advance of `p`: no general-purpose register, flag, memory, address-register or coprocessor state changes, and no privilege check is performed.

## 10.2 Condition Code Encoding

| Code | Mnemonic | Condition (when instruction executes) |
|---|---|---|
| 0000 | AL (or none) | Always (unconditional) |
| 0001 | == | Equal (Z = 1) |
| 0010 | != | Not Equal (Z = 0) |
| 0011 | CS | Carry Set (C = 1) |
| 0100 | CC | Carry Clear (C = 0) |
| 0101 | NS | Negative Set (N = 1) |
| 0110 | NC | Negative Clear (N = 0) |
| 0111 | OS | Overflow Set (V = 1) |
| 1000 | OC | Overflow Clear (V = 0) |
| 1001 | HI | Unsigned Higher (C = 0 AND Z = 0) |
| 1010 | LO | Unsigned Lower or Same (C = 1 OR Z = 1) |
| 1011 | >= | Signed Greater or Equal (N = V) |
| 1100 | « | Signed Less Than (N $\neq$ V) |
| 1101 | » | Signed Greater Than (Z = 0 AND N = V) |
| 1110 | <= | Signed Less or Equal (Z = 1 OR N $\neq$ V) |
| 1111 | NV | Never (never executes) |

Table 10.1: Condition Code Encoding

## 10.3 Condition Code Categories

### 10.3.1 Simple Conditions

These conditions test a single status flag:

**Always (default)** No condition code specified; instruction always executes.

**== (Equal)** Executes when Z = 1. Typically used after `CMP` to test equality.

**!= (Not Equal)** Executes when Z = 0. Typical use: test inequality.

**CS (Carry Set)** Executes when C = 1. The Carry flag's meaning depends on which instruction last set it: after an add (**ADDR**, **ADDI**, and so on), C = 1 means an unsigned overflow occurred. After a subtraction or **CMP**, C = 1 means a *borrow* occurred – the first operand was unsigned lower than the second.

**CC (Carry Clear)** Executes when C = 0. After an add, C = 0 means no unsigned overflow occurred. After a subtraction or **CMP**, C = 0 means no borrow occurred: the first operand was unsigned higher than or equal to the second.

**NS (Negative Set)** Executes when N = 1. Tests if result is negative (signed).

**NC (Negative Clear)** Executes when N = 0. Tests if result is positive or zero (signed).

**OS (Overflow Set)** Executes when V = 1. Indicates signed overflow.

**OC (Overflow Clear)** Executes when V = 0. No signed overflow.

### 10.3.2 Unsigned Comparisons

These conditions are used after comparing unsigned integers:

**HI (Unsigned Higher)** Executes when C = 0 AND Z = 0. Tests if first operand $>$ second operand (unsigned).

**LO (Unsigned Lower or Same)** Executes when C = 1 OR Z = 1. Tests if first $\leq$ second (unsigned).

**Note:** For unsigned comparisons:

- Use `HI` and `LO` after **CMP**.
- `HI` tests if first $>$ second (unsigned).
- `LO` tests if first $\leq$ second (unsigned).
- `CS` is equivalent to unsigned $<$.
- `CC` is equivalent to unsigned $\geq$.
- Prefer `HI`/`LO` over `CS`/`CC` for unsigned comparisons if that is easier to remember, since their names match their meaning directly.

### 10.3.3 Signed Comparisons

These conditions are used after comparing signed integers:

**>= (Signed Greater or Equal)** Executes when N = V. First operand $\geq$ second operand (signed).

**« (Signed Less Than)** Executes when N $\neq$ V. First operand $<$ second operand (signed).

**» (Signed Greater Than)** Executes when Z = 0 AND N = V. First operand $>$ second operand (signed).

**<= (Signed Less or Equal)** Executes when Z = 1 OR N $\neq$ V. First operand $\leq$ second operand (signed).

### 10.3.4 Special Conditions

**Never (NV)** Never executes: the instruction has no architectural effect beyond the normal two-word advance of `p`, no general-purpose register, flag, memory, address-register or coprocessor state changes, and no privilege check is performed. Can be used for instruction padding or to temporarily disable instructions during debugging.

## 10.4 Assembly Syntax

Condition codes are specified by appending a pipe character (`|`) followed by the condition mnemonic to the instruction:

```
; Unconditional
ADDI r1, #10

; Conditional - execute only if equal
ADDI|== r2, #20

; Conditional branch
BRAN|!= @loop_start

; Multiple conditions
ADDR|HI r3, r4, r5
STOR|NS (#0, s), r6
```

## 10.5 Usage with Compare Instructions

The most common use of condition codes is with compare (**`CMP`**) instructions:

```
; if (r1 > r2) { r3 = r4; } (unsigned)
CMPR r1, r2 ; Compare r1 and r2
MOVR|HI r3, r4 ; r3 = r4 if r1 > r2 (unsigned)

; if (r1 <= 100) { branch } (unsigned)
CMPI r1, #100
BRAN|LO @target
```

Example 10-1: Unsigned Comparison

```
; if (r1 >= r2) { r3 = r4; } (signed)
CMPR r1, r2 ; Compare r1 and r2
MOVR|>= r3, r4 ; r3 = r4 if r1 >= r2 (signed)

; if (r1 < -10) { branch } (signed)
CMPI r1, #-10
BRAN|<< @negative_case
```

Example 10-2: Signed Comparison

```
; if (r1 == r2) { branch }
CMPR r1, r2
BRAN|== @equal_case

; if (r1 != 0) { branch }
CMPI r1, #0
BRAN|!= @non_zero_case
```

Example 10-3: Equality Testing

## 10.6 Condition Code Truth Tables

### 10.6.1 Unsigned Comparison (CMPR rA, rB)

| Relationship | Z | C | Condition | Code | Meaning |
|---|---|---|---|---|---|
| rA = rB | 1 | X | == | 0001 | Equal |
| rA ≠ rB | 0 | X | != | 0010 | Not Equal |
| rA > rB (unsigned) | 0 | 0 | HI | 1001 | Higher |
| rA < rB (unsigned) | X | 1 | CS | 0011 | Lower |
| rA ≥ rB (unsigned) | X | 0 | CC | 0100 | Higher or Same |
| rA ≤ rB (unsigned) | C = 1 OR Z = 1* | | LO | 1010 | Lower or Same |

Table 10.2: Unsigned Comparison Results

X = the flag value does not affect this relationship.

*Unlike every other row, LO is not a single-corner condition: it is the OR of two flag values, so it cannot be expressed as one value per column with the other marked X. This is the only row in the table with that shape.

**Note:** after a subtraction or **CMP**, SIRC-1's Carry flag is set on a *borrow*, so CS (C = 1) means unsigned lower and CC (C = 0) means unsigned higher or same. HI and LO mean exactly what their names say.

### 10.6.2 Signed Comparison (CMPR rA, rB)

| Relationship | Z | N | V | Condition | Code | Meaning |
|---|---|---|---|---|---|---|
| rA = rB | 1 | X | X | == | 0001 | Equal |
| rA ≠ rB | 0 | X | X | != | 0010 | Not Equal |
| rA > rB (signed) | 0 | 0 | 0 | » | 1101 | Greater |
| rA > rB (signed) | 0 | 1 | 1 | » | 1101 | Greater |
| rA < rB (signed) | X | 0 | 1 | « | 1100 | Less |
| rA < rB (signed) | X | 1 | 0 | « | 1100 | Less |
| rA ≥ rB (signed) | X | 0 | 0 | >= | 1011 | Greater or Equal |
| rA ≥ rB (signed) | X | 1 | 1 | >= | 1011 | Greater or Equal |
| rA ≤ rB (signed) | 1 | X | X | <= | 1110 | Less or Equal |
| rA ≤ rB (signed) | 0 | 0 | 1 | <= | 1110 | Less or Equal |
| rA ≤ rB (signed) | 0 | 1 | 0 | <= | 1110 | Less or Equal |

Table 10.3: Signed Comparison Results

X = the flag value does not affect this relationship.

## 10.7 Advanced Usage

```
; max = (a > b) ? a : b (unsigned)
CMPR r1, r2 ; Compare a and b
MOVR|HI r3, r1 ; r3 = a if a > b
MOVR|LO r3, r2 ; r3 = b if a <= b
```

Example 10-4: Conditional Assignment

```
; if (condition) count++
CMPI r1, #0
ADDI|!= r2, #1 ; Increment r2 if r1 != 0
```

Example 10-5: Conditional Increment

```
; if (r1 > 0) call_function()
CMPI r1, #0
LJSR|>> a ; Call function if r1 > 0 (signed)
```

Example 10-6: Conditional Function Call

```
; for (i = 10; i > 0; i--)
MOVI r1, #10 ; i = 10
:loop
    ; ... loop body ...
    SUBI r1, #1 ; i--
    BRAN|HI @loop ; Continue if i > 0 (unsigned)
```

Example 10-7: Loop Construction

## 10.8 Condition Code Selection Guide

| Intent | After CMP | Condition Code |
|---|---|---|
| If equal | `CMPR a, b` | `==` |
| If not equal | `CMPR a, b` | `!=` |
| If a > b (unsigned) | `CMPR a, b` | `HI` |
| If a ≥ b (unsigned) | `CMPR a, b` | `CC` |
| If a < b (unsigned) | `CMPR a, b` | `CS` |
| If a ≤ b (unsigned) | `CMPR a, b` | `LO` |
| If a > b (signed) | `CMPR a, b` | `»` |
| If a ≥ b (signed) | `CMPR a, b` | `>=` |
| If a < b (signed) | `CMPR a, b` | `«` |
| If a ≤ b (signed) | `CMPR a, b` | `<=` |
| If negative | `CMPI a, #0` | `NS` |
| If positive or zero | `CMPI a, #0` | `NC` |
| If overflow occurred | After arithmetic | `OS` |
| If no overflow | After arithmetic | `OC` |

Table 10.4: Condition Code Selection Guide

## 10.9 Performance Considerations

- A predicated instruction costs the same six cycles whether or not it executes; the saving over a branch is the branch instruction itself, not a pipeline penalty, since the SIRC-1 has no overlapped pipeline to flush.
- When a condition is false, the instruction still takes 6 cycles but performs no operation.
- For short conditional sequences, conditional execution can be faster than branching.
- For longer conditional blocks, explicit branches may be more efficient.

## 10.10 Common Pitfalls

- **Signed vs. Unsigned**: Using unsigned conditions (`HI`, `LO`) for signed values or vice versa produces incorrect results.
- **Flag Clobbering**: Flags are modified by most ALU instructions. Ensure the condition flags haven't been modified between the comparison and conditional instruction:

```
1 ; WRONG - flags clobbered
2 CMPR r1, r2
3 ADDI r3, #100 ; Modifies flags!
4 BRAN|HI @target ; Tests wrong flags
5
6 ; CORRECT - flags preserved
7 CMPR r1, r2
8 BRAN|HI @target
9 ADDI r3, #100 ; After the branch
```

- **Inverted Logic**: Remember that `CMP A, B` computes A - B, so condition codes test A relative to B, not B relative to A.

# Part III

# SIRCIS Instruction Reference

CHAPTER 11

# Reading Instruction Descriptions

This part of the manual describes each SIRCIS instruction in a consistent format. The goal is to make each instruction entry usable as an implementation contract, not only as programmer guidance.

## 11.1 Instruction Entry Fields

Each instruction entry begins with a title naming the mnemonic or mnemonic family, followed immediately by one applicability line: `SIRC-1, all revisions` for CPU instructions, or the coprocessor and revision required for coprocessor instructions, per the model and revision policy in Chapter 16. The fields below then follow, in this order, for every entry:

**Mnemonic** The assembly mnemonic or mnemonic family, given in the entry title. Immediate and register variants are listed together when they perform the same operation.

**Opcodes** The 6-bit opcode values for each supported instruction format. Meta-instructions that assemble to another instruction's encoding use **Assembles to** instead of **Opcodes**.

**Encoding diagrams** A bit-field diagram for each encoding listed under Opcodes. A box labelled with an operand name (`rD`, `rS1`, `rO`, `imm16`, `offset`, `dest`, `src`, `addr` and so on) carries that operand; Table 11.1 defines the names. The shift fields `SO`, `ST` and `SA`, the condition field `Cond`, and the status update source `SUS` (the AF field of ALU instructions) keep their field names. A box showing a literal value (for example `0x0`, `00` or `p`) is a field the instruction fixes to that value.

**Instruction Fields** One line per encoding field the instruction uses: register fields, the condition field, the status update source field and which of its encodings are legal for this instruction, shift type and count, and immediate width. Values come from Chapter 7; an entry does not introduce a value that is not defined there. Each line leads with the diagram label and gives the field's name in Chapter 7 and its bit range in parentheses.

**Syntax** The accepted assembler forms. Meta-instructions are called out separately from real CPU instruction encodings.

**Operands** The permitted operand kinds and addressing modes for the instruction. Addressing-mode names come from the closed set in Table 8.1 (Chapter 8): Immediate, Register Direct, Address Register Direct, Indirect Immediate, Indirect Register, Post-Increment, and Pre-Decrement. An entry must not introduce a mode name outside that set; the 8-bit short-immediate encoding is a width variant of Immediate, not a mode.

**Operation** Pseudocode for the architectural effect of the instruction. Arithmetic is performed on 16-bit word values unless otherwise stated.

**Description** Prose description of the instruction's behavior, supplementing the Operation pseudocode.

**Flags** The effect on the condition flags in the status register.

**Write-back** Whether the computed result is written to a register, discarded, or used to update control state.

**Exceptions** Faults or traps that can be raised by the instruction. When an exception can occur, the entry must state whether partial side effects are possible.

**Condition field** The condition field values the instruction accepts for predicated execution. Every real instruction may be conditional. If the condition is false, the instruction has no architectural side effects unless a later instruction description explicitly states otherwise.

**Timing** The base execution time and any circumstances that add wait states.

**Privilege** Whether the instruction is available in protected mode, supervisor mode, or both.

**Example / Examples** One or more worked examples of the instruction in use. Each example is numbered `Example N-M:`, where N is the chapter number (or appendix letter) and M counts from 1 within the chapter; multiple examples in one entry take consecutive numbers.

**Notes** Additional informative remarks. A Notes block is informative and must not introduce a requirement that is not already stated in a normative field.

## 11.2 Notation

| Notation | Meaning |
|---|---|
| `rD` | Destination general-purpose register |
| `rS` | Source general-purpose register |
| `rS1` | First source register, usually the left-hand operand |
| `rS2` | Second source register, usually the right-hand operand |
| `rO` | Offset or index general-purpose register supplying a register displacement in a memory or effective-address form |
| `#imm16` | 16-bit immediate word encoded in immediate format |
| `#imm8` | 8-bit immediate encoded in short immediate format |
| `shift` | Optional shift definition. It applies to the register operand being shifted (the first source register in register and short-immediate formats, or the source register for register-displacement **`STOR`** forms); it never applies to an immediate value, a second source register, or loaded data. **`LOAD`** has no shift. See Chapter 9 for the full encoding. |
| `SR.X` | Status register field `X` |
| `SUS` | Status update source: the AF field of ALU instructions, selecting `[N]`, `[A]` or `[S]` |
| `addr / src` | Source address-register pair (`l`, `a`, `s`, or `p`) supplying the base address for a memory-class or address-calculation instruction |
| `dest` | Destination address-register pair for an address-calculation instruction, encoded in the register field |
| `#offset / #disp` | Displacement added to the low word of an address-register pair |
| `@label` | Symbol reference resolved by the linker; PC-relative for **`BRAN`** and **`BRSR`**, a low-word address in other instruction operands (see the Assembly Language Summary in the Notation and Glossary chapter for the full resolution rules, including data directives) |
| `\|cond` | Condition-field suffix selecting the predicate for conditional execution |

Table 11.1: Instruction Description Notation

## 11.3 Status Flag Effect Symbols

Flag tables use the following symbols:

| Symbol | Meaning |
|---|---|
| * | Updated from the instruction result |
| 0 | Cleared to zero |
| 1 | Set to one |
| – | Preserved |
| S | Updated from the shifter result when [S] is used |
| U | Architecturally undefined; the implementation leaves the flag in an unspecified state |

Table 11.2: Status Flag Effect Symbols

## 11.4 Conditional Execution

Every encoded instruction contains a condition field. If the condition evaluates true, the instruction executes normally. If the condition evaluates false, the instruction is skipped: it has no architectural effect beyond the normal two-word advance of p (set unconditionally at decode, before the condition is evaluated). No destination register, address register, memory, link register, coprocessor state, or status flag is modified by a skipped instruction.

## 11.5 Status Update Overrides

ALU instructions can select the source of status flag updates with the status update field:

| Syntax | Encoded AF | Effect |
|---|---|---|
| [N] | 00 | Preserve status flags |
| [A] | 01 | Update flags from the ALU result |
| [S] | 10 | Update flags from the shifter result |
| Reserved | 11 | Reserved for future use |

Table 11.3: Status Update Source Encoding

When no override is written, ALU instructions use [A]. **SHFT** defaults to [S] instead. **MOVI** and **MOVR** do not accept [S]. Instructions that do not support status updates must not use status update override syntax.

CHAPTER 12

# Instruction Summary

## 12.1 Overview

The SIRCIS instruction set consists of 64 possible opcodes (6-bit opcode field), of which 62 are documented and assigned; the remaining 2 are undocumented (see Appendix C). The instructions are organized into logical groups:

- **ALU Instructions (`0x00`–`0x0E`, `0x20`–`0x2E`, `0x30`–`0x3E`)**: Arithmetic, logical, and comparison operations
- **Memory Instructions (`0x10`–`0x17`)**: Load and store operations
- **Address and Control Flow (`0x18`–`0x1F`)**: Effective-address calculation, jumps, and calls
- **Coprocessor (`0x0F`, `0x3F`)**: Coprocessor interface

`0x27` and `0x2F` are undocumented (see Appendix C).

## 12.2 Complete Instruction List

| Opcode | Mnemonic | Format | Flags | Operation |
|---|---|---|---|---|
| 0x00 | ADDI | Immediate | NZCV | Add immediate |
| 0x01 | ADCI | Immediate | NZCV | Add immediate with carry |
| 0x02 | SUBI | Immediate | NZCV | Subtract immediate |
| 0x03 | SBCI | Immediate | NZCV | Subtract immediate with carry |
| 0x04 | ANDI | Immediate | NZ (C,V=0) | AND immediate |
| 0x05 | ORRI | Immediate | NZ (C,V=0) | OR immediate |
| 0x06 | XORI | Immediate | NZ (C,V=0) | XOR immediate |
| 0x07 | MOVI | Immediate | NZ (C,V=0) | Move immediate |
| 0x08 | CMNI | Immediate | NZCV | Compare negative immediate |
| 0x09 | CNCI | Immediate | NZCV | Compare negative with carry immediate |
| 0x0A | CMPI | Immediate | NZCV | Compare immediate |
| 0x0B | CPCI | Immediate | NZCV | Compare with carry immediate |
| 0x0C | TSAI | Immediate | NZ (C,V=0) | Test AND immediate |
| 0x0D | TSOI | Immediate | NZ (C,V=0) | Test OR immediate |
| 0x0E | TSXI | Immediate | NZ (C,V=0) | Test XOR immediate |
| 0x0F | COPI | Immediate | – | Coprocessor call immediate |
| 0x10 | STOR | Indirect Imm | – | Store to (addr + imm) |
| 0x11 | STOR | Indirect Reg | – | Store to (addr + reg) |
| 0x12 | STOR | Pre-Dec | – | Store with pre-decrement |
| 0x13 | STOR | Pre-Dec Reg | – | Store with pre-dec (reg) |
| 0x14 | LOAD | Indirect Imm | – | Load from (addr + imm) |
| 0x15 | LOAD | Indirect Reg | – | Load from (addr + reg) |
| 0x16 | LOAD | Post-Inc | – | Load with post-increment |
| 0x17 | LOAD | Post-Inc Reg | – | Load with post-inc (reg) |
| 0x18 | LDEA | Indirect Imm | – | Load effective address |
| 0x19 | LDEA | Indirect Reg | – | Load effective address (reg) |
| 0x1A | LDEA | Pre-Dec Imm | – | Load effective address, pre-dec |
| 0x1B | LDEA | Pre-Dec Reg | – | Load effective address, pre-dec (reg) |
| 0x1C | LDEL | Indirect Imm | – | Load effective address and link |
| 0x1D | LDEL | Indirect Reg | – | Load effective address and link (reg) |
| 0x1E | LDEL | Post-Inc Imm | – | Load effective address and link, post-inc |
| 0x1F | LDEL | Post-Inc Reg | – | Load effective address and link, post-inc (reg) |
| 0x20 | ADDI | Short Imm+Shift | NZCV | Add short immediate |
| 0x21 | ADCI | Short Imm+Shift | NZCV | Add short imm with carry |
| 0x22 | SUBI | Short Imm+Shift | NZCV | Subtract short immediate |
| 0x23 | SBCI | Short Imm+Shift | NZCV | Subtract short imm with carry |
| 0x24 | ANDI | Short Imm+Shift | NZ (C,V=0) | AND short immediate |
| 0x25 | ORRI | Short Imm+Shift | NZ (C,V=0) | OR short immediate |
| 0x26 | XORI | Short Imm+Shift | NZ (C,V=0) | XOR short immediate |
| 0x27 | – | Short Imm+Shift | – | Undocumented |
| 0x28 | CMNI | Short Imm+Shift | NZCV | Compare negative short immediate |
| 0x29 | CNCI | Short Imm+Shift | NZCV | Compare negative with carry short immediate |
| 0x2A | CMPI | Short Imm+Shift | NZCV | Compare short immediate |
| 0x2B | CPCI | Short Imm+Shift | NZCV | Compare with carry short immediate |
| 0x2C | TSAI | Short Imm+Shift | NZ (C,V=0) | Test AND short immediate |
| 0x2D | TSOI | Short Imm+Shift | NZ (C,V=0) | Test OR short immediate |
| 0x2E | TSXI | Short Imm+Shift | NZ (C,V=0) | Test XOR short immediate |
| 0x2F | – | Short Imm+Shift | – | Undocumented |
| 0x30 | ADDR | Register | NZCV | Add register |
| 0x31 | ADCR | Register | NZCV | Add register with carry |
| 0x32 | SUBR | Register | NZCV | Subtract register |
| 0x33 | SBCR | Register | NZCV | Subtract register with carry |
| 0x34 | ANDR | Register | NZ (C,V=0) | AND register |
| 0x35 | ORRR | Register | NZ (C,V=0) | OR register |
| 0x36 | XORR | Register | NZ (C,V=0) | XOR register |
| 0x37 | MOVR | Register | NZ (C,V=0) | Move register |
| 0x38 | CMNR | Register | NZCV | Compare negative register |
| 0x39 | CNCR | Register | NZCV | Compare negative with carry register |
| 0x3A | CMPR | Register | NZCV | Compare register |
| 0x3B | CPCR | Register | NZCV | Compare with carry register |
| 0x3C | TSAR | Register | NZ (C,V=0) | Test AND register |
| 0x3D | TSOR | Register | NZ (C,V=0) | Test OR register |
| 0x3E | TSXR | Register | NZ (C,V=0) | Test XOR register |
| 0x3F | COPR | Register | – | Coprocessor call register |

Table 12.1: Complete SIRCIS Instruction Set

See Table 11.2 for the flag-effect symbol definitions.

## 12.3 Instruction Grouping Patterns

### 12.3.1 Opcode Organization

The opcode space is systematically organized:

- **0x0_**: Immediate operand format
- **0x1_**: Memory and control flow operations
- **0x2_**: Short immediate with shift format
- **0x3_**: Register operand format

### 12.3.2 Save vs. Test Variants

Many ALU instructions have two variants:

- **+0x00 to +0x06**: Save result to destination register
- **+0x07**: **MOVI**/**MOVR** (0x27 is undocumented)
- **+0x08 to +0x0E**: Test only (update flags, discard result)
- **+0x0F**: Coprocessor call (neither result nor flags are written)

Examples:

- 0x00 = **ADDI** (save result), 0x08 = **CMNI** (test only)
- 0x04 = **ANDI** (save result), 0x0C = **TSAI** (test only)
- 0x06 = **XORI** (save result), 0x0E = **TSXI** (test only)

## 12.4 Meta-Instructions

Several commonly-used operations are implemented as assembler meta-instructions that assemble to specific opcodes:

| Meta-Instruction | Assembles To | Purpose |
|---|---|---|
| **NOOP** | `ADDI[N] r1, #0` | No operation |
| **RETS** | `LDEA p, (#0, l)` | Return from subroutine |
| **SHFT** | `ORRI[S] rD, #0, shift` | Shift with status update |
| **BRAN** | `LDEA p, ...` | PC-relative branch |
| **BRSR** | `LDEL p, ...` | PC-relative call |
| **LJMP** | `LDEA p, ...` | Long jump |
| **LJSR** | `LDEL p, ...` | Long call |
| **EXCP** | `COPI #0x11vv` | User exception |
| **WAIT** | `COPI #0x1900` | Wait for interrupt |
| **RETE** | `COPI #0x1A00` | Return from exception |
| **RSET** | `COPI #0x1B00` | System reset |
| **ETFR** | `COPI #0x1Cxy` | Read exception state |
| **ETTR** | `COPI #0x1Dxy` | Write exception state |
| **DMAR** | `COPI #0x28xx` | DMA read to registers |
| **DMAW** | `COPI #0x29xx` | DMA write from registers |
| **DMAT** | `COPI #0x2Ann` | DMA memory transfer |
| **MULU** | `COPI #0x3000` | Unsigned multiply |
| **MULS** | `COPI #0x3100` | Signed multiply |
| **DIVU** | `COPI #0x3200` | Unsigned divide |
| **DIVS** | `COPI #0x3300` | Signed divide |

Table 12.2: Meta-Instructions

## 12.5 Instruction Timing

Ordinary processing-unit instructions use exactly 6 execution phases and complete in 6 clock cycles when no bus wait states are required:

1. Instruction Fetch (High Word)
2. Instruction Fetch (Low Word)
3. Decode and Register Fetch
4. Execute and Address Calculation
5. Memory Access
6. Write Back

Coprocessor calls (**COPI**, **COPR** and every meta-instruction that assembles to one) take a second 6-cycle slot for the coprocessor dispatch that begins at the next phase 0, for 12 cycles in total before the next instruction is fetched.

This fixed sequence simplifies hardware design. Delayed bus acknowledgement may hold a phase and add wait cycles. DMA meta-instructions dispatch through the normal 6-cycle **COPI** path and then add DMA command and transfer cycles.

## 12.6 Next Chapters

The following chapters provide detailed documentation for each instruction group:

- **Chapter 13**: ALU instructions (arithmetic, logical, compare)

- **Chapter 14**: Load and store operations
- **Chapter 15**: Branches, jumps, and address operations
- **Chapter 16**: Coprocessor interface
- **Chapter 17**: Meta-instruction cross-reference

CHAPTER 13

# ALU Instructions

## 13.1 Overview

The ALU (Arithmetic Logic Unit) instructions perform arithmetic and logical operations on register operands. All ALU instructions follow the load/store architecture principle: they operate only on registers, not directly on memory.

ALU instructions are available in three format variants:

- **Immediate**: Operation with 16-bit constant
- **Short Immediate with Shift**: Operation with 8-bit constant and optional shift
- **Register**: Operation between registers with optional shift

## 13.2 ALU Instruction Families

### 13.2.1 Arithmetic Instructions

- **`ADD`** – Addition
- **`ADC`** – Add with Carry
- **`SUB`** – Subtraction
- **`SBC`** – Subtract with Carry (Borrow)

### 13.2.2 Logical Instructions

- **`AND`** – Bitwise AND
- **`ORR`** – Bitwise OR
- **`XOR`** – Bitwise XOR (Exclusive OR)

### 13.2.3 Data Movement

- **`MOV`** – Move immediate or copy register

### 13.2.4 Test and Compare

- **`CMN`** – Compare Negative (add without saving result)
- **`CNC`** – Compare Negative with Carry (add with carry without saving result)
- **`CMP`** – Compare (subtract without saving result)
- **`CPC`** – Compare with Carry (subtract with carry without saving result)
- **`TSA`** – Test AND (AND without saving result)
- **`TSO`** – Test OR (OR without saving result)
- **`TSX`** – Test XOR (XOR without saving result)

## 13.3 Legal Forms

ALU instructions are register-only operations. Immediate operands are encoded in the instruction word; memory operands are not legal for this instruction family.

| Instruction | Syntax | Encoding | Notes |
|---|---|---|---|
| ADD | `ADDI rD, #imm16` | 0x00 | Writes result |
| ADD | `ADDI rD, #imm8, shift` | 0x20 | Writes result |
| ADD | `ADDR rD, rS1, rS2[, shift]` | 0x30 | Writes result |
| ADD | `ADDR rD, rS2[, shift]` | 0x30 | Writes result (shorthand: rS1 = rD) |
| ADC | `ADCI rD, #imm16` | 0x01 | Writes result |
| ADC | `ADCI rD, #imm8, shift` | 0x21 | Writes result |
| ADC | `ADCR rD, rS1, rS2[, shift]` | 0x31 | Writes result |
| ADC | `ADCR rD, rS2[, shift]` | 0x31 | Writes result (shorthand: rS1 = rD) |
| SUB | `SUBI rD, #imm16` | 0x02 | Writes result |
| SUB | `SUBI rD, #imm8, shift` | 0x22 | Writes result |
| SUB | `SUBR rD, rS1, rS2[, shift]` | 0x32 | Writes result |
| SUB | `SUBR rD, rS2[, shift]` | 0x32 | Writes result (shorthand: rS1 = rD) |
| SBC | `SBCI rD, #imm16` | 0x03 | Writes result |
| SBC | `SBCI rD, #imm8, shift` | 0x23 | Writes result |
| SBC | `SBCR rD, rS1, rS2[, shift]` | 0x33 | Writes result |
| SBC | `SBCR rD, rS2[, shift]` | 0x33 | Writes result (shorthand: rS1 = rD) |
| AND | `ANDI rD, #imm16` | 0x04 | Writes result |
| AND | `ANDI rD, #imm8, shift` | 0x24 | Writes result |
| AND | `ANDR rD, rS1, rS2[, shift]` | 0x34 | Writes result |
| AND | `ANDR rD, rS2[, shift]` | 0x34 | Writes result (shorthand: rS1 = rD) |
| ORR | `ORRI rD, #imm16` | 0x05 | Writes result |
| ORR | `ORRI rD, #imm8, shift` | 0x25 | Writes result |
| ORR | `ORRR rD, rS1, rS2[, shift]` | 0x35 | Writes result |
| ORR | `ORRR rD, rS2[, shift]` | 0x35 | Writes result (shorthand: rS1 = rD) |
| XOR | `XORI rD, #imm16` | 0x06 | Writes result |
| XOR | `XORI rD, #imm8, shift` | 0x26 | Writes result |
| XOR | `XORR rD, rS1, rS2[, shift]` | 0x36 | Writes result |
| XOR | `XORR rD, rS2[, shift]` | 0x36 | Writes result (shorthand: rS1 = rD) |
| MOV | `MOVI rD, #imm16` | 0x07 | Writes result |
| MOV | `MOVR rD, rS` | 0x37 | Writes result |
| CMN | `CMNI rS, #imm16` | 0x08 | Updates flags only |
| CMN | `CMNI rS, #imm8, shift` | 0x28 | Updates flags only |
| CMN | `CMNR rS1, rS2[, shift]` | 0x38 | Updates flags only |
| CNC | `CNCI rS, #imm16` | 0x09 | Updates flags only |
| CNC | `CNCI rS, #imm8, shift` | 0x29 | Updates flags only |
| CNC | `CNCR rS1, rS2[, shift]` | 0x39 | Updates flags only |
| CMP | `CMPI rS, #imm16` | 0x0A | Updates flags only |
| CMP | `CMPI rS, #imm8, shift` | 0x2A | Updates flags only |
| CMP | `CMPR rS1, rS2[, shift]` | 0x3A | Updates flags only |
| CPC | `CPCI rS, #imm16` | 0x0B | Updates flags only |
| CPC | `CPCI rS, #imm8, shift` | 0x2B | Updates flags only |
| CPC | `CPCR rS1, rS2[, shift]` | 0x3B | Updates flags only |
| TSA | `TSAI rS, #imm16` | 0x0C | Updates flags only |
| TSA | `TSAI rS, #imm8, shift` | 0x2C | Updates flags only |
| TSA | `TSAR rS1, rS2[, shift]` | 0x3C | Updates flags only |
| TSO | `TSOI rS, #imm16` | 0x0D | Updates flags only |
| TSO | `TSOI rS, #imm8, shift` | 0x2D | Updates flags only |
| TSO | `TSOR rS1, rS2[, shift]` | 0x3D | Updates flags only |
| TSX | `TSXI rS, #imm16` | 0x0E | Updates flags only |
| TSX | `TSXI rS, #imm8, shift` | 0x2E | Updates flags only |
| TSX | `TSXR rS1, rS2[, shift]` | 0x3E | Updates flags only |

Table 13.1: Legal ALU Instruction Forms

**Register shorthand:** When a register-form ALU instruction omits `rS1`, the assembler encodes `rD`

as both the destination and first source operand. For example, `ADDR r1, r2` is encoded as `ADDR r1, r1, r2`. A shift definition may be combined with the shorthand; because the shift always applies to the left operand, `ADDR r1, r2, LSL #2` computes `(r1 « 2) + r2`, not `r1 + (r2 « 2)`.

**Short-immediate move:** Opcode `0x27` has no public assembly syntax and is undocumented.

## 13.4 Common ALU Semantics

| Topic | Definition |
|---|---|
| Condition false | The instruction is skipped and has no side effects. Registers and status flags are preserved. |
| Immediate format | The left operand is the named register. The right operand is the encoded 16-bit immediate. |
| Short immediate format | The left operand is the named register after the encoded shift is applied. The right operand is the encoded 8-bit immediate. |
| Register format | The left operand is `rS1` after the encoded shift is applied. The right operand is `rS2`. |
| Test variants | **`CMN`**, **`CNC`**, **`CMP`**, **`CPC`**, **`TSA`**, **`TSO`**, and **`TSX`** compute a result for flag updates but do not write it back. |
| MOV | **`MOVI`** and **`MOVR`** write the selected operand to `rD`. |
| Timing | ALU instructions complete in 6 cycles, plus any instruction-fetch wait states. |
| Exceptions | Raises no data-memory faults. In protected mode, an ALU instruction that writes a privileged high address register raises a privilege-violation fault at decode; see the notes below. |

Table 13.2: Common ALU Semantics

ALU instruction execution does not perform data-memory access and does not raise data bus, data bus-protection, data alignment, segment-overflow, or invalid-opcode faults. In protected mode, an ALU instruction that writes `ah`, `lh`, `ph`, or `sh` through its register field raises a privilege-violation fault at decode and has no other effect; compare and test instructions only read that field and never fault. An ALU instruction whose register field names `sr` is permitted in protected mode, but only bits 7–0 of `sr` are written; bits 15–8 are left unchanged (Section 5.5.2). Instruction fetch can still raise the normal fetch faults before an ALU instruction executes. If trace mode was enabled when the instruction began, an instruction-trace fault is raised after the instruction commits. Every 6-bit opcode decodes; no processing-unit encoding raises an invalid-opcode fault. Encodings outside the documented ALU forms execute with architecturally undefined results (see Appendix C).

## 13.5 Status Flag Updates

ALU instructions update the status register flags:

**Arithmetic (ADD, ADC, SUB, SBC, CMN, CNC, CMP, CPC)** Update all four flags: N, Z, C, V

**Logical and move (AND, ORR, XOR, TSA, TSO, TSX, MOVI, MOVR)** Update N and Z; clear C and V

| Family | N | Z | C | V | Default AF | Meaning |
|---|---|---|---|---|---|---|
| ADD | * | * | * | * | [A] | C is carry out; V is signed overflow. |
| ADC | * | * | * | * | [A] | Adds incoming C; C is carry out. |
| SUB | * | * | * | * | [A] | C is set when a borrow occurs. |
| SBC | * | * | * | * | [A] | Subtracts incoming C as borrow input; C is set on outgoing borrow. |
| CMN | * | * | * | * | [A] | Same flags as ADD; result is discarded. |
| CNC | * | * | * | * | [A] | Same flags as ADC; result is discarded. |
| CMP | * | * | * | * | [A] | Same flags as SUB; result is discarded. |
| CPC | * | * | * | * | [A] | Same flags as SBC; result is discarded. |
| AND | * | * | 0 | 0 | [A] | C and V are cleared. |
| ORR | * | * | 0 | 0 | [A] | C and V are cleared. |
| XOR | * | * | 0 | 0 | [A] | C and V are cleared. |
| TSA | * | * | 0 | 0 | [A] | Same flags as AND; result is discarded. |
| TSO | * | * | 0 | 0 | [A] | Same flags as ORR; result is discarded. |
| TSX | * | * | 0 | 0 | [A] | Same flags as XOR; result is discarded. |
| MOV | * | * | 0 | 0 | [A] | C and V are cleared. |

Table 13.3: ALU Status Flag Effects

See Table 11.2 for the flag-effect symbol definitions. The table shows the effect when the instruction uses its default status update source. If [N] is encoded, all status flags are preserved. If [A] is encoded, flags are updated from the ALU result according to the instruction family. If [S] is encoded, flags are updated from the shifter result instead of the ALU result; see Chapter 9 for the shifter flag rules. The immediate format has no shift fields, so [S] on an immediate-format instruction writes a constant zero into the flag byte: N, Z, C, and V are all cleared. Use [S] only with short-immediate and register forms. **MOVI** and **MOVR** have no shifted operand and do not accept [S]; an encoding of those opcodes with AF 10, which is not reachable from public assembly syntax, leaves all four status flags architecturally undefined (U U U U).

### 13.5.1 Flag Computation Formulas

Table 13.3 states which flags each family updates; this section states exactly how, as a Boolean formula in terms of the sign bit (bit 15) of the destination operand (Dm), the source operand (Sm), and the result (Rm). $\cdot$ is Boolean AND, $+$ is Boolean OR, and $\overline{X}$ is the complement of $X$.

| Family | C | V |
|---|---|---|
| ADD, ADC, CMN, CNC | Carry out of bit 15 of the full addition | $Dm \cdot Sm \cdot \overline{Rm} + \overline{Dm} \cdot \overline{Sm} \cdot Rm$ |
| SUB, SBC, CMP, CPC | $\overline{Dm} \cdot Sm + Sm \cdot Rm + Rm \cdot \overline{Dm}$ | $Dm \cdot \overline{Sm} \cdot \overline{Rm} + \overline{Dm} \cdot Sm \cdot Rm$ |
| AND, ORR, XOR, TSA, TSO, TSX | $0$ (always cleared) | $0$ (always cleared) |

Table 13.4: Carry and Overflow Flag Formulas

$N$ and $Z$ are the same for every family: $N = Rm$ (the result's own sign bit), and $Z$ is set when the full 16-bit result is zero. **ADC** and **SBC** use the same formulas as **ADD** and **SUB** respectively – the incoming carry/borrow is folded into the addition or subtraction before `Rm` (and the carry/borrow out) is evaluated, so no separate formula is needed for them. **CMN**/**CNC**/**CMP**/**CPC**/**TSA**/**TSO**/**TSX** compute the same flags as the corresponding **ADD**/**ADC**/**SUB**/**SBC**/**AND**/**ORR**/**XOR** family and simply discard the result.

### 13.5.2 Manual Flag Update Control

ALU instructions support manual control over how status flags are updated using the status override syntax. See Section 9.12 in Chapter 9 for complete details.


- `INSTR[A]` – Update flags from ALU result (default behavior)
- `INSTR[S]` – Update flags from shift result instead of ALU
- `INSTR[N]` – Do not update status flags
- **MOVI** and **MOVR** do not accept `[S]`.
- AF encoding `11` (binary) is reserved and has no assembly syntax.

```
1 ; Update flags from shift operation
2 ADDI[S] r1, #0, LSL #3 ; Flags reflect (r1 << 3), not the ALU
3
4 ; Preserve flags during operation
5 CMPR r2, r3 ; Set comparison flags
6 ADDI[N] r4, #1 ; Increment without changing flags
7 BRAN|>= @branch_if_r2_gte_r3 ; Use flags from CMPR
```

Example 13-1: Manual Status Flag Update Control

# SHFT
## Shift with Status Update Meta-Instruction

**Applicability:** SIRC-1, all revisions
**Assembles to:** `ORRI[S] rD, #0, shift`. See Table 13.1 for the full family of legal forms.




**Instruction Fields:**

- **Register (bits 25–22):** `rD`, the destination and shifted source register; any of the 16 registers, `0x0`–`0xF`.
- **Immediate (bits 21–14):** fixed at `0x00` by the meta-instruction.
- **SO, ST, SA (bits 13–6):** shift operand, type and count. Types: `NUL`, `LSL`, `LSR`, `ASL`, `ASR`, `RTL`, `RTR`; an immediate count is `0`–`15`; a register count is used in full (16 or more clamps to a full shift for `LSL`/`LSR`/`ASL`/`ASR`, and is taken modulo 16 for `RTL`/`RTR`) – see Chapter 9.
- **AF (bits 5–4):** fixed at `10` (Shift) by the meta-instruction.
- **Condition field (bits 3–0):** any of the 16 condition-code encodings in Table 7.5.

**Syntax:**

```
SHFT rD, shift ; rD = shifted rD; flags from shift
```

**Operands:** `rD` is both the destination and shifted source register. `shift` may use any standard immediate or register shift count supported by short-immediate ALU instructions.

**Operation:**

```
shifted = shift(rD)
rD = shifted OR 0
SR = flags_from_shift_result
```

**Description:**

Provides concise syntax for shifting a register value while taking status flags from the shifter result. It is not a separate CPU operation. The zero OR operation preserves the shifted source value, while `[S]` makes the status flags reflect the shift result instead of the OR result.

**Flags:** Updated from the shifter result by default.

**Write-back:** Inherits **`ORRI`** write-back to `rD`.

**Exceptions:** Does not access memory and raises no instruction-specific faults.

**Condition field:** If the condition is false, no shift result is written and status flags are preserved.

**Timing:** Same as **`ORRI`**: 6 cycles, plus instruction-fetch wait states.

**Privilege:** Available in protected mode and supervisor mode, except when it writes a privileged register (`ah`, `lh`, `ph`, `sh`); see Chapter 6.

```
; Shift r1 left by 3 and update flags
SHFT r1, LSL #3 ; ORRI[S] r1, #0, LSL #3

; Shift right and test result
SHFT r3, LSR #2 ; r3 = r3 >> 2
BRAN|== @zero_result ; Branch if shifted result is zero
```

Example 13-2: Shifting and Testing with SHFT

**Notes:**


- Immediate shift counts are 0–15; the assembler rejects a larger literal. A register shift count is used in full (16 or more clamps to a full shift for `LSL`/`LSR`/`ASL`/`ASR`, and is taken modulo 16 for `RTL`/`RTR`) – see Chapter 9.
- All six shift types are supported, plus **`NUL`**: NUL, LSL, LSR, ASL, ASR, RTL, and RTR. `SHFT rD, NUL #0` sets the flags from the unshifted value of `rD`.

# ADDI / ADDR

## Add Immediate / Add Register

**Applicability:** SIRC-1, all revisions

**Opcodes:** `0x00` (Imm), `0x20` (Short Imm), `0x30` (Reg). See Table 13.1 for the full family of legal forms.

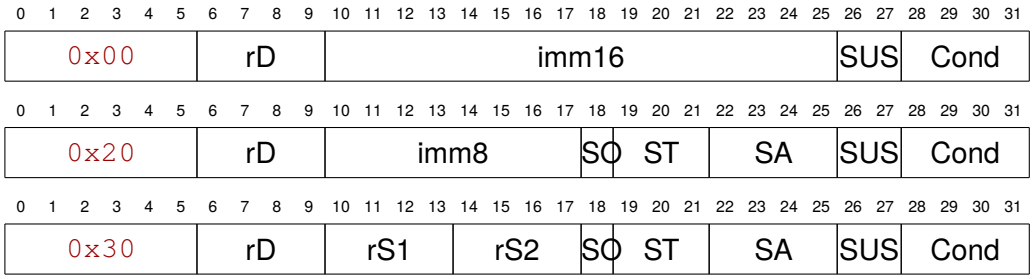


**Instruction Fields:**

- **rD (Reg or R1, bits 25–22):** destination register; any of the 16 registers, `0x0`–`0xF`.
- **rS1 (R2, bits 21–18) and rS2 (R3, bits 17–14), register form only:** first and second source registers.
- **imm16 (Immediate Value, bits 21–6) or imm8 (Imm, bits 21–14):** 16-bit value (immediate form) or 8-bit value zero-extended to 16 bits (short-immediate form).
- **SO, ST, SA (bits 13–6, short-immediate and register forms only):** shift operand, type and count. Types: `NUL`, `LSL`, `LSR`, `ASL`, `ASR`, `RTL`, `RTR`; an immediate count is `0`–`15`; a register count is used in full (16 or more clamps to a full shift for `LSL`/`LSR`/`ASL`/`ASR`, and is taken modulo 16 for `RTL`/`RTR`) – see Chapter 9.
- **SUS (AF, bits 5–4):** status update source: `00` = None, `01` = Alu (default), `10` = Shift, `11` = Reserved.
- **Condition field (bits 3–0):** any of the 16 condition-code encodings in Table 7.5.

**Syntax:**

```
1 ADDI rD, #imm16 ; rD = rD + imm16
2 ADDI rD, #imm8, shift ; rD = shift(rD) + imm8
3 ADDR rD, rS1, rS2 ; rD = rS1 + rS2
4 ADDR rD, rS1, rS2, shift ; rD = shift(rS1) + rS2
```

**Operands:** `rD` is the destination and first source in immediate forms. Register forms use `rS1` as the first source and `rS2` as the second source; assembler shorthand may omit `rS1`. Short-immediate and register forms may apply a shift to the first source operand.

**Operation:**

```
result = operand1 + operand2
destination = result
SR.N = result[15]
SR.Z = (result == 0)
SR.C = carry_out
SR.V = signed_overflow
```

**Description:**

Adds two values and stores the result in the destination register. In short immediate format with shift, the destination register is shifted before adding the immediate. The carry flag is set if an unsigned overflow occurs (carry out of bit 15). The overflow flag is set if a signed overflow occurs (the sign of the result is incorrect for the operation).

**Flags:** N Z C V

**Write-back:** If the condition is true, writes the 16-bit result to `rD`.

**Exceptions:** Does not access memory and raises no instruction-specific faults.

**Condition field:** If the condition is false, no result is written and status flags are preserved.

**Timing:** 6 cycles, plus instruction-fetch wait states.

**Privilege:** Available in protected mode and supervisor mode, except when it writes a privileged register (`ah`, `lh`, `ph`, `sh`); see Chapter 6.

```
1  ; Simple addition
2  ADDI r1, #100 ; r1 = r1 + 100
3
4  ; Add two registers
5  ADDR r3, r1, r2 ; r3 = r1 + r2
6
7  ; Scaled addition (multiply by 3)
8  ADDR r4, r5, r5, LSL #1 ; r4 = r5 + (r5 * 2) = r5 * 3
9
10 ; Build large constant
11 ADDI r1, #1, LSL #12 ; r1 = (r1 << 12) + 1
```

Example 13-3: Basic and Scaled Addition

**Notes:**


- For multi-precision arithmetic, use **ADC** to propagate carry
- Adding zero (`ADDI r1, #0`) can be used to move values or test flags
- Shift operations allow efficient constant multiplication

# ADCI / ADCR

## Add with Carry

**Applicability:** SIRC-1, all revisions

**Opcodes:** `0x01` (Imm), `0x21` (Short Imm), `0x31` (Reg). See Table 13.1 for the full family of legal forms.

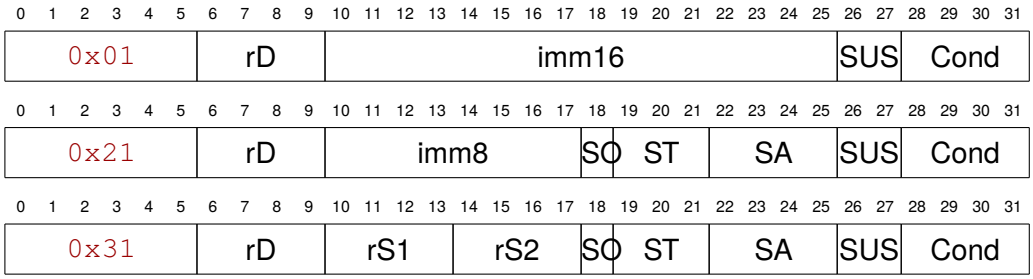


**Instruction Fields:**

- **rD (Reg or R1, bits 25–22):** destination register; any of the 16 registers, `0x0`–`0xF`.
- **rS1 (R2, bits 21–18) and rS2 (R3, bits 17–14), register form only:** first and second source registers.
- **imm16 (Immediate Value, bits 21–6) or imm8 (Imm, bits 21–14):** 16-bit value (immediate form) or 8-bit value zero-extended to 16 bits (short-immediate form).
- **SO, ST, SA (bits 13–6, short-immediate and register forms only):** shift operand, type and count. Types: `NUL`, `LSL`, `LSR`, `ASL`, `ASR`, `RTL`, `RTR`; an immediate count is `0`–`15`; a register count is used in full (16 or more clamps to a full shift for `LSL`/`LSR`/`ASL`/`ASR`, and is taken modulo 16 for `RTL`/`RTR`) – see Chapter 9.
- **SUS (AF, bits 5–4):** status update source: `00` = None, `01` = Alu (default), `10` = Shift, `11` = Reserved.
- **Condition field (bits 3–0):** any of the 16 condition-code encodings in Table 7.5.

**Syntax:**

```
1 ADCI rD, #imm16 ; rD = rD + imm16 + C
2 ADCI rD, #imm8, shift ; rD = shift(rD) + imm8 + C
3 ADCR rD, rS1, rS2 ; rD = rS1 + rS2 + C
4 ADCR rD, rS1, rS2, shift ; rD = shift(rS1) + rS2 + C
```

**Operands:** Same operand forms as **ADD**. The incoming `C` flag is read as an additional least-significant carry input.

**Operation:**

```
result = operand1 + operand2 + SR.C
destination = result
SR.N = result[15]
SR.Z = (result == 0)
SR.C = carry_out
SR.V = signed_overflow
```

**Description:**

Adds two values plus the carry flag and stores the result. In short immediate format with shift, the destination register is shifted before adding the immediate. This instruction is used for multi-precision (32-bit, 48-bit, etc.) arithmetic to propagate the carry from lower-order additions to higher-order additions.

**Flags:** N Z C V

**Write-back:** If the condition is true, writes the 16-bit result to `rD`.

**Exceptions:** Does not access memory and raises no instruction-specific faults.

**Condition field:** If the condition is false, no result is written and status flags are preserved.

**Timing:** 6 cycles, plus instruction-fetch wait states.

**Privilege:** Available in protected mode and supervisor mode, except when it writes a privileged register (`ah`, `lh`, `ph`, `sh`); see Chapter 6.

```
1 ; 32-bit addition (r1:r2 = r3:r4 + r5:r6)
2 ; Low words
3 ADDR r2, r4, r6 ; r2 = r4 + r6, set carry
4
5 ; High words (with carry propagation)
6 ADCR r1, r3, r5 ; r1 = r3 + r5 + carry
```

Example 13-4: 32-bit Addition with Carry Propagation

**Notes:**


- Always use after **`ADD`** for multi-word arithmetic
- The carry flag must be in the correct state before **`ADC`**
- Can be used to add 1 conditionally based on carry flag

# SUBI / SUBR

## Subtract Immediate / Subtract Register

**Applicability:** SIRC-1, all revisions

**Opcodes:** `0x02` (Imm), `0x22` (Short Imm), `0x32` (Reg). See Table 13.1 for the full family of legal forms.

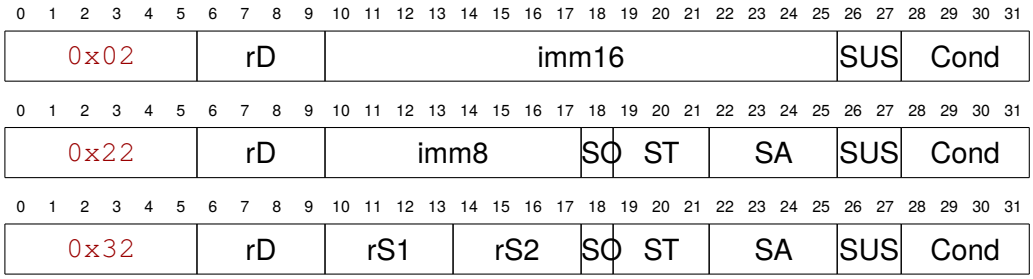


**Instruction Fields:**

- **rD (Reg or R1, bits 25–22):** destination register; any of the 16 registers, `0x0`–`0xF`.
- **rS1 (R2, bits 21–18) and rS2 (R3, bits 17–14), register form only:** first and second source registers.
- **imm16 (Immediate Value, bits 21–6) or imm8 (Imm, bits 21–14):** 16-bit value (immediate form) or 8-bit value zero-extended to 16 bits (short-immediate form).
- **SO, ST, SA (bits 13–6, short-immediate and register forms only):** shift operand, type and count. Types: `NUL`, `LSL`, `LSR`, `ASL`, `ASR`, `RTL`, `RTR`; an immediate count is `0`–`15`; a register count is used in full (16 or more clamps to a full shift for `LSL`/`LSR`/`ASL`/`ASR`, and is taken modulo 16 for `RTL`/`RTR`) – see Chapter 9.
- **SUS (AF, bits 5–4):** status update source: `00` = None, `01` = Alu (default), `10` = Shift, `11` = Reserved.
- **Condition field (bits 3–0):** any of the 16 condition-code encodings in Table 7.5.

**Syntax:**

```
1 SUBI rD, #imm16 ; rD = rD - imm16
2 SUBI rD, #imm8, shift ; rD = shift(rD) - imm8
3 SUBR rD, rS1, rS2 ; rD = rS1 - rS2
4 SUBR rD, rS1, rS2, shift ; rD = shift(rS1) - rS2
```

**Operands:** Same operand forms as **ADD**. The second operand is subtracted from the first operand.

**Operation:**

```
result = operand1 - operand2
destination = result
SR.N = result[15]
SR.Z = (result == 0)
SR.C = borrow
SR.V = signed_overflow
```

**Description:**

Subtracts the second operand from the first and stores the result. In short immediate format with shift, the destination register is shifted before subtracting the immediate. The carry flag is set if a borrow occurs (operand2 > operand1 for unsigned). The overflow flag indicates signed overflow.

**Flags:** N Z C V

**Write-back:** If the condition is true, writes the 16-bit result to `rD`.

**Exceptions:** Does not access memory and raises no instruction-specific faults.

**Condition field:** If the condition is false, no result is written and status flags are preserved.

**Timing:** 6 cycles, plus instruction-fetch wait states.

**Privilege:** Available in protected mode and supervisor mode, except when it writes a privileged register (`ah`, `lh`, `ph`, `sh`); see Chapter 6.

```
; Decrement by 1
SUBI r1, #1 ; r1 = r1 - 1

; Subtract registers
SUBR r3, r1, r2 ; r3 = r1 - r2

; Loop counter
SUBI r7, #1 ; Decrement counter
BRAN|!= @loop ; Branch if not zero
```


Example 13-5: Basic Subtraction and Loop Counting

**Notes:**

- Carry is set when the subtraction requires a borrow
- For multi-precision subtraction, use **SBC**
- Subtracting a value from itself (`SUBR r1, r1, r1`) clears the register

# SBCI / SBCR
## Subtract with Carry

**Applicability:** SIRC-1, all revisions
**Opcodes:** `0x03` (Imm), `0x23` (Short Imm), `0x33` (Reg). See Table 13.1 for the full family of legal forms.

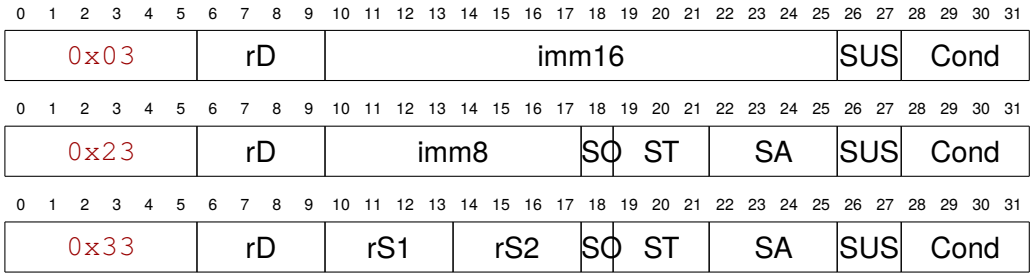


**Instruction Fields:**

- **rD (Reg or R1, bits 25–22):** destination register; any of the 16 registers, `0x0`–`0xF`.
- **rS1 (R2, bits 21–18) and rS2 (R3, bits 17–14), register form only:** first and second source registers.
- **imm16 (Immediate Value, bits 21–6) or imm8 (Imm, bits 21–14):** 16-bit value (immediate form) or 8-bit value zero-extended to 16 bits (short-immediate form).
- **SO, ST, SA (bits 13–6, short-immediate and register forms only):** shift operand, type and count. Types: `NUL`, `LSL`, `LSR`, `ASL`, `ASR`, `RTL`, `RTR`; an immediate count is `0`–`15`; a register count is used in full (16 or more clamps to a full shift for `LSL`/`LSR`/`ASL`/`ASR`, and is taken modulo 16 for `RTL`/`RTR`) – see Chapter 9.
- **SUS (AF, bits 5–4):** status update source: `00` = None, `01` = Alu (default), `10` = Shift, `11` = Reserved.
- **Condition field (bits 3–0):** any of the 16 condition-code encodings in Table 7.5.

**Syntax:**

```
SBCI rD, #imm16 ; rD = rD - imm16 - C
SBCI rD, #imm8, shift ; rD = shift(rD) - imm8 - C
SBCR rD, rS1, rS2 ; rD = rS1 - rS2 - C
SBCR rD, rS1, rS2, shift ; rD = shift(rS1) - rS2 - C
```

**Operands:** Same operand forms as **SUB**. The incoming `C` flag is read as the borrow input.
**Operation:**

```
result = operand1 - operand2 - SR.C
destination = result
SR.N = result[15]
SR.Z = (result == 0)
SR.C = borrow
SR.V = signed_overflow
```

**Description:**
Subtracts the second operand and borrow from the first operand. In short immediate format with shift, the destination register is shifted before subtracting the immediate. Used for multi-precision subtraction to propagate borrows from lower-order to higher-order subtractions.

**Flags:** N Z C V
**Write-back:** If the condition is true, writes the 16-bit result to `rD`.
**Exceptions:** Does not access memory and raises no instruction-specific faults.
**Condition field:** If the condition is false, no result is written and status flags are preserved.
**Timing:** 6 cycles, plus instruction-fetch wait states.
**Privilege:** Available in protected mode and supervisor mode, except when it writes a privileged register (`ah`, `lh`, `ph`, `sh`); see Chapter 6.

```
; 32-bit subtraction (r1:r2 = r3:r4 - r5:r6)
; Low words
SUBR r2, r4, r6 ; r2 = r4 - r6, set/clear carry

; High words (with borrow propagation)
SBCR r1, r3, r5 ; r1 = r3 - r5 - borrow
```

Example 13-6: 32-bit Subtraction with Borrow Propagation

**Notes:**


- Always use after **`SUB`** for multi-word subtraction
- Carry is treated as the borrow input for multi-word subtraction

# ANDI / ANDR

## AND Immediate / AND Register

**Applicability:** SIRC-1, all revisions

**Opcodes:** `0x04` (Imm), `0x24` (Short Imm), `0x34` (Reg). See Table 13.1 for the full family of legal forms.

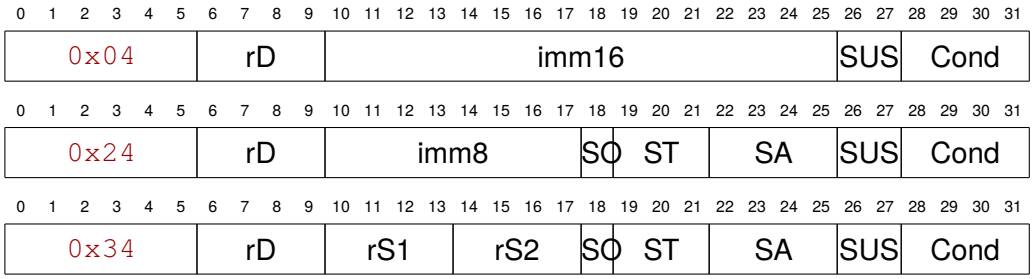


**Instruction Fields:**

- **rD (Reg or R1, bits 25–22):** destination register; any of the 16 registers, `0x0`–`0xF`.
- **rS1 (R2, bits 21–18) and rS2 (R3, bits 17–14), register form only:** first and second source registers.
- **imm16 (Immediate Value, bits 21–6) or imm8 (Imm, bits 21–14):** 16-bit value (immediate form) or 8-bit value zero-extended to 16 bits (short-immediate form).
- **SO, ST, SA (bits 13–6, short-immediate and register forms only):** shift operand, type and count. Types: `NUL`, `LSL`, `LSR`, `ASL`, `ASR`, `RTL`, `RTR`; an immediate count is `0`–`15`; a register count is used in full (16 or more clamps to a full shift for `LSL`/`LSR`/`ASL`/`ASR`, and is taken modulo 16 for `RTL`/`RTR`) – see Chapter 9.
- **SUS (AF, bits 5–4):** status update source: `00` = None, `01` = Alu (default), `10` = Shift, `11` = Reserved.
- **Condition field (bits 3–0):** any of the 16 condition-code encodings in Table 7.5.

**Syntax:**

```
1 ANDI rD, #imm16 ; rD = rD & imm16
2 ANDI rD, #imm8, shift ; rD = shift(rD) & imm8
3 ANDR rD, rS1, rS2 ; rD = rS1 & rS2
4 ANDR rD, rS1, rS2, shift ; rD = shift(rS1) & rS2
```

**Operands:** Same operand forms as **ADD**. Logical operations interpret operands as 16-bit bit patterns; short immediates are zero-extended.

**Operation:**

```
result = operand1 AND operand2
destination = result
SR.N = result[15]
SR.Z = (result == 0)
SR.C = 0
SR.V = 0
```

**Description:**

Performs bitwise AND operation. Each bit in the result is 1 only if the corresponding bits in both operands are 1. In short immediate format with shift, the destination register is shifted before ANDing with the immediate. Commonly used for bit masking and clearing specific bits.

**Flags:** N Z (C and V cleared)

**Write-back:** If the condition is true, writes the 16-bit result to `rD`.

**Exceptions:** Does not access memory and raises no instruction-specific faults.

**Condition field:** If the condition is false, no result is written and status flags are preserved.

**Timing:** 6 cycles, plus instruction-fetch wait states.

**Privilege:** Available in protected mode and supervisor mode, except when it writes a privileged register (`ah`, `lh`, `ph`, `sh`); see Chapter 6.

```
; Mask lower byte
ANDI r1, #0x00FF ; r1 = r1 & 0xFF

; Clear bit 5
ANDI r2, #0xFFDF ; r2 = r2 & 0xFFDF (clear bit 5)

; Check if two registers share any set bits
ANDR r3, r1, r2 ; r3 = r1 & r2
CMPI r3, #0
BRAN|!= @common_bits ; Branch if any bits in common
```

Example 13-7: Bit Masking and Clearing with AND

**Notes:**


- ANDing with 0xFFFF leaves value unchanged
- ANDing with 0x0000 clears the register
- Use **`TSA`** to test bits without modifying the register

# ORRI / ORRR

## OR Immediate / OR Register

**Applicability:** SIRC-1, all revisions

**Opcodes:** `0x05` (Imm), `0x25` (Short Imm), `0x35` (Reg). See Table 13.1 for the full family of legal forms.

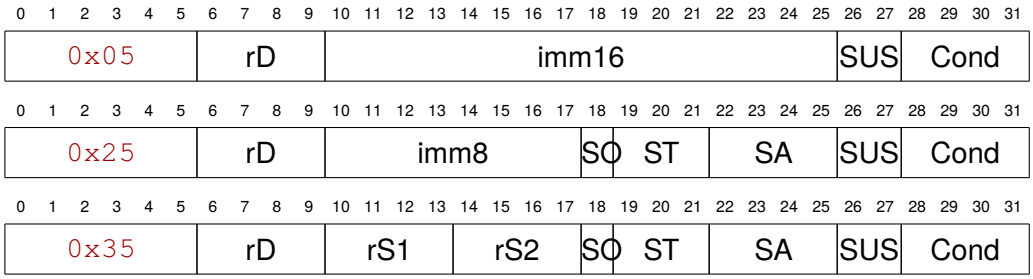


**Instruction Fields:**

- **rD (Reg or R1, bits 25–22):** destination register; any of the 16 registers, `0x0`–`0xF`.
- **rS1 (R2, bits 21–18) and rS2 (R3, bits 17–14), register form only:** first and second source registers.
- **imm16 (Immediate Value, bits 21–6) or imm8 (Imm, bits 21–14):** 16-bit value (immediate form) or 8-bit value zero-extended to 16 bits (short-immediate form).
- **SO, ST, SA (bits 13–6, short-immediate and register forms only):** shift operand, type and count. Types: `NUL`, `LSL`, `LSR`, `ASL`, `ASR`, `RTL`, `RTR`; an immediate count is `0`–`15`; a register count is used in full (16 or more clamps to a full shift for `LSL`/`LSR`/`ASL`/`ASR`, and is taken modulo 16 for `RTL`/`RTR`) – see Chapter 9.
- **SUS (AF, bits 5–4):** status update source: `00` = None, `01` = Alu (default), `10` = Shift, `11` = Reserved.
- **Condition field (bits 3–0):** any of the 16 condition-code encodings in Table 7.5.

**Syntax:**

```
1 ORRI rD, #imm16 ; rD = rD | imm16
2 ORRI rD, #imm8, shift ; rD = shift(rD) | imm8
3 ORRR rD, rS1, rS2 ; rD = rS1 | rS2
4 ORRR rD, rS1, rS2, shift ; rD = shift(rS1) | rS2
```

**Operands:** Same operand forms as **AND**. Logical operations interpret operands as 16-bit bit patterns; short immediates are zero-extended.

**Operation:**

```
result = operand1 OR operand2
destination = result
SR.N = result[15]
SR.Z = (result == 0)
SR.C = 0
SR.V = 0
```

**Description:**

Performs bitwise OR operation. Each bit in the result is 1 if either corresponding bit in the operands is 1. In short immediate format with shift, the destination register is shifted before ORing with the immediate. Commonly used for setting specific bits.

**Flags:** N Z (C and V cleared)

**Write-back:** If the condition is true, writes the 16-bit result to `rD`.

**Exceptions:** Does not access memory and raises no instruction-specific faults.

**Condition field:** If the condition is false, no result is written and status flags are preserved.

**Timing:** 6 cycles, plus instruction-fetch wait states.

**Privilege:** Available in protected mode and supervisor mode, except when it writes a privileged register (`ah`, `lh`, `ph`, `sh`); see Chapter 6.

```
; Set bit 7
ORRI r1, #0x0080 ; r1 = r1 | 0x80

; Set multiple bits
ORRI r2, #0xF000 ; Set high nibble

; Combine two registers
ORRR r3, r1, r2 ; r3 = r1 | r2

; Set bit N (variable)
MOVI r4, #1 ; r4 = 1
SHFT r4, LSL r5 ; r4 = 1 << r5
ORRR r1, r4 ; r1 |= (1 << r5)
```

Example 13-8: Setting Bits with OR

**Notes:**


- ORing with 0x0000 leaves value unchanged
- ORing with 0xFFFF sets all bits
- Use for enabling flag bits or combining bit fields

# XORI / XORR

## XOR Immediate / XOR Register

**Applicability:** SIRC-1, all revisions

**Opcodes:** `0x06` (Imm), `0x26` (Short Imm), `0x36` (Reg). See Table 13.1 for the full family of legal forms.

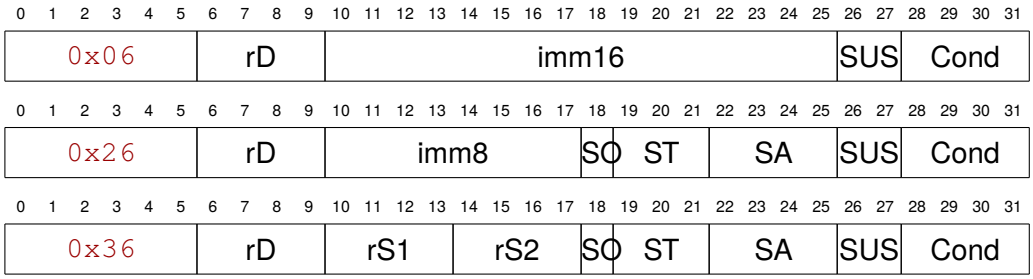


**Instruction Fields:**

- **rD (Reg or R1, bits 25–22):** destination register; any of the 16 registers, `0x0`–`0xF`.
- **rS1 (R2, bits 21–18) and rS2 (R3, bits 17–14), register form only:** first and second source registers.
- **imm16 (Immediate Value, bits 21–6) or imm8 (Imm, bits 21–14):** 16-bit value (immediate form) or 8-bit value zero-extended to 16 bits (short-immediate form).
- **SO, ST, SA (bits 13–6, short-immediate and register forms only):** shift operand, type and count. Types: `NUL`, `LSL`, `LSR`, `ASL`, `ASR`, `RTL`, `RTR`; an immediate count is `0`–`15`; a register count is used in full (16 or more clamps to a full shift for `LSL`/`LSR`/`ASL`/`ASR`, and is taken modulo 16 for `RTL`/`RTR`) – see Chapter 9.
- **SUS (AF, bits 5–4):** status update source: `00` = None, `01` = Alu (default), `10` = Shift, `11` = Reserved.
- **Condition field (bits 3–0):** any of the 16 condition-code encodings in Table 7.5.

**Syntax:**

```
1 XORI rD, #imm16 ; rD = rD ^ imm16
2 XORI rD, #imm8, shift ; rD = shift(rD) ^ imm8
3 XORR rD, rS1, rS2 ; rD = rS1 ^ rS2
4 XORR rD, rS1, rS2, shift ; rD = shift(rS1) ^ rS2
```

**Operands:** Same operand forms as **AND**. Logical operations interpret operands as 16-bit bit patterns; short immediates are zero-extended.

**Operation:**

```
result = operand1 XOR operand2
destination = result
SR.N = result[15]
SR.Z = (result == 0)
SR.C = 0
SR.V = 0
```

**Description:**

Performs bitwise XOR (exclusive OR) operation. Each bit in the result is 1 if the corresponding bits in the operands are different. In short immediate format with shift, the destination register is shifted before XORing with the immediate. Used for toggling bits, bitwise comparison, and simple encryption.

**Flags:** N Z (C and V cleared)

**Write-back:** If the condition is true, writes the 16-bit result to `rD`.

**Exceptions:** Does not access memory and raises no instruction-specific faults.

**Condition field:** If the condition is false, no result is written and status flags are preserved.

**Timing:** 6 cycles, plus instruction-fetch wait states.

**Privilege:** Available in protected mode and supervisor mode, except when it writes a privileged register (`ah`, `lh`, `ph`, `sh`); see Chapter 6.

```
1  ; Toggle bit 3
2  XORI r1, #0x0008 ; r1 = r1 ^ 0x08
3
4  ; Invert all bits
5  XORI r2, #0xFFFF ; r2 = ~r2
6
7  ; Check if registers are equal
8  XORR r3, r1, r2 ; r3 = r1 ^ r2
9  ; If r3 == 0, then r1 == r2
10
11 ; Swap using XOR (no temporary)
12 XORR r1, r1, r2 ; r1 = r1 ^ r2
13 XORR r2, r1, r2 ; r2 = r1 ^ r2 = (r1 ^ r2) ^ r2 = r1
14 XORR r1, r1, r2 ; r1 = (r1 ^ r2) ^ r1 = r2
```

Example 13-9: Bit Toggling, Equality Testing, and XOR Swap

**Notes:**


- XORing with 0x0000 leaves value unchanged
- XORing with 0xFFFF inverts all bits (bitwise NOT)
- XORing a value with itself always gives 0
- Use **`TSX`** to check for differences without modifying register

# MOVI / MOVR

## Move Immediate / Move Register

**Applicability:** SIRC-1, all revisions

**Opcodes:** `0x07` (Imm), `0x37` (Reg). Opcode `0x27` is undocumented. See Table 13.1 for the full family of legal forms.

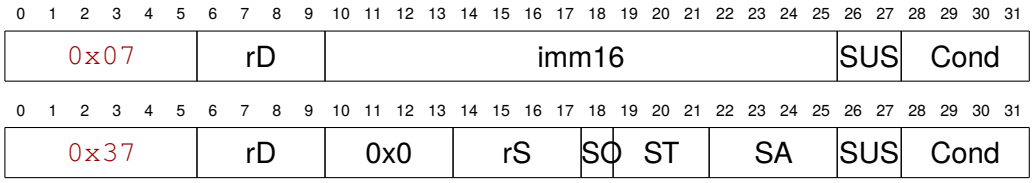


**Instruction Fields:**

- **rD (Reg or R1, bits 25–22):** destination register; any of the 16 registers, `0x0`–`0xF`.
- **R2 (bits 21–18), register form only:** unused, encoded as 0.
- **rS (R3, bits 17–14), register form only:** source register.
- **imm16 (Immediate Value, bits 21–6), immediate form only:** 16-bit value. The register form has no immediate field.
- **SUS (AF, bits 5–4):** status update source: `00` = None, `01` = Alu (default), `10` = Shift, `11` = Reserved. `[S]` is not accepted by these instructions, which have no shifted operand; an encoding with AF `10`, not reachable from assembly syntax, leaves all four status flags architecturally undefined (`U U U U`).
- **Condition field (bits 3–0):** any of the 16 condition-code encodings in Table 7.5.

**Syntax:**

```
1 MOVI rD, #imm16 ; rD = imm16
2 MOVR rD, rS ; rD = rS
```

**Operands:** Immediate form writes a 16-bit immediate value to `rD`. Register form copies `rS` to `rD`. No short-immediate, memory, or shift forms are public assembly syntax; the register-to-register form does not accept a shift definition (use **`SHFT`**), and the `[S]` status update source is not accepted. Neither instruction accesses memory; the memory forms of **`LOAD`** are documented in Chapter 14.

**Operation:**

```
result = operand
destination = result
SR.N = result[15]
SR.Z = (result == 0)
SR.C = 0
SR.V = 0
```

**Description:**

The ALU passes the second operand straight through to the destination; the first operand is ignored. This is the primary way to load constants into registers or move data between them. Opcode `0x27` has no public assembly syntax and is undocumented.

**Flags:** N Z (C and V cleared)

**Write-back:** If the condition is true, writes the loaded or copied value to `rD`.

**Exceptions:** Does not access memory in these forms and raises no instruction-specific faults.

**Condition field:** If the condition is false, no result is written and status flags are preserved.
**Timing:** 6 cycles, plus instruction-fetch wait states.
**Privilege:** Available in protected mode and supervisor mode, except when it writes a privileged register (`ah`, `lh`, `ph`, `sh`); see Chapter 6.

```
; Move a constant
MOVI r1, #1234 ; r1 = 1234

; Copy register
MOVR r2, r1 ; r2 = r1

; Move, then shift with an ALU instruction
MOVI r3, #1
ADDI r3, #0, LSL #8 ; r3 = (r3 << 8) + 0 = 256

; Zero a register
MOVI r4, #0 ; r4 = 0

; Build a large constant
MOVI r5, #0x12
ADDI r5, #0, LSL #8 ; r5 = (r5 << 8) + 0 = 0x1200
ORRI r5, #0x34 ; r5 = 0x1234
```

Example 13-10: Moving Constants and Copying Registers

**Notes:**


- Most efficient way to move data between registers
- For 16-bit constants, use **`MOVI`**
- To build shifted or composite constants, combine **`MOVI`** with ALU instructions such as **`ADDI`** or **`ORRI`**

# CMNI / CMNR

## Compare Negative Immediate / Compare Negative Register

**Applicability:** SIRC-1, all revisions

**Opcodes:** `0x08` (Imm), `0x28` (Short Imm), `0x38` (Reg). See Table 13.1 for the full family of legal forms.

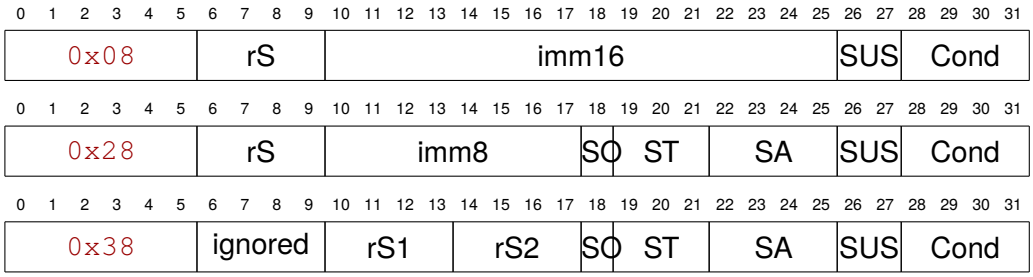


**Instruction Fields:**

- **rS (Reg, bits 25–22), immediate and short-immediate forms:** source register; any of the 16 registers, `0x0`–`0xF`. No destination register is written.
- **ignored (R1, bits 25–22), register form only:** no destination register is written, so the CPU ignores this field. The assembler encodes a copy of `rS1`.
- **rS1 (R2, bits 21–18) and rS2 (R3, bits 17–14), register form only:** first and second source registers.
- **imm16 (Immediate Value, bits 21–6) or imm8 (Imm, bits 21–14):** 16-bit value (immediate form) or 8-bit value zero-extended to 16 bits (short-immediate form).
- **SO, ST, SA (bits 13–6, short-immediate and register forms only):** shift operand, type and count. Types: `NUL`, `LSL`, `LSR`, `ASL`, `ASR`, `RTL`, `RTR`; an immediate count is `0`–`15`; a register count is used in full (16 or more clamps to a full shift for `LSL`/`LSR`/`ASL`/`ASR`, and is taken modulo 16 for `RTL`/`RTR`) – see Chapter 9.
- **SUS (AF, bits 5–4):** status update source: `00` = None, `01` = Alu (default), `10` = Shift, `11` = Reserved.
- **Condition field (bits 3–0):** any of the 16 condition-code encodings in Table 7.5.

**Syntax:**

```
CMNI rS, #imm16 ; Flags from rS + imm16
CMNI rS, #imm8, shift ; Flags from shift(rS) + imm8
CMNR rS1, rS2 ; Flags from rS1 + rS2
CMNR rS1, rS2, shift ; Flags from shift(rS1) + rS2
```

**Operands:** Same source operand forms as **ADD**. The first operand is added to the second operand; no destination register is written.

**Operation:**

```
result = operand1 + operand2
; Result is discarded, only flags updated
SR.N = result[15]
SR.Z = (result == 0)
SR.C = carry_out
SR.V = signed_overflow
```

**Description:**

Performs addition but discards the result, only updating the status flags. It is the flag-only counterpart of **ADD**, as **CMP** is of **SUB**. Adding two values and testing for zero is the same as comparing the first value with the negation of the second, so `CMNI r1, #5` sets Z when `r1` holds $-5$. In short immediate format with shift, the source register is shifted before the immediate is added.

**Flags:** N Z C V

**Write-back:** None. The sum is discarded after status flags are updated.

**Exceptions:** Does not access memory and raises no instruction-specific faults.

**Condition field:** If the condition is false, no status flags are updated.

**Timing:** 6 cycles, plus instruction-fetch wait states.

**Privilege:** Available in protected mode and supervisor mode. This instruction only reads the register named by its register field and never writes it, so it does not raise a privilege-violation fault even when that field names a privileged register such as `ah` (for example, `CMNI ah, #0`); see Chapter 6.

```
; Test if r1 is -1 (0xFFFF): r1 + 1 == 0
CMNI r1, #1
BRAN|== @is_minus_one

; Test if r1 is the negation of r2
CMNR r1, r2
BRAN|== @are_negations

; Would r3 + r4 overflow a signed 16-bit result?
; Neither register is changed
CMNR r3, r4
BRAN|OS @would_overflow
```

Example 13-11: Testing Sums Without Writing Them

**Notes:**


- Does not modify any register, only flags
- Z=1 means the operands sum to zero, so the first operand equals the negation of the second
- C is the carry out of the addition and V is signed overflow of the addition; the flags describe the sum, not an ordering, so the unsigned and signed ordering conditions that are meaningful after **CMP** are not meaningful after **CMN**
- Use **CNC** to continue the test across multiple words

# CNCI / CNCR

## Compare Negative with Carry Immediate / Register

**Applicability:** SIRC-1, all revisions

**Opcodes:** `0x09` (Imm), `0x29` (Short Imm), `0x39` (Reg). See Table 13.1 for the full family of legal forms.

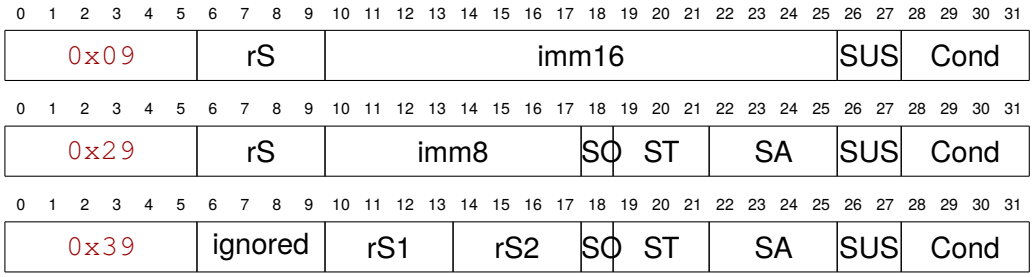


**Instruction Fields:**

- **rS (Reg, bits 25–22), immediate and short-immediate forms:** source register; any of the 16 registers, `0x0`–`0xF`. No destination register is written.
- **ignored (R1, bits 25–22), register form only:** no destination register is written, so the CPU ignores this field. The assembler encodes a copy of `rS1`.
- **rS1 (R2, bits 21–18) and rS2 (R3, bits 17–14), register form only:** first and second source registers.
- **imm16 (Immediate Value, bits 21–6) or imm8 (Imm, bits 21–14):** 16-bit value (immediate form) or 8-bit value zero-extended to 16 bits (short-immediate form).
- **SO, ST, SA (bits 13–6, short-immediate and register forms only):** shift operand, type and count. Types: `NUL`, `LSL`, `LSR`, `ASL`, `ASR`, `RTL`, `RTR`; an immediate count is `0`–`15`; a register count is used in full (16 or more clamps to a full shift for `LSL`/`LSR`/`ASL`/`ASR`, and is taken modulo 16 for `RTL`/`RTR`) – see Chapter 9.
- **SUS (AF, bits 5–4):** status update source: `00` = None, `01` = Alu (default), `10` = Shift, `11` = Reserved.
- **Condition field (bits 3–0):** any of the 16 condition-code encodings in Table 7.5.

**Syntax:**

```
1 CNCI rS, #imm16 ; Flags from rS + imm16 + C
2 CNCI rS, #imm8, shift ; Flags from shift(rS) + imm8 + C
3 CNCR rS1, rS2 ; Flags from rS1 + rS2 + C
4 CNCR rS1, rS2, shift ; Flags from shift(rS1) + rS2 + C
```

**Operands:** Same source operand forms as **ADC**. The incoming `C` flag is read as an additional least-significant carry input; no destination register is written.

**Operation:**

```
result = operand1 + operand2 + SR.C
; Result is discarded, only flags updated
SR.N = result[15]
SR.Z = (result == 0)
SR.C = carry_out
SR.V = signed_overflow
```

**Description:**

Adds two values plus the carry flag but discards the result, only updating the status flags. It is the flag-only counterpart of **ADC** and continues a **CMN** across multiple words: **CMN** on the low words followed by **CNC** on the high words leaves C, V and N describing the whole multi-word sum. In short immediate format with shift, the source register is shifted before the immediate is added.

**Flags:** N Z C V

**Write-back:** None. The sum is discarded after status flags are updated.

**Exceptions:** Does not access memory and raises no instruction-specific faults.

**Condition field:** If the condition is false, no status flags are updated.

**Timing:** 6 cycles, plus instruction-fetch wait states.

**Privilege:** Available in protected mode and supervisor mode. This instruction only reads the register named by its register field and never writes it, so it does not raise a privilege-violation fault even when that field names a privileged register such as `ah` (for example, `CNCI ah, #0`); see Chapter 6.

```
; Would the 32-bit signed sum r1:r2 + r3:r4 overflow?
; Low words first, then high words with the carry
CMNR r2, r4
CNCR r1, r3
BRAN|OS @overflowed ; V = signed overflow of the 32-bit sum

; Would the 32-bit unsigned sum carry out?
CMNR r2, r4
CNCR r1, r3
BRAN|CS @carried
```

Example 13-12: Testing 32-bit Sums Without Writing Them

**Notes:**


- Does not modify any register, only flags
- Use after **CMN** (or **ADD**) for multi-word arithmetic; the carry flag must be in the correct state before **CNC**
- Z reflects only the result of this instruction, not the whole multi-word sum, so use C, V and N rather than Z to describe the combined value

# CMPI / CMPR

## Compare Immediate / Compare Register

**Applicability:** SIRC-1, all revisions

**Opcodes:** `0x0A` (Imm), `0x2A` (Short Imm), `0x3A` (Reg). See Table 13.1 for the full family of legal forms.

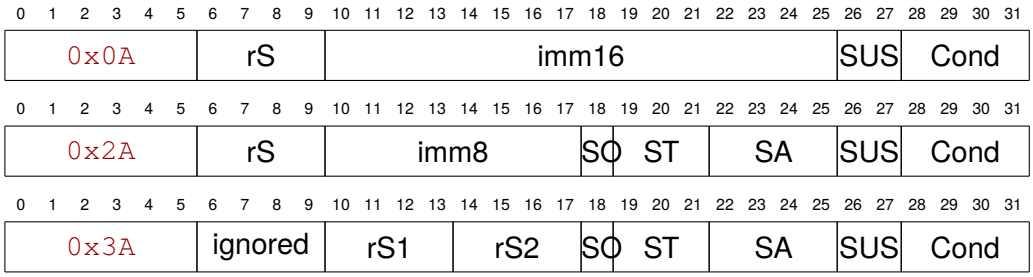


**Instruction Fields:**

- **rS (Reg, bits 25–22), immediate and short-immediate forms:** source register; any of the 16 registers, `0x0`–`0xF`. No destination register is written.
- **ignored (R1, bits 25–22), register form only:** no destination register is written, so the CPU ignores this field. The assembler encodes a copy of `rS1`.
- **rS1 (R2, bits 21–18) and rS2 (R3, bits 17–14), register form only:** first and second source registers.
- **imm16 (Immediate Value, bits 21–6) or imm8 (Imm, bits 21–14):** 16-bit value (immediate form) or 8-bit value zero-extended to 16 bits (short-immediate form).
- **SO, ST, SA (bits 13–6, short-immediate and register forms only):** shift operand, type and count. Types: `NUL`, `LSL`, `LSR`, `ASL`, `ASR`, `RTL`, `RTR`; an immediate count is `0`–`15`; a register count is used in full (16 or more clamps to a full shift for `LSL`/`LSR`/`ASL`/`ASR`, and is taken modulo 16 for `RTL`/`RTR`) – see Chapter 9.
- **SUS (AF, bits 5–4):** status update source: `00` = None, `01` = Alu (default), `10` = Shift, `11` = Reserved.
- **Condition field (bits 3–0):** any of the 16 condition-code encodings in Table 7.5.

**Syntax:**

```
CMPI rS, #imm16 ; Compare rS with imm16
CMPI rS, #imm8, shift ; Compare shift(rS) with imm8
CMPR rS1, rS2 ; Compare rS1 with rS2
CMPR rS1, rS2, shift ; Compare shift(rS1) with rS2
```

**Operands:** Same source operand forms as **SUB**. The first operand is compared with the second operand; no destination register is written.

**Operation:**

```
result = operand1 - operand2
; Result is discarded, only flags updated
SR.N = result[15]
SR.Z = (result == 0)
SR.C = borrow
SR.V = signed_overflow
```

**Description:**

Performs subtraction but discards the result, only updating the status flags. In short immediate format with shift, the source register is shifted before comparing with the immediate. This is the primary instruction for implementing conditional execution and branches. The flags can be tested with condition codes to determine the relationship between the operands.

**Flags:** N Z C V

**Write-back:** None. The subtraction result is discarded after status flags are updated.

**Exceptions:** Does not access memory and raises no instruction-specific faults.

**Condition field:** If the condition is false, no status flags are updated.

**Timing:** 6 cycles, plus instruction-fetch wait states.

**Privilege:** Available in protected mode and supervisor mode. This instruction only reads the register named by its register field and never writes it, so it does not raise a privilege-violation fault even when that field names a privileged register such as `ah` (for example, `CMPI ah, #0`); see Chapter 6.

```
; Test if r1 is zero
CMPI r1, #0
BRAN|== @is_zero ; Branch if r1 == 0

; Test if r1 > r2 (unsigned)
CMPR r1, r2
BRAN|HI @r1_greater

; Test if r1 >= r2 (signed)
CMPR r1, r2
BRAN|>= @r1_greater_or_equal

; Range check: if (r1 >= 10 && r1 < 20)
CMPI r1, #10
BRAN|<< @out_of_range ; Branch if r1 < 10
CMPI r1, #20
BRAN|>= @out_of_range ; Branch if r1 >= 20
; r1 is in range [10, 20)
```

Example 13-13: Comparisons and Range Checking

**Notes:**


- Does not modify any register, only flags
- Use with conditional instructions or branches
- Remember: `CMP A, B` computes A - B
- For signed comparisons, use >=, «, », <=
- For unsigned comparisons, use `HI`, `LO`, `CS`, `CC`

# CPCI / CPCR

## Compare with Carry Immediate / Register

**Applicability:** SIRC-1, all revisions

**Opcodes:** `0x0B` (Imm), `0x2B` (Short Imm), `0x3B` (Reg). See Table 13.1 for the full family of legal forms.

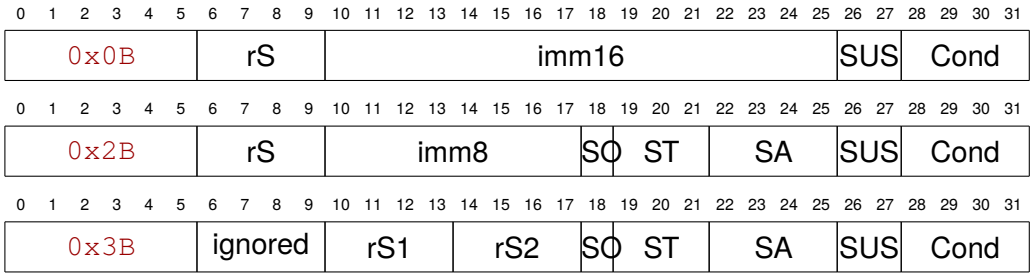


**Instruction Fields:**

- **rS (Reg, bits 25–22), immediate and short-immediate forms:** source register; any of the 16 registers, `0x0`–`0xF`. No destination register is written.
- **ignored (R1, bits 25–22), register form only:** no destination register is written, so the CPU ignores this field. The assembler encodes a copy of `rS1`.
- **rS1 (R2, bits 21–18) and rS2 (R3, bits 17–14), register form only:** first and second source registers.
- **imm16 (Immediate Value, bits 21–6) or imm8 (Imm, bits 21–14):** 16-bit value (immediate form) or 8-bit value zero-extended to 16 bits (short-immediate form).
- **SO, ST, SA (bits 13–6, short-immediate and register forms only):** shift operand, type and count. Types: `NUL`, `LSL`, `LSR`, `ASL`, `ASR`, `RTL`, `RTR`; an immediate count is `0`–`15`; a register count is used in full (16 or more clamps to a full shift for `LSL`/`LSR`/`ASL`/`ASR`, and is taken modulo 16 for `RTL`/`RTR`) – see Chapter 9.
- **SUS (AF, bits 5–4):** status update source: `00` = None, `01` = Alu (default), `10` = Shift, `11` = Reserved.
- **Condition field (bits 3–0):** any of the 16 condition-code encodings in Table 7.5.

**Syntax:**

```
1 CPCI rS, #imm16 ; Flags from rS - imm16 - C
2 CPCI rS, #imm8, shift ; Flags from shift(rS) - imm8 - C
3 CPCR rS1, rS2 ; Flags from rS1 - rS2 - C
4 CPCR rS1, rS2, shift ; Flags from shift(rS1) - rS2 - C
```

**Operands:** Same source operand forms as **SBC**. The incoming `C` flag is read as the borrow input; no destination register is written.

**Operation:**

```
result = operand1 - operand2 - SR.C
; Result is discarded, only flags updated
SR.N = result[15]
SR.Z = (result == 0)
SR.C = borrow
SR.V = signed_overflow
```

**Description:**

Subtracts the second operand and the borrow from the first operand but discards the result, only updating the status flags. It is the flag-only counterpart of **SBC** and continues a **CMP** across multiple words: **CMP** on the low words followed by **CPC** on the high words compares the whole multi-word values. In short immediate format with shift, the source register is shifted before the immediate is subtracted.

**Flags:** N Z C V

**Write-back:** None. The difference is discarded after status flags are updated.

**Exceptions:** Does not access memory and raises no instruction-specific faults.

**Condition field:** If the condition is false, no status flags are updated.

**Timing:** 6 cycles, plus instruction-fetch wait states.

**Privilege:** Available in protected mode and supervisor mode. This instruction only reads the register named by its register field and never writes it, so it does not raise a privilege-violation fault even when that field names a privileged register such as `ah` (for example, `CPCI ah, #0`); see Chapter 6.

```
1 ; Unsigned 32-bit compare: is r1:r2 lower than r3:r4?
2 CMPR r2, r4 ; Low words
3 CPCR r1, r3 ; High words, borrowing from the low compare
4 BRAN|CS @first_is_lower ; C = borrow out of the whole 32-bit subtraction
5
6 ; Signed 32-bit compare: is r1:r2 >= r3:r4?
7 CMPR r2, r4
8 CPCR r1, r3
9 BRAN|>= @first_is_gte ; N = V for the 32-bit result
```

Example 13-14: 32-bit Comparison with Borrow Propagation

**Notes:**


- Does not modify any register, only flags
- Always use after **CMP** (or **SUB**) for multi-word comparison; carry is treated as the borrow input
- After the final **CPC**, the `CS`, `CC`, `>=` and « conditions describe the whole multi-word comparison
- Z reflects only the result of this instruction, not the whole multi-word difference, so conditions that test Z (`==`, `!=`, `HI`, `LO`, », `<=`) do not describe the combined value

# TSAI / TSAR

## Test AND Immediate / Test AND Register

**Applicability:** SIRC-1, all revisions

**Opcodes:** `0x0C` (Imm), `0x2C` (Short Imm), `0x3C` (Reg). See Table 13.1 for the full family of legal forms.

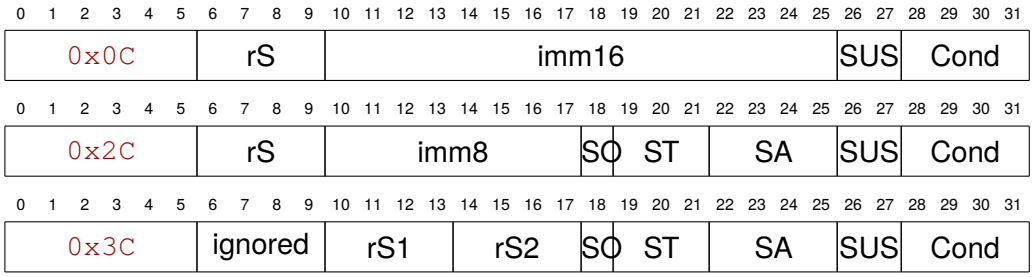


**Instruction Fields:**

- **rS (Reg, bits 25–22), immediate and short-immediate forms:** source register; any of the 16 registers, `0x0`–`0xF`. No destination register is written.
- **ignored (R1, bits 25–22), register form only:** no destination register is written, so the CPU ignores this field. The assembler encodes a copy of `rS1`.
- **rS1 (R2, bits 21–18) and rS2 (R3, bits 17–14), register form only:** first and second source registers.
- **imm16 (Immediate Value, bits 21–6) or imm8 (Imm, bits 21–14):** 16-bit value (immediate form) or 8-bit value zero-extended to 16 bits (short-immediate form).
- **SO, ST, SA (bits 13–6, short-immediate and register forms only):** shift operand, type and count. Types: `NUL`, `LSL`, `LSR`, `ASL`, `ASR`, `RTL`, `RTR`; an immediate count is `0`–`15`; a register count is used in full (16 or more clamps to a full shift for `LSL`/`LSR`/`ASL`/`ASR`, and is taken modulo 16 for `RTL`/`RTR`) – see Chapter 9.
- **SUS (AF, bits 5–4):** status update source: `00` = None, `01` = Alu (default), `10` = Shift, `11` = Reserved.
- **Condition field (bits 3–0):** any of the 16 condition-code encodings in Table 7.5.

**Syntax:**

```
1 TSAI rS, #imm16 ; Test rS & imm16
2 TSAI rS, #imm8, shift ; Test shift(rS) & imm8
3 TSAR rS1, rS2 ; Test rS1 & rS2
4 TSAR rS1, rS2, shift ; Test shift(rS1) & rS2
```

**Operands:** Same source operand forms as **AND**. The result is used only for status flag updates; no destination register is written.

**Operation:**

```
result = operand1 AND operand2
; Result is discarded, only flags updated
SR.N = result[15]
SR.Z = (result == 0)
SR.C = 0
SR.V = 0
```

**Description:**

Performs bitwise AND but discards the result, only updating flags. In short immediate format with shift, the source register is shifted before ANDing with the immediate. Used to test if specific bits are set without modifying the register. The zero flag indicates whether any tested bits were set.

**Flags:** N Z (C and V cleared)

**Write-back:** None. The AND result is discarded after status flags are updated.

**Exceptions:** Does not access memory and raises no instruction-specific faults.

**Condition field:** If the condition is false, no status flags are updated.

**Timing:** 6 cycles, plus instruction-fetch wait states.

**Privilege:** Available in protected mode and supervisor mode. This instruction only reads the register named by its register field and never writes it, so it does not raise a privilege-violation fault even when that field names a privileged register such as `ah` (for example, `TSAI ah, #0`); see Chapter 6.

```
; Test if bit 5 is set
TSAI r1, #0x0020 ; Test r1 & 0x20
BRAN|!= @bit5_set ; Branch if bit 5 was set

; Test if any high byte bits are set
TSAI r2, #0xFF00
BRAN|!= @has_upper_bits

; Test if r1 and r2 have any bits in common
TSAR r1, r2
BRAN|== @no_common_bits ; Branch if no bits in common

; Test multiple bits
TSAI r3, #0xF000 ; Test high nibble
BRAN|== @upper_clear ; Branch if all tested bits clear
```

Example 13-15: Bit Testing with TSA

**Notes:**


- Does not modify any register, only flags
- Z=1 means all tested bits were 0
- Z=0 means at least one tested bit was 1
- Use for bit testing without side effects
- More efficient than AND + CMP for simple tests

# TSOI / TSOR

## Test OR Immediate / Test OR Register

**Applicability:** SIRC-1, all revisions

**Opcodes:** `0x0D` (Imm), `0x2D` (Short Imm), `0x3D` (Reg). See Table 13.1 for the full family of legal forms.

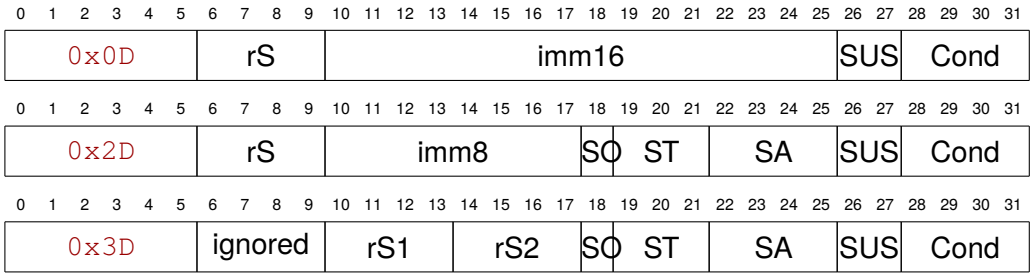


**Instruction Fields:**

- **rS (Reg, bits 25–22), immediate and short-immediate forms:** source register; any of the 16 registers, `0x0`–`0xF`. No destination register is written.
- **ignored (R1, bits 25–22), register form only:** no destination register is written, so the CPU ignores this field. The assembler encodes a copy of `rS1`.
- **rS1 (R2, bits 21–18) and rS2 (R3, bits 17–14), register form only:** first and second source registers.
- **imm16 (Immediate Value, bits 21–6) or imm8 (Imm, bits 21–14):** 16-bit value (immediate form) or 8-bit value zero-extended to 16 bits (short-immediate form).
- **SO, ST, SA (bits 13–6, short-immediate and register forms only):** shift operand, type and count. Types: `NUL`, `LSL`, `LSR`, `ASL`, `ASR`, `RTL`, `RTR`; an immediate count is `0`–`15`; a register count is used in full (16 or more clamps to a full shift for `LSL`/`LSR`/`ASL`/`ASR`, and is taken modulo 16 for `RTL`/`RTR`) – see Chapter 9.
- **SUS (AF, bits 5–4):** status update source: `00` = None, `01` = Alu (default), `10` = Shift, `11` = Reserved.
- **Condition field (bits 3–0):** any of the 16 condition-code encodings in Table 7.5.

**Syntax:**

```
1 TSOI rS, #imm16 ; Test rS | imm16
2 TSOI rS, #imm8, shift ; Test shift(rS) | imm8
3 TSOR rS1, rS2 ; Test rS1 | rS2
4 TSOR rS1, rS2, shift ; Test shift(rS1) | rS2
```

**Operands:** Same source operand forms as **ORR**. The result is used only for status flag updates; no destination register is written.

**Operation:**

```
result = operand1 OR operand2
; Result is discarded, only flags updated
SR.N = result[15]
SR.Z = (result == 0)
SR.C = 0
SR.V = 0
```

**Description:**

Performs bitwise OR but discards the result, only updating flags. In short immediate format with shift, the source register is shifted before ORing with the immediate. The zero flag is set only when every bit of both operands is zero, so a single **TSOR** tests whether two registers are both zero.

**Flags:** N Z (C and V cleared)

**Write-back:** None. The OR result is discarded after status flags are updated.

**Exceptions:** Does not access memory and raises no instruction-specific faults.

**Condition field:** If the condition is false, no status flags are updated.

**Timing:** 6 cycles, plus instruction-fetch wait states.

**Privilege:** Available in protected mode and supervisor mode. This instruction only reads the register named by its register field and never writes it, so it does not raise a privilege-violation fault even when that field names a privileged register such as `ah` (for example, `TSOI ah, #0`); see Chapter 6.

```
; Test if the 32-bit value in r1:r2 is zero
TSOR r1, r2
BRAN|== @is_zero ; Branch if both words are zero

; Test if either of two flag words has bit 15 set
TSOR r3, r4
BRAN|NS @flag_set
```

Example 13-16: Testing Two Values at Once with TSO

**Notes:**


- Does not modify any register, only flags
- Z=1 means every bit of both operands is 0
- Z=0 means at least one bit is 1 in one of the operands
- N=1 means bit 15 is set in at least one of the operands
- More efficient than ORR into a scratch register for testing whether two values are both zero

# TSXI / TSXR

## Test XOR Immediate / Test XOR Register

**Applicability:** SIRC-1, all revisions

**Opcodes:** `0x0E` (Imm), `0x2E` (Short Imm), `0x3E` (Reg). See Table 13.1 for the full family of legal forms.

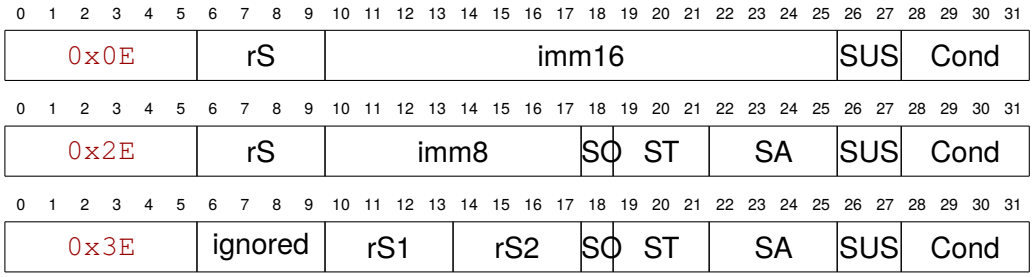


**Instruction Fields:**

- **rS (Reg, bits 25–22), immediate and short-immediate forms:** source register; any of the 16 registers, `0x0`–`0xF`. No destination register is written.
- **ignored (R1, bits 25–22), register form only:** no destination register is written, so the CPU ignores this field. The assembler encodes a copy of `rS1`.
- **rS1 (R2, bits 21–18) and rS2 (R3, bits 17–14), register form only:** first and second source registers.
- **imm16 (Immediate Value, bits 21–6) or imm8 (Imm, bits 21–14):** 16-bit value (immediate form) or 8-bit value zero-extended to 16 bits (short-immediate form).
- **SO, ST, SA (bits 13–6, short-immediate and register forms only):** shift operand, type and count. Types: `NUL`, `LSL`, `LSR`, `ASL`, `ASR`, `RTL`, `RTR`; an immediate count is `0`–`15`; a register count is used in full (16 or more clamps to a full shift for `LSL`/`LSR`/`ASL`/`ASR`, and is taken modulo 16 for `RTL`/`RTR`) – see Chapter 9.
- **SUS (AF, bits 5–4):** status update source: `00` = None, `01` = Alu (default), `10` = Shift, `11` = Reserved.
- **Condition field (bits 3–0):** any of the 16 condition-code encodings in Table 7.5.

**Syntax:**

```
1 TSXI rS, #imm16 ; Test rS ^ imm16
2 TSXI rS, #imm8, shift ; Test shift(rS) ^ imm8
3 TSXR rS1, rS2 ; Test rS1 ^ rS2
4 TSXR rS1, rS2, shift ; Test shift(rS1) ^ rS2
```

**Operands:** Same source operand forms as **XOR**. The result is used only for status flag updates; no destination register is written.

**Operation:**

```
result = operand1 XOR operand2
; Result is discarded, only flags updated
SR.N = result[15]
SR.Z = (result == 0)
SR.C = 0
SR.V = 0
```

**Description:**

Performs bitwise XOR but discards the result, only updating flags. In short immediate format with shift, the source register is shifted before XORing with the immediate. Used to test if bits match a specific pattern or to compare values for equality. Z=1 indicates the values are identical.

**Flags:** N Z (C and V cleared)

**Write-back:** None. The XOR result is discarded after status flags are updated.

**Exceptions:** Does not access memory and raises no instruction-specific faults.

**Condition field:** If the condition is false, no status flags are updated.

**Timing:** 6 cycles, plus instruction-fetch wait states.

**Privilege:** Available in protected mode and supervisor mode. This instruction only reads the register named by its register field and never writes it, so it does not raise a privilege-violation fault even when that field names a privileged register such as `ah` (for example, `TSXI ah, #0`); see Chapter 6.

```
; Test if r1 equals specific value
TSXI r1, #0x1234 ; Test r1 ^ 0x1234
BRAN|== @is_0x1234 ; Branch if r1 == 0x1234

; Test if two registers are equal
TSXR r1, r2 ; Test r1 ^ r2
BRAN|== @registers_equal ; Branch if r1 == r2

; Test if bit pattern matches
ANDI r3, #0x00FF ; Mask to low byte
TSXI r3, #0x00AA ; Test if low byte == 0xAA
BRAN|== @pattern_match
```

Example 13-17: Equality and Pattern Testing with TSX

**Notes:**

- Does not modify any register, only flags
- Z=1 means values are identical (all bits match)
- Can be used as equality test (alternative to CMP for == only)
- More efficient than XOR + CMP for simple equality tests

## 13.6 Summary

The ALU instructions form the computational core of the SIRCIS instruction set. Key points:

- All ALU operations work only on registers (load/store architecture)
- Three format variants provide flexibility (immediate, short+shift, register)
- Test variants (CMN, CNC, CMP, CPC, TSA, TSO, TSX) allow non-destructive testing
- Shift operations can be combined with ALU ops for powerful single-instruction operations
- Consistent flag behavior makes conditional execution predictable

CHAPTER 14

# Memory Access Instructions

## 14.1 Overview

Memory access instructions transfer data between registers and memory. Following the load/store architecture, these are the only instructions that can access memory—all arithmetic and logical operations must work on registers.

The SIRC-1 provides two primary memory operations:

- **LOAD** – Read from memory into a register
- **STOR** – Write from a register to memory

**LOAD** and **STOR** each support four memory addressing forms. Both support indirect addressing with an immediate offset and indirect addressing with a register offset; **LOAD** additionally supports post-increment and **STOR** additionally supports pre-decrement:

- Indirect with immediate offset: `(#offset, addr)`
- Indirect with register offset: `(r0, addr)`
- Post-increment (**LOAD** only): `(#offset, addr)+` or `(r0, addr)+`
- Pre-decrement (**STOR** only): `-(#offset, addr)` or `-(r0, addr)`

**Important:** **STOR**'s register-offset forms support an optional shift suffix, applied to the source register value before it is written to memory. **LOAD** does not support a shift suffix on any form: the offset register `r0` is always used unshifted. See Section 14.7 for details. Shifts are also **not** supported by **MOVI** and **MOVR**, which load immediate values and copy register values directly.

## 14.2 Effective Address Calculation

For all memory operations, the effective address (EA) is calculated as:

$$\text{EA} = \text{AddressRegister.high} : (\text{AddressRegister.low} + \text{Displacement}) \tag{14.1}$$

Where:

- Address Register is one of: `l`, `a`, `s`, or `p`
- Displacement is either a 16-bit signed immediate value or the unshifted contents of the offset register `r0`

The high word supplies the segment and is not changed by the displacement; only the low word participates in the addition, modulo $2^{16}$.

## 14.3 Legal Forms

| Instruction | Syntax | Encoding | Notes |
|---|---|---|---|
| LOAD | `LOAD rD, (#offset, addr)` | `0x14` | Immediate offset |
| LOAD | `LOAD rD, (rO, addr)` | `0x15` | Register offset; no shift suffix |
| LOAD | `LOAD rD, (#offset, addr)+` | `0x16` | Immediate offset; post-increment |
| LOAD | `LOAD rD, (rO, addr)+` | `0x17` | Register offset; no shift suffix; post-increment |
| STOR | `STOR (#offset, addr), rS` | `0x10` | Immediate offset |
| STOR | `STOR (rO, addr), rS[, shift]` | `0x11` | Register offset; optional source shift |
| STOR | `STOR -(#offset, addr), rS` | `0x12` | Immediate offset; pre-decrement |
| STOR | `STOR -(rO, addr), rS[, shift]` | `0x13` | Register offset; optional shift; pre-decrement |

Table 14.1: Legal Memory Instruction Forms

**Zero displacement:** Immediate-displacement memory forms may omit `#0`. Thus `LOAD rD, (addr)`, `LOAD rD, (addr)+`, `STOR (addr), rS`, and `STOR -(addr), rS` assemble as the matching `#0` forms. This shorthand does not add new addressing modes: **LOAD** has no pre-decrement form and **STOR** has no post-increment form.

**Aliased register writes:** In post-increment **LOAD** forms the destination register must not be either half of the auto-updated address-register pair; in pre-decrement **STOR** forms the source register must not be either half of the auto-updated pair. The result of such an encoding is architecturally undefined and the assembler rejects it.

## 14.4 Common Memory Semantics

| Topic | Definition |
|---|---|
| Condition false | The instruction is skipped and has no side effects. Registers, memory, address registers, and status flags are preserved. |
| Address calculation | Immediate-offset forms add the 16-bit signed displacement to the selected address register low word. Register-offset forms add the unshifted `r0` to the selected address register low word; `r0` is never shifted, even on **`STOR`**'s register-offset forms, which shift the value being stored instead. The selected address register high word supplies the segment and is unchanged. |
| Post-increment LOAD | The memory address is calculated from the original address register value. The address register low word is incremented by one word in write-back after the memory access. |
| Pre-decrement STOR | The memory address uses the selected address register low word decremented by one word, plus the offset. The address register low word is decremented by one word in write-back after the memory access. |
| Status flags | Memory instructions preserve all status flags. Shifts used by memory instructions cannot update the status register. |
| Timing | Memory instructions complete in 6 cycles when the bus access is acknowledged without wait states. Bus wait states extend the memory-access phase. |
| Exceptions | Memory instructions can raise data bus, data bus-protection, segment-overflow, and privilege-violation faults; see the notes below. |
| Fault side effects | Destination register writes and address-register auto-updates occur in write-back after the memory-access phase, so a fault that cancels the instruction before write-back leaves them undone (write-back still runs, but as a no-op). Data bus, data bus-protection, segment-overflow, and privilege-violation faults are all retryable: the saved return address is the address of the faulting instruction, so returning from the fault handler with **`RETE`** retries the same memory access (see Chapter 6). |

Table 14.2: Common Memory Instruction Semantics

Memory instructions can raise data bus and data bus-protection faults during the memory-access phase. The 16-bit displacement is signed two's-complement; effective-address calculation can raise a segment-overflow fault when `SR.A` (Trap on Address Overflow) is set and the low-word address calculation wraps. This segment-overflow fault is retryable: the saved return address is the address of the faulting instruction (see Chapter 6). A **`LOAD`** raises a privilege-violation fault in protected mode when its register field names a privileged high address register (`ah`, `lh`, `ph`,

or sh); this applies to the **LOAD** destination register only: **STOR** merely reads its register field, so storing a high address register is permitted. Naming sr is permitted in protected mode: **LOAD** into sr updates only bits 7–0, and **STOR** of sr stores the redacted value (bits 15–8 read as zero). Post-increment and pre-decrement address-register auto-update writes only the low word of the pair, so it never changes the high word and never raises a privilege-violation fault. Documented memory forms do not raise invalid-opcode faults. Instruction fetch can still raise the normal fetch faults before a memory instruction executes. If trace mode was enabled when the instruction began, an instruction-trace fault is raised after the instruction commits. Processing-unit encodings outside the documented memory forms are reserved or architecturally undefined; they are not required to raise an invalid-opcode fault.

## 14.5 Status Flag Effects

Memory instructions do not update status flags. All four condition flags are preserved regardless of addressing form, shift result, or auto-update side effect. This applies only to the memory-access **LOAD** forms (0x14–0x17) and **STOR** (0x10–0x13); see Chapter 13 for the flag behavior of **MOVI** (0x07) and **MOVR** (0x37). The AF field (bits 5–4) is not a status-update source for these opcodes; it selects the address-register pair used to form the effective address.

| Instruction | N | Z | C | V | Meaning |
|---|---|---|---|---|---|
| LOAD (0x14–0x17) | - | - | - | - | Flags are preserved. |
| STOR (0x10–0x13) | - | - | - | - | Flags are preserved. |


Table 14.3: Memory Instruction Status Flag Effects

See Table 11.2 for the flag-effect symbol definitions.

# LOAD
## Load from Memory

**Applicability:** SIRC-1, all revisions

**Opcodes:** `0x14` (Indirect Imm), `0x15` (Indirect Reg), `0x16` (Post-Inc Imm), `0x17` (Post-Inc Reg). See Table 14.1 for the full family of legal forms.

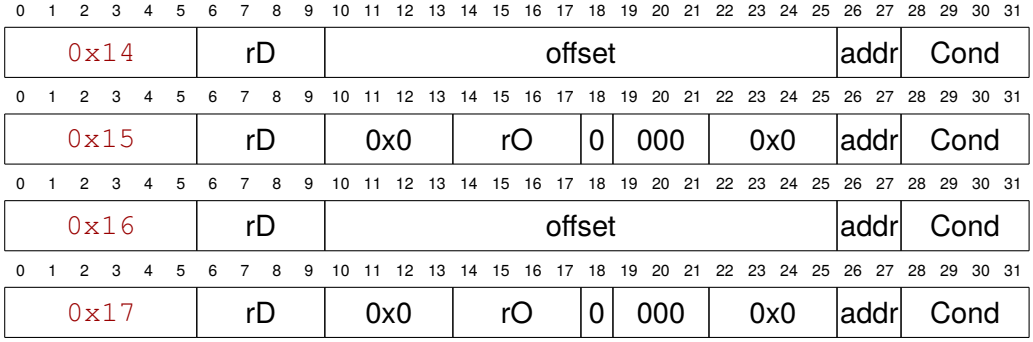


**Instruction Fields:**

- **rD (Reg, bits 25–22, Immediate format, `0x14`/`0x16`):** Destination register.
- **rD (R1, bits 25–22, Register format, `0x15`/`0x17`):** Destination register.
- **R2 (bits 21–18, Register format, `0x15`/`0x17`):** Unused, fixed at `0`. The assembler does not accept a shift suffix on any **LOAD** form: **LOAD** has no field that shifts the offset register or the loaded value. Use **SHFT** on `rO` before the **LOAD** if a scaled offset is needed.
- **SO, ST, SA (bits 13–6, Register format, `0x15`/`0x17`):** Reserved, fixed at `0`. A non-zero value is architecturally undefined; implementations are expected to ignore it, since a shift would apply to the unused R2 field and **LOAD** takes its offset from R3, so portable software must not rely on that.
- **rO (R3, bits 17–14, Register format, `0x15`/`0x17`):** Offset register, used unshifted.
- **offset (Immediate Value, bits 21–6, Immediate format, `0x14`/`0x16`):** 16-bit signed displacement.
- **addr (AF, bits 5–4):** Address-register pair – `00` = `l`, `01` = `a`, `10` = `s`, `11` = `p`. Not a status-update source for these opcodes.
- **Condition field (bits 3–0):** All 16 condition-field encodings are legal; see **Condition field** below.

**Syntax:**

```
1 LOAD rD, (#offset, addr) ; rD = memory[addr + offset]
2 LOAD rD, (addr) ; equivalent to LOAD rD, (#0, addr)
3 LOAD rD, (rO, addr) ; rD = memory[addr + rO]
4 LOAD rD, (#offset, addr)+ ; rD = memory[addr + offset]; addr += 1
5 LOAD rD, (addr)+ ; equivalent to LOAD rD, (#0, addr)+
6 LOAD rD, (rO, addr)+ ; rD = memory[addr + rO]; addr += 1
```

**Operands:** `rD` is the destination general-purpose register; a privileged high address register (`ah`, `lh`, `ph`, or `sh`) raises a privilege-violation fault in protected mode. `addr` is the address-register pair that supplies the segment and base low word. Immediate-offset forms use a 16-bit signed displacement. Register-offset forms use `rO` as the displacement register, always unshifted; **LOAD** does not accept a shift suffix.

**Operation:**

```
if post_increment then
    effective_address = addr + offset
    destination = memory[effective_address]
    addr.low = addr.low + 1
else
    effective_address = addr + offset
    destination = memory[effective_address]
endif
; Flags are preserved
```

**Description:**

Loads a 16-bit value from memory into the destination register. Post-increment forms update the address register after the load, which is useful for array traversal.

**Flags:** Preserved.

**Write-back:** If the condition is true, writes the loaded value to `rD`. Post-increment forms also write the incremented address-register low word.

**Exceptions:** May raise data bus or data bus-protection faults during the memory read. May raise a segment-overflow fault during effective-address calculation when `SR.A` is set; this fault is retryable (see Chapter 6). May raise a privilege-violation fault in protected mode if `rD` names a privileged high address register (`ah`, `lh`, `ph`, or `sh`).

**Condition field:** If the condition is false, no memory read occurs, no destination register is written, no address register is incremented, and status flags are preserved.

**Timing:** 6 cycles when the memory read is acknowledged without wait states; wait states extend the memory-access phase.


**Privilege:** Available in protected mode and supervisor mode. Protected-mode data-memory access is subject to bus protection. A privilege-violation fault is raised in protected mode if `rD` names a privileged high address register (`ah`, `lh`, `ph`, or `sh`); a **`LOAD`** into `sr` is permitted but updates only bits 7–0.

```
1  ; Load from fixed offset
2  LOAD r1, (#4, a) ; r1 = memory[a + 4]
3
4  ; Load using variable offset
5  LOAD r2, (r3, a) ; r2 = memory[a + r3]
6
7  ; Array iteration
8  LOAD r4, (#0, a)+ ; r4 = *a; a += 1
9
10 ; Stack pop
11 LOAD r5, (#0, s)+ ; r5 = *s; s += 1
12
13 ; LOAD has no shift suffix: scale the offset register first with SHFT
14 SHFT r2, LSL #2 ; r2 = r2 << 2
15 LOAD r3, (r2, a) ; r3 = memory[a + r2]
```

Example 14-1: Indirect, Post-Increment, and Register-Offset Loads

# STOR
## Store to Memory

**Applicability:** SIRC-1, all revisions
**Opcodes:** `0x10` (Indirect Imm), `0x11` (Indirect Reg), `0x12` (Pre-Dec Imm), `0x13` (Pre-Dec Reg). See Table 14.1 for the full family of legal forms.

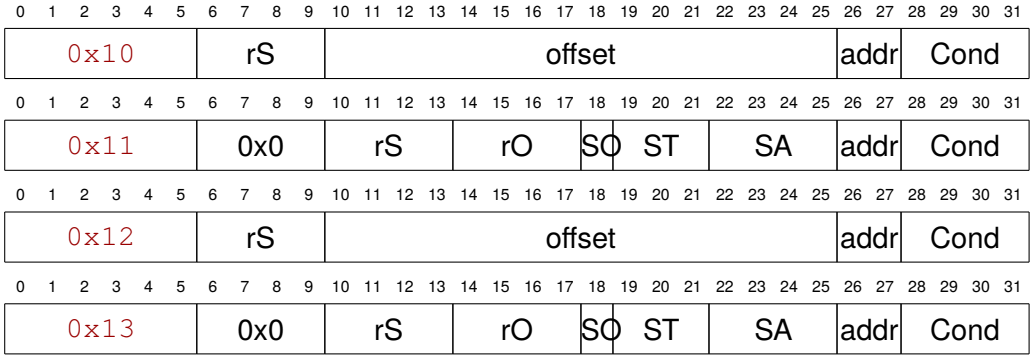


**Instruction Fields:**

- **rS (Reg, bits 25–22, Immediate format, `0x10`/`0x12`):** Source register.
- **R1 (bits 25–22, Register format, `0x11`/`0x13`):** Unused, encoded as 0.
- **rS (R2, bits 21–18, Register format, `0x11`/`0x13`):** Source register.
- **rO (R3, bits 17–14, Register format, `0x11`/`0x13`):** Offset register.
- **offset (Immediate Value, bits 21–6, Immediate format, `0x10`/`0x12`):** 16-bit signed displacement.
- **Shift Type (bits 12–10, Register format, `0x11`/`0x13`):** `000` none, `001` LSL, `010` LSR, `011` ASL, `100` ASR, `101` RTL, `110` RTR, `111` reserved. Applies to `rS` before the value is written to memory.
- **Shift Amount (bits 9–6, Register format, `0x11`/`0x13`):** Immediate count 0–15, or (Shift Operand bit set) a register holding the count; a register count is used in full (16 or more clamps to a full shift for `LSL`/`LSR`/`ASL`/`ASR`, and is taken modulo 16 for `RTL`/`RTR`) – see Chapter 9.
- **addr (AF, bits 5–4):** Address-register pair – `00` = `l`, `01` = `a`, `10` = `s`, `11` = `p`. Not a status-update source for these opcodes.
- **Condition field (bits 3–0):** All 16 condition-field encodings are legal; see **Condition field** below.

**Syntax:**

```
STOR (#offset, addr), rS ; memory[addr + offset] = rS
STOR (addr), rS ; equivalent to STOR (#0, addr), rS
STOR (rO, addr), rS ; memory[addr + rO] = rS
STOR -(#offset, addr), rS ; addr -= 1; memory[addr + offset] = rS
STOR -(addr), rS ; equivalent to STOR -(#0, addr), rS
STOR -(rO, addr), rS ; addr -= 1; memory[addr + rO] = rS

; With optional shift on the source value (register-offset memory forms only)
STOR (rO, addr), rS, shift ; Shift rS, then store
STOR -(rO, addr), rS, shift ; Decrement, shift rS, then store
```

**Operands:** `rS` is the source general-purpose register; a privileged high address register (`ah`, `lh`, `ph`, or `sh`) raises a privilege-violation fault in protected mode, even though **STOR** only reads it. `addr` is the address-register pair that supplies the segment and base low word. Immediate-offset forms use a 16-bit signed displacement. Register-offset forms use `rO` as the displacement register and may apply a shift to the source value before storing it.

**Operation:**

```
if pre_decrement then
    decremented_low = addr.low - 1
    effective_address = (addr.high : decremented_low) + offset
    memory[effective_address] = shift_if_encoded(source)
    addr.low = decremented_low
else
    effective_address = addr + offset
    memory[effective_address] = shift_if_encoded(source)
endif
; Source register and flags are preserved
```

**Description:**

Stores a 16-bit value from a register into memory. Pre-decrement forms use the decremented address for the store and write the decremented address register value back after the memory access, useful for stack push operations.

**Flags:** Preserved.

**Write-back:** If the condition is true, writes the source value to memory. Pre-decrement forms also write the decremented address-register low word.

**Exceptions:** May raise data bus or data bus-protection faults during the memory write. May raise a segment-overflow fault during effective-address calculation when `SR.A` is set; this fault is retryable (see Chapter 6).

**Condition field:** If the condition is false, no memory write occurs, no address register is decremented, and status flags are preserved.

**Timing:** 6 cycles when the memory write is acknowledged without wait states; wait states extend the memory-access phase.

**Privilege:** Available in protected mode and supervisor mode. Protected-mode data-memory access is subject to bus protection. **STOR** only reads `rS`, so it may name any register, including the privileged ones; in protected mode `sr` is stored with bits 15–8 redacted to zero.

```
1  ; Store to fixed offset
2  STOR (#8, a), r1 ; memory[a + 8] = r1
3
4  ; Store using variable offset
5  STOR (r3, a), r2 ; memory[a + r3] = r2
6
7  ; Store with shift (data shifted before storing)
8  STOR (r2, a), r1, LSL #1 ; memory[a + r2] = r1 << 1
9  STOR (r3, a), r1, LSR #3 ; memory[a + r3] = r1 >> 3
10
11 ; Stack push
12 STOR -(#0, s), r4 ; s -= 1; memory[s] = r4
```

Example 14-2: Indirect, Shifted, and Pre-Decrement Stores

## 14.6 Common Memory Access Patterns

### 14.6.1 Structure Field Access

```
; struct { int16_t x, y, z; } point;
; 'a' points to point
LOAD r1, (#0, a) ; r1 = point.x
LOAD r2, (#1, a) ; r2 = point.y
LOAD r3, (#2, a) ; r3 = point.z
```

### 14.6.2 Array Iteration

```
; Process array of 16-bit values
; 'a' = array base, r7 = count
:loop
    LOAD r1, (#0, a)+ ; Load element, advance
    ; ... process r1 ...
    SUBI r7, #1
    BRAN|!= @loop
```

### 14.6.3 Stack Operations

```
; Push registers
STOR -(#0, s), r1
STOR -(#0, s), r2
STOR -(#0, s), r3

; Pop registers (reverse order)
LOAD r3, (#0, s)+
LOAD r2, (#0, s)+
LOAD r1, (#0, s)+
```

## 14.7 Shift Operations with Memory Instructions

Only **STOR**'s register-offset forms support an optional shift suffix, applied to the source register value before it is written to memory. **LOAD** does not support a shift suffix on any form – the offset register r0 is always used unshifted, and there is no field that shifts the loaded value. This asymmetry is architectural, not an oversight: use **SHFT** on the offset register before a **LOAD** if a scaled index is needed.

### 14.7.1 STOR with Shift

When storing to memory, the source register value is shifted **before** being written to memory. The original register value is **not** modified:

```
STOR (r2, a), r1, LSL #1 ; memory[a + r2] = r1 << 1 (r1 unchanged)
STOR (r2, a), r1, ASL #2 ; memory[a + r2] = r1 << 2 (r1 unchanged)
STOR (r4, a), r1, ASR #4 ; memory[a + r4] = r1 >> 4 (r1 unchanged)
```

### 14.7.2 Supported Shift Types

All standard shift types are supported:

- **LSL** – Logical Shift Left (fill with zeros)
- **LSR** – Logical Shift Right (fill with zeros)
- **ASL** – Arithmetic Shift Left (same data result as LSL; sets V on signed overflow)

- **ASR** – Arithmetic Shift Right (sign-extend)
- **RTL** – Rotate Left within the operand
- **RTR** – Rotate Right within the operand

### 14.7.3 Shift Limitations

**Important:** The shift suffix is **only** supported on **STOR**'s register-offset forms. The following do **not** support a shift suffix:

- Any **LOAD** form, register-offset included – `LOAD r1, (r2, a)` – No shift suffix exists
- Loading immediate values: `MOVI r1, #0x1234` – No shift allowed
- Copying registers: `MOVR r1, r2` – No shift allowed
- Immediate-offset memory load: `LOAD r1, (#0, a)` – No shift allowed
- Immediate-offset memory store: `STOR (#0, a), r1` – No shift allowed

For any of these, load or store the unshifted value and use an ALU instruction or **SHFT** for the shift operation.

### 14.7.4 Use Cases

#### Scaled Indexing

**LOAD** has no shift suffix, so scaling an index for array access takes a separate **SHFT** before the **LOAD**:

```
1 ; r2 holds an element index; each element occupies 4 words
2 SHFT r2, LSL #2 ; r2 = r2 << 2
3 LOAD r3, (r2, a) ; r3 = memory[a + r2]
```

#### Bit Manipulation

Shifting the source register before a **STOR** is useful for packing a scaled or shifted value into memory without a separate ALU instruction:

```
1 ; Store a scaled value
2 STOR (r3, a), r2, LSL #2 ; memory[a + r3] = r2 * 4
```

#### Combined with Auto-Increment/Decrement

**STOR**'s shift suffix works seamlessly with pre-decrement mode:

```
1 ; Decrement, shift the source value, and store
2 STOR -(r2, a), r1, LSR #2 ; a -= 1; memory[a + r2] = r1 >> 2
```

### 14.7.5 Status Flags

**Note:** Unlike shifts in ALU instructions, a shift performed during a **STOR** cannot update the status register flags. For flag updates based on a shift result, use an ALU instruction or the **SHFT** meta-instruction (see Chapter 13).

CHAPTER 15

# Control Flow Instructions

## 15.1 Overview

Control flow in SIRC-1 is built from effective-address instructions. The real CPU opcodes compute an address into an address-register pair; jumps and calls are produced by targeting the program-counter pair `p`.

The SIRC-1 provides these control-flow and address-calculation operations:

- **`LDEA`** – Load Effective Address into an address-register pair
- **`LDEL`** – Load Effective Address and Link; also saves the return address in `l`
- **`BRAN`** – PC-relative assembler meta-instruction for `LDEA p, ...`
- **`BRSR`** – PC-relative assembler meta-instruction for `LDEL p, ...`
- **`RETS`** – Return meta-instruction for `LDEA p, (#0, l)`
- **`LJMP`** – Absolute-jump assembler meta-instruction for `LDEA p, ...`
- **`LJSR`** – Absolute-call assembler meta-instruction for `LDEL p, ...`

All encoded control-flow instructions can be conditional. If the condition is false, the instruction is skipped and has no side effects, as described in Chapter 11.

## 15.2 Legal Forms

| Instruction | Syntax | Encoding | Notes |
|---|---|---|---|
| LDEA | `LDEA dest, (#offset, src)` | `0x18` | Immediate-offset effective address |
| LDEA | `LDEA dest, (r0, src)` | `0x19` | Register-offset effective address |
| LDEA | `LDEA dest, -(#offset, src)` | `0x1A` | Pre-decrement source, immediate offset |
| LDEA | `LDEA dest, -(r0, src)` | `0x1B` | Pre-decrement source, register offset |
| LDEL | `LDEL dest, (#offset, src)` | `0x1C` | Immediate-offset effective address and link; `dest` excludes `l` |
| LDEL | `LDEL dest, (r0, src)` | `0x1D` | Register-offset effective address and link; `dest` excludes `l` |
| LDEL | `LDEL dest, (#offset, src)+` | `0x1E` | Post-increment source, immediate offset; `dest` excludes `l` |
| LDEL | `LDEL dest, (r0, src)+` | `0x1F` | Post-increment source, register offset; `dest` excludes `l` |
| BRAN | `BRAN #disp` | `LDEA` meta | Assembles to `LDEA p, (#disp, p)` |
| BRAN | `BRAN @label` | `LDEA` meta | PC-relative linker-computed displacement |
| BRSR | `BRSR #disp` | `LDEL` meta | Assembles to `LDEL p, (#disp, p)` |
| BRSR | `BRSR @label` | `LDEL` meta | PC-relative linker-computed call |
| RETS | `RETS` | `LDEA` meta | Assembles to `LDEA p, (#0, l)` |
| LJMP | `LJMP src` | `LDEA` meta | Assembles to `LDEA p, (#0, src)` |
| LJMP | `LJMP src, #offset` | `LDEA` meta | Assembles to `LDEA p, (#offset, src)` |
| LJMP | `LJMP src, r0` | `LDEA` meta | Assembles to `LDEA p, (r0, src)` |
| LJSR | `LJSR src` | `LDEL` meta | Assembles to `LDEL p, (#0, src)` |
| LJSR | `LJSR src, #offset` | `LDEL` meta | Assembles to `LDEL p, (#offset, src)` |
| LJSR | `LJSR src, r0` | `LDEL` meta | Assembles to `LDEL p, (r0, src)` |
| LJSR | `LJSR (#offset, src)+` | `LDEL` meta | Assembles to `LDEL p, (#offset, src)+` |
| LJSR | `LJSR (r0, src)+` | `LDEL` meta | Assembles to `LDEL p, (r0, src)+` |

Table 15.1: Legal Control-Flow and Effective-Address Forms

**Address registers:** `src` and `dest` are address-register pairs: `l`, `a`, `s`, or `p`. The branch meta-instructions always use `p` as both the source and destination address-register pair. `l` is never a legal **LDEL** destination, because **LDEL** always writes the return address to `l`; the destination and the link write would alias. **LDEL** destinations are `a`, `s`, or `p`.
**Zero displacement:** Immediate-displacement forms may omit `#0`. Thus `LDEA dest, (src)`, `LDEA dest, -(src)`, `LDEL dest, (src)`, and `LDEL dest, (src)+` assemble as the matching `#0` forms. For non-auto-update absolute jumps and calls, use the meta-instruction syntax `LJMP src` or `LJSR src`; `LJMP (src)` and `LJSR (src)` are not public syntax. The post-increment call shorthand `LJSR (src)+` is legal and assembles as `LDEL p, (#0, src)+`.
**Aliased register writes:** Instructions that write the same address-register pair through more than one write-back path have architecturally undefined behavior. The assembler rejects exactly these forms: **LDEA** pre-decrement with destination equal to source; **LDEL** with destination `l` (any form); **LDEL** post-increment with source `l` or with destination equal to source; **LJSR** post-increment from `l` or `p`; **LOAD** post-increment whose destination is a half of the auto-updated pair; and **STOR** pre-decrement whose source is a half of the auto-updated pair.
**Shift suffixes:** Control-flow and effective-address displacements are not shifted. Register-offset forms do not accept shift suffixes in the assembler.

## 15.3 Common Semantics

| Topic | Definition |
|---|---|
| Condition false | The instruction is skipped and has no side effects. The program counter advances to the next instruction normally. |
| Address calculation | The selected source address-register high word supplies the segment. The target low word is the selected source low word plus the immediate or register displacement. |
| Pre-decrement LDEA | The source low word is decremented by one word before the displacement is applied. The decremented source low word is written back. |
| Post-increment LDEL | The target address is calculated from the original source value. The source low word is incremented by one word in write-back. |
| Subroutine link | **`LDEL`**, **`BRSR`**, and **`LJSR`** save the normal next-instruction address in `l`. |
| Status flags | Preserved. Control-flow instructions do not support status update override syntax. |
| Timing | 6 cycles, plus any instruction-fetch wait states. These instructions do not perform a data-memory bus access. |
| Exceptions | Effective-address calculation can raise segment-overflow faults when `SR.A` is set; see the notes below. |
| Privilege | In protected mode, address-register-pair write-back is allowed only when every written high word would remain unchanged. If any high word would change, the instruction raises a privilege-violation fault instead of completing write-back. Direct writes to high address registers also raise a privilege-violation fault. |
| Fault side effects | Program-counter, destination address-register, source auto-update, and link-register updates occur after condition evaluation. If a fault cancels the instruction before write-back, those effects do not complete (write-back still runs, but as a no-op). |

Table 15.2: Common Control-Flow Instruction Semantics

Control-flow and effective-address instructions do not perform data-memory access and do not raise data bus, data bus-protection, or invalid-opcode faults in documented forms. Effective-address calculation can raise a segment-overflow fault when `SR.A` (Trap on Address Overflow) is set and the 16-bit low-word address calculation wraps. Instruction fetch can still raise the normal fetch faults before the instruction executes. If trace mode was enabled when the instruction began, an instruction-trace fault is raised after the instruction commits.

## 15.4 Status Flag Effects

Control-flow and effective-address instructions do not update status flags. All four condition flags are preserved regardless of whether the instruction branches, links, faults, or is skipped. Control-flow

instructions do not support status update override syntax.

| Instruction | N | Z | C | V | Meaning |
|---|---|---|---|---|---|
| LDEA | - | - | - | - | Flags are preserved. |
| LDEL | - | - | - | - | Flags are preserved. |

Table 15.3: Control-Flow Instruction Status Flag Effects


See Table 11.2 for the flag-effect symbol definitions. Meta-instructions (**`BRAN`**, **`BRSR`**, **`RETS`**, **`LJMP`**, **`LJSR`**) inherit the flag-preservation behavior of the **`LDEA`** or **`LDEL`** form they assemble to.

## 15.5 Branch Meta-Instructions

# BRAN
## Branch Meta-Instruction

**Applicability:** SIRC-1, all revisions

**Assembles to:** **LDEA** with p as the source and destination. See Table 15.1 for the full family of legal forms.




**Instruction Fields:**

- **Register (bits 25–22):** bits 23–22 are fixed at 0x3 (p) by the meta-instruction. Bits 25–24 are reserved for future use and always written as zero.
- **AF (bits 5–4):** fixed at 0x3 (p) by the meta-instruction.
- **disp (Immediate Value, bits 21–6):** signed 16-bit displacement.
- **Condition field (bits 3–0):** any of the 16 condition-code encodings in Table 7.5.

**Syntax:**

```
BRAN #disp ; p = p + disp
BRAN @label ; p = p + label offset
BRAN|cond #disp ; Conditional PC-relative branch
```

**Operands:** #disp is a signed 16-bit word displacement (−32768 to +32767) added to the low word of p modulo $2^{16}$; a branch cannot change the program segment, so the displacement wraps within the current 64K segment. @label is resolved by the linker to a word displacement from the address of the branch instruction itself.

**Operation:**

```
; Assembles to LDEA p, (#disp, p)
if condition:
    p = p + displacement
```

**Description:**

Branches relative to the current program counter. **BRAN** is an assembler meta-instruction, not a distinct CPU opcode. The displacement base is the branching instruction's own address, so BRAN #0 branches to itself and BRAN #2 falls through to the next instruction. Use **LDEA p, (#offset, src)** or **LDEA p, (r0, src)** for non-PC-relative computed jumps.

**Flags:** Preserved.

**Write-back:** Inherits **LDEA** write-back to p.

**Exceptions:** Same as **LDEA**; may raise segment-overflow or protected-mode privilege faults.

**Condition field:** If the condition is false, no branch occurs and status flags are preserved.

**Timing:** Same as **LDEA**: 6 cycles, plus instruction-fetch wait states.

**Privilege:** Same as **LDEA**. Protected-mode branches must preserve the high word of p.

```
; Unconditional branch forward
BRAN #20 ; Jump ahead 20 words

; Backward branch (loop)
:loop
    ; ... loop body ...
    BRAN|!= @loop ; Jump back if not zero
```


Example 15-1: Unconditional and Conditional Branching

# BRSR

## Branch to Subroutine Meta-Instruction

**Applicability:** SIRC-1, all revisions

**Assembles to:** **LDEL** with p as the source and destination. See Table 15.1 for the full family of legal forms.




**Instruction Fields:**

- **Register (bits 25–22):** bits 23–22 are fixed at 0x3 (p) by the meta-instruction. Bits 25–24 are reserved for future use and always written as zero.
- **AF (bits 5–4):** fixed at 0x3 (p) by the meta-instruction.
- **disp (Immediate Value, bits 21–6):** signed 16-bit displacement.
- **Condition field (bits 3–0):** any of the 16 condition-code encodings in Table 7.5.

**Syntax:**

```
1 BRSR #disp ; l = next PC; p = p + disp
2 BRSR @label ; l = next PC; p = p + label offset
3 BRSR|cond #disp ; Conditional PC-relative call
```

**Operands:** #disp is a signed 16-bit word displacement (−32768 to +32767) added to the low word of p modulo $2^{16}$; a call cannot change the program segment, so the displacement wraps within the current 64K segment. @label is resolved by the linker to a word displacement from the address of the call instruction itself.

**Operation:**

```
; Assembles to LDEL p, (#disp, p)
if condition:
    l = address_of_next_instruction
    p = p + displacement
```

**Description:**

Calls a PC-relative subroutine by saving the return address in l and branching to the computed target. The displacement base is the branching instruction's own address, so the **BRSR** link value is that address plus 2 (the address of the next instruction). Return with **RETS**, which assembles to LDEA p, (#0, l).

**Flags:** Preserved.

**Write-back:** Inherits **LDEL** write-back to l and p.

**Exceptions:** Same as **LDEL**; may raise segment-overflow or protected-mode privilege faults.

**Condition field:** If the condition is false, no call occurs, l is not written, and status flags are preserved.

**Timing:** Same as **LDEL**: 6 cycles, plus instruction-fetch wait states.

**Privilege:** Same as **LDEL**. Protected-mode calls must preserve the high words written to l and p.


```
; PC-relative call
BRSR @function

; Return from the subroutine
RETS
```

Example 15-2: Calling and Returning with BRSR/RETS

# RETS
## Return from Subroutine Meta-Instruction

**Applicability:** SIRC-1, all revisions
**Assembles to:** `LDEA p, (#0, l)`. See Table 15.1 for the full family of legal forms.




**Instruction Fields:**

- **Register (bits 25–22):** bits 23–22 are fixed at `0x3` (`p`) by the meta-instruction. Bits 25–24 are reserved for future use and always written as zero.
- **AF (bits 5–4):** fixed at `0x0` (`l`) by the meta-instruction.
- **Immediate (bits 21–6):** fixed at `0x0000` by the meta-instruction.
- **Condition field (bits 3–0):** any of the 16 condition-code encodings in Table 7.5.

**Syntax:**

```
RETS ; p = l
RETS|cond ; Conditional return
```

**Operands:** None. The source address-register pair is implicitly `l`; the destination is implicitly `p`.
**Operation:**

```
; Assembles to LDEA p, (#0, l)
if condition:
    p = l
```

**Description:**
Returns from a subroutine by copying the link register to the program counter. Used after **LJSR** or **BRSR**.
**Flags:** Preserved.
**Write-back:** Inherits **LDEA** write-back to `p`.
**Exceptions:** Same as **LDEA**; may raise protected-mode privilege faults if the return would change `p`'s high word.
**Condition field:** If the condition is false, no return occurs and status flags are preserved.
**Timing:** Same as **LDEA**: 6 cycles, plus instruction-fetch wait states.
**Privilege:** Available in protected mode and supervisor mode, subject to protected-mode address-register write-back restrictions.

```
:my_function
    ; ... function body ...
    ; Return to caller
    RETS
```


Example 15-3: Returning from a Subroutine

## 15.6 Load Effective Address

# LDEA
## Load Effective Address

**Applicability:** SIRC-1, all revisions

**Opcodes:** `0x18` (Immediate), `0x19` (Register), `0x1A` (Pre-Dec Immediate), `0x1B` (Pre-Dec Register). See Table 15.1 for the full family of legal forms.

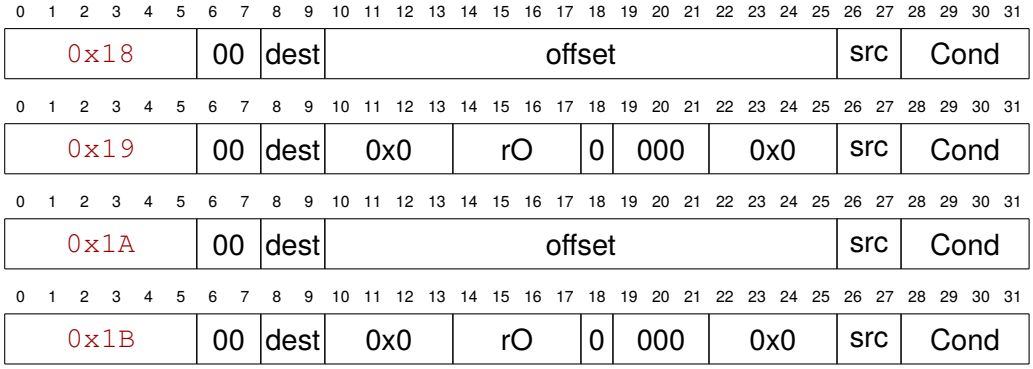


**Instruction Fields:**

- **dest (Reg or R1, bits 25–22):** bits 23–22 hold the destination address-register pair; `0x0` = `l`, `0x1` = `a`, `0x2` = `s`, `0x3` = `p`. Bits 25–24 are reserved for future use and always written as zero.
- **src (AF, bits 5–4):** source address-register pair; `0x0` = `l`, `0x1` = `a`, `0x2` = `s`, `0x3` = `p`.
- **offset (Immediate Value, bits 21–6, immediate forms only):** 16-bit signed displacement.
- **rO (R3, bits 17–14, register forms only):** a general-purpose register supplying the displacement.
- **Condition field (bits 3–0):** any of the 16 condition-code encodings in Table 7.5.

**Syntax:**

```
LDEA dest, (#offset, src) ; dest = src + offset
LDEA dest, (src) ; equivalent to LDEA dest, (#0, src)
LDEA dest, (rO, src) ; dest = src + rO
LDEA dest, -(#offset, src) ; src -= 1; dest = src + offset
LDEA dest, -(src) ; equivalent to LDEA dest, -(#0, src)
LDEA dest, -(rO, src) ; src -= 1; dest = src + rO
LDEA|cond dest, (#offset, src)
```

**Operands:** `dest` and `src` are address-register pairs. Immediate forms use a 16-bit displacement. Register forms use `rO` as a displacement. Pre-decrement forms also update `src`.

**Operation:**

```
if condition:
    if pre_decrement:
        src.low = src.low - 1
    dest.high = src.high
    dest.low  = src.low + displacement
```

**Description:**

Computes an effective address and loads it into the destination address-register pair. This is useful for pointer arithmetic and for control flow when the destination is `p`. Pre-decrement forms also update the source address register pair.

**Flags:** Preserved.

**Write-back:** If the condition is true, writes the computed address to `dest`. Pre-decrement forms also write the decremented source address back to `src`.

**Exceptions:** May raise a segment-overflow fault during effective-address calculation when `SR.A` is set. In protected mode, raises a privilege-violation fault if write-back would change a written address-register high word.

**Condition field:** If the condition is false, no destination or source address register is written and status flags are preserved.

**Timing:** 6 cycles, plus instruction-fetch wait states. No data-memory bus access is performed.

**Privilege:** Available in protected mode and supervisor mode, subject to protected-mode address-register write-back restrictions.

```
; Pointer arithmetic
LDEA a, (#16, a) ; a = a + 16

; Computed jump
LDEA p, (r1, a) ; p = a + r1


; Pre-decrement source pointer and copy nearby address
LDEA a, -(#0, s) ; s -= 1; a = s
```

Example 15-4: Pointer Arithmetic and Computed Jumps with LDEA

# LDEL
## Load Effective Address and Link

**Applicability:** SIRC-1, all revisions

**Opcodes:** `0x1C` (Immediate), `0x1D` (Register), `0x1E` (Post-Inc Immediate), `0x1F` (Post-Inc Register). See Table 15.1 for the full family of legal forms.

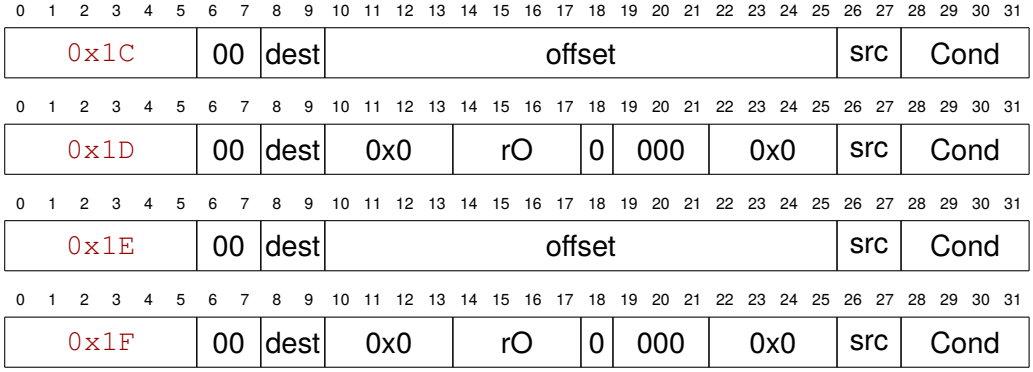


**Instruction Fields:**

- **dest (Reg or R1, bits 25–22):** bits 23–22 hold the destination address-register pair; `0x1` = `a`, `0x2` = `s`, `0x3` = `p` (`0x0` = `l` is not a legal **`LDEL`** destination). Bits 25–24 are reserved for future use and always written as zero.
- **src (AF, bits 5–4):** source address-register pair; `0x0` = `l`, `0x1` = `a`, `0x2` = `s`, `0x3` = `p`.
- **offset (Immediate Value, bits 21–6, immediate forms only):** 16-bit signed displacement.
- **rO (R3, bits 17–14, register forms only):** a general-purpose register supplying the displacement.
- **Condition field (bits 3–0):** any of the 16 condition-code encodings in Table 7.5.

**Syntax:**

```
1 LDEL dest, (#offset, src) ; l = next PC; dest = src + offset
2 LDEL dest, (src) ; equivalent to LDEL dest, (#0, src)
3 LDEL dest, (rO, src) ; l = next PC; dest = src + rO
4 LDEL dest, (#offset, src)+ ; l = next PC; dest = src + offset; src += 1
5 LDEL dest, (src)+ ; equivalent to LDEL dest, (#0, src)+
6 LDEL dest, (rO, src)+ ; l = next PC; dest = src + rO; src += 1
7 LDEL|cond dest, (#offset, src)
```

**Operands:** `dest` and `src` are address-register pairs. Immediate forms use a 16-bit displacement. Register forms use `rO` as a displacement. Post-increment forms also update `src`.

**Operation:**

```
if condition:
    l = address_of_next_instruction
    dest.high = src.high
    dest.low  = src.low + displacement
    if post_increment:
        src.low = src.low + 1
```

**Description:**

Computes an effective address, saves the return address to `l`, and writes the computed address to the destination address-register pair. It is the real link-writing primitive behind **`BRSR`** and **`LJSR`**.

**Flags:** Preserved.

**Write-back:** If the condition is true, writes the return address to `l` and the computed address to `dest`. Post-increment forms also write the incremented source address back to `src`.

**Exceptions:** May raise a segment-overflow fault during effective-address calculation when `SR.A` is set. In protected mode, raises a privilege-violation fault if write-back would change a written address-register high word.

**Condition field:** If the condition is false, no destination, link, or source address register is written and status flags are preserved.

**Timing:** 6 cycles, plus instruction-fetch wait states. No data-memory bus access is performed.

**Privilege:** Available in protected mode and supervisor mode, subject to protected-mode address-register write-back restrictions.


```
1 ; Absolute call through a
2 LDEL p, (#0, a) ; l = next PC; p = a
3
4 ; Explicit destination form
5 LDEL a, (r1, s) ; l = next PC; a = s + r1
6
7 ; Post-increment source pointer after call target calculation
8 LDEL p, (#0, a)+ ; l = next PC; p = old a; a += 1
```

Example 15-5: Calling Through a Register with LDEL

## 15.7 Long Jump Meta-Instructions

# LJMP
## Long Jump Meta-Instruction

**Applicability:** SIRC-1, all revisions
**Assembles to:** **LDEA** with p as the destination. See Table 15.1 for the full family of legal forms.

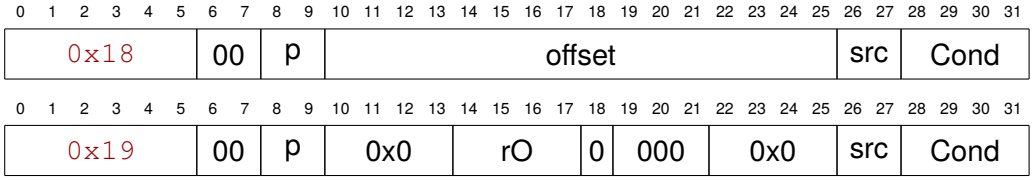


**Instruction Fields:**

- **Register (bits 25–22):** bits 23–22 are fixed at 0x3 (p) by the meta-instruction. Bits 25–24 are reserved for future use and always written as zero.
- **src (AF, bits 5–4):** source address-register pair; 0x0 = l, 0x1 = a, 0x2 = s, 0x3 = p.
- **offset (Immediate Value, bits 21–6, #offset form only):** 16-bit signed displacement; fixed at 0x0000 for plain LJMP src.
- **rO (R3, bits 17–14, register form only):** a general-purpose register supplying the displacement.
- **Condition field (bits 3–0):** any of the 16 condition-code encodings in Table 7.5.

**Syntax:**

```
1 LJMP src ; p = src
2 LJMP src, #offset ; p = src + offset
3 LJMP src, rO ; p = src + rO
4 LJMP|cond src ; Conditional long jump
```

**Operands:** src is an address-register pair. Optional #offset or rO operands select immediate or register displacement forms.
**Operation:**

```
; Assembles to LDEA p, ...
if condition:
    p = src + displacement
```

**Description:**
Performs an absolute jump through an address register. **LJMP** is an assembler meta-instruction, not a separate CPU opcode.
**Flags:** Preserved.
**Write-back:** Inherits **LDEA** write-back to p.
**Exceptions:** Same as **LDEA**; may raise segment-overflow or protected-mode privilege faults.
**Condition field:** If the condition is false, no jump occurs and status flags are preserved.
**Timing:** Same as **LDEA**: 6 cycles, plus instruction-fetch wait states.
**Privilege:** Same as **LDEA**. Protected-mode jumps must preserve the high word of p.

```
; Jump to address in a
LJMP a ; p = a


; Jump with offset
LJMP a, #16 ; p = a + 16

; Jump with register displacement
MOVI r1, #4
LJMP a, r1 ; p = a + r1
```

Example 15-6: Jumping Through a Register with LJMP

# LJSR
## Long Jump to Subroutine Meta-Instruction

**Applicability:** SIRC-1, all revisions
**Assembles to:** **`LDEL`** with `p` as the destination. See Table 15.1 for the full family of legal forms.

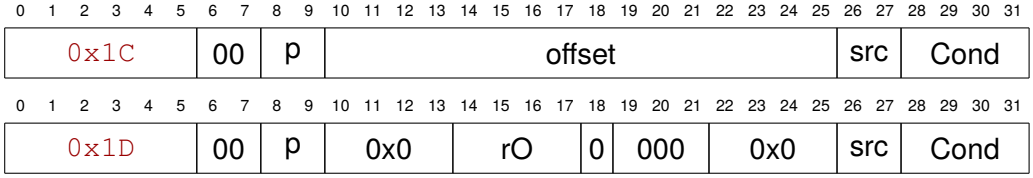


**Instruction Fields:**

- **Register (bits 25–22):** bits 23–22 are fixed at `0x3` (`p`) by the meta-instruction. Bits 25–24 are reserved for future use and always written as zero.
- **src (AF, bits 5–4):** source address-register pair; `0x0` = `l`, `0x1` = `a`, `0x2` = `s`, `0x3` = `p` for non-post-increment forms. Post-increment forms accept only `0x1` = `a` or `0x2` = `s`; `l` and `p` are aliased address-register writes with architecturally undefined behavior and are rejected by the assembler.
- **offset (Immediate Value, bits 21–6, `#offset` forms only):** 16-bit signed displacement; fixed at `0x0000` for plain `LJSR src`.
- **rO (R3, bits 17–14, register forms only):** a general-purpose register supplying the displacement.
- **Condition field (bits 3–0):** any of the 16 condition-code encodings in Table 7.5.

**Syntax:**

```
LJSR src ; l = next PC; p = src
LJSR src, #offset ; l = next PC; p = src + offset
LJSR src, rO ; l = next PC; p = src + rO
LJSR (#offset, src)+ ; l = next PC; p = src + offset; src += 1
LJSR (src)+ ; equivalent to LJSR (#0, src)+
LJSR (rO, src)+ ; l = next PC; p = src + rO; src += 1
LJSR|cond src ; Conditional long call
```

**Operands:** `src` is an address-register pair. Optional `#offset` or `rO` operands select immediate or register displacement forms. Post-increment forms also update `src`.

**Operation:**

```
; Assembles to LDEL p, ...
if condition:
    l = address_of_next_instruction
    p = src + displacement
    if post_increment:
        src.low = src.low + 1
```

**Description:**

Calls a subroutine through an address register. The return address is saved in `l`; return with **`RETS`**. Post-increment forms advance `src` after computing the target. Because **`LJSR`** implicitly writes `l` and `p`, post-increment source registers must not be `l` or `p`; such forms are aliased address-register writes with architecturally undefined behavior and are rejected by the assembler (see Appendix C).

**Flags:** Preserved.

**Write-back:** Inherits **LDEL** write-back to `l`, `p`, and any post-increment source register.
**Exceptions:** Same as **LDEL**; may raise segment-overflow or protected-mode privilege faults.
**Condition field:** If the condition is false, no call occurs, `l` is not written, any post-increment source register is preserved, and status flags are preserved.
**Timing:** Same as **LDEL**: 6 cycles, plus instruction-fetch wait states.
**Privilege:** Same as **LDEL**. Protected-mode calls must preserve the high words written to `l` and `p`.

```
; Call function at address in a
; supervisor mode only -- writing ah is privileged
MOVI ah, #0x0040
MOVI al, #0x0000 ; a = 0x00400000
LJSR a ; Call 0x00400000

; Call with offset
LJSR a, @function_offset ; p = a + function_offset

; Call with register displacement
MOVI r1, #8
LJSR a, r1 ; p = a + r1

; Call through a table entry and advance to the next entry
LJSR (#0, a)+ ; p = old a; a += 1
LJSR (r1, a)+ ; p = a + r1; a += 1
```

Example 15-7: Calling Through a Register with LJSR

## 15.8 Control Flow Patterns

### 15.8.1 If-Then-Else

```
; if (r1 > r2) { ... } else { ... }
CMPR r1, r2
BRAN|<= @else_part
; Then part
; ...
BRAN @end
:else_part
; Else part
; ...
:end
```

### 15.8.2 While Loop

```
; while (r1 > 0) { ... }
:while_start
    CMPI r1, #0
    BRAN|<= @while_end
    ; Loop body
    ; ...
    BRAN @while_start
:while_end
```

### 15.8.3 Switch/Jump Table

```
; Switch on r1 (0-3)
MOVR r2, r1 ; r2 = r1
; Scale the index to a 2-word BRAN entry and skip over this LDEA
ADDI r2, #2, LSL #1 ; r2 = (r2 << 1) + 2
LDEA p, (r2, p) ; Jump into the branch table below

:jump_table
    BRAN @case0
    BRAN @case1
    BRAN @case2
    BRAN @case3
```

CHAPTER 16

# Coprocessor Instructions

## 16.1 Overview

The SIRC-1 CPU includes a coprocessor interface that allows delegation of certain operations to specialized coprocessors. The primary coprocessor is the Exception Unit (Coprocessor 1), which handles exceptions, interrupts, and privileged operations.

Coprocessor calls are ordinary conditional instructions. If the instruction's condition is true, the processing unit computes a command operand and writes it to the 16-bit coprocessor select register (CSR, Section 2.3.2) during write-back. The selected coprocessor then interprets the command value. If the selected coprocessor is not present in the CPU model, the exception unit raises an invalid-opcode fault so the operation can be emulated or rejected by software. If the selected coprocessor is present but does not implement the requested operation, the result is architecturally undefined (see the Model and Revision Policy, Section 16.4.1).

## 16.2 Legal Forms

| Instruction | Syntax | Encoding | Notes |
|---|---|---|---|
| COPI | `COPI #imm16` | `0x0F` | 16-bit coprocessor command operand |
| COPR | `COPR rS` | `0x3F` | Command operand is read from `rS` |

Table 16.1: Legal Coprocessor Instruction Forms

The CPU encoding reserves the register field of the immediate format (opcode `0x0F`) and the R1, R2, and shift fields of the register format (opcode `0x3F`); the immediate format has no shift fields. The programmer-facing **`COPI`** and **`COPR`** syntax hides those fields; assemblers emit canonical values and coprocessors must not interpret them as destination-register writes. Opcode `0x2F` is listed as Undocumented because it has no public assembly syntax; unlike opcodes `0x08`, `0x09`, `0x0B`, and `0x0D`, whose behavior is architecturally undefined, opcode `0x2F`'s behavior is defined (see Appendix C).

## 16.3 Common Semantics

| Topic | Definition |
|---|---|
| Condition false | The instruction is skipped and has no side effects. The CSR, registers, memory, address registers, and status flags are preserved. The program counter still advances to the following instruction. |
| Command operand | **COPI** uses the 16-bit immediate value. **COPR** uses its source register value as the command operand. |
| Command format | For standard coprocessor commands, bits 15–12 select the coprocessor ID, bits 11–8 select the coprocessor operation, and bits 7–0 are coprocessor-defined operand bits. |
| Write-back | The processing unit writes the command operand to the CSR. It does not write general-purpose registers, address registers, or data memory as part of the call. Hidden encoding fields are ignored. |
| Status flags | Preserved by the processing-unit coprocessor-call write-back path. A coprocessor operation may define its own later CPU-state effects; exception-unit effects are documented in Chapter 6. |
| Privilege | In protected mode, coprocessor-operation nibbles 0x0–0x7 are user-callable and 0x8–0xF are supervisor-only. Privilege checks only apply when the instruction condition is true. For **COPR** the privilege decision is made on the run-time value of `rS` sampled during decode, not on any encoded field, so whether a given **COPR** instruction faults depends on register contents. |
| Timing | The coprocessor-call instruction itself uses the normal 6 execution phases and performs no data-memory bus access. Dispatch to coprocessor 1 then occupies one further complete 6-cycle slot beginning at the next phase 0, so a coprocessor-1 operation completes 12 cycles after the call's own fetch began. |
| Exceptions | Supervisor-only operations can raise privilege-violation faults; missing coprocessors can raise invalid-opcode faults. Unimplemented operations on a coprocessor that is present are architecturally undefined. See the notes below. |
| Fault side effects | If a fault is raised while dispatching the command, software must not depend on the contents of the CSR after the fault. A command waiting in the CSR is discarded if a fault or hardware exception is dispatched before the coprocessor's dispatch slot begins; the command is not re-issued after the handler returns. |


Table 16.2: Common Coprocessor Instruction Semantics

Coprocessor-call instructions do not perform data-memory access and do not raise data bus, data bus-protection, data alignment, or effective-address segment-overflow faults. A program-counter wrap with `SR.A` set still raises a segment-overflow fault at the following instruction fetch, as it does for every instruction. Instruction fetch can still raise the normal fetch faults before the call executes. If trace mode was enabled when the instruction began, an instruction-trace fault is raised after the processing-unit call commits, unless an earlier fault prevents the instruction from completing. In protected mode, supervisor-only coprocessor operation nibbles are rejected before the command is dispatched. A missing coprocessor is detected after the command has been latched for dispatch and raises an invalid-opcode fault through the exception unit. An unimplemented coprocessor operation on a coprocessor that is present is architecturally undefined (see the Model and Revision Policy, Section 16.4.1).

# COPI/COPR
## Coprocessor Call

**Applicability:** SIRC-1, all revisions

**Opcodes:** `0x0F` (Immediate), `0x3F` (Register). Opcode `0x2F` is Undocumented. See Table 16.1 for the full family of legal forms.

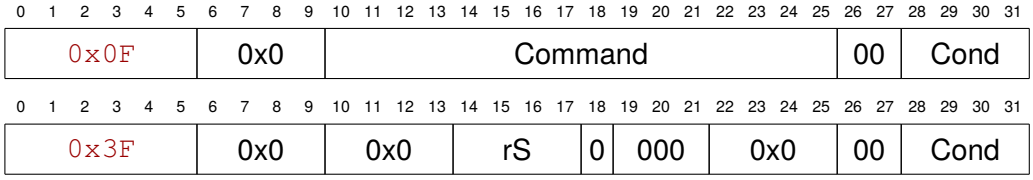


**Instruction Fields:**

- **Register (bits 25–22, Immediate format only):** reserved; the assembler emits `0x0` and coprocessors must not interpret it as a destination register.
- **Register 1, Register 2 (Register format, bits 25–18):** reserved; the assembler emits `0x0` for both.
- **rS (R3, Register format, bits 17–14):** any of the 16 registers, `0x0`–`0xF`; its value becomes the 16-bit command operand.
- **Command (Immediate Value, bits 21–6, Immediate format only):** 16-bit command operand for **COPI**.
- **Shift fields (Register format, bits 13–6):** reserved; the assembler emits `0` and coprocessors must not interpret them.
- **AF (bits 5–4):** reserved; the assembler emits `00` and coprocessors must not interpret it as a status-update selector.
- **Condition field (bits 3–0):** any of the 16 condition-code encodings in Table 7.5.

**Syntax:**

```
1 COPI #opcode ; Call coprocessor with 16-bit command
2 COPR rS ; Call coprocessor with command in rS
```

**Operands:** **COPI** takes a 16-bit immediate command operand. **COPR** takes any register name as its source; its 16-bit value is used as the command operand. A protected-mode **COPR sr** reads only the low byte of `sr` and therefore always builds a coprocessor-0 command. Hidden encoded register and shift fields are canonicalized by the assembler and are not programmer-visible operands.

**Operation:**

```
if condition_true then
    pending_coprocessor_command = command_operand
endif
```

**Description:**

Transfers a command to a coprocessor. For the standard command layout, the high nibble selects the coprocessor and the next nibble selects that coprocessor's operation. The remaining low byte is defined by the selected operation.

**Write-back:** Writes the command operand to the CSR.

**Flags:** Preserved by the coprocessor-call instruction.

**Exceptions:** May raise privilege-violation faults for supervisor-only operations in protected mode. May raise invalid-opcode faults for missing coprocessors. Unimplemented operations on a coprocessor that is present are architecturally undefined (see the Model and Revision Policy, Section 16.4.1).

**Condition field:** If the condition is false, no command is dispatched, the CSR is preserved, no coprocessor privilege or opcode checks are performed, and status flags are preserved.

**Timing:** 6 cycles for the processing-unit call, plus a further 6-cycle coprocessor dispatch slot (12 cycles in total), plus any bus wait states.

**Privilege:** Available in protected mode and supervisor mode. In protected mode, coprocessor-operation nibbles 0x8–0xF are supervisor-only and raise privilege-violation faults when executed. For **COPR** the privilege decision is made on the run-time value of `rS` sampled during decode, not on any encoded field, so whether a given **COPR** instruction faults depends on register contents.

```
; Wait for interrupt (Exception Unit)
COPI #0x1900 ; Coprocessor 1, operation 0x9
; Prefer the WAIT meta-instruction for normal assembly code.

; Return from exception
COPI #0x1A00 ; Coprocessor 1, operation 0xA
; Prefer the RETE meta-instruction for normal assembly code.

; User exception (system call)
COPI #0x1180 ; Coprocessor 1, operation 0x1, vector 0x80
; Prefer EXCP #0x80 for normal assembly code.
```

Example 16-1: Direct Coprocessor Calls

## 16.4 Coprocessor Compatibility

Standard coprocessor IDs are stable across SIRC-1 models. A CPU model may omit an optional coprocessor, but it must not assign that coprocessor ID to an incompatible unit. If software calls a coprocessor ID absent from the selected CPU model, the CPU raises an invalid-opcode fault. Calling an operation that an implemented coprocessor does not support is architecturally undefined; see the Model and Revision Policy below.

| ID | Name | Required | Operations | Compatibility rule |
|---|---|---|---|---|
| 0x0 | Processing Unit | Yes | Internal | Executes SIRCIS processing-unit instructions |
| 0x1 | Exception Unit | Yes | 0x1, 0x9–0xD (software); 0x0, 0xE–0xF (internal) | Handles reset, faults, interrupts, traps, and links |
| 0x2 | DMA Unit | No | 0x8–0xA | Optional standard DMA transfer unit |
| 0x3 | Integer Maths Unit | No | 0x0–0x3 | Optional standard integer multiply/divide unit |
| 0x4–0xF | Reserved/model space | No | Model-defined | Reserved unless a CPU model documents the assignment |

Table 16.3: Standard Coprocessor IDs

Exception-unit operation nibble 0x0 is the internal no-operation encoding and operation nibbles 0x2–0x8 are architecturally undefined. Operations 0xE and 0xF are internal encodings the exception

unit uses to dispatch a fault or a hardware exception; see Chapter 6 for the internal-instruction mechanism.

### 16.4.1 Model and Revision Policy

- Required coprocessors and documented operations must remain backward compatible within the SIRC-1 family.
- Optional standard coprocessors keep their assigned IDs even on models that omit them.
- Reserved coprocessor IDs must raise invalid-opcode faults when they are not implemented by the selected CPU model. Reserved operation nibbles and reserved operand values within an implemented coprocessor are architecturally undefined.
- Software may probe optional coprocessors by executing the documented operation and handling an invalid-opcode fault, or by using a model-specific capability table if one is provided by system firmware. The invalid-opcode fault records the offending 16-bit coprocessor command word in the `return_address` field of the fault-metadata link register (link register `#7`), which an emulation handler reads with **`ETFR`**. The CSR is cleared before the handler runs.
- Processing-unit undocumented opcodes are a separate case: they are accepted by the processing unit and have architecturally undefined effects unless a future CPU revision documents them.

## 16.5 Exception Unit (Coprocessor 1)

The Exception Unit handles:

- Faults (highest priority)
- Hardware exceptions (interrupts, multiple priority levels)
- Software exceptions (traps)
- Privileged operations

### 16.5.1 Common Operations

| Opcode | Mnemonic | Operation |
|---|---|---|
| 0x1100-0x11FF | EXCP | User exception (trap) at vector 0x60-0xFF |
| 0x1900 | WAIT | Wait for interrupt |
| 0x1A00 | RETE | Return from exception |
| 0x1B00 | RSET | System reset |
| 0x1C00-0x1C37 | ETFR | Transfer from exception link register |
| 0x1D00-0x1D37 | ETTR | Transfer to exception link register |

Table 16.4: Exception Unit Operations


For **`ETFR`** and **`ETTR`**, command bits 7–6 are not decoded, bits 5–4 select the register (`00` none, `01` saved address, `10` saved status, `11` both), and bits 3–0 hold the link-register index, `0`–`7`; values with bit 6 or bit 7 set are not distinct operations. Coprocessor-1 operations `0xE` and `0xF` are the exception unit's internal encodings for dispatching a fault or a hardware exception; a software-issued **`COPI`** or **`COPR`** naming operation `0xE` or `0xF` is architecturally undefined.

## 16.6 Exception Unit Meta-Instructions

# EXCP
## User Exception Meta-Instruction

**Applicability:** SIRC-1, all revisions; requires Coprocessor 1 (Exception Unit), a required coprocessor present in all SIRC-1 models.

**Assembles to:** `COPI #0x1100 | vector`. See Table 16.1 for the full family of legal forms.




**Instruction Fields:**

- **Register (bits 25–22):** reserved; the assembler emits `0x0`.
- **Immediate (bits 21–6):** `0x1100 | #vector`; bits 15–12 select coprocessor 1, bits 11–8 select operation `0x1`, and bits 7–0 hold `#vector`, `0x00`–`0xFF`.
- **AF (bits 5–4):** fixed at `00`.
- **Condition field (bits 3–0):** any of the 16 condition-code encodings in Table 7.5.

**Syntax:** `EXCP #vector`

**Operands:** `#vector` is the low 8-bit user exception vector selector.

**Operation:**

```
if condition_true then
    if protected_mode and vector < 0x60 then
        raise privilege_violation_fault
    else if current_exception_level != 0 then
        discard pending_coprocessor_command
    else
        link[0] = { pc, sr, current_exception_level }
        current_exception_level = 1
        pc = vector_table[vector]
    endif
endif
```

**Description:** Triggers a software exception at the specified user vector, 0x60–0xFF; a vector below 0x60 raises a privilege-violation fault in protected mode. Used by programs running in protected mode to invoke system calls or request supervisor-mode services.

**Write-back:** Inherits **`COPI`** command dispatch to the exception unit.

**Flags:** Preserved by the coprocessor-call instruction; exception entry effects are defined by the exception unit.

**Exceptions:** Dispatches a software exception through the exception unit. Raises a privilege-violation fault in protected mode if the selected vector is below 0x60. Software exceptions are accepted only at exception level 0; an **`EXCP`** executed inside any exception or fault handler is discarded – the CSR is cleared, no vector is fetched, and no fault is raised. Nested system calls from a handler are therefore not possible.

**Condition field:** If the condition is false, no trap is dispatched and status flags are preserved.

**Timing:** 6 cycles for the call plus a 6-cycle exception-unit dispatch slot.

**Privilege:** User-callable in protected mode and supervisor mode.


```
1 MOVI r1, #0x41 ; Character to print ('A')
2 EXCP #0x80 ; Trap to OS print routine
```

Example 16-2: Triggering a Software Exception

# WAIT
## Wait for Interrupt Meta-Instruction

**Applicability:** SIRC-1, all revisions; requires Coprocessor 1 (Exception Unit), a required coprocessor present in all SIRC-1 models.

**Assembles to:** `COPI #0x1900`. See Table 16.1 for the full family of legal forms.




**Instruction Fields:**

- **Register (bits 25–22):** reserved; the assembler emits `0x0`.
- **Immediate (bits 21–6):** fixed at `0x1900` (coprocessor 1, operation `0x9`, operand byte `0x00`).
- **AF (bits 5–4):** fixed at `00`.
- **Condition field (bits 3–0):** any of the 16 condition-code encodings in Table 7.5.

**Syntax:** `WAIT`
**Operands:** None.
**Operation:**

```
if condition_true then
    if protected_mode then
        raise privilege_violation_fault
    else
        stop instruction fetch
        wait until an enabled hardware interrupt is requested or the CPU is rese
    endif
endif
```

**Description:** Stops instruction fetch and places the CPU in a low-power wait state. The CPU issues no bus cycles while waiting. It leaves the wait state only when an enabled hardware interrupt is requested (NMI is always enabled) or when the CPU is reset. Interrupts masked by the hardware interrupt enable bits (`SR.E1`–`SR.E4`) do not wake the CPU, and faults and software exceptions cannot occur while waiting.

**Write-back:** Inherits **`COPI`** command dispatch to the exception unit.
**Flags:** Preserved by the coprocessor-call instruction.
**Exceptions:** Raises a privilege-violation fault if executed in protected mode.
**Condition field:** If the condition is false, the CPU does not enter wait state and status flags are preserved.
**Timing:** 6 cycles for the call plus a 6-cycle exception-unit dispatch slot.
**Privilege:** Supervisor mode only.

```
1 :idle_loop
2     WAIT ; Halt until an interrupt or reset occurs
3     BRAN @idle_loop ; Resume waiting if woken spuriously
```


Example 16-3: Idling Until an Interrupt

# RETE

## Return from Exception Meta-Instruction

**Applicability:** SIRC-1, all revisions; requires Coprocessor 1 (Exception Unit), a required coprocessor present in all SIRC-1 models.

**Assembles to:** `COPI #0x1A00`. See Table 16.1 for the full family of legal forms.




**Instruction Fields:**

- **Register (bits 25–22):** reserved; the assembler emits `0x0`.
- **Immediate (bits 21–6):** fixed at `0x1A00` (coprocessor 1, operation `0xA`, operand byte `0x00`).
- **AF (bits 5–4):** fixed at `00`.
- **Condition field (bits 3–0):** any of the 16 condition-code encodings in Table 7.5.

**Syntax:** `RETE`
**Operands:** None.
**Operation:**

```
if condition_true then
    if protected_mode then
        raise privilege_violation_fault
    else
        n = current_exception_level - 1
        pc = link[n].return_address
        sr = link[n].return_status
        current_exception_level = link[n].saved_level
    endif
endif
```

**Description:** Returns from an exception handler by restoring the saved program counter and status register. Executing **`RETE`** at exception level 0, that is, outside any exception or fault handler, is architecturally undefined.

**Write-back:** Inherits **`COPI`** command dispatch to the exception unit.
**Flags:** Restored by the exception unit as part of exception return.
**Exceptions:** Raises a privilege-violation fault if executed in protected mode.
**Condition field:** If the condition is false, no exception return occurs and current status flags are preserved.
**Timing:** 6 cycles for the call plus a 6-cycle exception-unit dispatch slot.
**Privilege:** Supervisor mode only.


```
1 :timer_handler
2     ; ... service the timer interrupt ...
3     RETE ; Return to the interrupted program
```

Example 16-4: Returning from an Interrupt Handler

# RSET
## System Reset Meta-Instruction

**Applicability:** SIRC-1, all revisions; requires Coprocessor 1 (Exception Unit), a required coprocessor present in all SIRC-1 models.

**Assembles to:** `COPI #0x1B00`. See Table 16.1 for the full family of legal forms.




**Instruction Fields:**

- **Register (bits 25–22):** reserved; the assembler emits `0x0`.
- **Immediate (bits 21–6):** fixed at `0x1B00` (coprocessor 1, operation `0xB`, operand byte `0x00`).
- **AF (bits 5–4):** fixed at `00`.
- **Condition field (bits 3–0):** any of the 16 condition-code encodings in Table 7.5.

**Syntax:** `RSET`
**Operands:** None.
**Operation:**

```
if condition_true then
    if protected_mode then
        raise privilege_violation_fault
    else
        assert reset output for 6 cycles
        sr = 0x0000
        pc = vector_table[reset_vector]
    endif
endif
```

**Description:** Requests a full processor reset. The reset output is asserted and held for 6 cycles, after which the exception unit fetches the reset vector, sets `sr` to `0x0000`, and loads the program counter from the vector. General-purpose registers, the `a`, `l`, and `s` pairs, and the exception link registers are not affected by reset and hold undefined values after power-on.

**Write-back:** Inherits **`COPI`** command dispatch to the exception unit.

**Flags:** Reset by the exception unit as part of reset processing.

**Exceptions:** Raises a privilege-violation fault if executed in protected mode.

**Condition field:** If the condition is false, no reset occurs and current status flags are preserved.

**Timing:** 6 cycles for the call, plus a 6-cycle `RSTO` hold, plus 6 cycles for the exception unit to fetch the reset vector – 18 cycles from the **`RSET`** fetch to the first instruction of the reset handler.

**Privilege:** Supervisor mode only.

```
; Request a full processor reset from supervisor code
RSET ; Reboots through the reset vector
```


Example 16-5: Requesting a Software Reset

# ETFR/ETTR

## Exception Link Transfer Meta-Instructions

**Applicability:** SIRC-1, all revisions; requires Coprocessor 1 (Exception Unit), a required coprocessor present in all SIRC-1 models.

**Assembles to:** `COPI #0x1Cxy` or `COPI #0x1Dxy`. See Table 16.1 for the full family of legal forms.

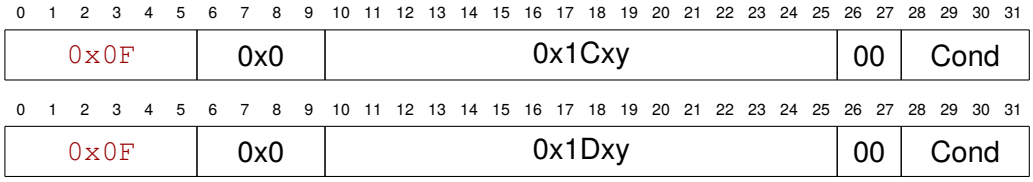


**Instruction Fields:**

- **Register (bits 25–22):** reserved; the assembler emits `0x0`.
- **Immediate (bits 21–6):** `0x1Cxy` (**ETFR**) or `0x1Dxy` (**ETTR**); bits 15–12 select coprocessor 1, bits 11–8 select operation `0xC` or `0xD`. Within the low operand byte `xy`: bits 7–6 are not decoded, bits 5–4 (`x`) select the register (`00` none, `01` saved address only, `10` saved status only, `11` both), and bits 3–0 (`y`) hold `#n`, the link-register index `0`–`7`.
- **AF (bits 5–4):** fixed at `00`.
- **Condition field (bits 3–0):** any of the 16 condition-code encodings in Table 7.5.

**Syntax:**

```
ETFR #n ; Transfer saved address and status to a and r7
ETFR a, #n ; Transfer saved address to a only
ETFR r7, #n ; Transfer saved status to r7 only
ETTR #n ; Transfer a and r7 to saved address and status
ETTR #n, a ; Transfer a to saved address only
ETTR #n, r7 ; Transfer r7 to saved status only
```

**Operands:** `#n` selects one of the eight exception link registers and must be in the range `#0`–`#7`. Link register `#7` holds fault metadata; link register $L - 1$ holds the state saved on entry to an exception at level $L$. Values above `#7` are architecturally undefined; the assembler currently masks `#n` to four bits without diagnosing the error. Optional operands select whether to transfer the saved return address, saved status register, or both.

**Operation:**

```
if condition_true then
    if protected_mode then
        raise privilege_violation_fault
    else if operation == ETFR then
        if x includes saved address then a = link[n].return_address
        if x includes saved status then r7 = link[n].return_status
    else
        if x includes saved address then link[n].return_address = a
        if x includes saved status then link[n].return_status = r7
    endif
endif
```

**Description:** **ETFR** copies saved exception state from an exception link register to CPU registers. **ETTR** copies CPU register state back to the selected exception link register before returning.

**Write-back:** **ETFR** writes selected saved state to `a`, `r7`, or both. **ETTR** writes `a`, `r7`, or both to selected saved exception state.

**Flags:** Preserved by the coprocessor-call instruction.

**Exceptions:** Raises a privilege-violation fault if executed in protected mode.

**Condition field:** If the condition is false, no transfer occurs and status flags are preserved.

**Timing:** 6 cycles for the call plus a 6-cycle exception-unit dispatch slot.

**Privilege:** Supervisor mode only.

```
:alignment_fault_handler
    ETFR a, #6 ; Get faulting return address
    MOVI al, #0x0100 ; Correct the address
    ETTR #6, a ; Write corrected address back
    RETE
```

Example 16-6: Correcting a Faulting Return Address

See Chapter 6 for detailed documentation of exception handling and all exception coprocessor instructions.

## 16.7 DMA Unit (Coprocessor 2)

The optional DMA unit provides bulk word transfers using the existing address register pairs and the general-purpose register file. It is intentionally simple: it has no descriptor table, hidden parameter registers, or autonomous background execution. When a DMA command is accepted, the processing unit stops fetching further instructions until the DMA command completes or faults. CPU models without the hardware raise an invalid-opcode fault for these commands, allowing supervisor software to fall back to ordinary **LOAD**/**STOR** loops.

DMA operations are supervisor-only because they perform memory access using supervisor-visible address state. In protected mode, they raise a privilege-violation fault before dispatch.

### 16.7.1 DMA Operations

| Mnemonic | Command | Count | Registers | Operation |
|---|---|---|---|---|
| **DMAR** | 0x2800 \| operand | `#-7`–`#7` | `a`/`l`/`s`, `r1`–`r7` | Read memory into registers |
| **DMAW** | 0x2900 \| operand | `#-7`–`#7` | `a`/`l`/`s`, `r1`–`r7` | Write registers to memory |
| **DMAT** | 0x2A00 \| n | 0–255 | `a`, `l`, `r1`–`r7` | Copy memory at `a` to memory at `l` |

Table 16.5: DMA Unit Operations

For **DMAR** and **DMAW**, the command operand byte is encoded as follows: bits 7–6 select the address register (`00` = `a`, `01` = `l`, `10` = `s`, `11` reserved), bit 5 selects direction (`0` = forward, `1` = backward), bits 2–0 hold the count magnitude, and bits 4–3 are reserved and written as zero. Negative counts are encoded as the backward direction bit plus the positive magnitude, not as a two's-complement count field. A zero count is encoded with the direction bit clear (forward). Note: this DMA operand field is not the AF address-register field; its `00`/`01` assignment differs from Table 8.6 in Chapter 8. For all DMA operations, a count of zero is a no-op: no memory access occurs, registers are preserved, and address registers are not advanced. CPU status flags are preserved. If the condition is false, no DMA command is dispatched, no coprocessor privilege or opcode checks are performed,

and the CSR, registers, memory, address registers, and status flags are preserved; the program counter still advances to the following instruction.
DMA timing assumes the command condition is true and every bus access is acknowledged without wait states. The **COPI** dispatch takes the normal 6 cycles; dispatch to the DMA unit then occupies one further complete 6-cycle slot beginning at the next phase 0, matching the coprocessor-1 dispatch model (see Table 16.2). For a zero count, that slot accepts the command, decodes the count, and resumes instruction fetch, and no further cycles are needed. For a non-zero count, the same slot performs the first no-wait DMA bus access. Each additional DMA read or write bus access then takes one further cycle in the no-wait case. Therefore **DMAR** and **DMAW** take $12 + \max(|n| - 1, 0)$ cycles, and **DMAT** takes $12 + \max(2n - 1, 0)$ cycles. A false condition skips the DMA command entirely and takes only the normal 6-cycle **COPI** instruction time.
Missing DMA hardware raises an invalid-opcode fault. Unsupported DMA operations and reserved operand encodings are architecturally undefined (see the Model and Revision Policy above). DMA memory reads and writes can raise data bus and bus-protection faults using DMA read/write bus access types. They can also raise segment-overflow faults, as described in Section 16.7.2. Partial side effects are possible if a fault occurs mid-transfer, and software must not assume that re-executing the same DMA instruction restarts the original operation; see each operation's **Fault side effects** entry below for what state a handler can rely on, and see Section 16.7.3 for what this means for a fault handler's recovery strategy.

### 16.7.2 Segment Overflow

DMA address arithmetic works on the low word of the selected address register only; the high word is never changed. The segment-overflow check is made at access time, one access at a time. It is never made up front for the whole transfer.

- **Each word access.** The address of every access is the register's low word plus the word's offset. If `SR.A` is set and forming that address would carry out of the low word (wrap past `0xFFFF`), a segment-overflow fault is raised at that access, before it is performed. Words already transferred stay transferred. If `SR.A` is clear, the low word wraps modulo $2^{16}$ and the transfer continues.
- **Negative counts.** The decrement of the address register is the address calculation for the first access. If it underflows with `SR.A` set, the fault is raised before the register is modified and before any word is transferred, so the register still holds its original value.
- **Address-register advance.** The advance at the end of a forward **DMAR** or **DMAW**, and after each completed **DMAT** chunk, is checked the same way. If it carries out of the low word with `SR.A` set, the fault is raised at that point, after the words have been transferred and with the register unchanged. A transfer that ends exactly at the top of the segment therefore faults on the advance even though every access was in range, as a post-increment **LOAD** does.
- **DMAT.** Reads use `a` and writes use `l`; an overflowing read access faults at the read and an overflowing write access faults at the write.

The fault metadata is captured as for any other segment-overflow fault, with the bus access type of the DMA access whose address overflowed (or, for the advance, of the last access performed).

### 16.7.3 Retrying After a Fault

Bus Fault, Bus Protection Fault, and Segment Overflow Fault are all classified *Retryable* (Chapter 6), and for an ordinary single-access instruction that classification means **RETE** safely re-executes the whole instruction from a clean, unstarted state. **DMAR**, **DMAW**, and **DMAT** are the only instructions in the SIRCIS instruction set whose execution spans more than one data-memory bus access, and for them this guarantee does not hold uniformly: simply returning with **RETE** after fixing the fault condition can re-run the instruction from the wrong starting point instead of from the beginning.

**Forward transfers (`DMAR`/`DMAW` with a positive count) are the one case where a bare `RETE` is safe.** The selected address register's advance is the last step of the operation and only runs once the whole transfer has completed, so a fault partway through leaves the address register exactly where it started. Retrying with **`RETE`** re-reads that unchanged value and redoes the entire transfer from the true beginning; some already-transferred words are transferred a second time, but the result is correct once the fault condition is fixed.

**Backward transfers (`DMAR`/`DMAW` with a negative count) are not safe to retry directly.** The address register is decremented to its final target address *before* the transfer loop begins. This is unlike pre-decrement addressing (Chapter 8), whose address-register update is only committed at write-back and so is undone by a fault; the DMA decrement is committed before the transfer loop begins, so by the time a fault can occur, the address register already holds the fully-decremented address, regardless of how many words actually transferred. A bare **`RETE`** re-reads that already-decremented value and decrements it a second time, landing the retried transfer on the wrong memory range entirely.

**`DMAT` is not safe to retry directly either, for a related reason.** `a` and `l` only advance once a complete chunk (up to seven words) has been both read and written, so a fault leaves them reflecting every fully-completed prior chunk – but the instruction's `#n` operand stays fixed at its original encoded value, not the remaining count. A bare **`RETE`** restarts from the already-advanced addresses and transfers the full original count again, overrunning the intended end of the transfer by the number of words in the chunks the first attempt fully completed.

**What a handler can and cannot recover.** Except for **`DMAT`**'s chunk boundary, the CPU exposes no transfer-progress counter: for **`DMAR`**/**`DMAW`**, the address register's fault-time value carries no information about how many of the `#n` words actually transferred, since it is either left untouched or already at its final position – never in between – and a partially-filled register range from **`DMAR`** cannot be distinguished from stale values left over from before the instruction ran. A fault handler cannot reconstruct a precise resume point for a backward **`DMAR`**/**`DMAW`**, or for the in-flight chunk of a faulted **`DMAT`**, from architectural state alone. In practice:

- For a positive-count **`DMAR`**/**`DMAW`**, correct the fault condition and return with **`RETE`** as for any other retryable fault – the address register is already untouched, so this naturally redoes the whole transfer.
- For a negative-count **`DMAR`**/**`DMAW`**, or for **`DMAT`**, do not return directly into the faulted instruction without first repairing its inputs. The instruction word itself is unchanged, so the simplest safe strategy is to restore the address register(s) to the values they held before the original attempt – values software must have saved independently, since the CPU will not hand them back – and only then return with **`RETE`**. This reruns the identical instruction from a clean state instead of resuming mid-transfer. Use **`ETFR`**/**`ETTR`** instead, to redirect the return address elsewhere, only once a retry budget is exhausted and the caller needs to be told the transfer failed.
- Treat a mid-transfer fault on a backward **`DMAR`**/**`DMAW`** as destructive to the original operand values: software that needs to recover precisely should keep its own record of the transfer's starting address and count before issuing the instruction, rather than relying on reconstructing it afterward.

Example 16-7 below wraps this pattern into a small, retryable block-copy routine. `l` is both **`DMAT`**'s destination register and the subroutine link register (Chapter 3; see also **`DMAT`**'s own Write-back field below), so the routine cannot take its destination address as an incoming `l` value the way an ordinary subroutine would. Instead, the caller passes the source address in `a`, unchanged, and the destination address in `r1` (high word) and `r2` (low word); on entry, the routine saves the return address that `l` holds to the stack before anything else touches `l`, loads `l` from the destination parameter, and restores the saved return address into `l` immediately before every **`RETS`**. It also saves the original transfer parameters on the stack before issuing **`DMAT`** (registers `r1`–`r7` are not

a safe place to keep them, since **DMAT** clobbers them as its own transfer window), and the fault handler installed at the Bus Fault, Bus Protection Fault, and Segment Overflow Fault vectors restores those parameters and retries in place, up to a fixed retry budget, before giving up. This handler assumes `dma_copy_safe` is the only DMA user in the system; a handler shared with other DMA callers would also need to check the faulting return address (**ETFR** `a`, `#6`) against the expected range before treating a fault as its own.

**Part 1: the copy routine.**

```
:dma_copy_safe
    STOR -(#0, s), lh ; save the caller's return address first,
    STOR -(#0, s), ll ; before l is repurposed as the destination
    MOVR lh, r1 ; destination high word (parameter)
    MOVR ll, r2 ; destination low word (parameter)

    STOR -(#0, s), ah ; save the original source/dest addresses
    STOR -(#0, s), al ; and the retry budget where DMAT can't
    STOR -(#0, s), lh ; touch them
    STOR -(#0, s), ll
    MOVI r1, #3 ; retry budget (3 attempts in total)
    STOR -(#0, s), r1

:dma_copy_attempt
    DMAT a, l, #16 ; may fault partway through
    ADDI sl, #5 ; success: discard the retry-loop state
    LOAD ll, (#0, s) ; restore the caller's return address
    LOAD lh, (#1, s)
    ADDI sl, #2
    RETS
```

**Part 2: the fault handler**, installed at the Bus Fault, Bus Protection Fault, and Segment Overflow Fault vectors.

```
:dma_fault_handler
    ETFR r7, #7 ; r7 = fault metadata
    MOVR r6, r7 ; copy it -- ANDI below would destroy r7
    ANDI r6, #0x0007 ; isolate the bus-access-type field
    CMPI r6, #0x0005 ; BAT = 0x5 (DMA read burst)?
    BRAN|== @dma_fault_is_dma
    CMPI r6, #0x0006 ; BAT = 0x6 (DMA write burst)?
    BRAN|!= @dma_fault_not_dma ; neither -- not this handler's fault

:dma_fault_is_dma
    LOAD r1, (#0, s) ; retry budget
    SUBI r1, #1
    STOR (#0, s), r1
    BRAN|== @dma_copy_give_up ; out of retries

    LOAD ll, (#1, s) ; restore the original addresses -- a/l
    LOAD lh, (#2, s) ; may already be wrong, for example
    LOAD al, (#3, s) ; double-decremented by a backward transfer
    LOAD ah, (#4, s)
    RETE ; retry dma_copy_attempt from a clean state

:dma_copy_give_up
    ADDI sl, #5 ; discard the retry-loop state
    ETFR a, #6 ; get the faulting return address
    MOVI al, @dma_copy_failed ; redirect past the retry loop
    ETTR #6, a
    RETE

:dma_fault_not_dma
    ; ... handling for faults unrelated to this transfer ...


:dma_copy_failed
    ; ... signal failure to the caller; left to the calling convention
    ; in use ...
    LOAD ll, (#0, s) ; restore the caller's return address
    LOAD lh, (#1, s)
    ADDI sl, #2
    RETS
```

Example 16-7: A Retry-Safe DMA Copy Routine

# DMAR
## DMA Read To Registers Meta-Instruction

**Applicability:** SIRC-1, all revisions; requires Coprocessor 2 (DMA Unit), an optional coprocessor absent on models that do not implement it.

**Assembles to:** `COPI #0x2800 | operand`. See Table 16.1 for the full family of legal forms.




**Instruction Fields:**

- **Register (bits 25–22):** reserved; the assembler emits `0x0`.
- **Immediate (bits 21–6):** `0x2800 |` operand; bits 15–12 select coprocessor 2 and bits 11–8 select operation `0x8`. Within the low operand byte: bits 7–6 select the address register (`00` = `a`, `01` = `l`, `10` = `s`, `11` reserved – this is not the AF address-register encoding), bit 5 selects direction (`0` forward, `1` backward), bits 4–3 are reserved and written as zero, and bits 2–0 hold the count magnitude, `0`–`7`.
- **AF (bits 5–4):** fixed at `00`.
- **Condition field (bits 3–0):** any of the 16 condition-code encodings in Table 7.5.

**Syntax:** `DMAR addr, #n`

**Operands:** `addr` must be `a`, `l`, or `s`. `#n` is a literal count operand in the range `#-7`–`#7`; the assembler rejects a literal outside that range.

**Operation:**

```
count = abs(n)
if n < 0:
    addr.low = addr.low - count
transfer = addr
for i in 1..count:
    r[i] = memory[transfer]
    transfer.low = transfer.low + 1
if n > 0:
    addr.low = addr.low + count
```

**Description:** Reads sequential words from the selected address register into `r1` through `rn`. Positive counts read from the current address and advance it. Negative counts first move the address register backward by the count magnitude, then read the ascending memory block from that new address.

**Write-back:** A successful positive-count **`DMAR`** advances the selected address register by the count magnitude. A successful negative-count **`DMAR`** leaves the selected address register at its decremented start address. Address-register high words are not changed by the transfer increments or decrements. Writes `r1` through `rn`.

**Flags:** Preserved.

**Exceptions:** Missing DMA hardware raises an invalid-opcode fault. The count field is 3 bits wide and every bit pattern (`0`–`7`) is a legal magnitude, so there is no invalid encoding for it to reject; the assembler's own `#-7`–`#7` range check exists only to keep source syntax honest, not to guard against an otherwise-representable illegal value. Unsupported DMA operations and reserved operand encodings are architecturally undefined (see the Model and Revision Policy in Section 16.4.1). In protected mode, raises a privilege-violation fault. DMA reads can raise data bus, bus-protection, and segment-overflow faults (see Section 16.7.2).

**Fault side effects:** If a fault occurs mid-transfer, only the registers among `r1` through `rn` read before the fault contain memory data; the rest are unmodified. The selected address register's state depends on direction, per the operation above: for a positive count, the address-register advance is the last step of the operation and does not run until the whole transfer completes, so a fault leaves it at its original, pre-transfer value no matter how many words were read. For a negative count, the address register is decremented to its final position *before* the transfer loop begins, so it already reflects the full decrement even if the fault occurs on the very first word (unless the decrement itself underflowed, which faults before the register is modified). Software must not assume the full requested count completed in either case. See Section 16.7.3 for what a handler can safely do about it.

**Condition field:** If the condition is false, no DMA command is dispatched and registers, memory, address registers, and status flags are preserved; the program counter still advances to the following instruction.

**Timing:** $12 + \max(|n| - 1, 0)$ cycles when the command condition is true and the DMA read cycles are acknowledged without wait states. The $n = 0$ no-op form and one-word transfer forms take 12 cycles. Wait states add to the relevant DMA read bus cycle. If the condition is false, the DMA command is not dispatched and the instruction takes 6 cycles.

**Privilege:** Supervisor mode only.

```
1 MOVI ah, #0x0040
2 MOVI al, #0x0000 ; a = 0x00400000, start of source block
3 DMAR a, #3 ; r1, r2, r3 = memory[a], memory[a+1], memory[a+2]; a += 3
```


Example 16-8: Reading a Memory Block into Registers

# DMAW

## DMA Write From Registers Meta-Instruction

**Applicability:** SIRC-1, all revisions; requires Coprocessor 2 (DMA Unit), an optional coprocessor absent on models that do not implement it.

**Assembles to:** `COPI #0x2900 | operand`. See Table 16.1 for the full family of legal forms.




**Instruction Fields:**

- **Register (bits 25–22):** reserved; the assembler emits `0x0`.
- **Immediate (bits 21–6):** `0x2900 |` operand; bits 15–12 select coprocessor 2 and bits 11–8 select operation `0x9`. Within the low operand byte: bits 7–6 select the address register (`00` = `a`, `01` = `l`, `10` = `s`, `11` reserved – this is not the AF address-register encoding), bit 5 selects direction (`0` forward, `1` backward), bits 4–3 are reserved and written as zero, and bits 2–0 hold the count magnitude, `0`–`7`.
- **AF (bits 5–4):** fixed at `00`.
- **Condition field (bits 3–0):** any of the 16 condition-code encodings in Table 7.5.

**Syntax:** `DMAW addr, #n`

**Operands:** `addr` must be `a`, `l`, or `s`. `#n` is a literal count operand in the range `#-7`–`#7`; the assembler rejects a literal outside that range.

**Operation:**

```
count = abs(n)
if n < 0:
    addr.low = addr.low - count
transfer = addr
for i in 1..count:
    memory[transfer] = r[i]
    transfer.low = transfer.low + 1
if n > 0:
    addr.low = addr.low + count
```

**Description:** Writes `r1` through `rn` to sequential words at the selected address register. Positive counts write from the current address and advance it. Negative counts first move the address register backward by the count magnitude, then write the ascending memory block from that new address. Register order always corresponds to ascending memory addresses, so `DMAW s, #-n` followed by `DMAR s, #n` restores `r1` through `rn`.

**Write-back:** A successful positive-count **`DMAW`** advances the selected address register by the count magnitude. A successful negative-count **`DMAW`** leaves the selected address register at its decremented start address. Address-register high words are not changed by the transfer increments or decrements. General-purpose registers are preserved; **`DMAW`** only reads them.

**Flags:** Preserved.

**Exceptions:** Missing DMA hardware raises an invalid-opcode fault. The count field is 3 bits wide and every bit pattern (`0`–`7`) is a legal magnitude, so there is no invalid encoding for it to reject; the assembler's own `#-7`–`#7` range check exists only to keep source syntax honest, not to guard against an otherwise-representable illegal value. Unsupported DMA operations and reserved operand encodings are architecturally undefined (see the Model and Revision Policy in Section 16.4.1). In

protected mode, raises a privilege-violation fault. DMA writes can raise data bus, bus-protection, and segment-overflow faults (see Section 16.7.2).

**Fault side effects:** If a fault occurs mid-transfer, only the memory words written before the fault reflect the source registers; the rest of the destination range is unchanged. The selected address register's state depends on direction, per the operation above: for a positive count, the address-register advance is the last step of the operation and does not run until the whole transfer completes, so a fault leaves it at its original, pre-transfer value no matter how many words were written. For a negative count, the address register is decremented to its final position *before* the transfer loop begins, so it already reflects the full decrement even if the fault occurs on the very first word (unless the decrement itself underflowed, which faults before the register is modified). Software must not assume the full requested count completed in either case. See Section 16.7.3 for what a handler can safely do about it.

**Condition field:** If the condition is false, no DMA command is dispatched and registers, memory, address registers, and status flags are preserved; the program counter still advances to the following instruction.

**Timing:** $12 + \max(|n| - 1, 0)$ cycles when the command condition is true and the DMA write cycles are acknowledged without wait states. The $n = 0$ no-op form and one-word transfer forms take 12 cycles. Wait states add to the relevant DMA write bus cycle. If the condition is false, the DMA command is not dispatched and the instruction takes 6 cycles.

**Privilege:** Supervisor mode only.

```
1 MOVI ah, #0x0040
2 MOVI al, #0x0000 ; a = 0x00400000, start of destination block
3 DMAW a, #3 ; memory[a], memory[a+1], memory[a+2] = r1, r2, r3; a += 3
```


Example 16-9: Writing Registers to a Memory Block

# DMAT

## DMA Memory Transfer Meta-Instruction

**Applicability:** SIRC-1, all revisions; requires Coprocessor 2 (DMA Unit), an optional coprocessor absent on models that do not implement it.

**Assembles to:** `COPI #0x2A00 | n`. See Table 16.1 for the full family of legal forms.




**Instruction Fields:**

- **Register (bits 25–22):** reserved; the assembler emits `0x0`.
- **Immediate (bits 21–6):** `0x2A00 | #n`; bits 15–12 select coprocessor 2, bits 11–8 select operation `0xA`, and bits 7–0 hold `#n`, `0–255`.
- **AF (bits 5–4):** fixed at `00`.
- **Condition field (bits 3–0):** any of the 16 condition-code encodings in Table 7.5.

**Syntax:** `DMAT a, l, #n`

**Operands:** The source and destination address registers must be written explicitly as `a` and `l`. `#n` is an 8-bit literal count operand in the range 0–255. A count of zero is a no-op.

**Operation:**

```
while remaining > 0:
    chunk = min(remaining, 7)
    read chunk words from memory[a] into r1..r[chunk]
    write chunk words from r1..r[chunk] to memory[l]
    a.low = a.low + chunk
    l.low = l.low + chunk
    remaining = remaining - chunk
```

**Description:** Copies sequential words from the address in `a` to the address in `l`, using `r1–r7` as an internal transfer window in chunks of up to seven words.

**Write-back:** A successful non-zero **`DMAT`** advances `a` and `l` by the number of words transferred. Address-register high words are not changed by the transfer increments. `r1–r7` are clobbered; after completion they contain the final transfer window. Because `l` is also the subroutine link register (Chapter 3), a subroutine that issues **`DMAT`** must save and restore its return address around the transfer.

**Flags:** Preserved.

**Exceptions:** Missing DMA hardware raises an invalid-opcode fault. Unsupported DMA operations and reserved operand encodings are architecturally undefined (see the Model and Revision Policy in Section 16.4.1). In protected mode, raises a privilege-violation fault. DMA reads and writes can raise data bus, bus-protection, and segment-overflow faults (see Section 16.7.2).

**Fault side effects:** `a` and `l` only advance once a full chunk (up to seven words) has both been read and written successfully, so a fault leaves both address registers at the last fully completed chunk boundary, not at the exact word. Within the chunk where the fault occurs, the state of `r1–r7` depends on which half of the chunk failed: a fault during the chunk's memory reads can leave them holding a mix of this chunk's already-read words and the previous chunk's stale contents for the words not yet read; a fault during the chunk's memory writes (after its reads all succeeded) means `r1–r7` fully reflect the current chunk, but the destination range may be only partially written for it. Software must not assume the full requested count completed, and cannot use `r1–r7` alone to

identify which words within the current chunk were actually transferred. See Section 16.7.3 for what a handler can safely do about it.

**Condition field:** If the condition is false, no DMA command is dispatched and registers, memory, address registers, and status flags are preserved; the program counter still advances to the following instruction.

**Timing:** $12 + \max(2n - 1, 0)$ cycles when the command condition is true and all DMA read and write cycles are acknowledged without wait states. The $n = 0$ no-op form takes 12 cycles, and a one-word memory transfer takes 13 cycles. Wait states add to the relevant DMA read or write bus cycle. Instruction fetch resumes only after the DMA operation completes or faults. If the condition is false, the DMA command is not dispatched and the instruction takes 6 cycles.

**Privilege:** Supervisor mode only.

**Overlap:** Overlapping source and destination ranges are architecturally undefined unless the source and destination addresses are identical.

**Notes:**

- **DMAT**'s `#n` is fixed at assembly time; it has no register-operand form. SIRC-1 meta-instructions are always aliases for exactly one real instruction, so a runtime-variable count cannot be a **DMAT** form without turning it into a multi-instruction expansion, which would make its instruction count vary with its operand, unlike every other meta-instruction.

- A transfer whose length is only known at runtime is still possible, just not as a single mnemonic: build the command word in a register and dispatch it directly with the general **COPR** instruction instead of **DMAT**, for example:

```
ANDI[N] rS, #0x00FF ; keep only the low byte (the count)
ORRI[N] rS, #0x2A00 ; combine with DMAT's own fixed header
COPR rS ; dispatch -- identical to DMAT from here
```

  The `[N]` suffix keeps these two setup steps from disturbing the status flags, matching **DMAT**'s own "Flags: Preserved" above. This is ordinary use of the already-documented **COPR** instruction (see the **COPI**/**COPR** entry above), not a distinct form of **DMAT**. Once dispatched, it behaves exactly like **DMAT** – including this entry's Fault side effects above – since the DMA unit cannot tell whether a command arrived via **COPI** or **COPR**.

```
MOVI ah, #0x0040
MOVI al, #0x0000 ; a = 0x00400000, source block
MOVI lh, #0x0050
MOVI ll, #0x0000 ; l = 0x00500000, destination block
DMAT a, l, #16 ; Copy 16 words from memory[a] to memory[l]
```

Example 16-10: Copying a Memory Block with DMAT

## 16.8 Integer Maths Unit (Coprocessor 3)

The optional integer maths unit provides a stable multiply/divide convention. CPU models without the hardware raise an invalid-opcode fault for these commands, allowing supervisor software to emulate the operation and return as if the coprocessor call had completed.

Reference source listings for software emulation routines are supplied with the SIRC-1 distribution media. Those listings are examples of a supervisor compatibility handler, not additional instruction encodings.

### 16.8.1 Maths Operations

| Mnemonic | Command | Inputs | Outputs | Operation |
|---|---|---|---|---|
| **MULU** | 0x3000 | r1, r2 | r1:r2, r3 | Unsigned 16 x 16 -> 32 multiply |
| **MULS** | 0x3100 | r1, r2 | r1:r2, r3 | Signed 16 x 16 -> 32 multiply |
| **DIVU** | 0x3200 | r1:r2, r3 | r1, r2, r3 | Unsigned divide |
| **DIVS** | 0x3300 | r1:r2, r3 | r1, r2, r3 | Signed divide |

Table 16.6: Integer Maths Unit Operations

| Bit | Name | Meaning |
|---|---|---|
| 0 | E | Any maths error |
| 1 | DZ | Divide by zero |
| 2 | OV | Quotient overflow |
| 3–15 | Reserved | Written as zero, ignore read |

Table 16.7: Maths Status Word in r3


Integer maths operations preserve CPU status flags. Missing maths hardware raises an invalid-opcode fault. Unsupported maths operations are architecturally undefined (see the Model and Revision Policy, Section 16.4.1). Divide by zero and quotient overflow are reported in r3, not as arithmetic exceptions. If the condition is false, no maths command is dispatched, no coprocessor opcode check is performed, and registers and status flags are preserved.

# MULU/MULS

## Integer Multiply Meta-Instructions

**Applicability:** SIRC-1, all revisions; requires Coprocessor 3 (Integer Maths Unit), an optional coprocessor absent on models that do not implement it.

**Assembles to:** `COPI #0x3000` or `COPI #0x3100`. See Table 16.1 for the full family of legal forms.

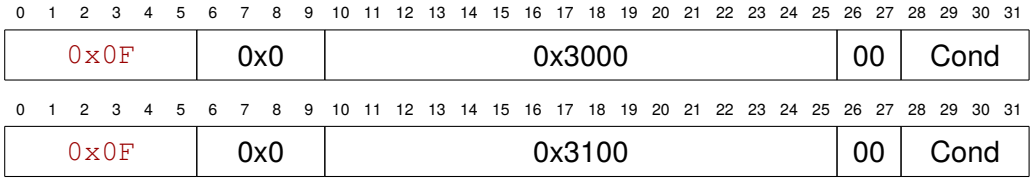


**Instruction Fields:**

- **Register (bits 25–22):** reserved; the assembler emits `0x0`.
- **Immediate (bits 21–6):** fixed at `0x3000` (**MULU**) or `0x3100` (**MULS**); bits 15–12 select coprocessor 3, bits 11–8 select the operation, and bits 7–0 are unused and written as zero.
- **AF (bits 5–4):** fixed at `00`.
- **Condition field (bits 3–0):** any of the 16 condition-code encodings in Table 7.5.

**Syntax:**

```
1 MULU ; Unsigned multiply
2 MULS ; Signed multiply
```

**Operands:** None in assembly syntax. The operations multiply `r1` by `r2`.

**Operation:**

```
MULU:
    product = unsigned(r1) * unsigned(r2)
    r1 = product[31:16]
    r2 = product[15:0]
    r3 = 0

MULS:
    product = signed(r1) * signed(r2)
    r1 = product[31:16]
    r2 = product[15:0]
    r3 = 0
```

**Description:** Multiplies two 16-bit operands and writes the 32-bit product to `r1`:`r2`, high word first. **MULU** treats both inputs as unsigned. **MULS** treats both inputs as two's-complement signed values.

**Write-back:** Writes `r1`, `r2`, and `r3`.

**Flags:** CPU status flags are preserved. `r3` is written as zero.

**Exceptions:** Missing maths hardware raises an invalid-opcode fault. An unsupported multiply operation on a maths coprocessor that is present is architecturally undefined (see the Model and Revision Policy, Section 16.4.1). These operations perform no data-memory bus access.

**Condition field:** If the condition is false, no maths command is dispatched and registers and status flags are preserved.

**Timing:** The **COPI** command dispatch uses the normal 6 execution phases. Hardware maths operations may take additional implementation-defined cycles before instruction fetch resumes.

**Privilege:** User-callable in protected mode and supervisor mode.

```
1 MOVI r1, #1000 ; Multiplicand
2 MOVI r2, #2000 ; Multiplier
3 MULU ; r1:r2 = 1000 * 2000, r3 = 0
```


Example 16-11: Unsigned 16x16 Multiply

# DIVU/DIVS

## Integer Divide Meta-Instructions

**Applicability:** SIRC-1, all revisions; requires Coprocessor 3 (Integer Maths Unit), an optional coprocessor absent on models that do not implement it.

**Assembles to:** `COPI #0x3200` or `COPI #0x3300`. See Table 16.1 for the full family of legal forms.

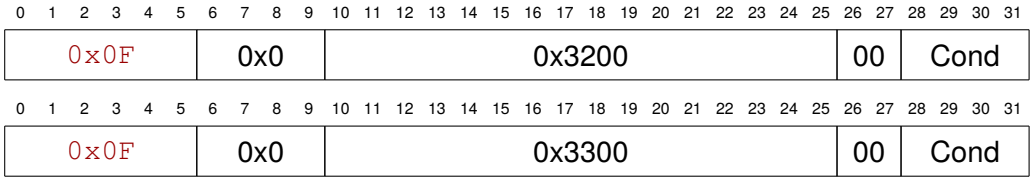


**Instruction Fields:**

- **Register (bits 25–22):** reserved; the assembler emits `0x0`.
- **Immediate (bits 21–6):** fixed at `0x3200` (**DIVU**) or `0x3300` (**DIVS**); bits 15–12 select coprocessor 3, bits 11–8 select the operation, and bits 7–0 are unused and written as zero.
- **AF (bits 5–4):** fixed at `00`.
- **Condition field (bits 3–0):** any of the 16 condition-code encodings in Table 7.5.

**Syntax:**

```
DIVU ; Unsigned divide
DIVS ; Signed divide
```

**Operands:** None in assembly syntax. The dividend is `r1:r2`, high word first. The divisor is `r3`.

**Operation:**

```
if divisor is zero:
    r3 = E | DZ
else if quotient does not fit in 16 bits:
    r3 = E | OV
else:
    r1 = remainder
    r2 = quotient
    r3 = 0
```

**Description:** Divides a 32-bit dividend by a 16-bit divisor. Successful division writes the remainder to `r1`, the quotient to `r2`, and zero to `r3`.

**Write-back:** Successful division writes `r1`, `r2`, and `r3`. Divide-by-zero and quotient-overflow cases leave `r1:r2` unchanged and write the maths status word to `r3`.

**Flags:** CPU status flags are preserved. Maths errors are reported through `r3`, not through `sr`.

**Exceptions:** Missing maths hardware raises an invalid-opcode fault. An unsupported divide operation on a maths coprocessor that is present is architecturally undefined (see the Model and Revision Policy, Section 16.4.1). Divide by zero and quotient overflow do not raise arithmetic exceptions. These operations perform no data-memory bus access.

**Condition field:** If the condition is false, no maths command is dispatched and registers and status flags are preserved.

**Timing:** The **COPI** command dispatch uses the normal 6 execution phases. Hardware maths operations may take additional implementation-defined cycles before instruction fetch resumes. Software emulation timing is defined by the invalid-opcode handler.

**Privilege:** User-callable in protected mode and supervisor mode.

**Signed division:** **`DIVS`** treats `r1:r2` as a 32-bit two's-complement dividend and `r3` as a 16-bit two's-complement divisor. The quotient is truncated toward zero and the remainder has the sign of the dividend. The case `-2147483648 / -1` is quotient overflow.

```
MOVI r1, #0 ; High word of dividend
MOVI r2, #100 ; Low word of dividend
MOVI r3, #7 ; Divisor
DIVU ; r1 = remainder, r2 = quotient, r3 = 0 on success
```

Example 16-12: Unsigned Divide

CHAPTER 17

# Meta-Instructions

## 17.1 Overview


Meta-instructions are assembly mnemonics that lower to ordinary SIRCIS instruction encodings. They exist to make common operations easier to read and write; they do not introduce additional CPU opcodes. Every meta-instruction is an alias for exactly one real instruction encoding, never a sequence of several: this keeps a program's instruction count, and therefore its timing, predictable directly from its source, without needing to know which mnemonics are "real" and which secretly expand to more than one. An operation that cannot be expressed as a single instruction (for example, a runtime-variable operand where the underlying encoding only has room for a compile-time immediate) is documented as an explicit multi-instruction technique where it comes up, not given its own meta-instruction mnemonic.

| Meta-Instruction | Primary Documentation | Lowers To |
|---|---|---|
| `NOOP` | Chapter 17 | `ADDI[N] r1, #0` |
| `SHFT` | Chapter 13 | `ORRI[S]` |
| `BRAN` | Chapter 15 | `LDEA p, ...` |
| `BRSR` | Chapter 15 | `LDEL p, ...` |
| `LJMP` | Chapter 15 | `LDEA p, ...` |
| `LJSR` | Chapter 15 | `LDEL p, ...` |
| `RETS` | Chapter 15 | `LDEA p, (#0, l)` |
| `EXCP` | Chapter 16 | `COPI` |
| `WAIT` | Chapter 16 | `COPI #0x1900` |
| `RETE` | Chapter 16 | `COPI #0x1A00` |
| `RSET` | Chapter 16 | `COPI #0x1B00` |
| `ETFR` | Chapter 16 | `COPI #0x1Cxy` |
| `ETTR` | Chapter 16 | `COPI #0x1Dxy` |
| `DMAR` | Chapter 16 | `COPI #0x28xx` |
| `DMAW` | Chapter 16 | `COPI #0x29xx` |
| `DMAT` | Chapter 16 | `COPI #0x2Ann` |
| `MULU` | Chapter 16 | `COPI #0x3000` |
| `MULS` | Chapter 16 | `COPI #0x3100` |
| `DIVU` | Chapter 16 | `COPI #0x3200` |
| `DIVS` | Chapter 16 | `COPI #0x3300` |

Table 17.1: Meta-Instruction Cross-Reference

# NOOP
## No Operation

**Applicability:** SIRC-1, all revisions
**Assembles to:** `ADDI[N] r1, #0`. See Table 13.1 for the full family of legal forms.




**Instruction Fields:**

- **Register (bits 25–22):** fixed at `0x0` (`r1`).
- **Immediate (bits 21–6):** fixed at `#0`.
- **AF (bits 5–4):** fixed at `00` (status register not updated).
- **Condition field (bits 3–0):** any of the 16 condition-code encodings in Table 7.5.

**Syntax:** `NOOP`
**Operands:** None.
**Operation:** Executes an add-immediate-zero instruction whose destination is `r1`: `r1` is rewritten with its own value plus zero, so no architectural state changes occur. Because the status-register update source is `None`, no condition flags are written. Register field `0x0` is deliberately assigned to `r1`, an ordinary unprivileged register (see Chapter 3), so this instruction is unprivileged and an all-zero instruction word (as read from erased or uninitialized memory) always executes safely as a no-op, in both protected and supervisor mode.
**Description:** Does nothing for 6 cycles. Useful for timing delays, instruction padding, or placeholders during development.
**Write-back:** No architectural state changes.
**Flags:** Preserved.
**Exceptions:** Inherits **`ADDI[N]`** exception behavior. It does not access data memory and raises no instruction-specific faults; instruction-fetch faults can still occur before it executes, and trace faults can still occur after it commits.
**Condition field:** If the condition is false, no state changes occur. Conditional **`NOOP`** is allowed but normally not useful.
**Timing:** Same as **`ADDI`**: 6 cycles, plus instruction-fetch wait states.
**Privilege:** Available in protected mode and supervisor mode.

```
1 ; Wait 18 cycles (6 cycles per NOOP)
2 NOOP
3 NOOP
4 NOOP
```

Example 17-1: Timing Delay with NOOP

CHAPTER A

# Opcode Map

## A.1 Complete Opcode Reference

This appendix provides a complete map of all 64 possible opcodes in the SIRCIS instruction set.

Table A.1: Complete SIRCIS Opcode Map

| Hex | Binary | Mnemonic | Description |
|---|---|---|---|
| | | | **ALU Immediate (0x00–0x0F)** |
| 0x00 | 000000 | ADDI | Add Immediate |
| 0x01 | 000001 | ADCI | Add with Carry Immediate |
| 0x02 | 000010 | SUBI | Subtract Immediate |
| 0x03 | 000011 | SBCI | Subtract with Carry Immediate |
| 0x04 | 000100 | ANDI | AND Immediate |
| 0x05 | 000101 | ORRI | OR Immediate |
| 0x06 | 000110 | XORI | XOR Immediate |
| 0x07 | 000111 | MOVI | Move Immediate |
| 0x08 | 001000 | CMNI | Compare Negative Immediate |
| 0x09 | 001001 | CNCI | Compare Negative with Carry Immediate |
| 0x0A | 001010 | CMPI | Compare Immediate |
| 0x0B | 001011 | CPCI | Compare with Carry Immediate |
| 0x0C | 001100 | TSAI | Test AND Immediate |
| 0x0D | 001101 | TSOI | Test OR Immediate |
| 0x0E | 001110 | TSXI | Test XOR Immediate |
| 0x0F | 001111 | COPI | Coprocessor Immediate |
| | | | **Memory and Control (0x10–0x1F)** |
| 0x10 | 010000 | STOR | Store Indirect Immediate |
| 0x11 | 010001 | STOR | Store Indirect Register |
| 0x12 | 010010 | STOR | Store Pre-Decrement Immediate |
| 0x13 | 010011 | STOR | Store Pre-Decrement Register |
| 0x14 | 010100 | LOAD | Load Indirect Immediate |
| 0x15 | 010101 | LOAD | Load Indirect Register |
| 0x16 | 010110 | LOAD | Load Post-Increment Immediate |
| 0x17 | 010111 | LOAD | Load Post-Increment Register |
| 0x18 | 011000 | LDEA | Load Effective Address Immediate |
| 0x19 | 011001 | LDEA | Load Effective Address Register |
| 0x1A | 011010 | LDEA | Load Effective Address Pre-Decrement Immediate |
| 0x1B | 011011 | LDEA | Load Effective Address Pre-Decrement Register |
| 0x1C | 011100 | LDEL | Load Effective Address and Link Immediate |
| 0x1D | 011101 | LDEL | Load Effective Address and Link Register |
| 0x1E | 011110 | LDEL | Load Effective Address and Link Post-Increment Immediate |
| 0x1F | 011111 | LDEL | Load Effective Address and Link Post-Increment Register |
| | | | **ALU Short Immediate (0x20–0x2F)** |
| 0x20 | 100000 | ADDI | Add Short Immediate |

*continued on next page*

*Table A.1 (continued)*

| Hex | Binary | Mnemonic | Description |
|---|---|---|---|
| 0x21 | 100001 | ADCI | Add with Carry Short Immediate |
| 0x22 | 100010 | SUBI | Subtract Short Immediate |
| 0x23 | 100011 | SBCI | Subtract with Carry Short Immediate |
| 0x24 | 100100 | ANDI | AND Short Immediate |
| 0x25 | 100101 | ORRI | OR Short Immediate |
| 0x26 | 100110 | XORI | XOR Short Immediate |
| 0x27 | 100111 | – | Undocumented (MOVI-like) |
| 0x28 | 101000 | CMNI | Compare Negative Short Immediate |
| 0x29 | 101001 | CNCI | Compare Negative with Carry Short Immediate |
| 0x2A | 101010 | CMPI | Compare Short Immediate |
| 0x2B | 101011 | CPCI | Compare with Carry Short Immediate |
| 0x2C | 101100 | TSAI | Test AND Short Immediate |
| 0x2D | 101101 | TSOI | Test OR Short Immediate |
| 0x2E | 101110 | TSXI | Test XOR Short Immediate |
| 0x2F | 101111 | – | Undocumented (COP-like) |
| | | **ALU Register (0x30–0x3F)** | |
| 0x30 | 110000 | ADDR | Add Register |
| 0x31 | 110001 | ADCR | Add with Carry Register |
| 0x32 | 110010 | SUBR | Subtract Register |
| 0x33 | 110011 | SBCR | Subtract with Carry Register |
| 0x34 | 110100 | ANDR | AND Register |
| 0x35 | 110101 | ORRR | OR Register |
| 0x36 | 110110 | XORR | XOR Register |
| 0x37 | 110111 | MOVR | Move Register |
| 0x38 | 111000 | CMNR | Compare Negative Register |
| 0x39 | 111001 | CNCR | Compare Negative with Carry Register |
| 0x3A | 111010 | CMPR | Compare Register |
| 0x3B | 111011 | CPCR | Compare with Carry Register |
| 0x3C | 111100 | TSAR | Test AND Register |
| 0x3D | 111101 | TSOR | Test OR Register |
| 0x3E | 111110 | TSXR | Test XOR Register |
| 0x3F | 111111 | COPR | Coprocessor Register |

## A.2 Opcode Patterns

### A.2.1 Format Identification

Bit numbers in this section refer to the 6-bit opcode value (instruction bits 31–26), not to the instruction word.

- Opcode bits 5–4 = 00: Immediate format (0x00–0x0F)
- Opcode bits 5–4 = 01: Memory and control operations (0x10–0x1F). Format is selected by opcode bit 0: even opcodes use Immediate format, odd opcodes use Register format.
- Opcode bits 5–4 = 10: Short Immediate with Shift (0x20–0x2F)
- Opcode bits 5–4 = 11: Register format (0x30–0x3F)

### A.2.2 Save vs. Test

- Bit 3 = 0 and low nibble 0–6: save result (0x00–0x06, 0x20–0x26, 0x30–0x36)
- Bit 3 = 1 and low nibble 8–E: test only, discard result (0x08–0x0E, 0x28–0x2E, 0x38–0x3E)
- Low nibble F is the coprocessor call (0x0F, 0x3F), not a test form
- Low nibble 7 is **MOVI**/**MOVR** (0x07, 0x37)
- 0x27 and 0x2F are undocumented

### A.2.3 Memory Operations Decoding

For opcodes `0x10`–`0x1F`, bits encode memory operation type:

- Bit 4 = 1: Always set for memory/control section
- Bits 3–2: Operation type
  - 00 = Store
  - 01 = Load
  - 10 = Load Effective Address
  - 11 = Load EA with Link (jump to subroutine)
- Bit 1: Auto-update of the source address register (0 = no update, 1 = pre-decrement for STOR/LDEA, post-increment for LOAD/LDEL). Only the low word of the pair is adjusted, and always by one word regardless of the displacement.
- Bit 0: Immediate (0) or Register (1) offset

## A.3 Undocumented Instructions

Two opcodes are undocumented and have no public assembly syntax: `0x27` and `0x2F`, both in the Short Immediate group. Do not use them in production code. See Appendix C for the behavior of both.

## A.4 Quick Lookup Table

| Operation | Immediate | Short+Shift | Register |
|---|---|---|---|
| ADD | `0x00` | `0x20` | `0x30` |
| ADC | `0x01` | `0x21` | `0x31` |
| SUB | `0x02` | `0x22` | `0x32` |
| SBC | `0x03` | `0x23` | `0x33` |
| AND | `0x04` | `0x24` | `0x34` |
| ORR | `0x05` | `0x25` | `0x35` |
| XOR | `0x06` | `0x26` | `0x36` |
| MOV | `0x07` | `0x27`* | `0x37` |
| CMN | `0x08` | `0x28` | `0x38` |
| CNC | `0x09` | `0x29` | `0x39` |
| CMP | `0x0A` | `0x2A` | `0x3A` |
| CPC | `0x0B` | `0x2B` | `0x3B` |
| TSA | `0x0C` | `0x2C` | `0x3C` |
| TSO | `0x0D` | `0x2D` | `0x3D` |
| TSX | `0x0E` | `0x2E` | `0x3E` |
| COP | `0x0F` | `0x2F`* | `0x3F` |

Table A.2: Instruction Variant Quick Reference

* These opcodes have no public assembly syntax and are undocumented.

CHAPTER B

# Instruction Timing

## B.1 Overview

Most SIRCIS instructions follow the six-stage execution phase model and complete in 6 clock cycles when no bus wait states are required. A bus operation may hold the current phase until it is acknowledged, adding wait cycles without adding execution phases. Coprocessor calls are the exception: the dispatched coprocessor occupies at least one further slot after the six-phase call. This fixed execution sequence greatly simplifies software development and hardware design. See the *SIRC-1 Hardware Reference Manual* for the bus signal timing, wait-state, and response-priority rules.

## B.2 Six-Stage Execution Phases

For a detailed description of each phase, see Chapter 2.

1. **Instruction Fetch (High Word)** – 1 cycle
2. **Instruction Fetch (Low Word)** – 1 cycle
3. **Decode and Register Fetch** – 1 cycle
4. **Execute and Address Calculation** – 1 cycle
5. **Memory Access** – 1 cycle
6. **Write Back** – 1 cycle

## B.3 Timing Characteristics

| Instruction Type | Cycles |
|---|---|
| ALU (Register) | 6 |
| ALU (Immediate) | 6 |
| Load from Memory | 6 |
| Store to Memory | 6 |
| Branch (taken) | 6 |
| Branch (not taken) | 6 |
| Conditional (executed) | 6 |
| Conditional (not executed) | 6 |
| **NOOP** | 6 |
| **DMAR**/**DMAW** | $12 + \max(\lvert n \rvert - 1, 0)$ |
| **DMAT** | $12 + \max(2n - 1, 0)$ |
| **COPI**/**COPR** | 12 (6 + 6 coprocessor dispatch) |
| Exception-unit meta-instructions (**EXCP**, **RETE**, **ETFR**, **ETTR**) | 12 (6 + 6 dispatch) |
| **RSET** | 18 (6 call + 6 `RSTO` hold + 6 reset-vector fetch) |
| **WAIT** | 12 + idle until an enabled interrupt or reset |

Table B.1: Instruction Timing

The cycle counts in this appendix assume that every bus operation is acknowledged without a wait state. For **DMAR**, **DMAW**, and **DMAT**, the DMA unit gets at least one post-dispatch cycle after the 6-cycle **COPI** dispatch. For non-zero transfers, that first post-dispatch cycle may also be the first no-wait DMA bus access. A conditional **DMAR**/**DMAW**/**DMAT** whose condition is false does not dispatch to the DMA unit and takes only 6 cycles.

### B.3.1 Exception and Fault Timing

A hardware-exception or fault dispatch occupies one 6-cycle slot: the vector's high word is fetched at phase 0, the low word at phase 1, and entry to the handler is committed at phase 3. A latched interrupt is dispatched at the next phase 0, so the worst-case latency from the interrupt request to the handler's first instruction fetch is 6 cycles to finish the current instruction plus 6 cycles to dispatch. Reset holds `RSTO` for 6 cycles before the reset-vector fetch.

A retryable fault cancels the faulting instruction at the phase that detects it. The six-phase sequence is never cut short: the instruction's remaining phases still run, but as no-ops that perform no bus access and commit no results, so the cancelled instruction occupies its full six cycles. Alignment is detected before phase 0; Privilege Violation is detected at phase 2; Segment Overflow is detected at phase 2 or phase 3; Bus and Bus Protection faults are detected at the phase that acknowledges the failing bus access. In every case the exception-unit dispatch slot begins at the next phase 0, after the remaining phases have run. Alignment, Bus, Bus Protection, Invalid Opcode, Privilege Violation, and Segment Overflow all save the address of the faulting instruction and are retryable. The instruction trace fault is raised after its instruction has completed, so nothing is cancelled.

A bus or protection fault during an exception-vector fetch is handled the same way as one during an instruction fetch. The dispatch slot in progress is cancelled and its remaining phases run as no-ops, and the dispatch for the new fault begins at the next phase 0. Only reset restarts the phase sequence immediately: it discards all state and returns to phase 0.

## B.4 Conditional Execution

When a conditional instruction's condition is not met:

- All six phases still occur and consume one cycle each
- The execute, memory-access, and write-back phases perform no operation: no effective address is computed, no `SR.A` overflow check is made, and no data bus cycle is driven
- No register, memory, or address-register update occurs
- Status flags are not updated

This means conditional instructions do not branch and avoid control-flow stalls, but failed conditions still consume execution time.

## B.5 Program Timing Examples

### B.5.1 Simple Loop

```
; Process 10 elements (assuming no bus wait states)
MOVI r7, #10 ; 6 cycles
:loop
    LOAD r1, (#0, a)+ ; 6 cycles
    ADDI r1, #1 ; 6 cycles
    STOR (#-1, a), r1 ; 6 cycles
    SUBI r7, #1 ; 6 cycles
    BRAN|!= @loop ; 6 cycles
; Total per iteration: 30 cycles
; Total for 10 iterations: 6 + (10 * 30) = 306 cycles
```

### B.5.2 Function Call Overhead

```
; Call function
LJSR a ; 6 cycles

; Function body executes...

; Return
RETS ; 6 cycles
; Total overhead: 12 cycles
```

### B.5.3 Conditional Block

```
CMPR r1, r2 ; 6 cycles
ADDR|HI r3, r4, r5 ; 6 cycles (exec if r1 > r2)
ADDR|LO r3, r6, r7 ; 6 cycles (exec if r1 <= r2)
; Total: 18 cycles (one conditional executes, one doesn't)
```

## B.6 Performance Considerations

### B.6.1 No Pipeline Stalls

The SIRC-1 does not implement pipelining in the traditional sense where multiple instructions are in flight simultaneously. Instead:

- Each instruction completes fully before the next begins
- No data hazards or phase bubbles
- No branch prediction penalties
- Base execution time is predictable before bus wait states are considered

### B.6.2 Memory Access

- Instruction fetch, data memory access, and exception vector fetch each occupy one execution phase per 16-bit word transferred.
- If the external memory system has not acknowledged the transfer (`BACK`) and has not aborted it with a bus error (`BERR`) or bus protection error (`BPER`), the CPU holds that phase until the transfer is acknowledged.
- Each wait state adds one clock cycle to the instruction
- Every instruction performs two instruction-fetch bus accesses; a load or store adds one data access; an exception or fault dispatch adds two exception-vector-fetch accesses; a coprocessor dispatch performs no bus access of its own. A system that inserts $w$ wait states per access therefore adds $2w$ cycles to an ALU instruction and $3w$ cycles to a load or store.

### B.6.3 Optimization Guidelines

1. **Use conditional execution for short sequences**

```
; Instead of:
CMPR r1, r2
BRAN|LO @skip
ADDI r3, #1
:skip

; Use:
CMPR r1, r2
ADDI|HI r3, #1 ; Saves branch overhead
```

2. **Combine operations with shifts**

```
; Instead of:
ADDR r1, r2, r2 ; r1 = 2 * r2
ADDR r1, r1, r2 ; r1 = 3 * r2

; Use:
ADDR r1, r2, r2, LSL #1 ; Multiply by 3 in one instruction
```

3. **Use post-increment/pre-decrement for iteration**

```
; Instead of:
LOAD r1, (#0, a)
ADDI a1, #1

; Use:
LOAD r1, (#0, a)+ ; Same result, fewer cycles
```

4. **Loop unrolling reduces overhead**

```
; Instead of processing one item per iteration,
; process multiple items to reduce branch overhead
:loop
    LOAD r1, (#0, a)+
    LOAD r2, (#0, a)+
    LOAD r3, (#0, a)+
    LOAD r4, (#0, a)+
    ; Process 4 items...
    SUBI r7, #4
    BRAN|HI @loop
```

## B.7 Theoretical Performance

At a given clock frequency:

- **Instructions per second:** $f_{clock}/6$
- **At 10 MHz:** ≈ 1.67 million instructions/second
- **At 24 MHz (maximum rated clock):** ≈ 4.0 million instructions/second

These are theoretical maximums assuming perfect code with no inefficiencies.

The SIRC-1's fixed 6-cycle execution trades peak throughput for predictability: every ordinary instruction takes the same number of cycles regardless of the operation or operands, which is simpler to implement in hardware and easier to reason about than a variable-cycle-count design.

CHAPTER C

# Undocumented Instructions

## C.1 Overview

The SIRCIS instruction set includes two undocumented instruction opcodes, `0x27` and `0x2F`. Each has fully defined, tested behavior (`0x27`: `rD` is loaded with the zero-extended 8-bit immediate; `0x2F`: the coprocessor command is the 8-bit immediate and the coprocessor ID is always 0, so the instruction is never privileged) but no public assembly syntax, and they are listed here for that reason. Undocumented opcodes are reserved for future CPU revisions and may be repurposed without preserving their current behavior.

**Warning:** Use of undocumented instructions is not recommended for production code.

## C.2 Undefined Operand Combinations

Undefined operand combinations are different from undocumented opcodes: the opcode is documented, but a particular choice of operands creates multiple architectural writes to the same address-register pair during the same instruction.

### C.2.1 Aliased Address-Register Writes

The auto-update effective-address forms can write both a destination address-register pair and an updated source address-register pair. **`LDEL`** also writes the link-register pair. If two of those write-back targets are the same address-register pair, the final value is architecturally undefined.

```
; Undefined: a is both destination and auto-updated source
LDEA a, -(#0, a)

; Undefined: l is both link register and auto-updated source
LDEL p, (#0, l)+

; Undefined: l is both link register and destination
LDEL l, (#0, a)
```

Programs should avoid aliased register writes. The assembler rejects the known hazardous forms so that programs do not accidentally depend on undefined write-back ordering.

## C.3 Undocumented Opcode List

| Opcode | Format | Pattern | Notes |
|---|---|---|---|
| `0x27` | Short Imm | MOVI-like | No public assembly syntax |
| `0x2F` | Short Imm | COP-like | No public assembly syntax |

Table C.1: Undocumented Instruction Opcodes

## C.4 Implementation Notes

### C.4.1 Implementation Behavior

An implementation – whether an emulator or a hardware implementation – decodes undocumented instructions normally rather than rejecting them. Their exact behavior depends on implementation details and is not part of the architectural contract. It is not required to be preserved in future CPU revisions.

## C.5 Why Undocumented?

These instructions were left undocumented for two reasons:

1. **Opcode space reservation**: May be used for future features.
2. **Implementation flexibility**: Allows hardware optimizations.

## C.6 Recommendations

### C.6.1 For Application Developers

**Do not use undocumented instructions in production code.**

- Behavior may change between CPU revisions.
- Assemblers may reject them or emit warnings.
- Code may not be portable.
- Debugging tools may not recognize them.

### C.6.2 For Compiler Writers

- Do not generate undocumented instructions.
- Use only documented instructions for all operations.
- If optimization requires new operations, request formal documentation.

### C.6.3 For Hardware Implementers

- These opcodes may be implemented following the logical pattern.
- Document any implementation-specific behavior.
- Consider reserving them for future standardization.

## C.7 Future Standardization

Either undocumented opcode may be formally specified in a future SIRCIS revision, or repurposed. Until then, software must not depend on either.

## C.8 Opcode Space for Expansion

The SIRCIS instruction set has limited expansion space:

- 2 undocumented opcodes, `0x27` and `0x2F` (could be formally specified)
- Reserved shift type (111) could enable additional shift modes.
- The reserved status-update source encoding (AF = 11) could select a new flag-update source.
- Standard optional coprocessors and model-specific coprocessors can provide extended functionality through the documented coprocessor compatibility rules.

Any future expansion must maintain backward compatibility with existing code.

CHAPTER D

# Example Programs

This appendix contains sample programs that demonstrate several features of the CPU.

## D.1 Program Conventions

The assembly syntax used in these programs is summarised in the Assembly Language Summary in the Notation and Glossary chapter, and described in full in the *SIRC Assembly Programmer's Manual*.

Every program in this appendix that is loaded at segment zero begins with a `.ORG 0x0000` / `.DQ @label` pair, which places the reset vector (Chapter 6): the CPU begins execution by reading a stored pointer from word addresses `0x000000`–`0x000001`, not by executing whatever instruction happens to be placed there. The separately mapped high segment and the standalone data segment shown later do not need one.

## D.2 Byte Sieve

This program computes primes below 1000 using the Sieve of Eratosthenes, storing one word per candidate number in a memory-mapped array rather than in a register or the stack. It is a compact illustration of addressing-register setup (`ah`/`al` and `sh`/`sl`) and of using **`STOR`** and **`LOAD`** with an indexed effective address to walk an array. The two nested loops starting at labels `:2` and `:3` (lines 35–50) are the core of the sieve: the outer loop advances the candidate, and the inner loop marks its multiples as composite.

Listing D.1: Example D-1: Byte sieve

```
1  ; https://rosettacode.org/wiki/Sieve_of_Eratosthenes
2
3  .EQU $MAX_PRIME #1000
4
5  ; Reserved space for 256x32 bit exception vectors
6  .ORG 0x0000
7  .DQ @main
8
9  .ORG 0x0200
10 :main
11
12 ; File I/O segment
13 MOVI ah, #0x00F0
14 ; Array Start = 0x00F0_0000
15 MOVI al, #0x0000
16
17 ; Stack segment (other end of mapped file)
18 MOVI sh, #0x00F0
19 ; Stack top = 0x00F0_FFFF
20 MOVI sl, #0xFFFF
21
22 MOVI r7, #2
23 MOVI r1, #2
24 MOVI r2, #1
25
26 :1
27
28 STOR (r1, a), r2
29 ADDI r1, #2
30 CMPI r1, $MAX_PRIME
31 BRAN|<= @1
32 MOVI r1, #3
```

```
33 MOVI r3, #1
34
35 :2
36
37 LOAD r2, (r1, a)
38 CMPI r2, #1
39 BRAN|== @4
40 ; THIS NUMBER IS A PRIME!
41 ; TODO: Log this somehow
42 STOR -(s), r1
43 MOVR r7, r1
44 MOVR r2, r1
45
46 :3
47 STOR (r2, a), r3
48 ADDR r2, r1
49 CMPI r2, $MAX_PRIME
50 BRAN|<= @3
51
52 :4
53 ADDI r1, #2
54 CMPI r1, $MAX_PRIME
55 BRAN|<= @2
56
57 :DONE
58
59 ; Halt CPU
60 COPI #0x14FF
```

## D.3 Faults

This pair of programs exercises every fault type the CPU can raise and the vector table that routes them to handlers. `faults.sasm` deliberately triggers, in sequence, a bus fault, an alignment fault, two segment-overflow faults (one from an effective-address calculation, one from program-counter overflow), an instruction-trace fault, a bus-protection fault, an invalid-opcode fault (which itself triggers a nested double fault), a privilege violation, and a level-five interrupt. Each handler, defined from line 158 onward, increments a distinct register so a reader can confirm which faults fired and in what order. The segment-overflow handler (lines 197–242) is worth particular attention: it reads exception metadata with **`ETFR`** to distinguish an instruction-fetch overflow from an effective-address overflow before deciding how to fix up the return address.

Listing D.2: Example D-2: Fault handling

```
1  ;; Segments
2  .EQU $PROGRAM_SEGMENT #0x0000
3  .EQU $SCRATCH_SEGMENT #0x0001
4  .EQU $PROGRAM_SEGMENT_HIGH #0x0002
5
6  ;; Devices
7  ; Debug
8  .EQU $DEBUG_DEVICE_SEGMENT #0x000B
9  .EQU $DEBUG_DEVICE_BUS_ERROR #0x0000
10 .EQU $DEBUG_DEVICE_EXCEPTION_L5 #0x0005
11 .EQU $DEBUG_DEVICE_BUS_PROTECTION_ERROR #0x0006
12
13
14 ;; Bus access types (fault metadata register, bits 0-2)
15 .EQU $BAT_NONE #0x0000
16 .EQU $BAT_DATA_WRITE #0x0003
17
18
```

```
; Reserved space for 256x32 bit exception vectors
.ORG 0x0000
.DQ @init
.ORG 0x0002
.DQ @bus_fault_handler
.ORG 0x0004
.DQ @alignment_fault_handler
.ORG 0x0006
.DQ @segment_overflow_fault_handler
.ORG 0x0008
.DQ @invalid_opcode_fault_handler
.ORG 0x000A
.DQ @privilege_violation_fault_handler
.ORG 0x000C
.DQ @instruction_trace_fault_handler
.ORG 0x000E
.DQ @level_five_interrupt_conflict_handler
.ORG 0x0010
.DQ @double_fault_handler
.ORG 0x0012
.DQ @bus_protection_fault_handler

.ORG 0x0020
.DQ @level_five_interrupt_handler

.ORG 0x0200
:init
MOVI r1, #1
MOVI r2, #1
MOVI r3, #1
MOVI r4, #1
MOVI r5, #1
MOVI r6, #1
MOVI r7, #1

; Get the debug device to raise a fault on the bus
MOVI ah, $DEBUG_DEVICE_SEGMENT
MOVI al, $DEBUG_DEVICE_BUS_ERROR
STOR (a), r1

:after_bus_error_store

; Jumping to an odd address triggers an alignment fault
MOVI pl, #0x0201

:after_odd_address

; Loading/storing from an odd address should not trigger an alignment fault
MOVI ah, $SCRATCH_SEGMENT
MOVI al, #0x0
MOVI r7, #0xCAFE
STOR (#1, a), r7
LOAD r7, (#1, a)


; Calculating an effective address that overflows triggers a segment
    overflow fault
; (but only if the SR is set up the right way)
MOVI ah, $PROGRAM_SEGMENT
```

```
77  MOVI al, #0xFFFE
78
79  ; This should not trigger fault
80  LOAD r7, (#2, a)
81  ; Switch on trap on overflow bit
82  ORRI sr, #0b0100_0000_0000_0000
83  ; This _should_ trigger a fault
84  LOAD r7, (#2, a)
85
86  :after_segment_overflow_load
87
88  ; Switch off trap on overflow bit
89  ANDI sr, #0b1011_1111_1111_1111
90
91  ; Segment overflow again, but this time the PC overflow causes it
92
93  MOVI ah, $PROGRAM_SEGMENT_HIGH
94  MOVI al, #0xFFFE
95
96  ; This should not trigger fault
97  LJMP a
98
99  :return_from_testing_pc_overflow_no_fault
100
101 ; Switch on trap on overflow bit
102 ORRI sr, #0b0100_0000_0000_0000
103
104 MOVI ah, $PROGRAM_SEGMENT_HIGH
105 MOVI al, #0xFFFE
106
107 ; This _should_ trigger a fault
108 LJMP a
109
110 :return_from_testing_pc_overflow_with_fault
111
112 ; Switch off trap on overflow bit
113 ANDI sr, #0b1011_1111_1111_1111
114
115 ; Instruction trace fault test
116 ; Set T bit - the next instruction will be traced and the handler will fire
117 ORRI sr, #0b1000_0000_0000_0000
118 ; This instruction is traced
119 NOOP
120 ; T bit was cleared by the trace handler, so no further instructions are
      traced
121
122 ; Bus protection fault test
123 ; Get the debug device to raise a protection error on the bus
124 MOVI ah, $DEBUG_DEVICE_SEGMENT
125 MOVI al, $DEBUG_DEVICE_BUS_PROTECTION_ERROR
126 MOVI r7, #0x1
127 STOR (a), r7
128
129 :after_bus_protection_error_store
130
131 ; Switch to non privileged mode
132 ORRI sr, #0b0000_0001_0000_0000
133 ; Try to escape the current segment (this should be blocked -- the fault
      handler must not
```

```
134 ; let this write actually take effect)
135 MOVI ph, #0xFEFE
136
137 :after_privilege_violation_load
138
139 ; Get the debug device to raise an interrupt (this one should be fine)
140 MOVI r7, #0x1
141 MOVI ah, $DEBUG_DEVICE_SEGMENT
142 MOVI al, $DEBUG_DEVICE_EXCEPTION_L5
143 STOR (a), r7
144
145 ; Invalid opcode fault test (kept last: its handler deliberately triggers a
      nested double
146 ; fault, which -- since faults share a single link register with no stack --
      leaves
147 ; current_exception_level stuck at the fault level rather than correctly
     unwinding back to
148 ; 0. Running it after every other fault test, rather than before, keeps
     that lingering state
149 ; from affecting them.)
150 ; There is no coprocessor at ID 4, so should trigger an invalid opcode
     fault
151 COPI #0x4000
152
153 :after_invalid_opcode_copi
154
155 ; Halt CPU
156 COPI #0b0001_0100_1111_1111
157
158 .ORG 0x0300
159
160 :bus_fault_handler
161 ADDI r1, #1
162
163 ; Bus Fault is retryable: fix up the return address so RETE doesn't retry
     the same
164 ; faulting STOR forever.
165 ETFR a, #6
166 MOVI al, @after_bus_error_store
167 ETTR #6, a
168
169 RETE
170
171 :bus_protection_fault_handler
172 ADDI r5, #1
173
174 ; Bus Protection Fault is retryable: fix up the return address so RETE
     doesn't retry the
175 ; same faulting STOR forever.
176 ETFR a, #6
177 MOVI al, @after_bus_protection_error_store
178 ETTR #6, a
179
180 RETE
181
182 :alignment_fault_handler
183 ADDI r2, #1
184
185 ; Fix up the return address because the original PC causes an alignment
```

```
      fault
186 ; Returning without fixing up the return address would cause an endless
      loop
187
188 ; Transfer current ELR into 'a' register
189 ETFR a, #6
190 ; Correct the lower word
191 MOVI al, @after_odd_address
192 ; Transfer corrected address back to ELR
193 ETTR #6, a
194
195 RETE
196
197 :segment_overflow_fault_handler
198 ; Check which kind of address computation caused the overflow, using the
199 ; bus access type captured in the fault metadata register
200
201 ; Transfer fault metadata to r7
202 ETFR r7, #7
203 ; Mask off the bus access type (bits 0-2) from the fault metadata register
204 ANDI r7, #0x7
205
206 CMPI r7, $BAT_NONE
207 BRAN|== @segment_overflow_fault_handler_pc
208 ; Mask off the bus access type (bits 0-2) from the fault metadata register
209 ANDI r7, #0x7
210
211 CMPI r7, $BAT_DATA_WRITE
212 BRAN|== @segment_overflow_fault_handler_address
213
214 BRAN @segment_overflow_fault_handler_end
215
216 :segment_overflow_fault_handler_pc
217
218 ADDI r3, #0x0F00
219
220 ; Fix up the return address because it isn't valid
221 ; Load address after fault
222 MOVI ah, $PROGRAM_SEGMENT
223 MOVI al, @return_from_testing_pc_overflow_with_fault
224 ; Transfer corrected address back to ELR
225 ETTR #6, a
226
227 BRAN @segment_overflow_fault_handler_end
228
229 :segment_overflow_fault_handler_address
230
231 ADDI r3, #0x000F
232
233 ; Segment Overflow is retryable: fix up the return address so RETE doesn't
      retry the same
234 ; faulting access forever. (This branch is not reached by anything in this
      example today,
235 ; but is fixed defensively so it isn't a landmine if that changes.)
236 ETFR a, #6
237 MOVI al, @after_segment_overflow_load
238 ETTR #6, a
239
240 :segment_overflow_fault_handler_end
```

```
241
242 RETE
243
244 :invalid_opcode_fault_handler
245 ; A double fault will blat the EU link registers so we need to save them
      before we trigger it
246 ETFR #6
247
248 ADDI r4, #1
249 ; Trigger another invalid opcode fault to test double fault handling
250 ; This will cause a fault while already handling a fault
251 COPI #0xF000
252
253 :after_nested_invalid_opcode_copi
254
255 ; Restore link register
256 ETTR #6
257
258 ; Invalid Opcode Fault is retryable: fix up the return address so RETE
      doesn't retry the
259 ; trapped COPI forever.
260 ETFR a, #6
261 MOVI al, @after_invalid_opcode_copi
262 ETTR #6, a
263
264 RETE
265
266 :privilege_violation_fault_handler
267 ADDI r5, #1
268
269 ; Make sure that the CPU is back in privileged mode again after handling
      this fault
270
271 ; Transfer current ELR into 'r7' register
272 ETFR r7, #6
273 ; Correct the lower word
274 ANDI r7, #0xFEFF
275 ; Transfer corrected SR back to ELR
276 ETTR #6, r7
277
278 ; Privilege Violation is retryable: the link register holds the blocked
      instruction's own
279 ; address. Retrying it now that we're back in privileged mode would let it
      actually take
280 ; effect -- but this instruction is deliberately testing that an escape
      attempt is blocked,
281 ; so redirect past it instead of retrying it.
282 ETFR a, #6
283 MOVI al, @after_privilege_violation_load
284 ETTR #6, a
285
286 RETE
287
288 :double_fault_handler
289 ; A double fault occurred - this is typically a last-chance handler
290 ; In this example, we'll increment r4 to show we were here
291 ; and then return (though in production you'd probably reset)
292 ADDI r4, #1
293
```

```
294 ; The link register holds the address of the instruction that triggered the
        double fault
295 ; (the nested COPI above) -- fix up the return address so RETE doesn't
      retrigger it forever.
296 ETFR a, #6
297 MOVI al, @after_nested_invalid_opcode_copi
298 ETTR #6, a
299
300 RETE
301
302 :level_five_interrupt_conflict_handler
303 ADDI r6, #0x1
304 RETE
305
306 :level_five_interrupt_handler
307 ADDI r6, #0x1000
308
309 ; Trigger another L5 interupt while it is already being serviced
310 ; which will trigger a fault
311 MOVI r7, #0x1
312 MOVI ah, $DEBUG_DEVICE_SEGMENT
313 MOVI al, $DEBUG_DEVICE_EXCEPTION_L5
314 STOR (a), r7
315
316 RETE
317
318 :instruction_trace_fault_handler
319 ADDI r6, #0x100
320 ; Clear T bit from the saved SR so RETE does not re-enable tracing
321 ETFR r7, #6
322 ANDI r7, #0x7FFF
323 ETTR #6, r7
324 RETE
325
326 ; Trampoline for faults-high to come back
327 .ORG 0xFFF0
328 MOVI pl, @return_from_testing_pc_overflow_no_fault
```

`faults-high.sasm` is a second, separately assembled segment that the program-counter overflow test in Example D-2 jumps into; it exists only to let that fault trigger without the CPU executing the vector table sitting at address `0x0000` in the main segment. It jumps back into `faults.sasm` through the trampoline at `0xFFF0`.

Listing D.3: Example D-3: High-address fault handling

```
1  ;; Segments
2  .EQU $PROGRAM_SEGMENT #0x0000
3  .EQU $SCRATCH_SEGMENT #0x0001
4  .EQU $PROGRAM_SEGMENT_HIGH #0x0002
5
6  ; Section to test program counter overflow
7  ; without trying to execute the vector table
8  ; that lives at 0x0000 in the main segment
9
10 ; Note: This is not linked together with the main program
11 ; This is compiled as a separate program and mapped as a separate segment
12
13 .ORG 0x0000
14
15 MOVI ah, $PROGRAM_SEGMENT
16 MOVI al, #0xFFF0
```

```
17 LJMP a
18
19
20 ; TODO: Work out how to avoid padding this out
21 ; I had to pad it out because even though I said this segment has a length
       of 0xFFFF
22 ; I think the way files are mapped means that length is ignored
23 .ORG 0xFFFE
24 MOVR r1, r1
```

## D.4 Hardware Exception

This example shows a device-driven interrupt handled through the serial device: the program prints a help message, waits on **WAIT** for a hardware exception, and exits once the handler reports that the expected character has arrived in `r7`. The exception handler itself is installed at vector `0x40` (word address `0x0080`) and defined from line 137 onward; it saves the link register, calls `read_pending_byte` and `write_pending_byte` in turn, and restores the link register before returning with **RETE**. Those two subroutines show the poll-and-acknowledge pattern used to drain and refill the serial device's receive and send buffers one byte at a time.

Listing D.4: Example D-4: Hardware exception

```
1  ; Reserved space for 256x32 bit exception vectors
2
3
4  .EQU $FALSE #0x0
5  .EQU $TRUE #0x1
6
7  ; When this character is typed, the program should exit
8  .EQU $EXPECTED_CHAR #0x61
9
10 ;; Segments
11 .EQU $PROGRAM_SEGMENT #0x0000
12 .EQU $SCRATCH_SEGMENT #0x0001
13
14 ;; Devices
15 ; Serial
16 .EQU $SERIAL_DEVICE_SEGMENT #0x000A
17 .EQU $SERIAL_DEVICE_BAUD #0x0000
18 .EQU $SERIAL_DEVICE_RECV_ENABLED #0x0001
19 .EQU $SERIAL_DEVICE_RECV_PENDING #0x0002
20 .EQU $SERIAL_DEVICE_RECV_DATA #0x0003
21 .EQU $SERIAL_DEVICE_SEND_ENABLED #0x0004
22 .EQU $SERIAL_DEVICE_SEND_PENDING #0x0005
23 .EQU $SERIAL_DEVICE_SEND_DATA #0x0006
24
25 ;; Scratch Variables
26 .EQU $MESSAGE_SEND_BASE #0x0000
27 .EQU $MESSAGE_SEND_POINTER #0x0001
28
29
30 ;; Exception Vectors
31 ; First vector is the reset vector
32 .ORG 0x0000
33 .DQ @start
34
35 .ORG 0x0080
36 .DQ @exception_handler_p3
37
38 ;;;;;;; MAIN CODE SECTION
39
```

```
40 .ORG 0x0200
41 :start
42
43 ; Enable all four maskable hardware interrupt lines (bits 9-12 of SR)
44 ORRI sr, #0b0001_1110_0000_0000
45
46 ; Setup routines
47 BRSR @setup_serial
48 BRSR @print_help
49 ; Make sure this is after the initial help message print (see the
       subroutine for more info)
50 BRSR @enable_serial_recv
51
52 :wait_for_char
53 ; Wait for exception (will spin until interrupted)
54 WAIT
55
56 ; Pending byte should be in r7 after exeception handler runs
57 CMPI r7, $EXPECTED_CHAR
58 BRAN|== @finish
59
60 BRAN @wait_for_char
61
62 :setup_serial
63
64 MOVI r1, #9600
65 MOVI ah, $SERIAL_DEVICE_SEGMENT
66 MOVI al, $SERIAL_DEVICE_BAUD
67 STOR (a), r1
68
69 RETS
70
71 :enable_serial_recv
72
73 ; When piping data to stdin, an EOF character gets sent which closes stdin
74 ; This means that we can't trigger any more interrupts manually after the
       data is piped
75 ; (stdin is currently the only way to externally trigger an interrupt)
76 ; If the data is coming in at the same type we are sending data out,
77 ; it ends up with the program gets stuck waiting for an interrupt and never
       finishes
78 ; TODO: Actually that shouldn't be a problem - better investigate this
       further (
79 ; maybe the exception handler routines are conflicting with each other)
80
81 MOVI r1, #0x1
82 MOVI al, $SERIAL_DEVICE_RECV_ENABLED
83 STOR (a), r1
84
85 RETS
86
87 :print_help
88
89 MOVI r1, @help_message
90 BRAN @print
91
92 :print_exit
93
94 MOVI r1, @exit_message
```

```
95  BRAN @print
96
97  :print
98
99  MOVI ah, $SCRATCH_SEGMENT
100 MOVI al, $MESSAGE_SEND_BASE
101 STOR (a), r1
102
103 ; Align pointer
104 MOVI r1, #1
105
106 MOVI ah, $SCRATCH_SEGMENT
107 MOVI al, $MESSAGE_SEND_POINTER
108 STOR (a), r1
109
110 MOVI r1, $TRUE
111 MOVI ah, $SERIAL_DEVICE_SEGMENT
112 MOVI al, $SERIAL_DEVICE_SEND_ENABLED
113 STOR (a), r1
114
115 :wait_for_print_finish
116
117 MOVI ah, $SERIAL_DEVICE_SEGMENT
118 MOVI al, $SERIAL_DEVICE_SEND_ENABLED
119 LOAD r1, (a)
120
121 CMPI r1, $TRUE
122 BRAN|== @wait_for_print_finish
123
124 RETS
125
126 :finish
127
128 BRSR @print_exit
129
130 ; Halt CPU
131 COPI #0b0001_0100_1111_1111
132
133 ;;;;;;; EXCEPTION HANDLERS
134
135 .ORG 0x0400
136 :exception_handler_p3
137
138 ; Save the link register
139 LDEA s, (l)
140
141 BRSR @read_pending_byte
142 BRSR @write_pending_byte
143
144 ; Restore the link register
145 LDEA l, (s)
146
147 RETE
148
149 :read_pending_byte
150 ; Check if there is something we need to read
151 MOVI ah, $SERIAL_DEVICE_SEGMENT
152 MOVI al, $SERIAL_DEVICE_RECV_PENDING
153 LOAD r1, (a)
```

```
154
155 ; Return early if not
156 CMPI r1, $FALSE
157 RETS|==
158
159 ; Read pending byte
160 MOVI al, $SERIAL_DEVICE_RECV_DATA
161 LOAD r7, (a)
162
163 MOVI al, $SERIAL_DEVICE_RECV_PENDING
164 MOVI r1, $FALSE
165 STOR (a), r1
166 RETS
167
168 :write_pending_byte
169 ; Check if the device is ready to write
170 MOVI ah, $SERIAL_DEVICE_SEGMENT
171 MOVI al, $SERIAL_DEVICE_SEND_PENDING
172 LOAD r1, (a)
173
174 ; Return early if not (there is already a send pending)
175 CMPI r1, $TRUE
176 RETS|==
177
178 MOVI ah, $SCRATCH_SEGMENT
179 MOVI al, $MESSAGE_SEND_POINTER
180 LOAD r2, (a)
181 MOVI al, $MESSAGE_SEND_BASE
182 LOAD al, (a)
183
184 MOVI ah, $PROGRAM_SEGMENT
185 LOAD r3, (r2, a)
186
187 ; If the message buffer (zero terminated) has been sent. Stop sending
188 CMPI r3, #0
189 BRAN|== @stop_send
190
191 MOVI ah, $SERIAL_DEVICE_SEGMENT
192 MOVI al, $SERIAL_DEVICE_SEND_DATA
193 STOR (a), r3
194
195 ; Increment by two because of lack of packing (a word actually is padded to
      a DW)
196 ADDI r2, #2
197 MOVI ah, $SCRATCH_SEGMENT
198 MOVI al, $MESSAGE_SEND_POINTER
199 STOR (a), r2
200
201 MOVI ah, $SERIAL_DEVICE_SEGMENT
202 MOVI al, $SERIAL_DEVICE_SEND_PENDING
203 MOVI r1, $TRUE
204 STOR (a), r1
205
206 RETS
207
208 :stop_send
209 MOVI ah, $SERIAL_DEVICE_SEGMENT
210 MOVI al, $SERIAL_DEVICE_SEND_ENABLED
211 MOVI r1, $FALSE
```

```
212 STOR (a), r1
213
214 RETS
```

The data segment below supplies the two zero-terminated, word-per-character messages (`help_message` and `exit_message`) that Example D-4 prints at startup and on exit.

Listing D.5: Example D-5: Hardware exception data

```
1  ;;;;;;; DATA
2
3  ; TODO: A string data type that does this for us
4  :help_message
5  .DW #84
6  .DW #121
7  .DW #112
8  .DW #101
9  .DW #32
10 .DW #39
11 .DW #97
12 .DW #39
13 .DW #32
14 .DW #116
15 .DW #111
16 .DW #32
17 .DW #101
18 .DW #120
19 .DW #105
20 .DW #116
21 .DW #10
22 .DW #0
23
24 :exit_message
25 .DW #71
26 .DW #111
27 .DW #111
28 .DW #100
29 .DW #98
30 .DW #121
31 .DW #101
32 .DW #33
33 .DW #10
34 .DW #0
```

## D.5 Software Exception

This short program demonstrates a software-raised exception with **`EXCP`** and confirms that nesting is blocked while a handler is running. It sets `r1` to 1, raises exception `0x60`, and expects `r1` to hold `0xFF` once the handler at line 26 has run. That handler itself raises a second exception, `0x61`, from inside the handler; because the handler at address `0x0500` (line 37) sets `r1` to `0xBB` only if it runs, the final value of `r1` shows whether the nested exception was correctly ignored.

Listing D.6: Example D-6: Software exception

```
1 ; Reserved space for 256x32 bit exception vectors
2
3 ; First vector is the reset vector
4 .ORG 0x0000
5 .DQ @start
6
```

```
7  ; 96th vector (*2 words per vector)
8  .ORG 0x00C0
9  .DQ @exception_handler
10 .DQ @exception_handler_that_should_be_ignored
11
12 .ORG 0x0200
13 :start
14
15 ; Reset register
16 MOVI r1, #1
17 ; Trigger Software Exception
18 EXCP #0x60
19
20 ; r1 should be 0x0FF here after exception handler runs
21
22 ; Halt CPU
23 COPI #0x14FF
24
25 .ORG 0x0300
26 :exception_handler
27
28 ; Load a value to detect if this code runs
29 ; Final value of r1 should be this value
30 MOVI r1, #0xFF
31 ; Try and trigger nested software exception (should be ignored)
32 EXCP #0x61
33 ; Return from exception
34 RETE
35
36 .ORG 0x0500
37 :exception_handler_that_should_be_ignored
38
39 ; Load a value to detect if this code runs
40 ; Final value of r1 should _not_ be BB because this vector should never be
       jumped to
41 MOVI r1, #0xBB
42 ; Return from exception
43 RETE
```

## D.6 Store Load

This program is a self-checking test of indexed and immediate-offset memory access, followed by an exhaustive exercise of every **LJMP**/**LJSR** addressing form. The store and load block (lines 8–19) round-trips values through memory using an immediate offset and a register offset from an address-register pair. The remainder of the listing chains together register-offset, immediate-offset, and plain register forms of **LJMP** and **LJSR**; every path not on the intended route lands on an `LJMP s`/`LJSR s` instruction commented `FAIL!`, so a working implementation reaches the `:pass` label at the end while a faulty one jumps into the "forbidden zone" and fails at `:fail`.

Listing D.7: Example D-7: Store/load

```
1  ; Reserved space for 256x32 bit exception vectors
2
3  .ORG 0x0000
4  .DQ @init
5
6  .ORG 0x0200
7
8  :init
9  MOVI r1, #0xCAFE
10 MOVI r3, #0xBEEF
```

```
11 MOVI r5, #0x000A
12
13 MOVI ah, #0x0008
14 MOVI al, #0xAAF0
15
16 STOR (#0x000F, a), r1
17 LOAD r2, (#0x000F, a)
18 STOR (r5, a), r3
19 LOAD r4, (r5, a)
20
21
22 ; Lets test jumping!
23
24 ; TODO: Add some tests that:
25 ; LJMP to another segment
26 ; LJMP with offset
27 ; LJMP with shifted offset
28 ; Same three things but with LJSR
29 ; Make a maze of jumps so if the jump goes to the wrong place it will land
       in the forbidden zone where every instruction jumps to the fail label
30
31 ; r7 will store the test result
32 MOVI r7, #0
33 ; Use the stack address register pair to store fail address
34 MOVI sh, #0x0
35 MOVI sl, @fail
36 ; Address register pair used as part of test
37 MOVI ah, #0x0
38 MOVI al, #0x0
39
40 BRAN #12 ; Step 1
41 LJMP s ; FAIL!
42 LJMP s ; FAIL!
43 BRAN #10 ; Step 3
44 LJMP s ; FAIL!
45 LJMP s ; FAIL!
46 BRAN #-6 ; Step 2
47 LJMP s ; FAIL!
48 BRAN @ljmp_register_offset
49
50
51 :ljmp_register_offset
52 MOVI al, @ljmp_register_offset_anchor
53 MOVI r1, #-6
54 MOVI r2, #4
55 BRAN @ljmp_register_offset_anchor
56 LJMP s ; FAIL!
57 LJMP s ; FAIL!
58 LJMP s ; FAIL!
59 LJMP a, r2
60 LJMP s ; FAIL!
61 LJMP s ; FAIL!
62 :ljmp_register_offset_anchor
63 LJMP a, r1
64 LJMP s ; FAIL!
65 BRAN @ljmp_immediate_offset
66 LJMP s ; FAIL!
67 LJMP s ; FAIL!
68 LJMP s ; FAIL!
```

```
69  LJMP s ; FAIL!
70
71
72  :ljmp_immediate_offset
73  MOVI a1, @ljmp_immediate_offset_anchor
74  BRAN @ljmp_immediate_offset_anchor
75  LJMP s ; FAIL!
76  LJMP s ; FAIL!
77  LJMP s ; FAIL!
78  LJMP a, #4
79  LJMP s ; FAIL!
80  LJMP s ; FAIL!
81  :ljmp_immediate_offset_anchor
82  LJMP a, #-6
83  LJMP s ; FAIL!
84  BRAN @ljsr_register_offset
85  LJMP s ; FAIL!
86  LJMP s ; FAIL!
87  LJMP s ; FAIL!
88  LJMP s ; FAIL!
89
90
91  :ljsr_register_offset
92  MOVI a1, @ljsr_register_offset_anchor
93  MOVI r1, #-6
94  MOVI r2, #4
95  BRAN @ljsr_register_offset_anchor
96  LJSR s ; FAIL!
97  LJSR s ; FAIL!
98  LJSR s ; FAIL!
99  LJSR a, r2
100 LJSR s ; FAIL!
101 LJSR s ; FAIL!
102 :ljsr_register_offset_anchor
103 LJSR a, r1
104 LJSR s ; FAIL!
105 BRAN @ljsr_immediate_offset
106 LJSR s ; FAIL!
107 LJSR s ; FAIL!
108 LJSR s ; FAIL!
109 LJSR s ; FAIL!
110
111
112 :ljsr_immediate_offset
113 MOVI a1, @ljsr_immediate_offset_anchor
114 BRAN @ljsr_immediate_offset_anchor
115 LJSR s ; FAIL!
116 LJSR s ; FAIL!
117 LJSR s ; FAIL!
118 LJSR a, #4
119 LJSR s ; FAIL!
120 LJSR s ; FAIL!
121 :ljsr_immediate_offset_anchor
122 LJSR a, #-6
123 LJSR s ; FAIL!
124 BRAN @finish
125 LJSR s ; FAIL!
126 LJSR s ; FAIL!
127 LJSR s ; FAIL!
```

```
128 LJSR s ; FAIL!
129
130
131 :finish
132 MOVI r7, #0x0FAB
133
134 MOVI sh, #0x0
135 MOVI sl, @pass
136 LJMP s
137
138 .ORG 0x0400
139
140 :fail
141 MOVI r7, #0xFA11
142
143 :pass
144
145 ; Halt CPU
146 COPI #0x14FF
```

CHAPTER E

# Quick Reference

This appendix collects the most frequently consulted tables in a single location for use during development. Section E.4 lists where to find additional reference tables defined in the main chapters.

## E.1 Instruction Mnemonic Index

All instruction mnemonics in alphabetical order. *Type*: ALU, Memory (Mem), Control-flow (CF), Coprocessor (COP), or Meta. *N*, *Z*, *C*, *V*: use the symbols defined in Table 11.2 (Chapter 11): `*` (updated), `0`, `1`, `–` (preserved), and `S` (from the shifter). Rows marked † are preserved by the call instruction itself, but the selected coprocessor may define further effects once dispatched. Rows marked ‡ are updated from a named source rather than from the instruction's own result. Meta-instructions inherit the flag behavior of the underlying CPU instruction. For full encoding details, see the chapter cited in the header of each group.

Table E.1: Alphabetical Mnemonic Index

| Mnemonic | Type | Opcode(s) | N | Z | C | V | Description |
|---|---|---|---|---|---|---|---|
| *A – Ch.13* | | | | | | | |
| **ADCI** | ALU | 0x01/0x21 | * | * | * | * | Add with carry, immediate or short immediate |
| **ADCR** | ALU | 0x31 | * | * | * | * | Add with carry, register |
| **ADDI** | ALU | 0x00/0x20 | * | * | * | * | Add immediate or short immediate |
| **ADDR** | ALU | 0x30 | * | * | * | * | Add register |
| **ANDI** | ALU | 0x04/0x24 | * | * | 0 | 0 | Bitwise AND immediate or short immediate |
| **ANDR** | ALU | 0x34 | * | * | 0 | 0 | Bitwise AND register |
| *B – Ch.15 / Ch.17* | | | | | | | |
| **BRAN** | Meta | LDEA p,... | - | - | - | - | PC-relative conditional branch |
| **BRSR** | Meta | LDEL p,... | - | - | - | - | PC-relative call (saves return address to l) |
| *C – Ch.13 / Ch.16* | | | | | | | |
| **CMNI** | ALU | 0x08/0x28 | * | * | * | * | Compare negative immediate or short immediate (no write-back) |
| **CMNR** | ALU | 0x38 | * | * | * | * | Compare negative register (no write-back) |
| **CMPI** | ALU | 0x0A/0x2A | * | * | * | * | Compare immediate or short immediate (no write-back) |
| **CMPR** | ALU | 0x3A | * | * | * | * | Compare register (no write-back) |
| **CNCI** | ALU | 0x09/0x29 | * | * | * | * | Compare negative with carry, immediate or short immediate (no write-back) |
| **CNCR** | ALU | 0x39 | * | * | * | * | Compare negative with carry, register (no write-back) |
| **COPI** | COP | 0x0F | - | - | - | -† | Coprocessor call immediate |
| **COPR** | COP | 0x3F | - | - | - | -† | Coprocessor call register |
| **CPCI** | ALU | 0x0B/0x2B | * | * | * | * | Compare with carry, immediate or short immediate (no write-back) |
| **CPCR** | ALU | 0x3B | * | * | * | * | Compare with carry, register (no write-back) |
| *D – Ch.17* | | | | | | | |

*continued on next page*

*Table E.1 (continued)*

| Mnemonic | Type | Opcode(s) | N | Z | C | V | Description |
|---|---|---|---|---|---|---|---|
| **DIVS** | Meta | COPI #0x3300 | - | - | - | -† | Signed divide (Integer Maths Unit, coprocessor 0x3) |
| **DIVU** | Meta | COPI #0x3200 | - | - | - | -† | Unsigned divide (Integer Maths Unit, coprocessor 0x3) |
| **DMAR** | Meta | COPI #0x28xx | - | - | - | - | DMA read into registers (DMA unit, coprocessor 0x2) |
| **DMAT** | Meta | COPI #0x2Ann | - | - | - | - | DMA memory-to-memory transfer |
| **DMAW** | Meta | COPI #0x29xx | - | - | - | - | DMA write from registers |
| *E – Ch.17* | | | | | | | |
| **ETFR** | Meta | COPI #0x1Cxy | - | - | - | - | Read exception-unit state |
| **ETTR** | Meta | COPI #0x1Dxy | - | - | - | - | Write exception-unit state |
| **EXCP** | Meta | COPI #0x11vv | - | - | - | - | Raise user exception (trap) with vector vv |
| *L – Ch.14 / Ch.15 / Ch.17* | | | | | | | |
| **LDEA** | CF | 0x18–0x1B | - | - | - | - | Load effective address |
| **LDEL** | CF | 0x1C–0x1F | - | - | - | - | Load effective address and link (saves PC to l) |
| **LJMP** | Meta | LDEA p,... | - | - | - | - | Long (absolute) jump |
| **LJSR** | Meta | LDEL p,... | - | - | - | - | Long (absolute) call |
| **LOAD** | Mem | 0x14–0x17 | - | - | - | - | Load from memory |
| *M – Ch.13 / Ch.17* | | | | | | | |
| **MOVI** | ALU | 0x07 | * | * | 0 | 0 | Move immediate |
| **MOVR** | ALU | 0x37 | * | * | 0 | 0 | Move register |
| **MULS** | Meta | COPI #0x3100 | - | - | - | -† | Signed multiply (Integer Maths Unit, coprocessor 0x3) |
| **MULU** | Meta | COPI #0x3000 | - | - | - | -† | Unsigned multiply (Integer Maths Unit, coprocessor 0x3) |
| *N – Ch.17* | | | | | | | |
| **NOOP** | Meta | ADDI[N] r1,#0 | - | - | - | - | No operation |
| *O – Ch.13* | | | | | | | |
| **ORRI** | ALU | 0x05/0x25 | * | * | 0 | 0 | Bitwise OR immediate or short immediate |
| **ORRR** | ALU | 0x35 | * | * | 0 | 0 | Bitwise OR register |
| *R – Ch.15 / Ch.17* | | | | | | | |
| **RETE** | Meta | COPI #0x1A00 | * | * | * | *‡ | Return from exception handler (SR restored from the link register) |
| **RETS** | Meta | LDEA p,(#0,l) | - | - | - | - | Return from subroutine |
| **RSET** | Meta | COPI #0x1B00 | * | * | * | *‡ | System reset (SR cleared to 0) |
| *S – Ch.13 / Ch.14 / Ch.17* | | | | | | | |
| **SBCI** | ALU | 0x03/0x23 | * | * | * | * | Subtract with carry, immediate or short immediate |
| **SBCR** | ALU | 0x33 | * | * | * | * | Subtract with carry, register |
| **SHFT** | Meta | ORRI[S] rD,#0 | S | S | S | S | Shift with status-register update |
| **STOR** | Mem | 0x10–0x13 | - | - | - | - | Store to memory |
| **SUBI** | ALU | 0x02/0x22 | * | * | * | * | Subtract immediate or short immediate |
| **SUBR** | ALU | 0x32 | * | * | * | * | Subtract register |

*continued on next page*

*Table E.1 (continued)*

| Mnemonic | Type | Opcode(s) | N | Z | C | V | Description |
|---|---|---|---|---|---|---|---|
| *T – Ch.13* | | | | | | | |
| **TSAI** | ALU | 0x0C/0x2C | * | * | 0 | 0 | Test AND immediate or short (no write-back) |
| **TSAR** | ALU | 0x3C | * | * | 0 | 0 | Test AND register (no write-back) |
| **TSOI** | ALU | 0x0D/0x2D | * | * | 0 | 0 | Test OR immediate or short (no write-back) |
| **TSOR** | ALU | 0x3D | * | * | 0 | 0 | Test OR register (no write-back) |
| **TSXI** | ALU | 0x0E/0x2E | * | * | 0 | 0 | Test XOR immediate or short (no write-back) |
| **TSXR** | ALU | 0x3E | * | * | 0 | 0 | Test XOR register (no write-back) |
| *W – Ch.17* | | | | | | | |
| **WAIT** | Meta | COPI #0x1900 | - | - | - | - | Idle until an enabled hardware interrupt or a reset occurs |
| *X – Ch.13* | | | | | | | |
| **XORI** | ALU | 0x06/0x26 | * | * | 0 | 0 | Bitwise XOR immediate or short immediate |
| **XORR** | ALU | 0x36 | * | * | 0 | 0 | Bitwise XOR register |

† Preserved by the coprocessor-call instruction itself; the selected coprocessor may define further effects once the call is dispatched. ‡ **RETE** restores all four flags from the link register; **RSET** clears all four flags to zero as part of clearing `sr`.

## E.2 Status Register Bit Reference

The status register (`sr`) is 16 bits wide. The high byte (bits 15–8) is privileged: in protected mode, reads return zero for those bits and writes to them are silently ignored, with no fault. The low byte (bits 7–0) can be read and written in both modes.

| Bit | Name | Access | Reset | Function |
|---|---|---|---|---|
| 15 | T | Privileged | 0 | Trace mode: fault after every instruction (used by debuggers) |
| 14 | A | Privileged | 0 | Address overflow trap: fault when an address calculation overflows |
| 13 | EA | Privileged | 0 | Exception Active: set automatically while inside an exception handler (read-only) |
| 12 | E4 | Privileged | 0 | Enable hardware interrupt line 4 (level 4, highest maskable) |
| 11 | E3 | Privileged | 0 | Enable hardware interrupt line 3 |
| 10 | E2 | Privileged | 0 | Enable hardware interrupt line 2 |
| 9 | E1 | Privileged | 0 | Enable hardware interrupt line 1 (level 1, lowest maskable) |
| 8 | P | Privileged | 0 | Protected mode: 0 = supervisor, 1 = protected |
| 7–4 | – | Either | 0 | Reserved for future use; software must not rely on the value read |
| 3 | V | Either | 0 | Overflow: signed arithmetic overflow occurred |
| 2 | C | Either | 0 | Carry: unsigned carry out or borrow |
| 1 | N | Either | 0 | Negative: result bit 15 = 1 (two's complement sign bit) |
| 0 | Z | Either | 0 | Zero: result was zero |

Table E.2: Status Register Bit Summary

Hardware interrupt line 5 (level 5) is a Non-Maskable Interrupt (NMI) and is always enabled; it has no enable bit in `sr`. See Chapter 5 for full details and examples.

## E.3 Bus Access Type (BAT) Reference

The 3-bit Bus Access Type (BAT) field accompanies every bus cycle and is also captured in fault metadata. External devices (memory controllers, coprocessors) can use it to determine the nature of the access.

| BAT[2:0] | Value | Meaning |
|---|---|---|
| 000 | 0 | No I/O (internal cycle, no bus transaction) |
| 001 | 1 | Instruction Fetch |
| 010 | 2 | Data Read |
| 011 | 3 | Data Write |
| 100 | 4 | Exception Vector Fetch |
| 101 | 5 | DMA Coprocessor Read Burst |
| 110 | 6 | DMA Coprocessor Write Burst |
| 111 | 7 | Reserved |

Table E.3: Bus Access Type (BAT) Encoding

See the *SIRC-1 Hardware Reference Manual* for how the BAT and PROT (protected-mode) signals reach external devices, including usage examples that combine them.

## E.4 Where to Find Other Tables

| Table | Chapter / Appendix | Label |
|---|---|---|
| Complete opcode map (all 64 opcodes) | Appendix A | A.1 |
| Register encoding (4-bit IDs) | Chapter 3 | 3.1 |
| Condition code encoding | Chapter 7 | 7.5 |
| Shift type encoding | Chapter 7 | 7.6 |
| Addressing mode summary | Chapter 8 | 8.1 |
| Exception vector table | Chapter 6 | — |
| Instruction timing (cycle counts) | Appendix B | — |
| Complete instruction list by opcode | Chapter 12 | 12.1 |
| Meta-instructions cross-reference | Chapter 17 | 17.1 |
| Flag effect symbols | Chapter 11 | 11.2 |

Table E.4: Reference Table Locations

# SIRC-1 Architecture Reference Manual

The SIRC-1 brings together a clean 16-bit load/store architecture, a fully specified six-stage execution model, and an extensible coprocessor interface, without sacrificing the predictability system programmers and hardware designers depend on. This manual documents every instruction, register, exception, and bus signal to an implementation-ready level of detail, so that assemblers, compilers, operating systems, and hardware implementations can all be built directly from its pages, without consulting any other source.

**Inside you will find:**

- The complete SIRCIS instruction set reference, arranged for quick lookup by mnemonic
- Full exception, interrupt, and reset specifications
- Cross-references to the companion SIRC-1 Hardware Reference Manual for pinout and bus timing
- Coprocessor and future-model compatibility guidelines



ISBN 0-000000-00-0

SILICON INTEGRATED RESEARCH CORPORATION
1400 Fabrication Way, Milpitas Flat, CA
Printed in the United States of America

First Printing, 1989 • Version 1.0 • $49.95