File Edit Selection View Go Run Terminal Help

EXPLORER

NO FOLDER OPENED

You have not yet opened a folder.

Open Folder

Opening a folder will close all currently open editors. To keep them open, add a folder instead.

day1.py | wallet blockchain.py

C: > Users > RANJITH > OneDrive > Desktop > Block chain > wallet blockchain.py > ...

```python
import tkinter as tk
from tkinter import messagebox

class SimpleStorageGUI:
    def __init__(self, root):
        # -------- CONSTRUCTOR --------
        self.root = root
        self.root.title("Simple Storage Smart Contract - GUI Demo")
        self.root.geometry("600x560")

        # -------- STATE VARIABLE --------
        self.message = "Hello Blockchain"

        # -------- UI --------
        tk.Label(
            root,
            text="Simple Storage Smart Contract (GUI)",
            font=("Arial", 16, "bold")
        ).pack(pady=10)

        tk.Label(root, text="Enter Message:").pack()
        self.message_entry = tk.Entry(root, width=60)
        self.message_entry.pack(pady=5)

        tk.Button(
            root,
            text="Store / Update Message",
            command=self.set_message,
            bg="lightblue",
            width=25
        ).pack(pady=6)

        tk.Button(
            root,
            text="Retrieve Stored Message",
            command=self.get_message,
            bg="lightgreen",
```

CHAT

Build with Agent

AI responses may be inaccurate.

Generate Agent Instructions to onboard AI onto your codebase.

wallet blockchain.py

Describe what to build next

Agent Auto

OUTLINE

TIMELINE

Ln 100, Col 20 Spaces: 4 UTF-8 CRLF {} Python 3.14.2

File Edit Selection View Go Run Terminal Help

EXPLORER

NO FOLDER OPENED

You have not yet opened a folder.

Open Folder

Opening a folder will close all currently open editors. To keep them open, add a folder instead.

day1.py | wallet blockchain.py

C: > Users > RANJITH > OneDrive > Desktop > Block chain > wallet blockchain.py > ...

```python
class SimpleStorageGUI:
    def __init__(self, root):
        width=25
        ).pack(pady=6)

        # 🔄 REFRESH BUTTON
        tk.Button(
            root,
            text="Refresh / Clear History",
            command=self.refresh_history,
            bg="lightcoral",
            width=25
        ).pack(pady=6)

        # -------- OUTPUT AREA --------
        self.output = tk.Text(root, height=18, width=72)
        self.output.pack(pady=10)

        self.show_initial_details()

    # -------- INITIAL DETAILS --------
    def show_initial_details(self):
        self.output.insert(tk.END, "APPLICATION STARTED\n")
        self.output.insert(tk.END, "-" * 60 + "\n")
        self.output.insert(tk.END, "Constructor Executed:\n")
        self.output.insert(tk.END, "• Message initialized as: 'Hello Blockchain'\n\n")

        self.output.insert(tk.END, "State Variable:\n")
        self.output.insert(tk.END, "• message (Data Type: string)\n\n")

        self.output.insert(tk.END, "Functions Available:\n")
        self.output.insert(tk.END, "• set_message() → Store / Update message\n")
        self.output.insert(tk.END, "• get_message() → Retrieve message\n\n")

    # -------- SET MESSAGE FUNCTION --------
    def set_message(self):
        new_message = self.message_entry.get()
```

CHAT

Build with Agent

AI responses may be inaccurate.

Generate Agent Instructions to onboard AI onto your codebase.

wallet blockchain.py

Describe what to build next

Agent Auto

OUTLINE

TIMELINE

Ln 100, Col 20 Spaces: 4 UTF-8 CRLF {} Python 3.14.2

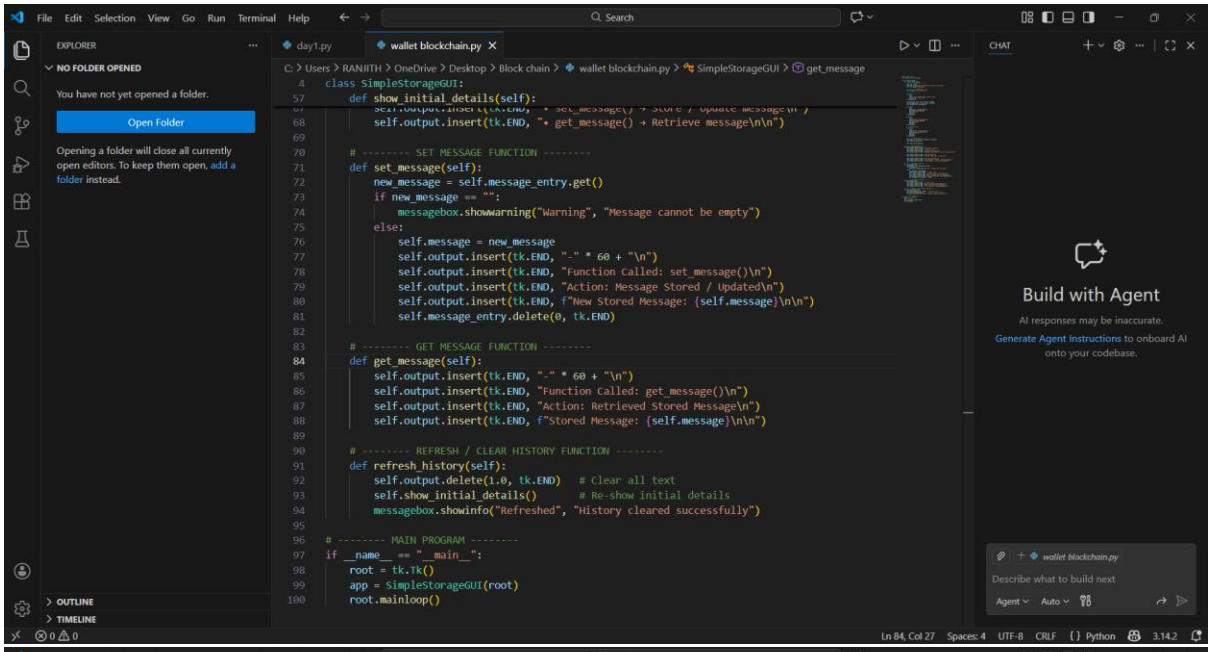
File Edit Selection View Go Run Terminal Help
Search
EXPLORER
NO FOLDER OPENED
You have not yet opened a folder.
Open Folder
Opening a folder will close all currently open editors. To keep them open, add a folder instead.
day1.py
wallet blockchain.py
C: > Users > RANJITH > OneDrive > Desktop > Block chain > wallet blockchain.py > SimpleStorageGUI > get_message
class SimpleStorageGUI:
def show_initial_details(self):
self.output.insert(tk.END, "• get_message() → Retrieve message\n\n")
# -------- SET MESSAGE FUNCTION --------
def set_message(self):
new_message = self.message_entry.get()
if new_message == "":
messagebox.showwarning("Warning", "Message cannot be empty")
else:
self.message = new_message
self.output.insert(tk.END, "-" * 60 + "\n")
self.output.insert(tk.END, "Function Called: set_message()\n")
self.output.insert(tk.END, "Action: Message Stored / Updated\n")
self.output.insert(tk.END, f"New Stored Message: {self.message}\n\n")
self.message_entry.delete(0, tk.END)
# -------- GET MESSAGE FUNCTION --------
def get_message(self):
self.output.insert(tk.END, "-" * 60 + "\n")
self.output.insert(tk.END, "Function Called: get_message()\n")
self.output.insert(tk.END, "Action: Retrieved Stored Message\n")
self.output.insert(tk.END, f"Stored Message: {self.message}\n\n")
# -------- REFRESH / CLEAR HISTORY FUNCTION --------
def refresh_history(self):
self.output.delete(1.0, tk.END) # Clear all text
self.show_initial_details() # Re-show initial details
messagebox.showinfo("Refreshed", "History cleared successfully")
# -------- MAIN PROGRAM --------
if __name__ == "__main__":
root = tk.Tk()
app = SimpleStorageGUI(root)
root.mainloop()
OUTLINE
TIMELINE
CHAT
Build with Agent
AI responses may be inaccurate.
Generate Agent Instructions to onboard AI onto your codebase.
wallet blockchain.py
Describe what to build next
Agent
Auto
Ln 84, Col 27
Spaces: 4
UTF-8
CRLF
Python
3.14.2

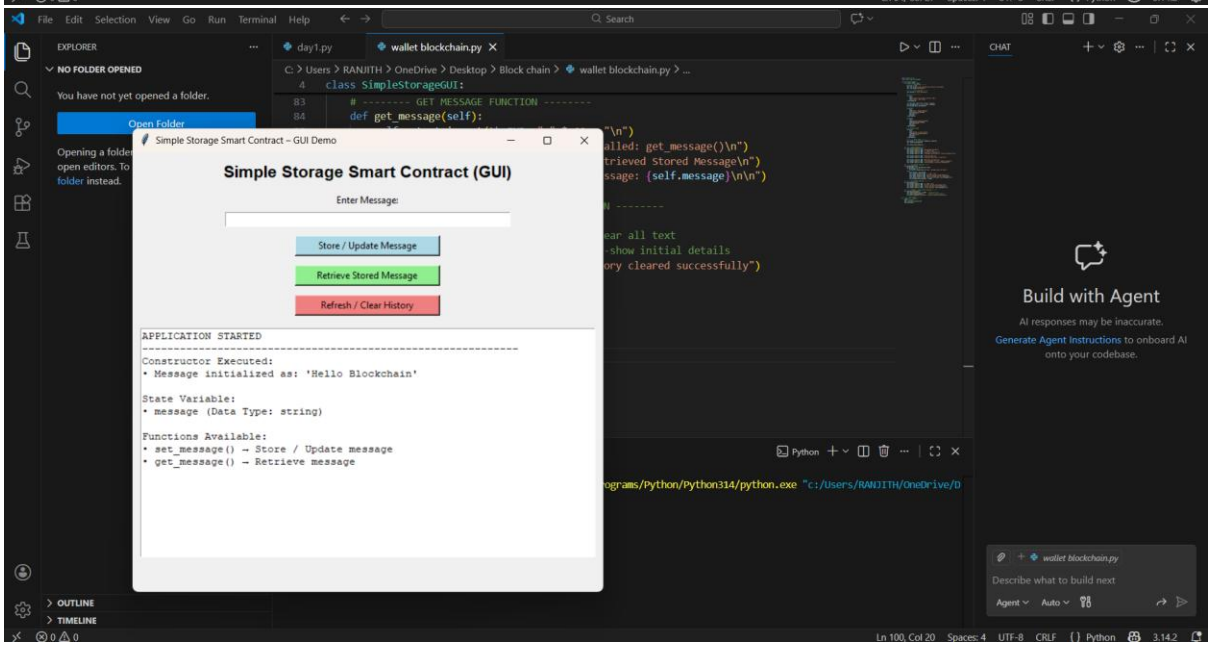
File Edit Selection View Go Run Terminal Help
Search
EXPLORER
NO FOLDER OPENED
You have not yet opened a folder.
Open Folder
day1.py
wallet blockchain.py
C: > Users > RANJITH > OneDrive > Desktop > Block chain > wallet blockchain.py > ...
class SimpleStorageGUI:
# -------- GET MESSAGE FUNCTION --------
def get_message(self):
Simple Storage Smart Contract – GUI Demo
Simple Storage Smart Contract (GUI)
Enter Message:
Store / Update Message
Retrieve Stored Message
Refresh / Clear History
APPLICATION STARTED
Constructor Executed:
• Message initialized as: 'Hello Blockchain'
State Variable:
• message (Data Type: string)
Functions Available:
• set_message() → Store / Update message
• get_message() → Retrieve message
Python
OUTLINE
TIMELINE
CHAT
Build with Agent
AI responses may be inaccurate.
Generate Agent Instructions to onboard AI onto your codebase.
wallet blockchain.py
Describe what to build next
Agent
Auto
Ln 100, Col 20
Spaces: 4
UTF-8
CRLF
Python
3.14.2

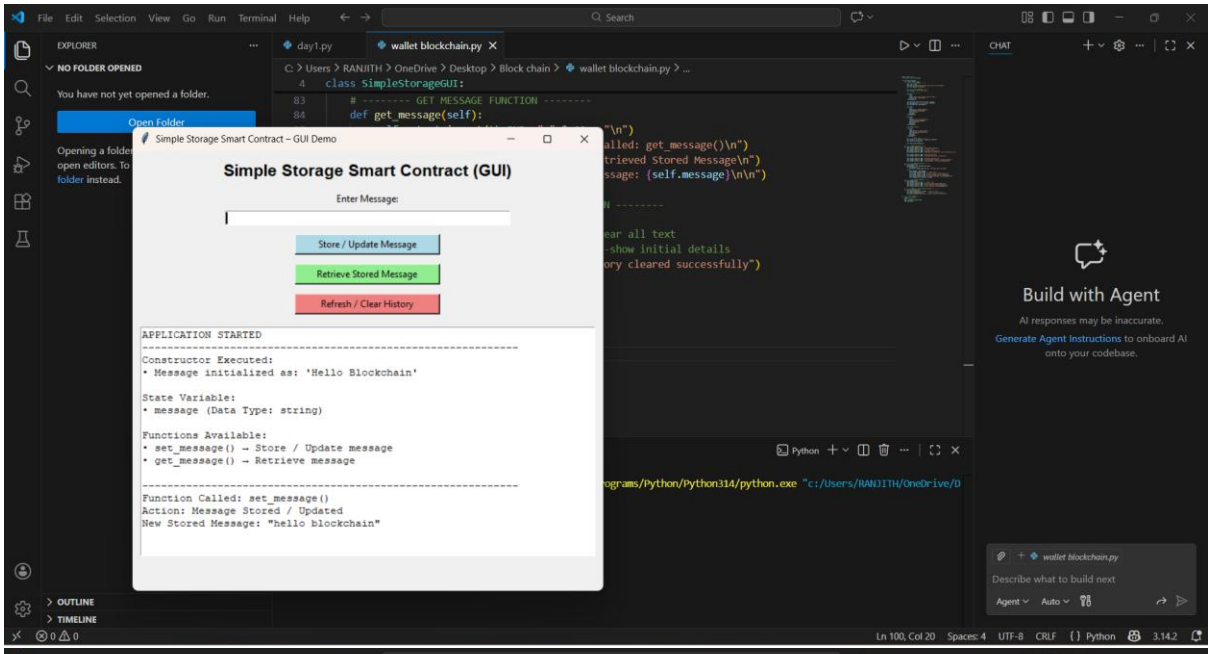
Simple Storage Smart Contract – GUI Demo
Simple Storage Smart Contract (GUI)
Enter Message:
Store / Update Message
Retrieve Stored Message
Refresh / Clear History
APPLICATION STARTED
Constructor Executed:
• Message initialized as: 'Hello Blockchain'
State Variable:
• message (Data Type: string)
Functions Available:
• set_message() → Store / Update message
• get_message() → Retrieve message
Function Called: set_message()
Action: Message Stored / Updated
New Stored Message: "hello blockchain"

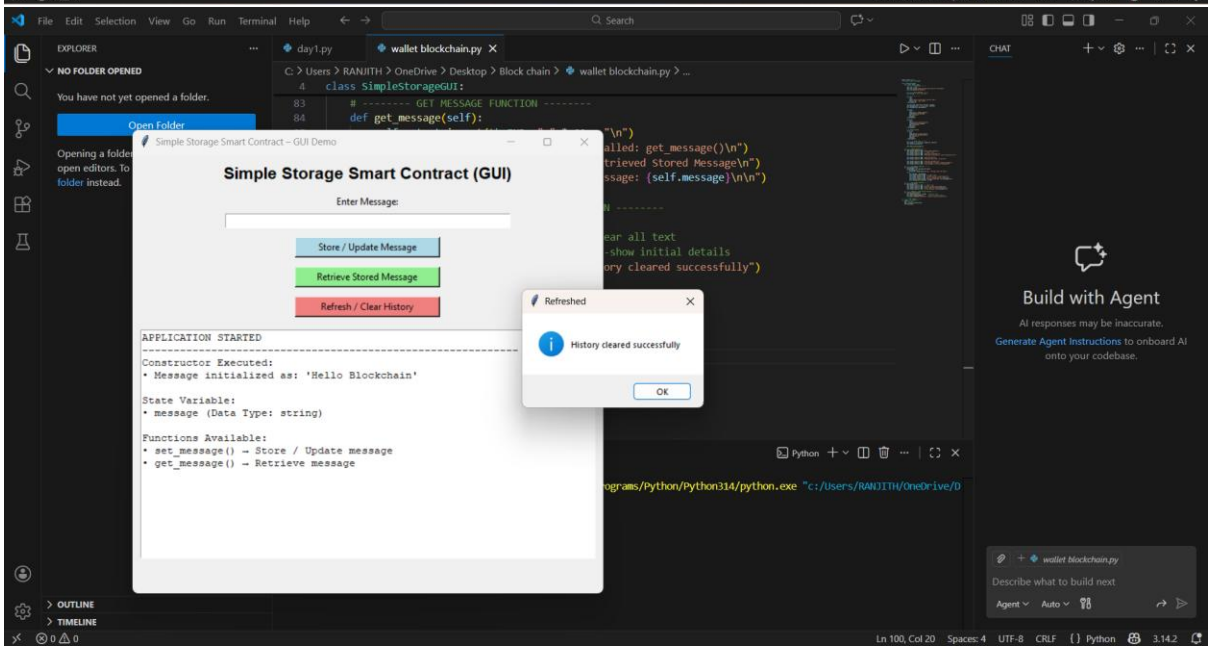
Simple Storage Smart Contract – GUI Demo
Simple Storage Smart Contract (GUI)
Enter Message:
Store / Update Message
Retrieve Stored Message
Refresh / Clear History
Refreshed
History cleared successfully
OK
APPLICATION STARTED
Constructor Executed:
• Message initialized as: 'Hello Blockchain'
State Variable:
• message (Data Type: string)
Functions Available:
• set_message() → Store / Update message
• get_message() → Retrieve message