Probl... Submit 1


Description Note Editorial Solutions Submissions

Given the `head` of a linked list, return *the node where the cycle begins. If there is no cycle, return* `null`.

There is a cycle in a linked list if there is some node in the list that can be reached again by continuously following the `next` pointer. Internally, `pos` is used to denote the index of the node that tail's `next` pointer is connected to (**0-indexed**). It is `-1` if there is no cycle. **Note that** `pos` **is not passed as a parameter**.

Do not modify the linked list.

Example 1:

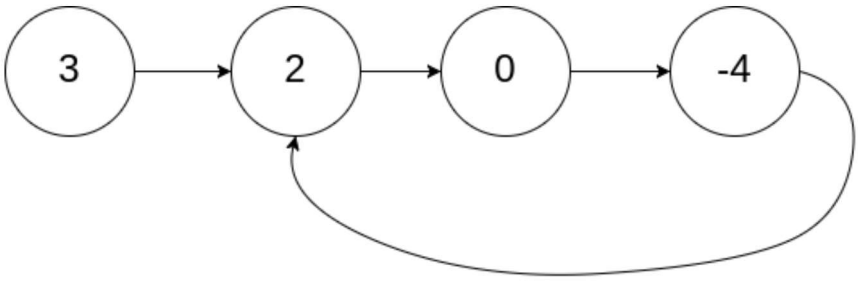


```
Input: head = [3,2,0,-4], pos = 1
Output: tail connects to node index 1
Explanation: There is a cycle in the linked list, where
```

15.5K 303 23 Online

Code

Java Auto

```
11   */
12  public class Solution
13      public ListNode de
14          ListNode slow
15          ListNode fast
16          while(fast!=nu
17              slow=slow.
18              fast=fast.
19              if(slow==f
20                  slow=h
21                  while(
22                      sl
23                      fa
24                  }
25                  return
```

Saved

Testcase Test Result