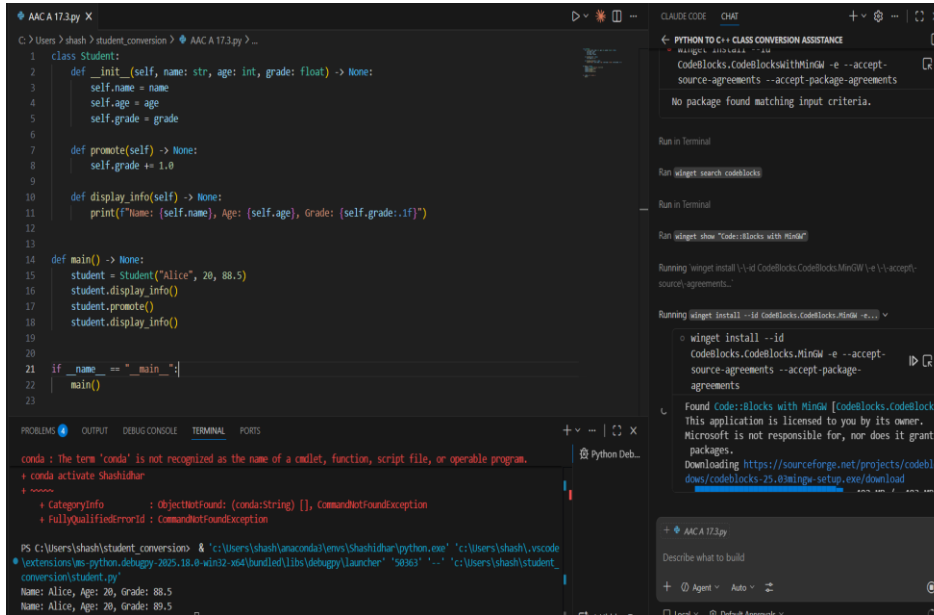



Name:G.Eshwar H.No:2303A51808 Batch:26

SCHOOL OF COMPUTER SCIENCE AND ARTIFICIAL INTELLIGENCE		DEPARTMENT OF COMPUTER SCIENCE ENGINEERING	
Program Name: B. Tech		Assignment Type: Lab	Academic Year:2025-2026
Course Coordinator Name		Dr. Rishabh Mittal	
Instructor(s) Name		Mr. S Naresh Kumar	
		Ms. B. Swathi	
		Dr. Sasanko Shekhar Gantayat	
		Mr. Md Sallauddin	
		Dr. Mathivanan	
		Mr. Y Srikanth	
		Ms. N Shilpa	
		Dr. Rishabh Mittal (Coordinator)	
		Dr. R. Prashant Kumar	
		Mr. Ankushavali MD	
		Mr. B Viswanath	
		Ms. Sujitha Reddy	
		Ms. A. Anitha	
		Ms. M.Madhuri	
		Ms. Katherashala Swetha	
		Ms. Velpula sumalatha	
		Mr. Bingi Raju	
CourseCode	23CS002PC304	Course Title	AI Assisted Coding
Year/Sem	III/II	Regulation	R23
Date and Day of Assignment	Week10 – Wednesday	Time(s)	23CSBTB01 To 23CSBTB52
Duration	2 Hours	Applicable to Batches	All batches
Assignment Number:19.3(Present assignment number)/24(Total number of assignments)			

Q.No.	Question	Expected Time to complete
1	Lab 19 – Code Translation: Converting Between Programming Languages Lab Objectives: Understand how AI tools can assist in translating code between	Week10 – Wednesday

	different programming languages. - Learn to verify correctness and functionality after translation. - Explore syntactic and semantic differences between languages (e.g., Python, Java, C++). - Practice debugging and optimizing AI-translated code.	
	Task 1 – Python to C++ Conversion Task: Translate a simple Python class into C++ using AI assistance. Instructions: - Prompt AI to convert a Python class representing a Student with attributes and methods into equivalent C++ code - Ensure proper handling of: - Constructors - Data types - Access specifiers - Compile and run both versions to verify output consistency Expected Output: An equivalent working C++ class translated from Python. 	
	Task 2 – Java to Python Function Conversion Task: Convert a Java method that checks whether a number is prime into Python. Instructions: - Ask AI to translate a Java isPrime() method into Python - Test the function with multiple inputs - Ensure the Python version follows Pythonic syntax and logic	

Expected Output:
A correct Python function equivalent to the original Java prime-checking method.

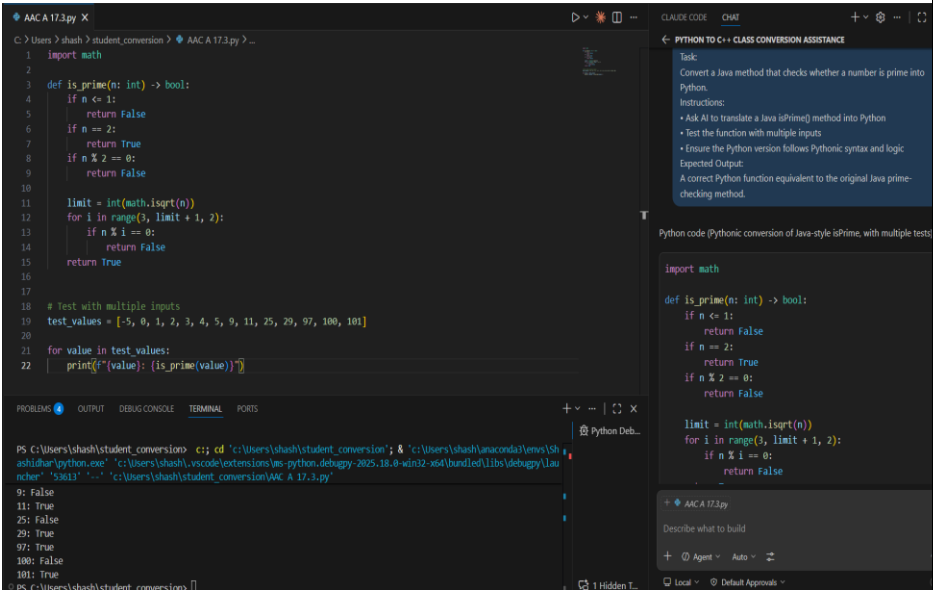

Task 3 – Pseudocode to Python Implementation
Task:
Translate a given pseudocode algorithm into Python using AI.
Instructions:

- Provide AI with pseudocode for sorting numbers (e.g., bubble sort or selection sort)
- Ask AI to convert it into executable Python code
- Validate correctness using sample input lists

Expected Output:
A working Python program that correctly implements the pseudocode logic.

```

AAC A 17.3.py X
C:\Users\shash> student_conversion > AAC A 17.3.py > ...
1 def bubble_sort(nums):
2     arr = nums[:]
3     n = len(arr)
4     for i in range(n):
5         swapped = False
6         for j in range(0, n - i - 1):
7             if arr[j] > arr[j + 1]:
8                 arr[j], arr[j + 1] = arr[j + 1], arr[j]
9                 swapped = True
10        if not swapped:
11            break
12        return arr
13
14
15 def main():
16     test_lists = [
17         [64, 34, 25, 12, 22, 11, 90],
18         [5, 1, 4, 2, 8],
19         [3, 3, 2, 1, 5, 0],
20         [],
21         [10],
22     ]
23
24     for lst in test_lists:
25         print("Input :", lst)
26         print("Sorted:", bubble_sort(lst))
27         print()
28
29 if __name__ == "__main__":
30     main()
31
32

```

Python Deb...

for lst in test_lists:
print("Input :", lst)
print("Sorted:", bubble_sort(lst))
print()

Input : []
Sorted: []

Input : [10]
Sorted: [10]

```

AAC A 17.3.py X
C:\Users\shash> student_conversion > AAC A 17.3.py > ...
15 def main():
16     test_lists = [
17         [64, 34, 25, 12, 22, 11, 90],
18         [5, 1, 4, 2, 8],
19         [3, 3, 2, 1, 5, 0],
20         [],
21         [10],
22     ]
23
24     for lst in test_lists:
25         print("Input :", lst)
26         print("Sorted:", bubble_sort(lst))
27         print()
28
29 if __name__ == "__main__":
30     main()
31
32

```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

PS C:\Users\shash\student_conversion> c;; cd 'c:\Users\shash\stud
ashidhar\python.exe' 'c:\Users\shash\.vscode\extensions\ms-python.de
ncher' '56797' '--' 'c:\Users\shash\student_conversion\AAC A 17.3.
py'

Input : []
Sorted: []

Input : [10]
Sorted: [10]

Task 4 – SQL to Pandas Query

Task:

Translate a SQL query into a Pandas DataFrame operation in Python.

Instructions:

- Provide AI with a SQL query (e.g., SELECT name, salary FROM employees WHERE salary > 50000).
- Ask AI to generate equivalent Pandas code.
- Test the generated code on a sample DataFrame.

Expected Output:

- Equivalent Pandas query that retrieves the correct subset of data.

The screenshot shows a VS Code editor with a Python file named 'AAC A 17.3.py'. The code defines a pandas DataFrame 'employees' with columns 'name', 'salary', and 'department'. It filters the DataFrame for employees with a salary greater than 50,000 and prints the result. The terminal window at the bottom shows the command prompt and the output of the script, which lists the names and salaries of the filtered employees: Bob (62000), Charlie (51000), and Evan (75000). The sidebar on the right displays 'PYTHON TO C++ CLASS CONVERSION ASSISTANCE' with a task description and instructions for using AI to translate SQL queries into pandas code.

```
1 import pandas as pd
2
3 employees = pd.DataFrame({
4     "name": ["Alice", "Bob", "Charlie", "Diana", "Evan"],
5     "salary": [48000, 62000, 51000, 45000, 75000],
6     "department": ["HR", "Engineering", "Sales", "Finance", "Engineering"],
7 })
8
9
10
11 result = employees.loc[employees["salary"] > 50000, ["name", "salary"]]
12
13 print(result)
```

```
name salary
1 Bob 62000
2 Charlie 51000
4 Evan 75000
```

Task 5 – Real-Time Application: Algorithm Translation Across Languages

Scenario:

A company maintains algorithms written in different programming languages.

Examples:

- Converting a Python searching algorithm into C
- Translating a Java sorting program into JavaScript

Instructions:

- Use AI to translate a selected algorithm between two programming languages
- Execute and test both versions
- Document translation challenges such as:
 - Syntax differences
 - Library support
 - Memory management

Expected Output:

Equivalent, tested code implementations in two different programming languages.

ACA 17.3.py X

```
C:\Users\shash> student_conversion > ACA 17.3.py >
1 def python_binary_search(arr, target):
2     left, right = 0, len(arr) - 1
3     while left <= right:
4         mid = left + (right - left) // 2
5         if arr[mid] == target:
6             return mid
7         if arr[mid] < target:
8             left = mid + 1
9         else:
10            right = mid - 1
11    return -1
12
13
14 def c_style_binary_search(arr, size, target):
15     left = 0
16     right = size - 1
17     while left <= right:
18         mid = left + (right - left) // 2
19         if arr[mid] == target:
20             return mid
21         elif arr[mid] < target:
22             left = mid + 1
23         else:
24             right = mid - 1
25    return -1
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
```

PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

PORTS

```
PS C:\Users\shash\student_conversion> cd 'c:\Users\shash\student_conversion'; & 'c:\Users\shash\anaconda\envs\shash\python.exe' 'c:\Users\shash\vscode\extensions\ms-python.debugpy-2025.18.0-win32-x64\bundled\libs\debugpy\launcher' "00000" "-c" 'c:\Users\shash\student_conversion\ACA 17.3.py'
Search Tests
Input: [64, 34, 25, 12, 22, 11, 90], java_like=[11, 12, 22, 25, 34, 64, 90], js_like=[11, 12, 22, 25, 34, 64, 90], match=True
Input: [5, 1, 4, 2, 8], java_like=[1, 2, 4, 5, 8], js_like=[1, 2, 4, 5, 8], match=True
Input: [3, 3, 2, 1, 5, 0], java_like=[0, 1, 2, 3, 3, 5], js_like=[0, 1, 2, 3, 3, 5], match=True
Input: [], java_like=[], js_like=[], match=True
Input: [10], java_like=[10], js_like=[10], match=True
PS C:\Users\shash\student_conversion>
```

CLAUDE CODE

CHAT

PYTHON TO C++ CLASS CONVERSION ASSISTANCE

Task 5 - Real-Time Application: Algorithm Translation Across Languages
Scenario:
A company maintains algorithms written in different programming languages.
Examples:
• Converting a Python searching algorithm into C
• Translating a Java sorting program into JavaScript
Instructions:
• Use AI to translate a selected algorithm between two programming languages
• Execute and test both versions
• Document translation challenges such as:
o Syntax differences
o Library support
o Memory management
Expected Output:
Equivalent, tested code implementations in two different programming languages
give code in python without comments

def python_binary_search(arr, target):
 left, right = 0, len(arr) - 1
 while left <= right:
 mid = left + (right - left) // 2
 if arr[mid] == target:
 return mid
 elif arr[mid] < target:
 left = mid + 1
 else:
 right = mid - 1
 return -1

def c_style_binary_search(arr, size, target):
 left = 0
 right = size - 1
 while left <= right:
 mid = left + (right - left) // 2
 if arr[mid] == target:
 return mid
 elif arr[mid] < target:
 left = mid + 1
 else:
 right = mid - 1
 return -1

ACA 17.3.py
Describe what to build
Agent Auto
Local Default Approvals

ACA 17.3.py X

```
C:\Users\shash> student_conversion > ACA 17.3.py >
14 def c_style_binary_search(arr, size, target):
15     left = 0
16     right = size - 1
17     while left <= right:
18         mid = left + (right - left) // 2
19         if arr[mid] == target:
20             return mid
21         elif arr[mid] < target:
22             left = mid + 1
23         else:
24             right = mid - 1
25    return -1
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
```

PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

PORTS

```
PS C:\Users\shash\student_conversion> cd 'c:\Users\shash\student_conversion'; & 'c:\Users\shash\anaconda\envs\shash\python.exe' 'c:\Users\shash\vscode\extensions\ms-python.debugpy-2025.18.0-win32-x64\bundled\libs\debugpy\launcher' "00000" "-c" 'c:\Users\shash\student_conversion\ACA 17.3.py'
Search Tests
Input: [64, 34, 25, 12, 22, 11, 90], java_like=[11, 12, 22, 25, 34, 64, 90], js_like=[11, 12, 22, 25, 34, 64, 90], match=True
Input: [5, 1, 4, 2, 8], java_like=[1, 2, 4, 5, 8], js_like=[1, 2, 4, 5, 8], match=True
Input: [3, 3, 2, 1, 5, 0], java_like=[0, 1, 2, 3, 3, 5], js_like=[0, 1, 2, 3, 3, 5], match=True
Input: [], java_like=[], js_like=[], match=True
Input: [10], java_like=[10], js_like=[10], match=True
PS C:\Users\shash\student_conversion>
```

CLAUDE CODE

CHAT

PYTHON TO C++ CLASS CONVERSION ASSISTANCE

def python_binary_search(arr, target):
 left, right = 0, len(arr) - 1
 while left <= right:
 mid = left + (right - left) // 2
 if arr[mid] == target:
 return mid
 elif arr[mid] < target:
 left = mid + 1
 else:
 right = mid - 1
 return -1

def c_style_binary_search(arr, size, target):
 left = 0
 right = size - 1
 while left <= right:
 mid = left + (right - left) // 2
 if arr[mid] == target:
 return mid
 elif arr[mid] < target:
 left = mid + 1
 else:
 right = mid - 1
 return -1

ACA 17.3.py
Describe what to build
Agent Auto
Local Default Approvals

AAC A 17.3.py X

C: > Users > shash > student_conversion > AAC A 17.3.py > ...

```
40 def javascript_bubble_sort(arr):
41     a = arr[:]
42     n = len(a)
43     for i in range(n):
44         swapped = False
45         for j in range(0, n - i - 1):
46             if a[j] > a[j + 1]:
47                 a[j], a[j + 1] = a[j + 1], a[j]
48                 swapped = True
49         if not swapped:
50             break
51     return a
52
53
54 def run_search_tests():
55     data = [3, 7, 12, 19, 24, 31, 45, 58]
56     targets = [3, 24, 58, 9]
57     print("Search Tests")
58     for t in targets:
59         p = python_binary_search(data, t)
60         c = c_style_binary_search(data, len(data), t)
61         print(f"target={t}, python={p}, c_style={c}, match={p == c}")
62
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

```
PS C:\Users\shash\student_conversion> c++; cd 'c:\Users\shash\student_conversion'; & 'c:\Users\shash\anaconda3\envs\Sh
ashidhar\python.exe' 'c:\Users\shash\.vscode\extensions\ms-python.debugpy-2025.18.0-win32-x64\bundle\libs\debugpy\lau
ncher' '49361' '--' 'c:\Users\shash\student_conversion\AAC A 17.3.py'
```

```
Search Tests
input=[64, 34, 25, 12, 22, 11, 90], java_like=[11, 12, 22, 25, 34, 64, 90], js_like=[11, 12, 22, 25, 34, 64, 90], matc
h=True
input=[5, 1, 4, 2, 8], java_like=[1, 2, 4, 5, 8], js_like=[1, 2, 4, 5, 8], match=True
input=[3, 3, 2, 1, 5, 0], java_like=[0, 1, 2, 3, 3, 5], js_like=[0, 1, 2, 3, 3, 5], match=True
input=[], java_like=[], js_like=[], match=True
input=[10], java_like=[10], js_like=[10], match=True
```

AAC A 17.3.py X

C: > Users > shash > student_conversion > AAC A 17.3.py > ...

```
63
64 def run_sort_tests():
65     test_cases = [
66         [64, 34, 25, 12, 22, 11, 90],
67         [5, 1, 4, 2, 8],
68         [3, 3, 2, 1, 5, 0],
69         [],
70         [10],
71     ]
72     print("\nSort Tests")
73     for case in test_cases:
74         j = java_bubble_sort(case)
75         js = javascript_bubble_sort(case)
76         print(f"input={case}, java_like={j}, js_like={js}, match={j == js}")
77
78
79 if __name__ == "__main__":
80     run_search_tests()
81     run_sort_tests()
82
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

```
PS C:\Users\shash\student_conversion> c++; cd 'c:\Users\shash\student_conversion'; & 'c:\Users\shash\anaconda3\envs\Sh
ashidhar\python.exe' 'c:\Users\shash\.vscode\extensions\ms-python.debugpy-2025.18.0-win32-x64\bundle\libs\debugpy\lau
ncher' '49361' '--' 'c:\Users\shash\student_conversion\AAC A 17.3.py'
```

```
Search Tests
input=[64, 34, 25, 12, 22, 11, 90], java_like=[11, 12, 22, 25, 34, 64, 90], js_like=[11, 12, 22, 25, 34, 64, 90], r
h=True
input=[5, 1, 4, 2, 8], java_like=[1, 2, 4, 5, 8], js_like=[1, 2, 4, 5, 8], match=True
input=[3, 3, 2, 1, 5, 0], java_like=[0, 1, 2, 3, 3, 5], js_like=[0, 1, 2, 3, 3, 5], match=True
input=[], java_like=[], js_like=[], match=True
input=[10], java_like=[10], js_like=[10], match=True
```

Note: Report should be submitted as a word document for all tasks in a single document with prompts, comments & code explanation, and output and if required, screenshots.