7.3.3 Upload a Board

There are two entries for uploading a board, in “Project” menu, “Board” page of “Repository” view. You need to do the following operations.

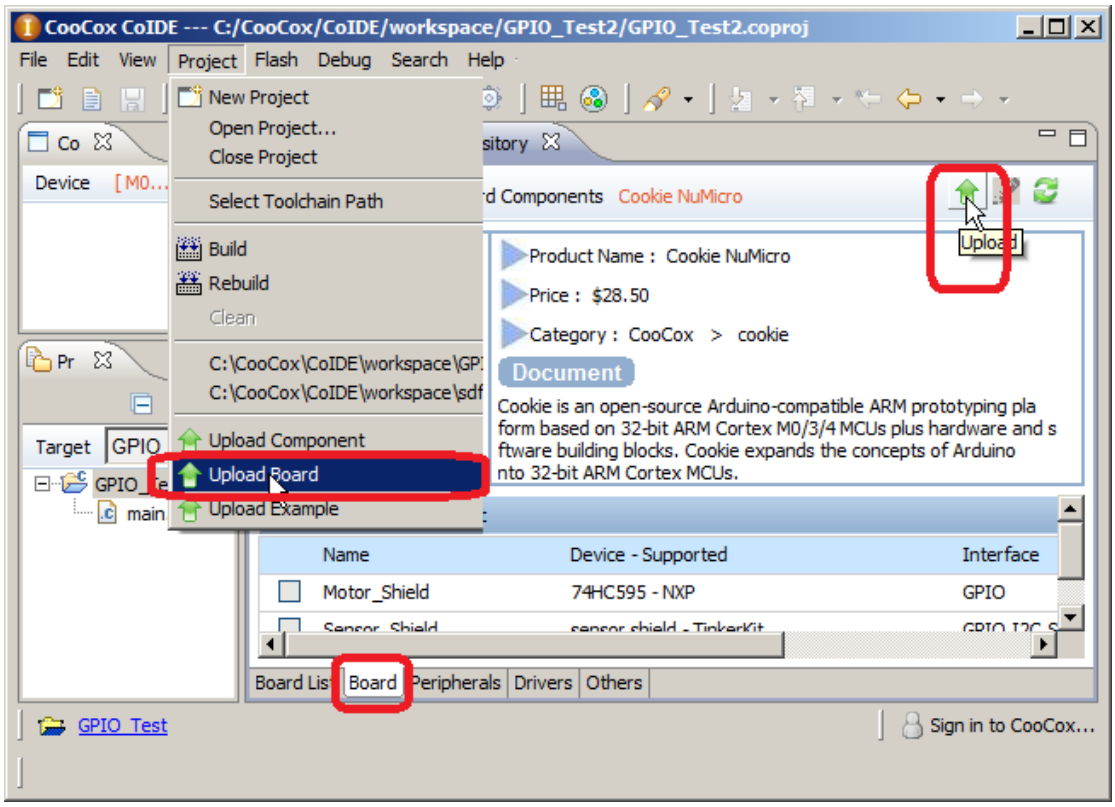

1. Input necessary information: “Board Name”, “Board Description”. If you want users know more about your board, you should input more information.

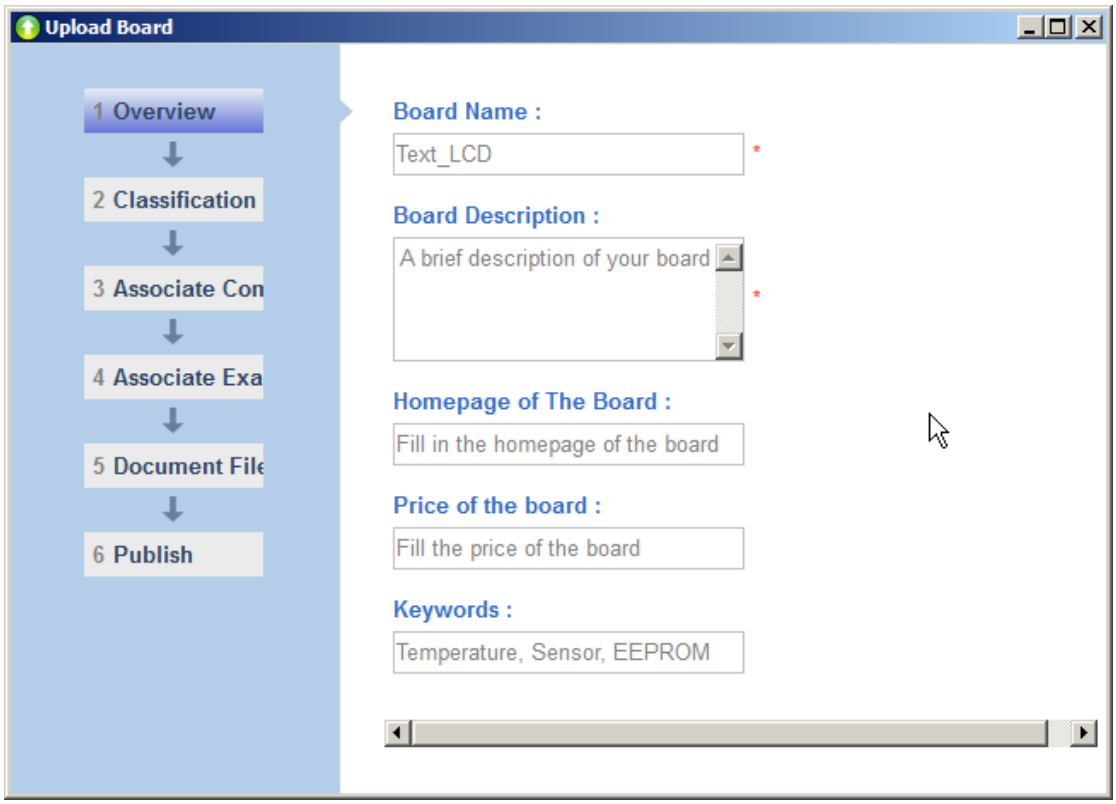

2. Input the necessary information: “Board Name”, “Board Description”.

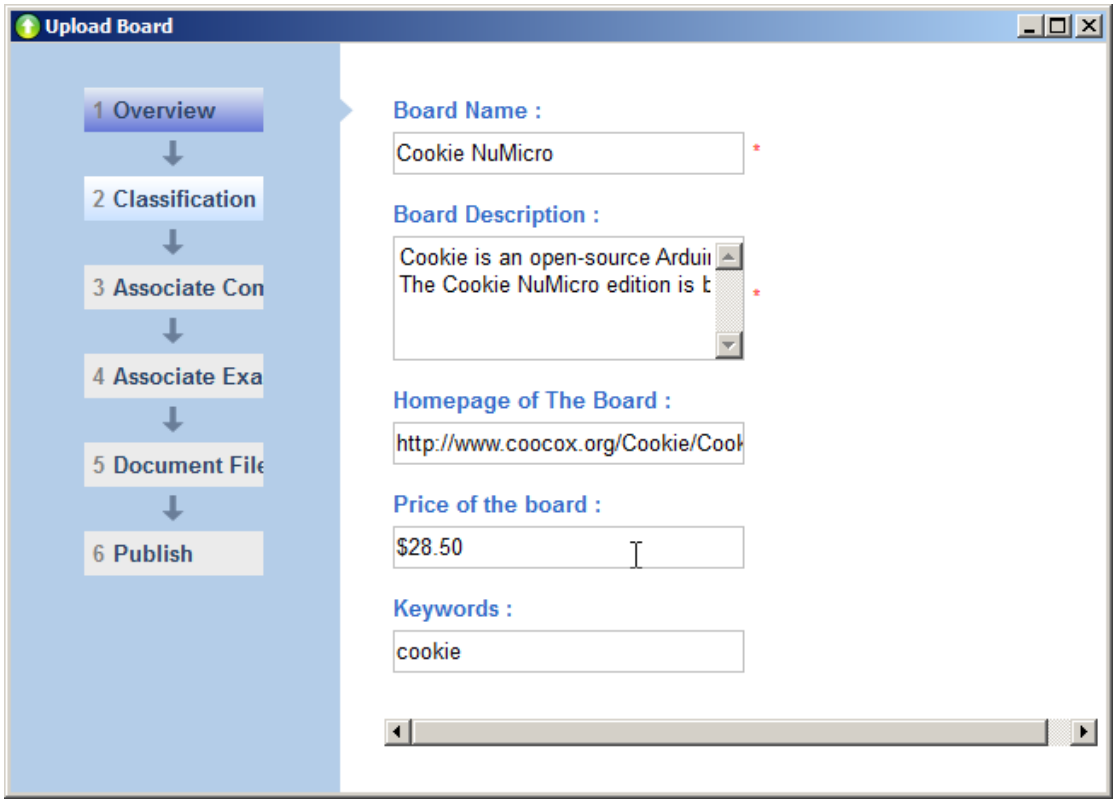

3. Step 2-“Classification”. “Chip Manufacturer” means the manufacturer of the chip that your board based on. “Chip” means the chip that the board uses. “Board Manufacturer” means the manufacturer that makes the board. For instance, the cookie board which make by CooCox (more info: http://www.coocox.org/Cookie.html). The cookie board uses the chip M0516LBN that make by Nuvoton. So i set “Nuvoton” for “Chip Manufacturer” and set “M0516LBN” for “Chip”.

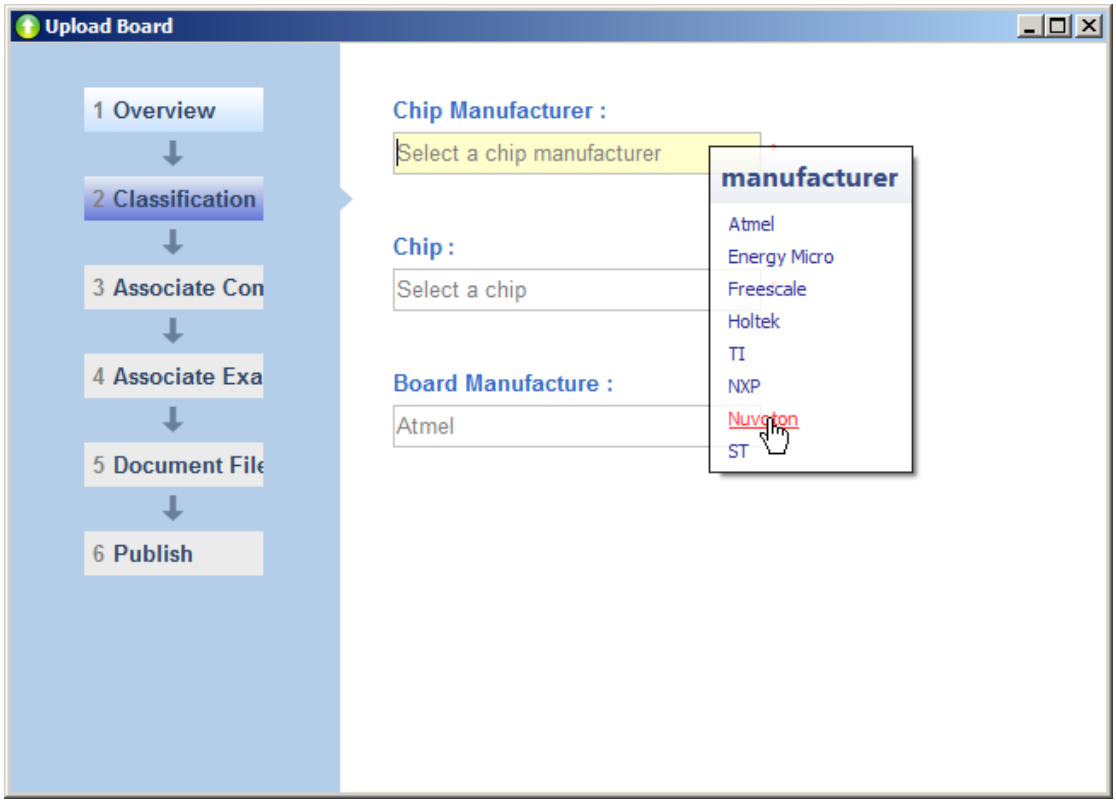

4. Step 3-“Associate Components”. Specify driver components that are suitable for your board. When other users choose your board, they could see the driver components that you specified at this step in “Board” page of “Repository” view.

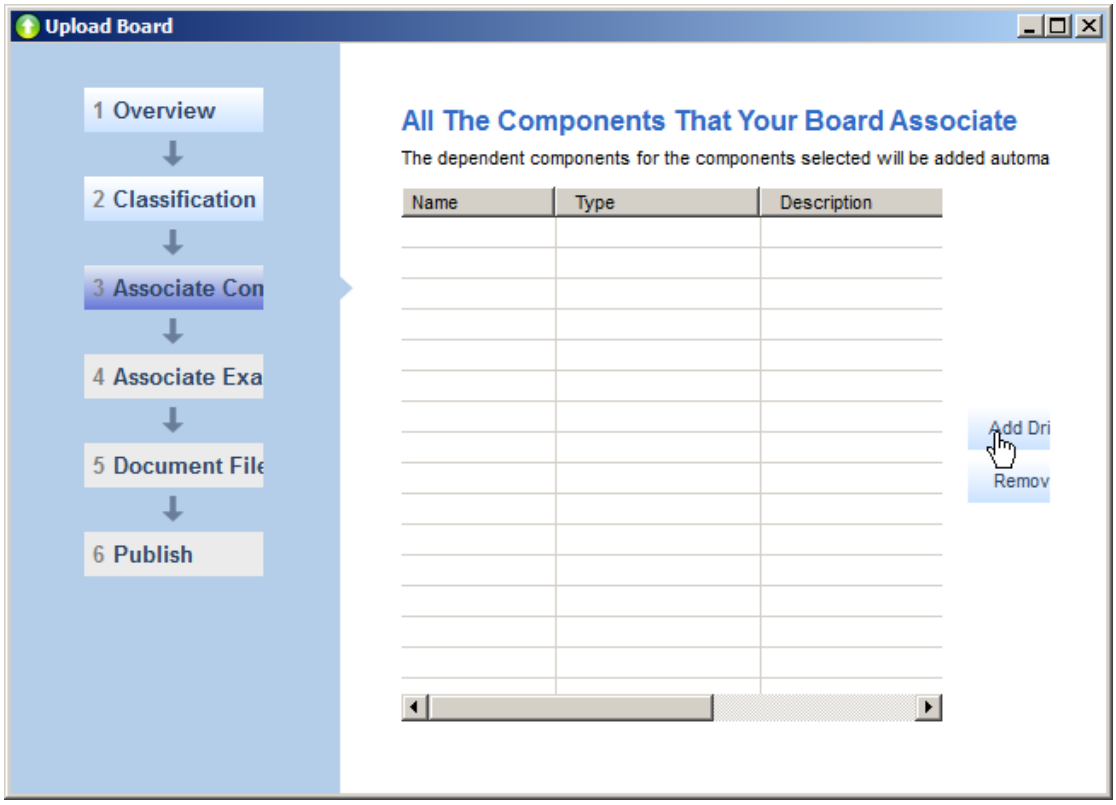

5. Step 4-“Associate Examples”. If you have app examples for the board, you should upload these app examples first (Refer to chapter 7.2.3 Upload Example), and then you can associate these examples with the board by this step. When other users choose your board, they could see the app examples which you specified at this step in “Board” page of “Repository” view.

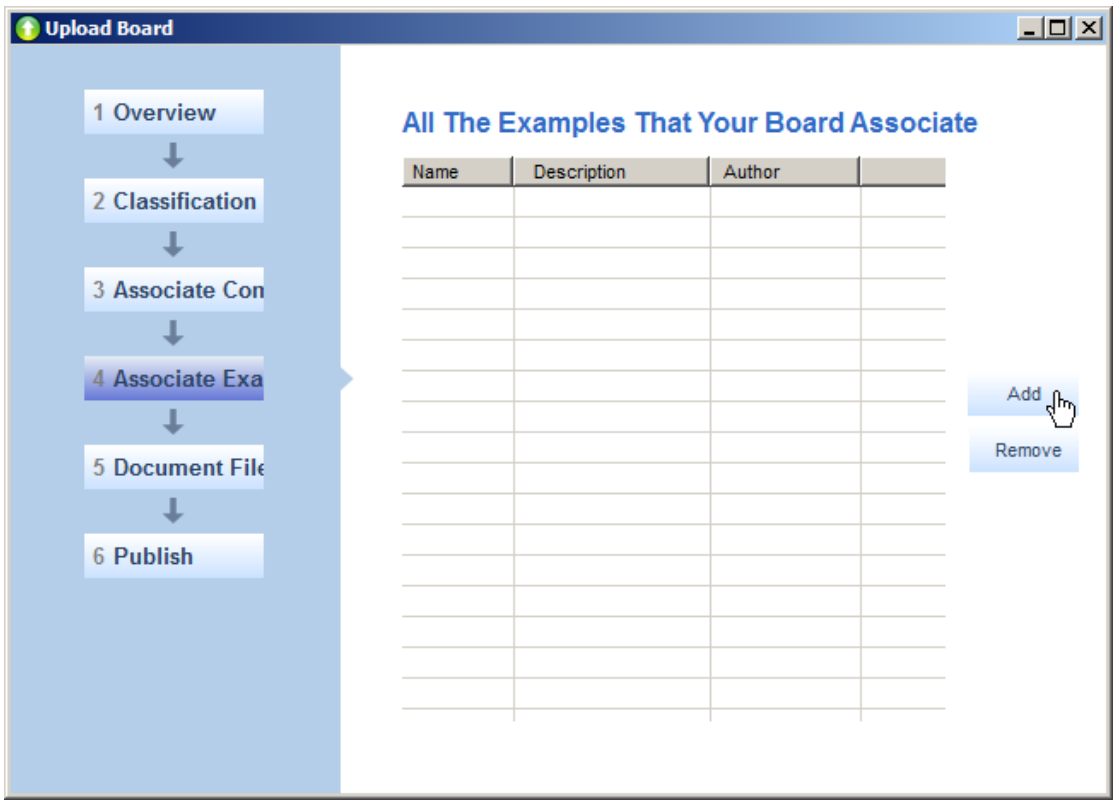

6. Step 5-“Document Files”. Edit your board document in “HTML Editor”.

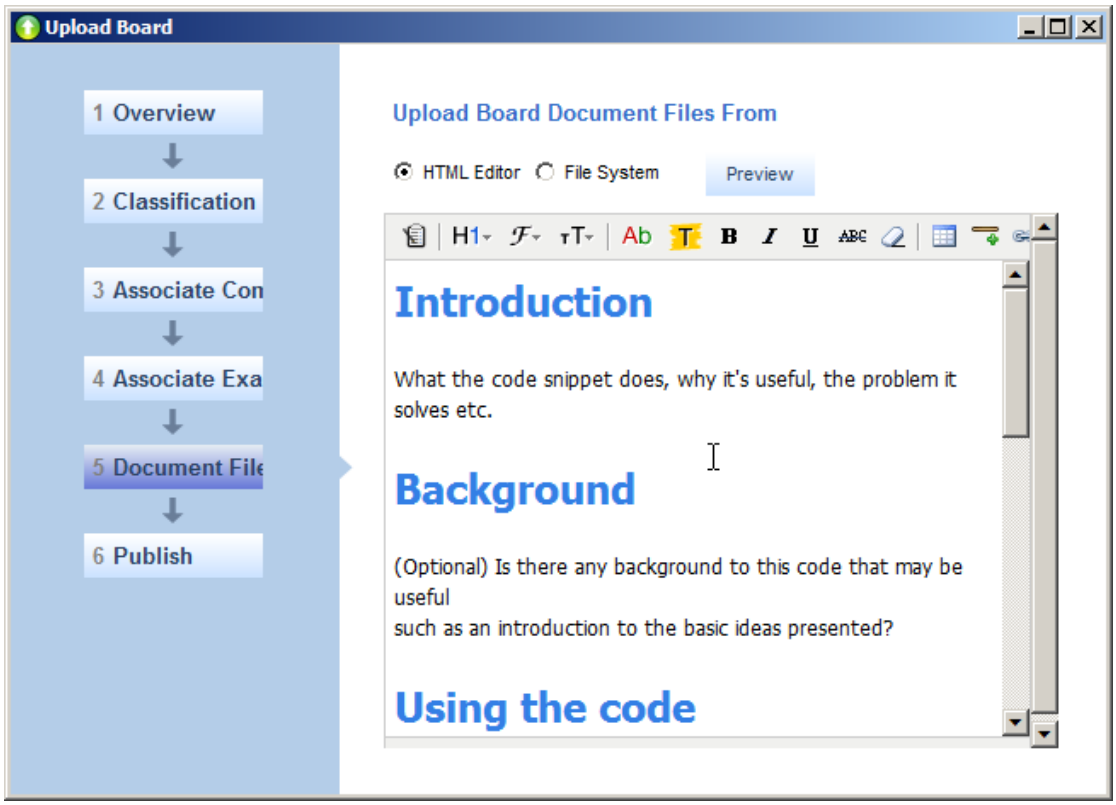
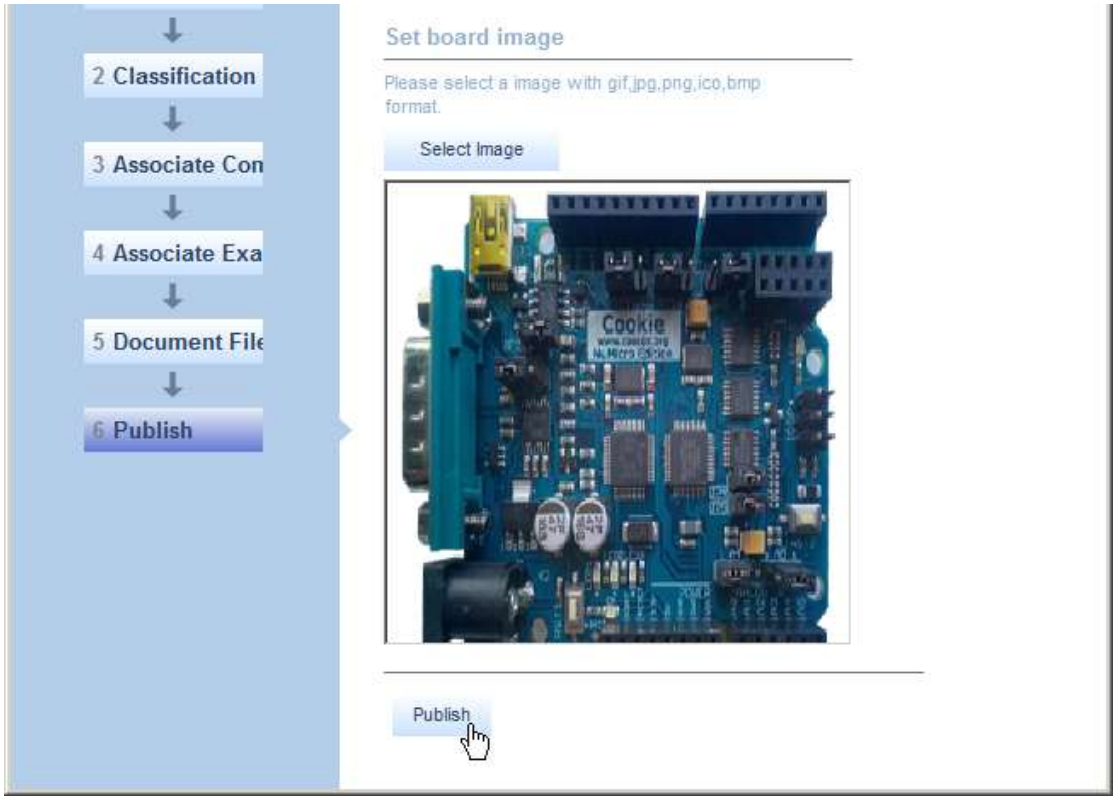
7. Set your board image and then click “Publish” to upload your board.