



Technical and Functional Specifications

	Project:	Integrated Visa POS
	Type:	Protocol specifications
Integrated VISA POS Protocol specifications		

Observations



1. Historical

Version	Date	Description	Author
1.01	23/10/2006	Creation of the document.	JB
1.02	04/07/2007	Fields were added to some messages and FN host response codes in annex 3	
1.03	26/12/2011	A field is added to some messages with the VA BIN aggregate.	
1.04	30/10/2015	The length of Plans is modified.	MERA
1.05	17/12/2015	Vending functionality is incorporated, with the MERA generic card 'VVI'	
1.06	12/02/2016	Examples of plots are added.	MERA
1.07	21/11/2016	The PLA command was corrected. Card code from N2 to N3 Plan code from N1 to N2	IOR
1.08	17/03/2017	Section 5.2, format of the field LENGTH OF FIELDS (2 bytes hex) in pos message integrated	
1.09	13/03/2018	The response of the DEV Command was corrected. Position 76 (last 4 digits of the card) Position 80 (first 6 digits of the card)	MERA

2.Index

1. Historical.....	2
2. Indexe.3	
3. Introduction	4
4. Architecture	4
Protocol Serial	5
5.1. Level of linke.....	5
5.2. Level of application	
5.2.1. Test connection	6
5.2.2. Venta.7	
5.2.3. Cancellation of winda.....	9
5.2.4. Devolución.....	12
5.2.5. Cancellation of return.....	14
5.2.6. Closing.....	15
5.2.7. Obtain last transaction datan	17
5.2.8. Obtain last closing data	18
5.2.9. Reprint of the last transaction ticket	20
5.2.10. Reprinting of last closing tickete	20
5.2.11. Obtain card table	21
5.2.12. Obtain plan table.....	25
Annex 1.....	28
General response codes (IngStore).....	28
Specific response codes (Integrated Visa POS).....	28
Annex 2.....	29
Summary of command names.....	29
Appendix 3	30
Host response codes.....	30

3. Introduction

This document aims to define the protocol of communications between a PC type box and an Ingenico POS with the application Visa Argentina Credit-Debit.

The solution is structured in layers. The application of the box or the POS, it the necessary parameters will be passed to the modules:


- "visaposi.dll": 32-bit Windows DLL that runs on the client side.
- visaposi.lib: Static library, which is linked to the POS application.

This module is responsible for formatting the parameters that are sent to the lowest level layer, which is ultimately responsible for communication.

These modules are:

- ingstore.dll: on the PC side
- ingstore.lib: on the POS side

4. Architecture

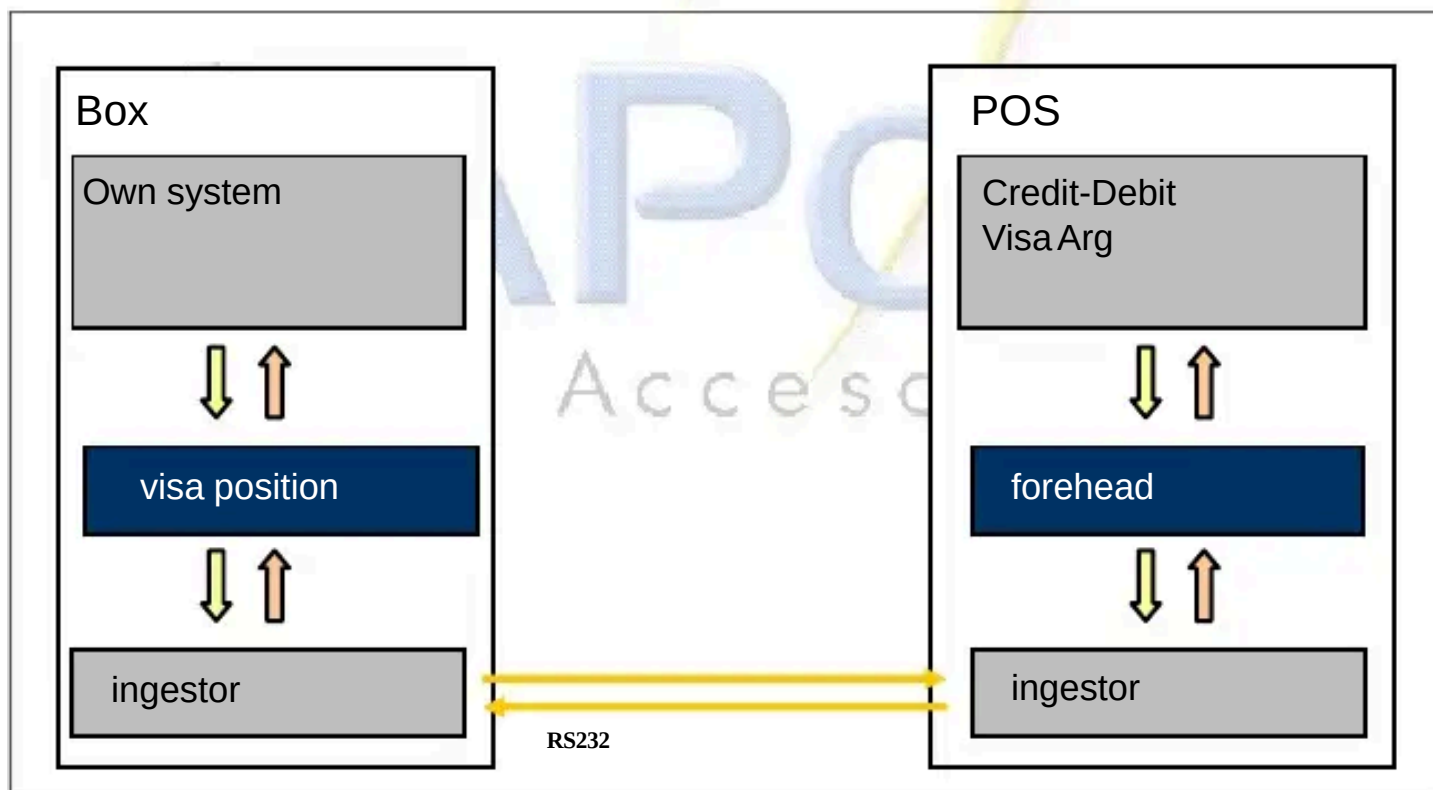

5.Serial Protocol

5.1.Link Layer

The communication must be RS232 serial. The configuration is configurable, with the following default configuration:

- . Speed: 19200 bps
- . Data bits: 8
- . Parity: N (no parity)
- . Stop bits: 1

The communication is always initiated and concluded by the Box, and the POS responds.

5.2.Application level

Data packet format

	Long	Description
0x02	H1	Start of Text Indicator (STX)
COMMAND	A3	Indicate the command sent (VEN, ANV, etc.)
LENGTH OF FIELDS	H2	Length of the sent fields. Size 2 bytes If you do not have parameters, the value is 0("00h 00h") Example for the VEN command with a length of 104 (decimal) 68 (hex) characters: 56 45 4E 68 00 Example for the TES command with length of 0 characters: 54 45 53 00 00
0x03	H1	End of packet indicator (ETX)
CRC	1	

5.2.1. Test de conexión

Command name _____

TES

Input parameters _____

Without parameters

Return parameters _____

Without parameters

Example Plot _____

Sent:

ENQ:

05

Received:

ACK:

06

Sent:

STX:02

XOR SUM COMPLETE PACKAGE WITHOUT STX:41

ESC: E5 84 53 00 00 01A

DEC: .TES...A

Received:

ACK:06

XOR SUM COMPLETE PACKAGE WITHOUT ACK:70

TEST001

DEC: ..TES001...p

Sent:

HEX: 06

DEC: 6

Sale

Command name: _____

COME

Input parameters: _____

Long	Format	Position	Description
0	N	12	Amount. The last two digits are the decimals
12	N	12	Invoice number. In case it does not correspond will be completed with "0"
24	N	2	Number of installments. Right aligned, padding with "0".
26	N	3	Card code. Aligned to the right, padding with "0".
29	N	1	Plan code. Right aligned, filled with 0. In case of not corresponding, it should go in white.
30	N	12	Tip amount. The last two digits they are decimals. In case they do not correspond will be completed with '0'
42	N	15	Commercial code. In case of not the correspondence must be left blank.
57	A	23	Trade name. In case of not the correspondence must be left blank.
80	A	23	Tax ID of the commerce. In case it does not correspond it should be left blank.
103	A	1	Line mode. '1' if the trx is online and '0' if it is not transaction is offline

Return parameters: _____

Position	Long	Format	Description
0	N	2	Host response code. The value '00' it means approved.
2	A	32	Response message. Aligned to the left, filling with whites.
34	N	6	Authorization code. Fill with '0' in case not corresponding.
40	N	7	Coupon number. Fill with '0' if applicable not correspond.
47	N	3	Número de lote. Alineado a derecha, relleno con "0".
50	A	26	Customer name read from the band. Filling with blank in case of not corresponding.
76	N	4	Last 4 digits of the card. Fill with '0' in In case of non-conformity.
80	N	6	First 6 digits of the card. Fill with "0" in case of not corresponding.
86	A	10	Transaction date ("DD/MM/YYYY")
96	A	8	Hora de la transacción ("HH:MM:SS")
104	N	8	Terminal id

Technical and Functional Specifications

Description of the response fields of the command 'VEN'
Response Code:00
Response Message: 00 PLAN V: pay your summary
Authorization Code: 020670
Nro de Cupón:0000001
Nro de Lote:001
Nombre del Cliente:PRUEBA/PRUEBA
Last 4 of Card: 7787
I am from Card: 450799
Transaction date: 12/02/2016
Time trans: 14:42:00
Nro Terminal:17000096

Sent:

HEX: 06
DEC: 6

In the case that the sale response is obtained, it is obtained. ...VEN000p.
In the event that the sale is sent, but is canceled from the POS or fails due to
time out is obtained ..VEN201...m :

Received:

ACK:06
XOR SUM OF COMPLETE PACKAGE WITHOUT ACK:6D
End of package:03
HEXA:0602 56 45 4E 32 30 31 00 0003 6D
..VEN201...m

Sent:

HEX: 06
DEC: 6

Sale cancellation

Command name: _____

ANV

Input parameters: _____

Long	Format	Position	Description
0	N	7	Coupon number of the original transaction.
7	N	3	Card code.

Return parameters: _____

Long	Format	Position	Descripción
0	N	2	Host response code. The value '00' means approved.
2	A	32	Host reply message
34	N	6	Authorization code. Fill in with '0' if applicable. of not corresponding.
40	N	7	Ticket number. Fill with '0' if not correspond.
47	N	3	Batch number
50	A	26	Customer name read from the band. Aligned to left, fill with white in case of not to correspond.
76	N	6	First 6 digits of the card. Fill with '0'. in case it does not correspond.
82	N	4	Last 4 digits of the card. Fill with '0' in in case it does not correspond.
86	A	10	Fecha de la transacción("DD/MM/AAAA")
96	A	8	Transaction time ("HH:MM:SS")
104	N	8	Terminal ID

Technical and Functional Specifications

Return

Command name: _____

DEV

Input parameters: _____

Long	Format	Position	Description
0	N	12	Amount. The last two digits are the decimals
12	N	3	Card code. Aligned to the right, padding with "0".
15	N	1	Plan code. Right aligned, filled with 0
16	N	2	Cantidad de cuotas. Alineado a derecha, relleno with "0".
18	N	7	Original transaction coupon number
25	A	10	Date of the original transaction. Format DD/MM/YYYY
35	N	12	Invoice number. In case it does not correspond will be completed with "0"
47	N	15	Commercial Code. In case of not The correspondence should be left blank.
62	A	23	Trade name. In case of not the corresponding one must be left blank.
85	A	23	Commercial tax ID. In case it does not correspond. it should be left blank.
108	A	1	Line mode. " if the trx is online and " if the transaction is offline

Technical and Functional Specifications

Return parameters: _____

Long	Format	Position	Description
0	N	2	Host response code. The value "00" means approved (See complete list in Annex 2).
2	A	32	Response message. Aligned to the left, filling with blanks.
34	N	6	Authorization code. Fill with '0' in case not corresponding.
40	N	7	Coupon number. Fill with '0' in case of not correspond.
47	N	3	Batch number. Aligned to the right, filled with 0
50	A	26	Customer name read from the band. Filling with white in case it does not correspond.
76	N	4	Last 4 digits of the card. Fill with "0" in in case of non-correspondence.
80	N	6	First 6 digits of the card. Fill with '0' in case of not corresponding.
86	A	10	Transaction date ("DD/MM/YYYY")
96	A	8	Hora de la transacción ("HH:MM:SS")
104	N	8	Terminal ID

5.2.2. Cancellation of Return

Command name: _____

AND

Input parameters: _____

Long	Format	Position	Description
0	N	7	Original transaction coupon number.
7	N	3	Card Code

Return parameters: _____

Long	Format	Position	Description
0	N	2	Host response code. The value '00' means approved (See complete list in Annex 2)
2	A	32	Host response message
34	N	6	Authorization code. Fill with '0' if applicable not corresponding.
40	N	7	Ticket number. Fill with '0' in case of not correspond.
47	N	3	Lot number
50	A	26	Customer name read from the band. Filling with blank in case of not corresponding.
76	N	4	Last 4 digits of the card. Fill with '0' in case of non-correspondence.
80	N	6	First 6 digits of the card. Fill with '0' in case of not corresponding.
86	A	10	Fecha de la transacción ("DD/MM/AAAA")
96	A	8	Transaction time ("HH:MM:SS")
104	N	8	Terminal ID

5.2.3. Closure

Command name: _____

CIE

Input parameters: _____

None

Return parameters: _____

Long	Format	Position	Description
0	N	2	Host response code
2	A	10	Date ("DD/MM/YYYY")
12	A	8	Hora ("HH:MM:SS")
20	N	8	Terminal ID

LAPOS
Línea Acceso POS

Technical and Functional Specifications

Example Plot

Sent:

ENQ: 05

Received:

ACK: 06

Sent:

STX:02
SUM XOR COMPLETE PACKAGE WITHOUT STX:4C
End of package:03
HEX: 0243 49 45 00 0003 4C
DEC: .CIE...L

Received:

ACK:06
XOR SUM FULL PACKAGE WITHOUT ACK:63
End of packet:03
CIE0000.0012/0
32/201616:14:5917
3030 30 30 39 3603 63
DEC: ..CIE000..0012/02/201616:14:5917000096.c

Description of the response fields of the command 'CIE'
Response Code: 00
Fecha:12/02/2016
Hora:16:14:59
Terminal Number: 17000096

Sent:

HEX: 06
DEC: 6

Obtain data from last transaction

Command name _____

ULT

Input parameters: _____

Without parameters.

Return parameters: _____

Long	Format	Position	Description
0	N	1	Transaction type code: ☐ Sale ☐ 2: Cancellation of sale ☐ 3: Return ☐ 4: Cancellation of return
1	N	2	Host response code. The value '00' it means approved (See full list in Annex 2)
3	A	32	Host response message.
35	N	6	Authorization code. Fill with '0' if applicable. of not corresponding.
41	N	7	Coupon number. Fill in with '0' in case of not correspond.
48		3	Lot number.
51	A	26	Customer name read from the band. Filling with blank in case it does not correspond.
77	N	6	First 6 digits of the card. Fill with "0" in case it does not correspond.
83	N	4	Last 4 digits of the card. Fill with '0' in in case of non-conformity.
87	A	10	Transaction date ("DD/MM/YYYY")
97	A	8	Transaction time ("HH:MM:SS")
105	N	8	Terminal ID

5.2.4. Obtain last closing data

Command name _____

ULC

Input parameters _____

Long	Format	Position	Description
0	N	4	Index of the required card record, starting from 0. Right aligned, fill with '0'.

Return parameters _____

Long	Format	Position	Description
0	N	4	Index of the register.
4	N	3	Processor code.
7	N	3	Batch number.
10	N	3	Card code
13	N	4	Number of sales.
17	N	12	Total sales amount.
29	N	4	Number of sales cancellations.
33	N	12	Total amount of cancellations.
45	N	4	Number of sales returns.
49	N	12	Total amount of sales returns.
61	N	4	Number of return cancellations.
65	N	12	Total amount of return cancellations.
77	A	10	Closing date xx/xx/20xx
87	A	8	Closing time xx:xx:xx
95	N	8	Terminal ID

Reprint of last transaction ticket

Command name_____

IMT

Input parameters_____

Without parameters.

Return parameters_____

Without parameters.

5.2.5. Re-print of last closing ticket

Command name_____

IMC

Input parameters_____

Without parameters.

Return parameters_____

Without parameters.

5.2.6. Obtain card table

Command name _____

TAR

Input parameters: _____

Long	Format	Position	Description
0	N	4	Index of the required record, starting from 0. Right aligned, filled with '0'.

Parámetros de retorno: _____

Long	Format	Position	Description
0	N	4	Index of the record
4	A	3	Processor code
7	A	3	Card code
10	A	16	Card name. Aligned to the left filling with whites.
26	N	2	Maximum number of installments allowed by the card
28	N	8	Terminal ID

Example Plot

Sent:

ENQ:
05

Received:

ACK:
06

Sent:

STX:02
XOR SUM COMPLETE PACKAGE WITHOUT STX: 40
End of package:03
AR000000@
.TAR..0000.@

Description of the fields of the 'TAR' command
Registry Index: 0000

Received:

ACK:06
SUM IN XOR COMPLETE PACKAGE WITHOUT THE ACK:26
End of package:03
R001\$0000VI
53 56 49 20 56 49 53 41 20 20 20 20 20 20 20
20 20 20 20 39 39 31 37 30 30 30 30 39 3603 26
DEC:
..TAR001\$.0000VISVI VISA 9917000096.
Description of the response fields of the 'TAR' command
Index of Reg:0000
Processor Code: VIS
Card Code: VI
Nombre Tarjeta:VISA
Maximum Installments: 99
Nro Terminal:17000096

Enviado:

HEX: 06
DEC: 6

Sent:

ENQ:
05

Received:

ACK:
06

Sent:

STX:02
XOR sum complete package without the STX: 41
End of packet:03
AR000001A
.TAR..0001.A

Description of the fields of the 'TAR' command
Registry Index:0001

Technical and Functional Specifications

Received:

ACK:06
XOR SUM COMPLETE PACKAGE WITHOUT THE ACK: 26
End of package:03
TAR001\$0001VI
HEL VISA DEBITO
20 20 20 20 32 34 31 37 30 30 30 30 39 3603 26
DEC:
TAR001\$.0001VISEL VISA DEBIT 2417000096.&
Description of the response fields of the "TAR" command
Reg Index: 0001
Processor Code: VIS
Card Code: EL
Card Name: VISA DEBIT
Máximo Cuotas:24
Nro Terminal:17000096

Sent:

HEX: 06
DEC: 6

Sent:

ENQ:
05

Received:

ACK:
06

Sent:

STX:02
SUM IN XOR COMPLETE PACKAGE WITHOUT THE STX:42
End of package:03
AR d00030032B
DEC: .TAR..0002.B

Description of the fields of the "TAR" command
Index of Reg:0002

Received:

ACK:06
XOR SUM OF COMPLETE PACKAGE WITHOUT ACK:37
End of packet: 03
TAR000\$00 002VI
53 4F 55 20 43 54 43 49 4C 53 2D 47 43 20 20 20
20 20 20 20 31 20 31 37 30 30 30 30 39 3603 37
DEC:
..TAR000\$.0002VISOU CTCILS-GC 1 17000096.7
Description of the response fields of the 'TAR' command
Index of Reg:0002
Processor Code: VIS
Código Tarjeta:0U
Nombre Tarjeta:CTCILS-GC
Máximo Cuotas:1
Nro Terminal:17000096

Sent:

HEX: 06
DEC: 6

Clarification: in the response of the TAR command, as long as there are more records will return **..TAR001** it will be indicated as the last record upon arrival **..TAR000**



5.2.7. Obtain plans table

Command name

PLA

Input parameters:

Long	Format	Position	Description
0	N	4	Index of the required register, starting from 0. Right aligned, filled with '0'.

Return parameters:

Long	Format	Position	Description
0	N	4	Index of the registry. Aligned to the right, padding with "0".
4	N	3	Card code
7	N	2	Plan code
9	A	14	Name of the plan
23	N	8	Terminal ID

Technical and Functional Specifications

Example Plot

Sent:

ENQ:

05

Received:

ACK:

06

Sent:

STX:02

SUM IN XOR COMPLETE PACKAGE WITHOUT STX:5A

End of package:03

HEX:0250 LA 04 00 300303 Z

DEC: .PLA..0000.Z

Description of the fields of the 'PLA' command

Reg Index:0000

Received:

ACK:06

SUM IN XOR COMPLETE PACKAGE WITHOUT THE ACK:51

End of packet:03

HEX:0602 50 4C 41 30 30 31 1F 00 30 30 30 30 4F 55

20 30 20 20 20 20 43 4F 4D 50 52 41 20 20 20 20

20 31 37 30 30 30 30 39 3603 51

DEC:

..PLA001..00000U0 PURCHASE 17000096.Q

Description of the response fields of the command 'PLA'

Reg Index:0000

Código Tarjeta:0U

Code Plan:0

Plan Name: PURCHASE

Nro Terminal:17000096

Sent:

HEX: 06

DEC: 6

Sent:

ENQ:

05

Received:

ACK:

06

Sent:

STX:02

XOR SUM COMPLETE PACKAGE WITHOUT STX: 5B

End of package:03

HEX:0250 4C 41 04 00 30 30 30 3103 5B

DEC: .PLA..0001.[

Description of the fields of the command 'PLA'

Index of Reg:0001

Received:

ACK:06

XOR SUM COMPLETE PACKAGE WITHOUT ACK:3A

Technical and Functional Specifications

End of package: 03

HEX:0602 50 4C 41 30 30 30 1F 00 30 30 30 31 4F 55
20 31 43 4F 4E 53 55 4C 54 41 20 53 41 4C 44 4F
20 31 37 30 30 30 30 39 3603 3A

DEC:

..PLA000..00010U1BALANCE INQUIRY17000096.:

Description of the response fields of the "PLA" command

Index of Reg:0001

Card Code: 0U

Código Plan:1

Nombre Plan:CONSULTA SALDO

Nro Terminal:17000096

Sent:

HEX: 06

DEC: 6

Clarification: in the response of the PLA command, as long as there are more records it will return..PLA001, it will be indicated as the last record upon arrival..PLA000



Annex 1

General response codes (IngStore)

Value	Description
000	Successful operation.
Implementation errors	
901	Name of the nonexistent command.
902	Length of the invalid parameters for this command.
903	The format of some parameter is not correct.
909	General error in the operation.

Specific response codes (Integrated Visa POS)

Value	Description
001	There are records left to send.
Input parameter errors	
102	The ticket number does not exist.
103	The plan code does not exist.
104	The registration index does not exist.
Errors at the start of the transaction	
201	Transaction canceled by the user.
202	The card swiped by the user does not match the one requested.
203	The swiped card is not valid.
204	The slid card is expired.
205	Original transaction does not exist.
206	There are no transactions in the batch.
Errors closing the transaction	
301	The POS could not communicate with the host.
302	The POS could not print the ticket.

Annex 2

Summary of command names

Name	Description
TES	Connection test
VEN	Sale
ANV	Cancellation of sale
DEV	Return
AND	Cancellation of return
CIE	Closure
ULT	Last transaction
ULC	Last closing
IMT	Reprint of latest transaction
IMC	Reprint of the last closing
TAR	Obtaining card table
PLA	Obtaining a table of plans



Annex 3

Host response codes.

Cod	Description	Observations
00	APPROVED (authno)	Operation approved, issue coupon (charge or ticket).
01	REQUEST AUTHORIZATION	Request telephone authorization, in case of being approved, load the obtained code and leave the operation in OFFLINE.
02	REQUEST AUTHORIZATION	Same as the previous point.
03	INVALID TRADE	Check system parameters, code of badly loaded trade
04	CAPTURE CARD	Denied, capture the card.
05	DENIED	Denied.
07	HOLD AND CALL	Denied, call the Authorization Center.
08	APPROVED TO REQUEST IDENT.	
11	APPROVED	Operation approved, issue coupon (charge or ticket).
12	INVALID TRANSACTION	Check the system, unrecognized transaction in the system.
13	INVALID AMOUNT	Check the system, error in the format of the amount field.
14	INVALID CARD	Denied, card does not match.
19	RESTART OPERATION	
25	NO ORIGINAL EXISTS	Denied, record not found in the file of transactions.
30	ERROR IN FORMAT	Check the system, error in the format of the message.
38	EXCEEDING PIN	Denied, exceeds the number of retry attempts of Allowed PINs.
43	RETENTION CARD	Denied, retain card.
45	NO INSTALLMENT OPERA	Denied, card inhibited for operation in installments.
46	CARD NOT VALID	Denied, the card is not yet valid.
47	PIN REQUIRED	Denied, card requires entering PIN.
48	EXCEEDS MAX. INSTALLMENTS	Denied, exceeds maximum number of installments allowed.
49	DATE ERROR WE WIN.	Check the system, error in date format of expiration (due date)
50	DELIVERY OVERCOMES LIMIT	Denied, the entered DELIVERY amount is out of the allowed limits. Check the monto ingresado.

Technical and Functional Specifications

51	FUNDS INSUFFICIENT	Denied, does not have sufficient funds.
53	NON-EXISTENT ACCOUNT	Denied, no associated account exists.
54	EXPIRED CARD	Denied, card expired.
55	INCORRECT PIN	Denied, personal identification code is incorrect.
56	CARD NOT ENABLED	Denied, sender not authorized in the system.
57	TRANSACTION NOT PERMITTED	Check the system, transaction not allowed to said card.
58	INVALID SERVICE	Check the system, transaction not allowed to said terminal.
61	EXCEED LIMIT	Denied, exceeds remaining limit of the card.
65	EXCEED LIMIT. CARD	Denied, exceeds remaining limit of the card.
76	CALL THE SENDER– ERROR - DESCRIPTION. PRODUCT.	Request telephone authorization, in case of being approved, load the obtained code and leave the operation in OFFLINE.
77	ERROR PLAN/QUOTAS –ERROR RECONCILIATION	Denied, invalid number of installments for the selected plan.
85	APPROVED–LOT NO Operation FOUND	Operation approved, issue coupon (charge or ticket).
88	APPROVED. CLIENT CALL	
89	INVALID TERMINAL	Denied, terminal number not enabled by the Issuer.
91	EMITTER OFFLINE	Request telephone authorization, in case of being approved, upload the obtained code and leave it operation in OFFLINE.
94	NRO. SEC. DUPLICATE	Denied. Error in message. Send again the transaction increasing by 1 link the system trace of the same.
95	RE-TRANSMITTING	Differences in the closing reconciliation, send Batch Upload.
96	SYSTEM ERROR INVALID MESSAGE	System malfunction. Request telephone authorization.
BB	COMP NOT AVAILABLE TRY LATER	The host responds this code when the capture The batch is not available. The terminal will be able to continue operating but it will not be possible to carry out the batch closure.
xx	REJECTED (codnum)	Denied, any other code not contemplated in the table.

Annex 4

Vending

In the case of operating at Vending terminals, the printing of coupons is eliminated and the generic card 'VVI' is incorporated, with which the POS recognizes the card with which is being paid, depending on the card that is swiped.

In this case, the sales command is as follows:

Command name: _____

VEN

Input parameters: _____

Long	Format	Position	Description
0	N	12	Amount. The last two digits are the decimals.
12	N	12	Invoice number. In case it does not correspond will be completed with '0'
24	N	2	Number of installments. Right aligned, padding with '0'.
26	N	3	Card code. "VVI"
29	N	1	Plan code. Right aligned, filled with 0. In case it does not correspond, it should go in white.
30	N	12	Tip amount. The last two digits are decimals. In case of not corresponding, it will complete with '0'
42	N	15	Commercial Code. In case of not the correspondence should be left blank.
57	A	23	Business name. In case of not the responder should be left blank.
80	A	23	Tax ID for commerce. In case it does not correspond it should be left blank.
103	A	1	Line mode. " if the trx is online and " if the transaction is offline

Return parameters: _____

Long	Format	Position	Description
0	N	2	Host response code. The value "00" means approved.
2	A	32	Response message. Aligned to the left, filling with blanks.
34	N	6	Authorization code. Fill with '0' in case not to correspond.
40	N	7	Coupon number. Fill with '0' in case of not correspond.
47	N	3	Batch number. Aligned to the right, filled with 0
50	A	26	Customer name read from the band. Filling with white in case it does not correspond.
76	N	6	First 6 digits of the card. Fill with '0' in case it does not correspond.
82	N	4	Last 4 digits of the card. Fill with '0' in In case of discrepancy.
86	A	10	Transaction date ("DD/MM/YYYY")
96	A	8	Hora de la transacción ("HH:MM:SS")
104	N	8	Terminal id