


To request an update to this runbook please click [here](#) (OC1 link)

NA LVV Service: Portal Tutorial

Tools Required	Username and password created by the DCO engineer

First time logging into the portal

- Once a [user account has been created](#), the LVV site lead will receive an automated email for verifying the account
 - Use the tenancy name `lvv-dcbt-dco`
 - The initial one-time password for the account can be obtained from the DCO engineer
 - The unique vendor name will be there in the automated email
- Verify and reset the password using the link in the email
- From a browser, go to the [lvv-portal](#)
- In the initial Sign In page for tenancy write: `lvv-dcbt-dco` and click Continue

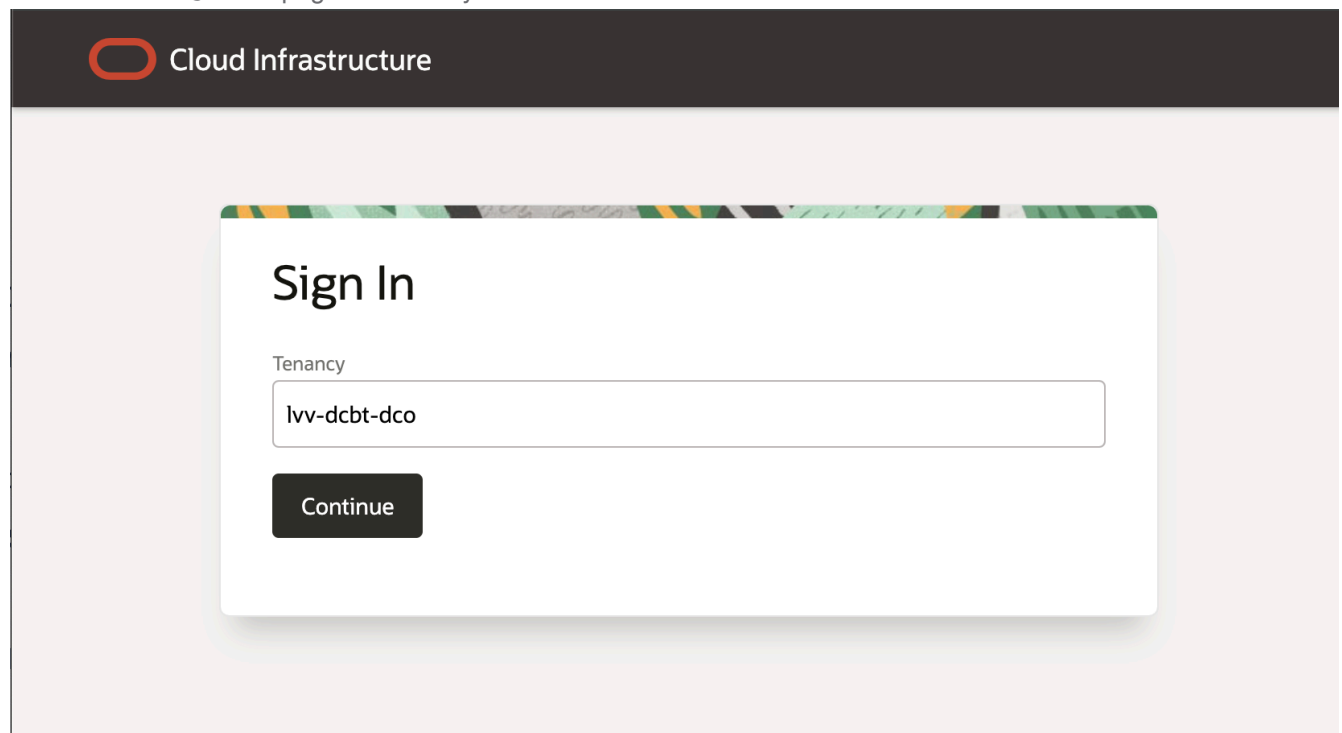

Cloud Infrastructure

Sign In

Tenancy

Continue

- The next page will ask for the vendor name and the password. Provide your unique vendor name and the password here

lvv-portal

[Change tenancy](#)

Sign in with your Oracle Cloud Infrastructure credentials

User Name

vendor2

Password

.....

Sign In

[Forgot Password?](#)

- The initial page will display the open tasks based on building and block

lvv.us-phoenix-1.oci.oraclecloud.com

OCI Usefull Links Services Oncall https://permission... NA KTLO - Networ... Index of libs-relea... LVV NACAPS

ORACLE[®] LVV Portal Vendor Name: vendor2

Projects

Project	Building	Block
DO115	phx1	7

Select project to view items

Looking at project detail

- Click on the project in the **Projects** table to get the list of racks with cabling issues

ORACLE[®]LVV Portal Vendor Name: vendor2
rakshit.viswanatha

Projects

Project	Building	Block
DO115	phx1	7

Project DO115 Details

Rack Location	Rack Serial Number	Issue(s) Type	Ticket
4108	2409XL801H	validation	DO-1191815

Building: phx1
Block: 7
Project ID: **DO115**

- Click on the rack in the Project Details table to get the detailed cabling error for that specific rack

lvv.us-phoenix-1.oci.oraclecloud.com
Incognito

OCI Usefull Links
Services
Oncall
https://permission...
NA KTLO - Networ...
Index of libs-relea...
LVV
NACAPS

ORACLE[®]LVV Portal Vendor Name: vendor2
rakshit.viswanatham@oracle.com

Projects

Project	Building	Block
DO115	phx1	7

Project DO115 Details

Rack Location	Rack Serial Number	Issue(s) Type	Ticket
4108	2409XL801H	validation	DO-1191815

Building: phx1
Block: 7
Project ID: **DO115**

[About Oracle](#)
[Contact Us](#)
[Legal Notices](#)
[Terms Of Use](#)
[Your Privacy Rights](#)

Copyright © 2014, 2024 Oracle and/or its affiliates All rights reserved.

Validating the rack

- Once you select a rack, you will land on the rack validation page where you would be requested to validate the rack

ORACLE[®] LVV Portal Vendor Name: vendor2

Building: syd4, Block: 35, Rack: 6020, Serial: 2524NM8062

Validate

Resolve

Download CSV

Please validate the rack by clicking on the validate button above.

Run validation to view the latest diagnostics and export results.

☒ Hide "UNSUPPORTED" LLDP Status errors

* When Action Items are completed, Click the Resolve button at the top of the page to resolve the corresponding Jira ticket.

[About Oracle](#) | [Contact Us](#) | [Legal Notices](#) | [Terms Of Use](#) | [Your Privacy Rights](#)
Copyright © 2014, 2024 Oracle and/or its affiliates All rights reserved.

- You can then hit the validate button to run the validations

ORACLE[®] LVV Portal Vendor Name: vendor2

Building: syd4, Block: 35, Rack: 6020, Serial: 2524NM8062

Validate

Resolve

Download CSV

Please validate the rack by clicking on the validate button above.

Run validation to view the latest diagnostics and export results.

☒ Hide "UNSUPPORTED" LLDP Status errors

* When Action Items are completed, Click the Resolve button at the top of the page to resolve the corresponding Jira ticket.

[About Oracle](#) | [Contact Us](#) | [Legal Notices](#) | [Terms Of Use](#) | [Your Privacy Rights](#)
Copyright © 2014, 2024 Oracle and/or its affiliates All rights reserved.

- This will trigger the rack validation, which would take a few minutes

ORACLE LVV Portal Vendor Name: vendor2

Building: syd4, Block: 35, Rack: 6020, Serial: 2524NM8062

Validate Resolve Download CSV

Validation in progress...

Please validate the rack by clicking on the validate button above.

Run validation to view the latest diagnostics and export results.

Hide "UNSUPPORTED" LLDP Status errors

* When Action Items are completed, Click the Resolve button at the top of the page to resolve the corresponding Jira ticket.

About Oracle Contact Us Legal Notices Terms Of Use Your Privacy Rights

Copyright © 2014, 2024 Oracle and/or its affiliates All rights reserved.

- Once the validation is completed, you would be able to see the rack validation failures

ORACLE LVV Portal Vendor Name: vendor2

Building: syd4, Block: 35, Rack: 6020, Serial: 2524NM8062

Validate Resolve Download CSV

Hide "UNSUPPORTED" LLDP Status errors

	Device A Rack	Device A Name	Device A Port	Current Device B Rack	Current Device B...	Current Device B Port	Expected Device B Rack	Expected Device B Name	Expected Device B Port	LLDP Status	TX Power	RX Power
☐	6020:4	syd4-c1-b35-t2-r10	Ethernet1/1	Unknown	Unknown	Unknown	0406:14	syd4-c1-t3-c1-r10	Ethernet18/1	MISMATCH		
☐	6020:4	syd4-c1-b35-t2-r10	Ethernet17/1	Unknown	Unknown	Unknown	0206:14	syd4-c1-t3-c5-r10	Ethernet18/1	MISMATCH	1.62	-30.0
☐	6020:4	syd4-c1-b35-t2-r10	Ethernet21/1	Unknown	Unknown	Unknown	0207:14	syd4-c1-t3-c6-r10	Ethernet18/1	MISMATCH	1.49	-30.0
☐	6020:4	syd4-c1-b35-t2-r10	Ethernet5/1	Unknown	Unknown	Unknown	0407:14	syd4-c1-t3-c2-r10	Ethernet18/1	MISMATCH	1.24	-30.0
☐	6020:4	syd4-c1-b35-t2-r10	Ethernet9/1	Unknown	Unknown	Unknown	0306:14	syd4-c1-t3-c3-r10	Ethernet18/1	MISMATCH		
☐	6020:5	syd4-c1-b35-t2-r11	Ethernet17/1	Unknown	Unknown	Unknown	0206:15	syd4-c1-t3-c5-r11	Ethernet18/1	MISMATCH	1.74	-30.0
☐	6020:5	syd4-c1-b35-t2-r11	Ethernet21/1	Unknown	Unknown	Unknown	0207:15	syd4-c1-t3-c6-r11	Ethernet18/1	MISMATCH	1.53	-30.0
☐	6020:6	syd4-c1-b35-t2-r12	Ethernet1/1	Unknown	Unknown	Unknown	0406:16	syd4-c1-t3-c1-r12	Ethernet18/1	MISMATCH		
☐	6020:6	syd4-c1-b35-t2-r12	Ethernet17/1	Unknown	Unknown	Unknown	0206:16	syd4-c1-t3-c5-r12	Ethernet18/1	MISMATCH	1.58	-30.0
☐	6020:6	syd4-c1-b35-t2-r12	Ethernet21/1	Unknown	Unknown	Unknown	0207:16	syd4-c1-t3-c6-r12	Ethernet18/1	MISMATCH	1.4	-30.0
☐	6020:6	syd4-c1-b35-t2-r12	Ethernet2...	Unknown	Unknown	Unknown	0105:16	syd4-c1-t3-c7-r12	Ethernet18/1	MISMATCH	1.38	-30.0
☐	6020:6	syd4-c1-b35-t2-r12	Ethernet5/1	Unknown	Unknown	Unknown	0407:16	syd4-c1-t3-c2-r12	Ethernet18/1	MISMATCH	1.55	-30.0
☐	6020:6	syd4-c1-b35-t2-r12	Ethernet9/1	Unknown	Unknown	Unknown	0306:16	syd4-c1-t3-c3-r12	Ethernet18/1	MISMATCH	1.43	-30.0
☐	6020:7	syd4-c1-b35-t2-r13	Ethernet21/1	Unknown	Unknown	Unknown	0207:17	syd4-c1-t3-c6-r13	Ethernet18/1	MISMATCH	1.53	-30.0

- If you scroll slightly to the right, you would also see if there are any PSU failures. Generally, a green check would mean no PSU errors

Building: syd4, Block: 35, Rack: 6020, Serial: 2524NM8062

Validate

Resolve

Download CSV

☒ Hide "UNSUPPORTED" LLDP Status errors

Device A Name	Device A Port	Current Device B Rack	Current Device B...	Current Device B Port	Expected Device B Rack	Expected Device B Name	Expected Device B Port	LLDP Status	TX Power	RX Power	PSU Failure
syd4-c1-b35-t2-r10	Ethernet1/1	Unknown	Unknown	Unknown	0406:14	syd4-c1-t3-c1-r10	Ethernet18/1	MISMATCH			✓
syd4-c1-b35-t2-r10	Ethernet17/1	Unknown	Unknown	Unknown	0206:14	syd4-c1-t3-c5-r10	Ethernet18/1	MISMATCH	1.62	-30.0	✓
syd4-c1-b35-t2-r10	Ethernet21/1	Unknown	Unknown	Unknown	0207:14	syd4-c1-t3-c6-r10	Ethernet18/1	MISMATCH	1.49	-30.0	✓
syd4-c1-b35-t2-r10	Ethernet5/1	Unknown	Unknown	Unknown	0407:14	syd4-c1-t3-c2-r10	Ethernet18/1	MISMATCH	1.24	-30.0	✓
syd4-c1-b35-t2-r10	Ethernet9/1	Unknown	Unknown	Unknown	0306:14	syd4-c1-t3-c3-r10	Ethernet18/1	MISMATCH			✓
syd4-c1-b35-t2-r11	Ethernet17/1	Unknown	Unknown	Unknown	0206:15	syd4-c1-t3-c5-r11	Ethernet18/1	MISMATCH	1.74	-30.0	✓
syd4-c1-b35-t2-r11	Ethernet21/1	Unknown	Unknown	Unknown	0207:15	syd4-c1-t3-c6-r11	Ethernet18/1	MISMATCH	1.53	-30.0	✓
syd4-c1-b35-t2-r12	Ethernet1/1	Unknown	Unknown	Unknown	0406:16	syd4-c1-t3-c1-r12	Ethernet18/1	MISMATCH			✓
syd4-c1-b35-t2-r12	Ethernet17/1	Unknown	Unknown	Unknown	0206:16	syd4-c1-t3-c5-r12	Ethernet18/1	MISMATCH	1.58	-30.0	✓
syd4-c1-b35-t2-r12	Ethernet21/1	Unknown	Unknown	Unknown	0207:16	syd4-c1-t3-c6-r12	Ethernet18/1	MISMATCH	1.4	-30.0	✓
syd4-c1-b35-t2-r12	Ethernet2...	Unknown	Unknown	Unknown	0105:16	syd4-c1-t3-c7-r12	Ethernet18/1	MISMATCH	1.38	-30.0	✓
syd4-c1-b35-t2-r12	Ethernet5/1	Unknown	Unknown	Unknown	0407:16	syd4-c1-t3-c2-r12	Ethernet18/1	MISMATCH	1.55	-30.0	✓
syd4-c1-b35-t2-r12	Ethernet9/1	Unknown	Unknown	Unknown	0306:16	syd4-c1-t3-c3-r12	Ethernet18/1	MISMATCH	1.43	-30.0	✓
syd4-c1-b35-t2-r13	Ethernet21/1	Unknown	Unknown	Unknown	0207:17	syd4-c1-t3-c6-r13	Ethernet18/1	MISMATCH	1.53	-30.0	✓

- You can also select a couple of devices to validate if you don't want to run validations on all the devices.

Building: syd4, Block: 35, Rack: 6020, Serial: 2524NM8062

Validate

Resolve

Download CSV

☒ Hide "UNSUPPORTED" LLDP Status errors**The following links need to be checked and replaced.**

	Device A Rack	Device A Name	Device A Port	Current Device B Rack	Current Device B...	Current Device B Port	Expected Device B Rack	Expected Device B Name	Expected Device B Port	LLDP Status	TX Power	RX Power
☒	6020:4	syd4-c1-b35-t2-r10	Ethernet1/1	Unknown	Unknown	Unknown	0406:14	syd4-c1-t3-c1-r10	Ethernet18/1	MISMATCH		
☒	6020:4	syd4-c1-b35-t2-r10	Ethernet17/1	Unknown	Unknown	Unknown	0206:14	syd4-c1-t3-c5-r10	Ethernet18/1	MISMATCH	1.62	-30.0
☐	6020:4	syd4-c1-b35-t2-r10	Ethernet21/1	Unknown	Unknown	Unknown	0207:14	syd4-c1-t3-c6-r10	Ethernet18/1	MISMATCH	1.49	-30.0
☐	6020:4	syd4-c1-b35-t2-r10	Ethernet5/1	Unknown	Unknown	Unknown	0407:14	syd4-c1-t3-c2-r10	Ethernet18/1	MISMATCH	1.24	-30.0
☐	6020:4	syd4-c1-b35-t2-r10	Ethernet9/1	Unknown	Unknown	Unknown	0306:14	syd4-c1-t3-c3-r10	Ethernet18/1	MISMATCH		
☒	6020:5	syd4-c1-b35-t2-r11	Ethernet17/1	Unknown	Unknown	Unknown	0206:15	syd4-c1-t3-c5-r11	Ethernet18/1	MISMATCH	1.74	-30.0
☐	6020:5	syd4-c1-b35-t2-r11	Ethernet21/1	Unknown	Unknown	Unknown	0207:15	syd4-c1-t3-c6-r11	Ethernet18/1	MISMATCH	1.53	-30.0
☐	6020:6	syd4-c1-b35-t2-r12	Ethernet1/1	Unknown	Unknown	Unknown	0406:16	syd4-c1-t3-c1-r12	Ethernet18/1	MISMATCH		
☒	6020:6	syd4-c1-b35-t2-r12	Ethernet17/1	Unknown	Unknown	Unknown	0206:16	syd4-c1-t3-c5-r12	Ethernet18/1	MISMATCH	1.58	-30.0
☐	6020:6	syd4-c1-b35-t2-r12	Ethernet21/1	Unknown	Unknown	Unknown	0207:16	syd4-c1-t3-c6-r12	Ethernet18/1	MISMATCH	1.4	-30.0
☐	6020:6	syd4-c1-b35-t2-r12	Ethernet2...	Unknown	Unknown	Unknown	0105:16	syd4-c1-t3-c7-r12	Ethernet18/1	MISMATCH	1.38	-30.0
☐	6020:6	syd4-c1-b35-t2-r12	Ethernet5/1	Unknown	Unknown	Unknown	0407:16	syd4-c1-t3-c2-r12	Ethernet18/1	MISMATCH	1.55	-30.0
☐	6020:6	syd4-c1-b35-t2-r12	Ethernet9/1	Unknown	Unknown	Unknown	0306:16	syd4-c1-t3-c3-r12	Ethernet18/1	MISMATCH	1.43	-30.0

Resolving an issue

- Once the cabling issue mentioned in the details page is fixed click on the Resolve button to start the revalidation
 - The revalidation process takes some time to complete

- If the issue is not fixed the DCO engineer will inform the site lead again

ORACLE[®] LVV Portal Vendor Name: vendor2

Building: phx10, Block: 1, Rack: 1214, Serial: 2509NMY03L

Validate

Resolve

Download CSV

☒ Hide "UNSUPPORTED" LLDP Status errors

* When Action Items are completed, Click the Resolve button at the top of the page to resolve the corresponding Jira ticket.

[About Oracle](#) | [Contact Us](#) | [Legal Notices](#) | [Terms Of Use](#) | [Your Privacy Rights](#)
Copyright © 2014, 2024 Oracle and/or its affiliates All rights reserved.

- If there are no more pending tasks the initial page will not have any data in the Project Details table

OCI LVV Portal

lvv.us-phoenix-1.oci.oraclecloud.com

OCI Usefull Links | Services | Oncall | https://permission... | NA KTLO - Networ... | Index of libs-relea... | LVV | NACAPS

ORACLE[®] LVV Portal Vendor Name: vendor2

rakshit.viswanatham@or

Projects

Project	Building	Block
DO115	phx1	7

Project DO115 Details

Rack Location	Rack Serial Number	Issue(s) Type	Ticket
No data to display.			
Building: phx1			
Block: 7			
Project ID: DO115			

[About Oracle](#) | [Contact Us](#) | [Legal Notices](#) | [Terms Of Use](#) | [Your Privacy Rights](#)

Copyright © 2014, 2024 Oracle and/or its affiliates All rights reserved.

Unsupported LLDP Errors

- Some of the link failures that you would see on the portal are unsupported by the Portal at the moment. We can hide them using this checkbox

ORACLE LVV Portal Vendor Name: vendor2

Building: phx10, Block: 1, Rack: 1214, Serial: 2509NMY03L

Validate

Resolve

Download CSV

☒ Hide "UNSUPPORTED" LLDP Status errors

* When Action Items are completed, Click the Resolve button at the top of the page to resolve the corresponding Jira ticket.

[About Oracle](#) | [Contact Us](#) | [Legal Notices](#) | [Terms Of Use](#) | [Your Privacy Rights](#)
Copyright © 2014, 2024 Oracle and/or its affiliates All rights reserved.

- These errors are hidden by default, but if you'd like to see them, you can uncheck it.

Building: phx10, Block: 1, Rack: 1214, Serial: 2509NMY03L

Validate

Resolve

Download CSV

☐ Hide "UNSUPPORTED" LLDP Status errors

Link Action Items

The following links need to be checked and replaced.

	Device A Rack	Device A Name	Device A Port	Current Device B Rack	Current Device B Name	Current Device B Port	Expected Device B Rack	Expected Device B Name	Expected Device B Port	LLDP Status	TX Power
☐	1214:23	phx10-c1-nb127-t1-r1	Ethernet10/1	1122:5	phx10-j1-crypto3	Ethernet9/1	0413:3	phx29-j1-b2-t1-r17	Ethernet9/1	UNSUPPORTED	
☐	1214:23	phx10-c1-nb127-t1-r1	Ethernet12/1	1122:5	phx10-j1-crypto3	Ethernet17/1	0413:3	phx29-j1-b2-t1-r17	Ethernet11/1	UNSUPPORTED	
☐	1214:23	phx10-c1-nb127-t1-r1	Ethernet14/1	1122:6	phx10-j1-crypto4	Ethernet9/1	0413:3	phx29-j1-b2-t1-r17	Ethernet13/1	UNSUPPORTED	
☐	1214:23	phx10-c1-nb127-t1-r1	Ethernet16/1	1122:6	phx10-j1-crypto4	Ethernet17/1	0413:3	phx29-j1-b2-t1-r17	Ethernet15/1	UNSUPPORTED	
☐	1214:23	phx10-c1-nb127-t1-r1	Ethernet18/1	1213:2	phx10-j1-crypto5	Ethernet9/1	0413:3	phx29-j1-b2-t1-r17	Ethernet17/1	UNSUPPORTED	
☐	1214:23	phx10-c1-nb127-t1-r1	Ethernet2/1	1122:2	phx10-j1-crypto1	Ethernet9/1	0413:3	phx29-j1-b2-t1-r17	Ethernet1/1	UNSUPPORTED	
☐	1214:23	phx10-c1-nb127-t1-r1	Ethernet20/1	1213:2	phx10-j1-crypto5	Ethernet17/1	0413:3	phx29-j1-b2-t1-r17	Ethernet19/1	UNSUPPORTED	
☐	1214:23	phx10-c1-nb127-t1-r1	Ethernet22/1	1213:3	phx10-j1-crypto6	Ethernet9/1	0413:3	phx29-j1-b2-t1-r17	Ethernet21/1	UNSUPPORTED	
☐	1214:23	phx10-c1-nb127-t1-r1	Ethernet24/1	1213:3	phx10-j1-crypto6	Ethernet17/1	0413:3	phx29-j1-b2-t1-r17	Ethernet23/1	UNSUPPORTED	
☐	1214:23	phx10-c1-nb127-t1-r1	Ethernet26/1	1213:5	phx10-j1-crypto7	Ethernet9/1	0413:3	phx29-j1-b2-t1-r17	Ethernet25/1	UNSUPPORTED	
☐	1214:23	phx10-c1-nb127-t1-r1	Ethernet2...	1213:5	phx10-j1-crypto7	Ethernet17/1	0413:3	phx29-j1-b2-t1-r17	Ethernet27/1	UNSUPPORTED	

Devices Unreachable Error

- After hitting validate, if you see an error which says devices are unreachable

ORACLE LVV Portal Vendor Name: vendor2

Building: bom18, Block: 1, Rack: 0502, Serial: 2519NMY04B

[Validate](#) [Resolve](#) [Download CSV](#)

Validation failed!
Code: 400
Message: bom18-epagg1, bom18-epagg2, bom18-j1-fcreflector1, bom18-j1-fcreflector2, bom18-j1-vpn1, bom18-j1-vpn2 device(s) not reachable

Error

Failed to load validation failures. Please try again later.

☒ Hide "UNSUPPORTED" LLDP Status errors

* When Action Items are completed, Click the Resolve button at the top of the page to resolve the corresponding Jira ticket.

[About Oracle](#) [Contact Us](#) [Legal Notices](#) [Terms Of Use](#) [Your Privacy Rights](#)
Copyright © 2014, 2024 Oracle and/or its affiliates All rights reserved.

- You would need to re-check the cabling work for this rack
- After checking and fixing the cabling, if the issue persists, you may want to reach out to a DCO engineer for guidance