

[Dashboard](#) / [My courses](#) / [CS23333-OOPUI-2023](#) / [Lab-08 - Polymorphism, Abstract Classes, final Keyword](#) / [Lab-08-Logic Building](#)

Status	Finished
Started	Monday, 21 October 2024, 10:48 PM
Completed	Monday, 21 October 2024, 11:10 PM
Duration	22 mins 4 secs


Question 1

Correct

Marked out of 5.00

Create a base class Shape with a method called calculateArea(). Create three subclasses: Circle, Rectangle, and Triangle. Override the calculateArea() method in each subclass to calculate and return the shape's area.

In the given exercise, here is a simple diagram illustrating polymorphism implementation:

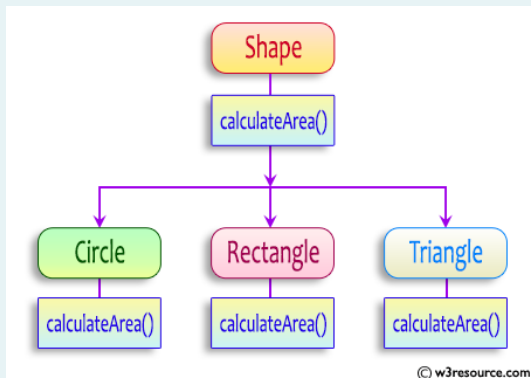

```

abstract class Shape {
    public abstract double calculateArea() ;
}

```

```
System.out.printf("Area of a Triangle :%.2f%n",((0.5)*base*height)); // use this statement
```

sample Input :

```

4 // radius of the circle to calculate area PI*r*r
5 // length of the rectangle
6 // breadth of the rectangle to calculate the area of a rectangle
4 // base of the triangle
3 // height of the triangle

```

OUTPUT:

Area of a circle :50.27

Area of a Rectangle :30.00

Area of a Triangle :6.00

For example:

Test	Input	Result
1	4 5 6 4 3	Area of a circle: 50.27 Area of a Rectangle: 30.00 Area of a Triangle: 6.00
2	7 4.5 6.5 2.4 3.6	Area of a circle: 153.94 Area of a Rectangle: 29.25 Area of a Triangle: 4.32

Answer: (penalty regime: 0 %)

```

1 import java.util.Scanner;
2 abstract class Shape {
3     public abstract double calculateArea();
4 }
5 class Circle extends Shape {
6     private double radius;
7     public Circle(double radius) {
8         this.radius = radius;
9     }
10    @Override
11    public double calculateArea() {
12        return Math.PI * radius * radius;

```

```

13 }
14 }
15 class Rectangle extends Shape {
16     private double length;
17     private double breadth;
18     public Rectangle(double length, double breadth) {
19         this.length = length;
20         this.breadth = breadth;
21     }
22     @Override
23     public double calculateArea() {
24         return length * breadth;
25     }
26 }
27 class Triangle extends Shape {
28     private double base;
29     private double height;
30     public Triangle(double base, double height) {
31         this.base = base;
32         this.height = height;
33     }
34     @Override
35     public double calculateArea() {
36         return 0.5 * base * height; // Area of triangle: 0.5 * base * height
37     }
38 }
39 public class ShapeTest {
40     public static void main(String[] args) {
41         Scanner scanner = new Scanner(System.in);
42         double radius = scanner.nextDouble();
43         Circle circle = new Circle(radius);
44         System.out.printf("Area of a circle: %.2f\n", circle.calculateArea());
45         double length = scanner.nextDouble();
46         double breadth = scanner.nextDouble();
47         Rectangle rectangle = new Rectangle(length, breadth);
48         System.out.printf("Area of a Rectangle: %.2f\n", rectangle.calculateArea());
49         double base = scanner.nextDouble();
50         double height = scanner.nextDouble();
51         Triangle triangle = new Triangle(base, height);
52         System.out.printf("Area of a Triangle: %.2f\n", triangle.calculateArea());

```

	Test	Input	Expected	Got	
✓	1	4 5 6 4 3	Area of a circle: 50.27 Area of a Rectangle: 30.00 Area of a Triangle: 6.00	Area of a circle: 50.27 Area of a Rectangle: 30.00 Area of a Triangle: 6.00	✓
✓	2	7 4.5 6.5 2.4 3.6	Area of a circle: 153.94 Area of a Rectangle: 29.25 Area of a Triangle: 4.32	Area of a circle: 153.94 Area of a Rectangle: 29.25 Area of a Triangle: 4.32	✓

Passed all tests! ✓

Question **2**

Correct

Marked out of 5.00

As a logic building learner you are given the task to extract the string which has vowel as the first and last characters from the given array of Strings.

Step1: Scan through the array of Strings, extract the Strings with first and last characters as vowels; these strings should be concatenated.

Step2: Convert the concatenated string to lowercase and return it.

If none of the strings in the array has first and last character as vowel, then return no matches found

input1: an integer representing the number of elements in the array.

input2: String array.

Example 1:

input1: 3

input2: {"oreo", "sirish", "apple"}

output: oreoapple

Example 2:

input1: 2

input2: {"Mango", "banana"}

output: no matches found

Explanation:

None of the strings has first and last character as vowel.

Hence the output is no matches found.

Example 3:

input1: 3

input2: {"Ate", "Ace", "Girl"}

output: ateace

For example:

Input	Result
3 oreo sirish apple	oreoapple
2 Mango banana	no matches found
3 Ate Ace Girl	ateace

Answer: (penalty regime: 0 %)

```

1 import java.util.Scanner;
2 public class VowelStringExtractor {
3     public static String extractVowelStrings(String[] stringArray) {
4         StringBuilder result = new StringBuilder();
5         String vowels = "aeiouAEIOU";
6         for (String s : stringArray) {
7             if (s.length() > 0 && vowels.indexOf(s.charAt(0)) != -1 &&
8                 vowels.indexOf(s.charAt(s.length() - 1)) != -1) {
9                 result.append(s);
10            }
11        }
12        return result.length() > 0 ? result.toString().toLowerCase() : "no matches found";
13    }
14    public static void main(String[] args) {
15        Scanner scanner = new Scanner(System.in);
16        int n = scanner.nextInt();
17        scanner.nextLine();
18        String input = scanner.nextLine();
19        String[] strings = input.split(" ");

```

```
20 String result = extractVowelStrings(strings);  
21 System.out.println(result);  
22 scanner.close();  
23 }  
24 }
```

	Input	Expected	Got	
✓	3 oreo sirish apple	oreoapple	oreoapple	✓
✓	2 Mango banana	no matches found	no matches found	✓
✓	3 Ate Ace Girl	ateace	ateace	✓

Passed all tests! ✓

Question 3

Correct

Marked out of 5.00

1. Final Variable:

- Once a variable is declared **final**, its value cannot be changed after it is initialized.
- It must be initialized when it is declared or in the constructor if it's not initialized at declaration.
- It can be used to define constants

```
final int MAX_SPEED = 120; // Constant value, cannot be changed
```

2. Final Method:

- A method declared **final** cannot be overridden by subclasses.
- It is used to prevent modification of the method's behavior in derived classes.

```
public final void display() {
    System.out.println("This is a final method.");
}
```

3. Final Class:

- A class declared as **final** cannot be subclassed (i.e., no other class can inherit from it).
- It is used to prevent a class from being extended and modified.
- `public final class Vehicle {`
 // class code
}

Given a Java Program that contains the bug in it, your task is to clear the bug to the output.

you should delete any piece of code.

For example:

Test	Result
1	The maximum speed is: 120 km/h This is a subclass of FinalExample.

Answer: (penalty regime: 0 %)

Reset answer

```
1 class FinalExample {
2
3     // Final variable
4     ..... int maxSpeed = 120;
5
6     // Final method
7     public final void displayMaxSpeed() {
8         System.out.println("The maximum speed is: " + maxSpeed + " km/h");
9     }
10 }
11
12 class SubClass extends FinalExample {
13
14     // You can create new methods here
15     public void showDetails() {
16         System.out.println("This is a subclass of FinalExample.");
17     }
18 }
19
20 class prog {
21     public static void main(String[] args) {
22         FinalExample obj = new FinalExample();
23         obj.displayMaxSpeed();
24
25         SubClass subObj = new SubClass();
26         subObj.showDetails();
27     }
28 }
29
```

	Test	Expected	Got	
✓	1	The maximum speed is: 120 km/h This is a subclass of FinalExample.	The maximum speed is: 120 km/h This is a subclass of FinalExample.	✓

Passed all tests! ✓

[◀ Lab-08-MCQ](#)

Jump to...



[FindStringCode ▶](#)