

Ex. No.: 12

Date: 19.04.25

### File Organization Technique- Single and Two level directory

#### AIM:

To implement File Organization Structures in C are

- a. Single Level Directory
- b. Two-Level Directory
- c. Hierarchical Directory Structure
- d. Directed Acyclic Graph Structure

#### a. Single Level

#### Directory

#### ALGORITHM

1. Start
2. Declare the number, names and size of the directories and file names.
3. Get the values for the declared variables.
4. Display the files that are available in the directories.
5. Stop.

#### PROGRAM:

```
#include<stdio.h>
#include<stdlib.h>
#include<graphics.h>
void main() {
    int gd=DETECT, gm, count, i, j, mid, cir-x,
    char fname[10][20];
    initgraph(&gd, &gm, "c:\\tc\\bgi");
    cleardevice();
    setbkcolor(GREEN);
```


```

puts("Enter the number of files");
scanf("%d", &count);
for(i=0; i<count; i++)
{
    clrdevice();
    setbkcolor(GREEN);
    printf("Enter the file %d name", i+1);
    scanf("%s", fname[i]);

    setfillstyle(1, MAGENTA);
    mid=640/count; cir-x=mid/3;
    bar3d(270, 100, 370, 150, 0, 0);
    settextstyle(2, 0, 4);
    settextjustify(1, 1);

    outtextxy(320, 125, "Root Directory");
    setcolor(BLUE);
    for(j=0; j<=i; j++, cir-x += mid)
    {
        line(320, 150, cir-x, 250);
        fillellipse(cir-x, 250, 30, 30);
        outtextxy(cir-x, 250, fname[j]);
    }
}

```




**OUTPUT:**


Enter the Number of files

2

Enter the file1 J



Enter the file2 E

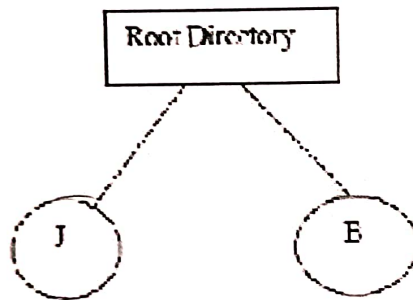

## b. Two-level directory Structure

### ALGORITHM:

1. Start
2. Declare the number, names and size of the directories and subdirectories and file names.
3. Get the values for the declared variables.
4. Display the files that are available in the directories and subdirectories.
5. Stop.

### PROGRAM:

```
#include <stdio.h>
#include <graphics.h>
struct tree_element
{
    char name[20];
    int x, y, ftype, lx, rx, inc, level;
    struct tree_element
    * link[5];
}; typedef struct tree_element node;

void main() {
    int gd = DETECT, gm; node *root;
    root = NULL; clrscr();
    create(&root, 0, "null", 0, 630, 320);
    clrscr();
    initgraph(&gd, &gm, "c:\\tc\\bgi");
    display(root);
    getch();
    closegraph();
}

createCnode **root, int lev, char *dname, int lx, int rx, int x) {
    int i, gap;
    if (*root == NULL) {
        (*root) = (node *) malloc(sizeof(node));
        printf("enter name of dir ^9 / file (under /s): ", dname); fflush(stdin);
        getc(*root) -> name;
        if (lev == 0 || lev == 1)
            (*root) -> ftype = 1;
```

else

(\*root) → ftype = 2;

(\*root) → level = lev;

(\*root) → y = 50 + lev \* 50;

(\*root) → x = x;

(\*root) → lx = lx;

(\*root) → rx = rx;

for (i = 0; i < 5; i++)

(\*root) → link[i] = NULL;

if ((\*root) → ftype == 1)

{

if (lev == 0 || lev == 1)

{

if ((\*root) → level == 0)

printf("How many users");

else

printf("How many files");

printf("(for %s):", (\*root) → name);

scanf("%d", &(\*root) → nc);

}

else (\*root) → nc = 0;

if ((\*root) → nc == 0)

gap = rx - lx;

else

gap = (rx - lx) / (\*root) → nc;

for (i = 0; i < (\*root) → nc; i++)

create(&(\*root) → link[i], lev + 1, (\*root) → name, lx + gap \* i, lx + gap \* i + gap \* i / 2);

}

else

(\*root) → nc = 0;

}

}

display(node \*root) {

int i;

settextstyle(2, 0, 4);

settextstyle(1, 1);

setfillstyle(1, BLUE);

setcolor(14);

if (root != NULL) {

for (i = 0; i < root → nc; i++)

{

line(root → x, root → y, root → link[i] → x, root → link[i] → y);

}

80

if (root → ftype == 1) bar2d(root → x - 20, root → y - 10, root → x + 20, root → y + 10, 0, 0); else


```

fillellipse Croot → x, root → y, 20, 20); out extxy Croot → x, root → y,
root → name);
for (i = 0; i < root → nc; i++)
{ display Croot → link [i] );
}
}
}

```

### Sample Output:

Enter the name of dir/file (under null): Hai  
 How many users (for Hai): 1  
 Enter name of dir/file (under Hai): Hello  
 How many files (for Hello): 1  
 Enter name of dir/file (under Hello): welcome

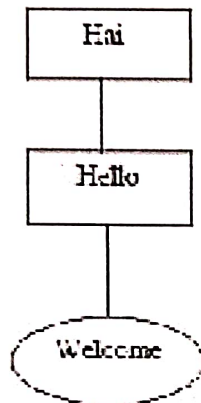

### Result:

Thus the code to implement file organization technique - single & two level directory has been executed successfully