

# CS23333-Object Oriented Programming Using Java-2023

[Dashboard](#) / [My courses](#) / [CS23333-OOPJ-2023](#) / [Lab-08 - Polymorphism, Abstract Classes, final Keyword](#) / [Lab-08-Logic Building](#)

## Quiz navigation



[Show one page at a time](#)

[Finish review](#)

<b>Status</b>	Finished
<b>Started</b>	Sunday, 6 October 2024, 12:50 AM
<b>Completed</b>	Sunday, 6 October 2024, 12:52 AM
<b>Duration</b>	1 min 27 secs

### Question 1


Correct

Marked out of 5.00

[Flag question](#)

Create a base class Shape with a method called calculateArea(). Create three subclasses: Circle, Rectangle, and Triangle. Override the calculateArea() method in each subclass to calculate and return the shape's area.

In the given exercise, here is a simple diagram illustrating polymorphism implementation:

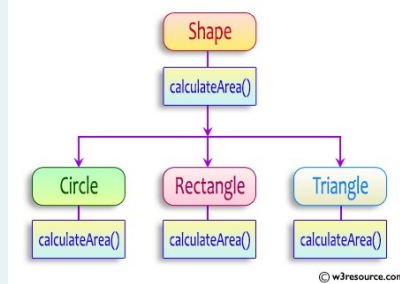

```
abstract class Shape {
    public abstract double calculateArea() ;
}
```

```
System.out.printf("Area of a Triangle :%.2f%n",((0.5)*base*height)); // use this statement
```

sample Input :

```
4 // radius of the circle to calculate area PI*r*r
5 // length of the rectangle
6 // breadth of the rectangle to calculate the area of a rectangle
4 // base of the triangle
3 // height of the triangle
```

### OUTPUT:

**Area of a circle :50.27**

**Area of a Rectangle :30.00**

**Area of a Triangle :6.00**

**For example:**

Test	Input	Result
1	4 5 6 4 3	Area of a circle: 50.27 Area of a Rectangle: 30.00 Area of a Triangle: 6.00
2	7 4.5 6.5 2.4 3.6	Area of a circle: 153.94 Area of a Rectangle: 29.25 Area of a Triangle: 4.32

**Answer:** (penalty regime: 0 %)

```
1 import java.util.Scanner;
2
3 // Abstract class Shape
4 abstract class Shape {
5     public abstract double calculateArea();
6 }
7
8 // Circle class
9 class Circle extends Shape {
10     private double radius;
11
12     public Circle(double radius) {
13         this.radius = radius;
14     }
15
16     @Override
17     public double calculateArea() {
18         return Math.PI * radius * radius; // Area of circle:  $\pi r^2$ 
19     }
20 }
21
22 // Rectangle class
23 class Rectangle extends Shape {
24     private double length;
25     private double breadth;
26
27     public Rectangle(double length, double breadth) {
28         this.length = length;
29         this.breadth = breadth;
30     }
31
32     @Override
33     public double calculateArea() {
34         return length * breadth; // Area of rectangle: length * breadth
```

```

35     }
36 }
37
38 // Triangle class
39 class Triangle extends Shape {
40     private double base;
41     private double height;
42
43     public Triangle(double base, double height) {
44         this.base = base;
45         this.height = height;
46     }
47
48     @Override
49     public double calculateArea() {
50         return 0.5 * base * height; // Area of triangle: 0.5 * base * height
51     }
52 }

```

	Test	Input	Expected	Got
1		4	Area of a circle: 50.27	Area of a circle: 50.27
		5	Area of a Rectangle: 30.00	Area of a Rectangle: 30.00
		6	Area of a Triangle: 6.00	Area of a Triangle: 6.00
		4		
		3		
2		7	Area of a circle: 153.94	Area of a circle: 153.94
		4.5	Area of a Rectangle: 29.25	Area of a Rectangle: 29.25
		6.5	Area of a Triangle: 4.32	Area of a Triangle: 4.32
		2.4		
		3.6		

Passed all tests!

Question **2**  
Correct  
Marked out of 5.00  
[Flag question](#)

## 1. Final Variable:

- Once a variable is declared **final**, its value cannot be changed after it is initialized.
- It must be initialized when it is declared or in the constructor if it's not initialized at declaration.
- It can be used to define constants

```
final int MAX_SPEED = 120; // Constant value, cannot be changed
```

## 2. Final Method:

- A method declared **final** cannot be overridden by subclasses.
- It is used to prevent modification of the method's behavior in derived classes.

```

public final void display() {
    System.out.println("This is a final method.");
}

```

## 3. Final Class:

- A class declared as **final** cannot be subclassed (i.e., no other class can inherit from it).
- It is used to prevent a class from being extended and modified.
- public final class Vehicle {  
 // class code  
}

Given a Java Program that contains the bug in it, your task is to clear the bug to the output.

you should delete any piece of code.

For example:

Test	Result
1	The maximum speed is: 120 km/h This is a subclass of FinalExample.

Answer: (penalty regime: 0 %)

Reset answer

```

1 // Final class definition
2 final class FinalExample {
3     // Final variable
4     final int MAX_SPEED = 120; // Constant value
5
6     // Final method
7     public final void display() {
8         System.out.println("The maximum speed is: " + MAX_SPEED + " km/h");
9     }
10 }
11
12 // Main class to test the final class
13 public class Test {
14     public static void main(String[] args) {
15         // Create an instance of FinalExample
16         FinalExample example = new FinalExample();
17         example.display();
18
19         // Uncommenting the following line will result in a compile-time error
20         // because FinalExample is a final class and cannot be subclassed.
21         // class SubclassExample extends FinalExample { }
22
23         System.out.println("This is a subclass of FinalExample.");
24     }
25 }
26

```

	Test	Expected	Got
1	The maximum speed is: 120 km/h This is a subclass of FinalExample.	The maximum speed is: 120 km/h This is a subclass of FinalExample.	

Passed all tests!

Question **3**  
Correct  
Marked out of 5.00  
[Flag question](#)

As a logic building learner you are given the task to extract the string which has vowel as the first and last characters from the given array of Strings.

Step1: Scan through the array of Strings, extract the Strings with first and last characters as vowels; these strings should be concatenated.

Step2: Convert the concatenated string to lowercase and return it.

If none of the strings in the array has first and last character as vowel, then return no matches found

input1: an integer representing the number of elements in the array.

input2: String array.

Example 1:

input1: 3

input2: {"oreo", "sirish", "apple"}

output: oreoapple

Example 2:

input1: 2

input2: {"Mango", "banana"}

output: no matches found

Explanation:

None of the strings has first and last character as vowel.

Hence the output is no matches found.

Example 3:

input1: 3

input2: {"Ate", "Ace", "Girl"}

output: ateace

For example:

Input	Result
3 oreo sirish apple	oreoapple
2 Mango banana	no matches found
3 Ate Ace Girl	ateace

Answer: (penalty regime: 0 %)

```
1 import java.util.Scanner;
2
3 public class VowelStringExtractor {
4
5     // Method to extract strings with vowels as first and last characters
6     public static String extractVowelStrings(String[] stringArray) {
7         StringBuilder result = new StringBuilder();
8         String vowels = "aeiouAEIOU"; // String containing all vowels
9
10        // Iterate through the array of strings
11        for (String s : stringArray) {
12            // Check if the string is not empty and if both the first and last characters are vowels
13            if (s.length() > 0 && vowels.indexOf(s.charAt(0)) != -1 && vowels.indexOf(s.charAt(s.length() - 1))
14                result.append(s); // Append matching string to the result
15            }
16        }
17
18        // Return the concatenated string in lowercase or "no matches found"
19        return result.length() > 0 ? result.toString().toLowerCase() : "no matches found";
20    }
21
22    public static void main(String[] args) {
23        Scanner scanner = new Scanner(System.in);
24
25        // Input for the number of strings
26
27        int n = scanner.nextInt();
28        scanner.nextLine(); // Consume the newline character
29
30        // Input for the strings in one line
31
32        String input = scanner.nextLine();
33        String[] strings = input.split(" "); // Split input into an array
34
35        // Process and output the result
36        String result = extractVowelStrings(strings);
37        System.out.println(result);
38
39        scanner.close(); // Close the scanner
40    }
41 }
42
```

	Input	Expected	Got
--	-------	----------	-----

	Input	Expected	Got	
3	oreo sirish apple	oreoapple	oreoapple	
2	Mango banana	no matches found	no matches found	
3	Ate Ace Girl	ateace	ateace	

Passed all tests!

[Finish review](#)

[◀ Lab-08-MCQ](#)

Jump to... 

[FindStringCode ▶](#)