

resources
- server

router.get

router.delete

router.post

```
JS
function add(n1,n2)


executer(add)

executer((n1,n2)=>{

})
```

```
executor(fn){
  n1= prompt('num1')
  n2 = prompr('num2')
  fn(n1,n2)
}
```

module.exports.add =

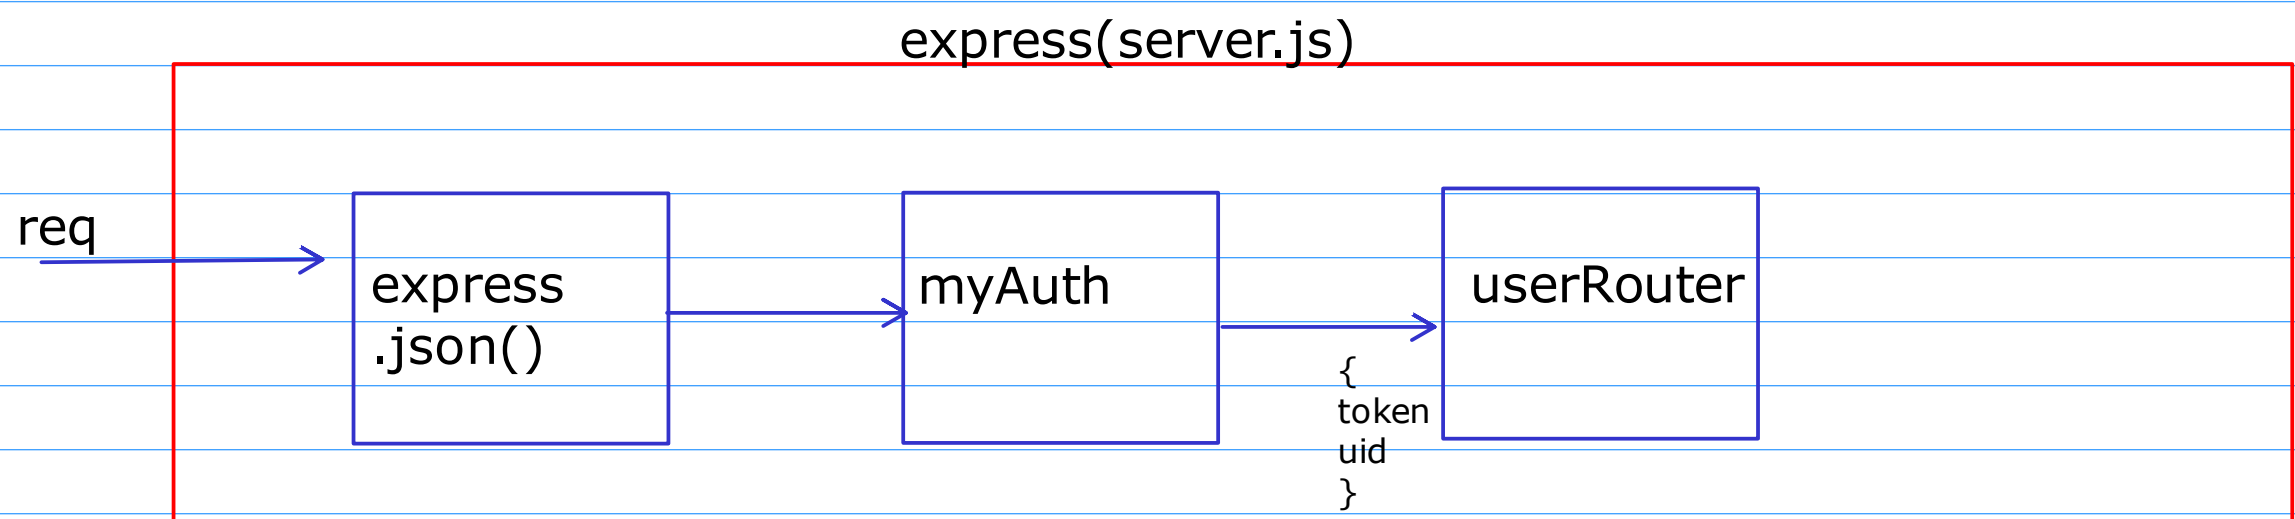

multer

