

Swagger UI

localhost:5011/swagger/index.html

Select a definition Phase3_RainbowSchoolMarksApi v1


Phase3_RainbowSchoolMarksApi 1.0 OAS3


<http://localhost:5011/swagger/v1/swagger.json>

StudentMarks

- GET** /api/StudentMarks
- POST** /api/StudentMarks
- GET** /api/StudentMarks/{id}
- PUT** /api/StudentMarks/{id}
- DELETE** /api/StudentMarks/{id}

Students

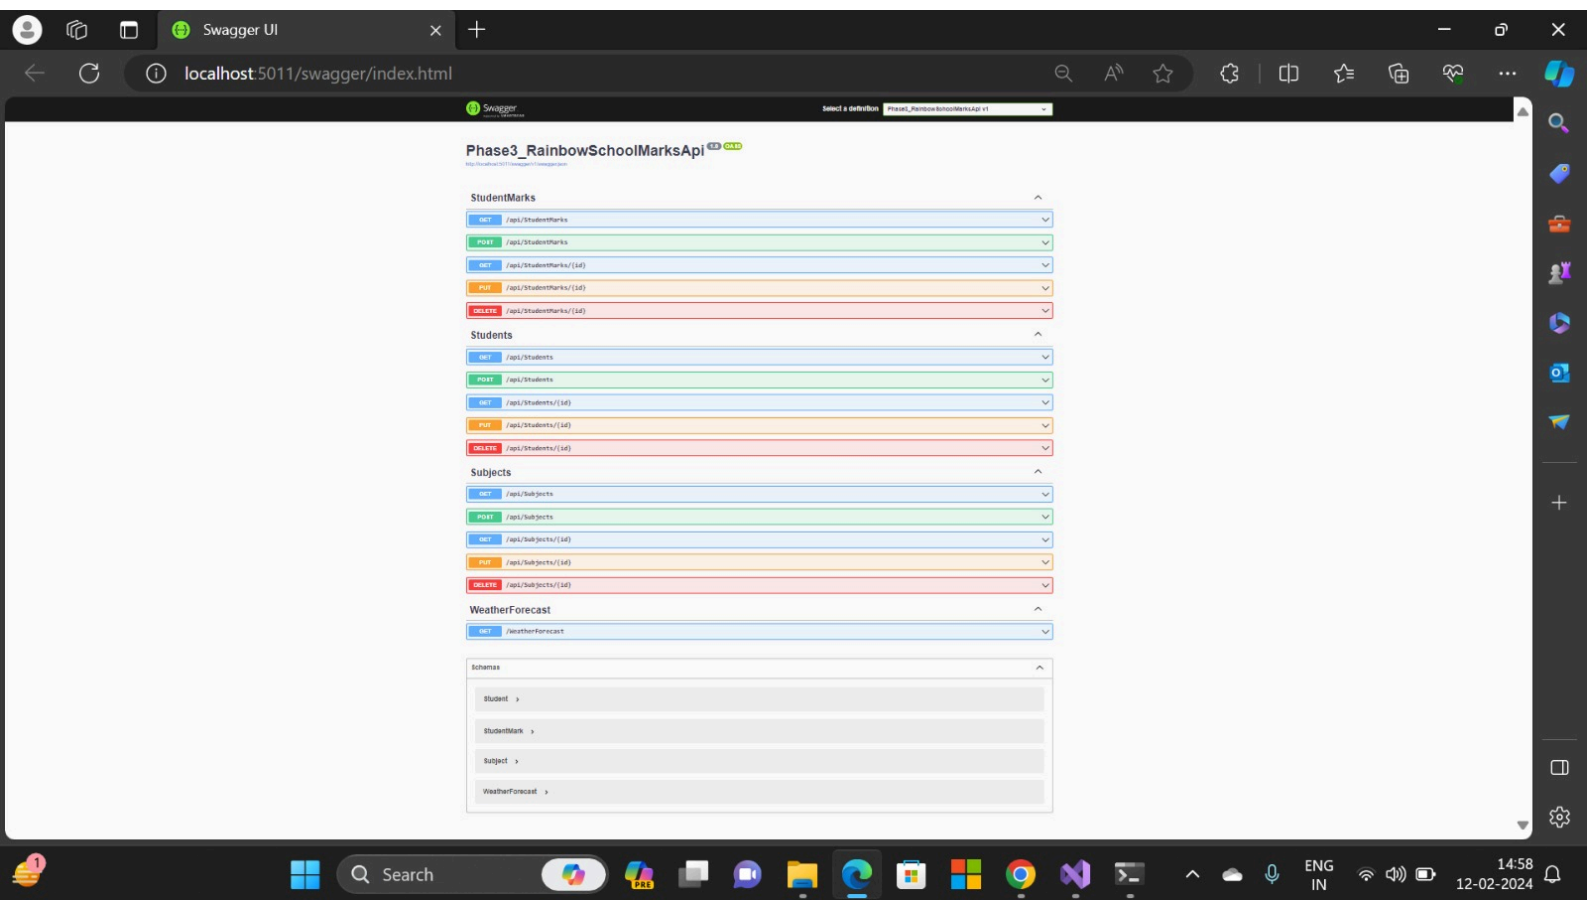

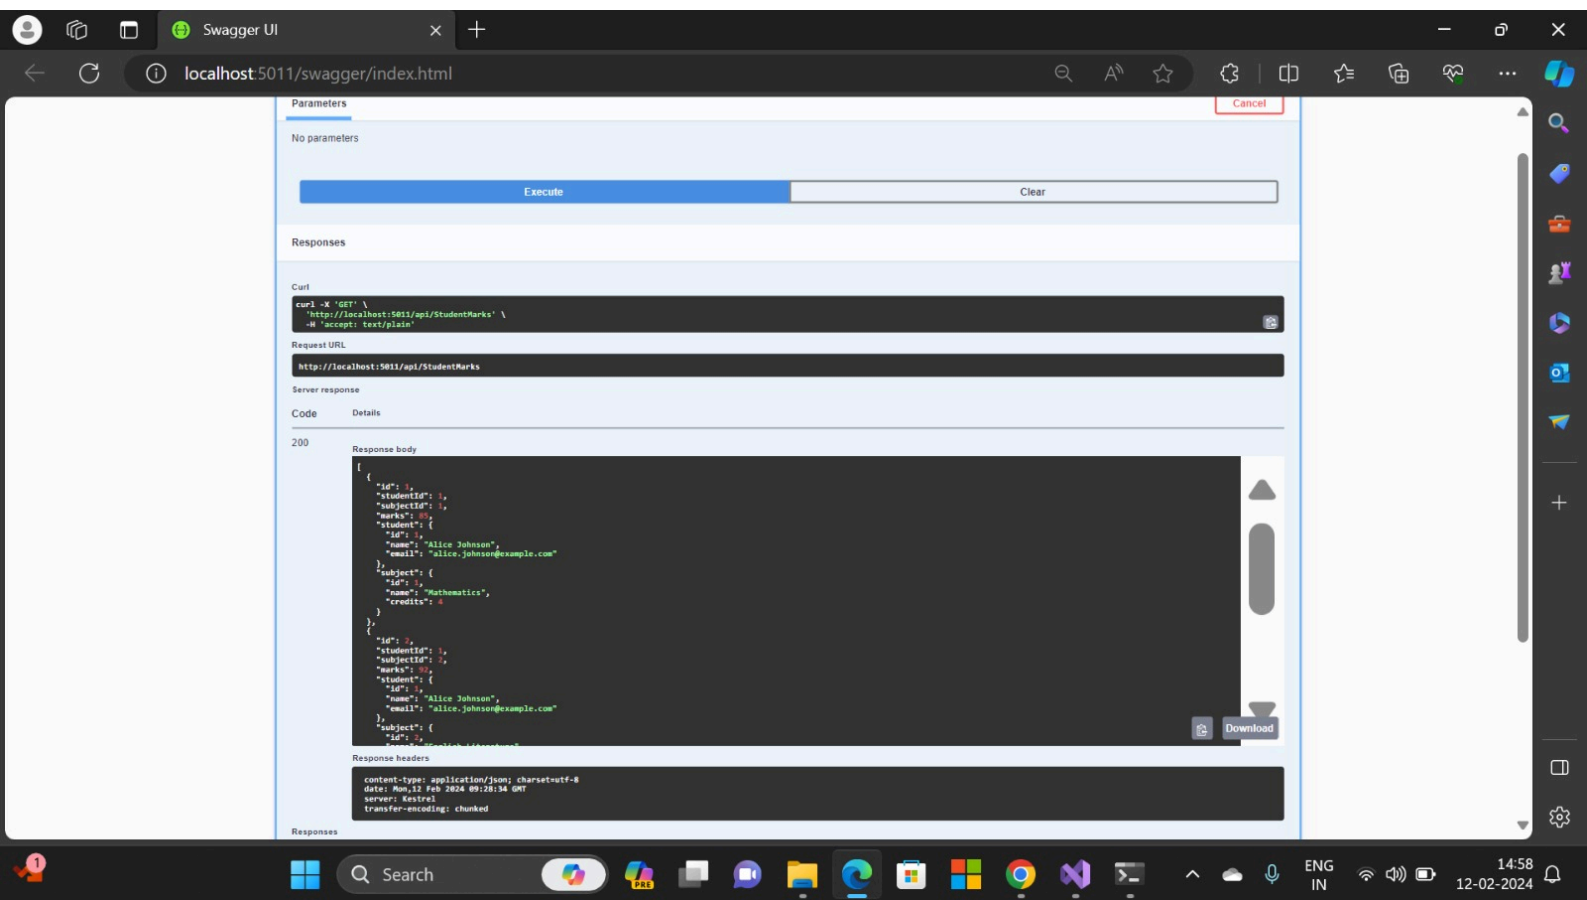

The screenshot shows a web browser window with the address bar displaying 'localhost:5011/swagger/index.html'. The browser's developer tools are open, showing the 'Responses' tab for a 200 status code. The response body is a JSON object representing a student's marks:

```
{
  "id": 0,
  "name": "Mathematics",
  "credits": 4
}
```

Below the response details, there is a table of API endpoints:

Method	Endpoint
POST	/api/StudentMarks
GET	/api/StudentMarks/{id}
PUT	/api/StudentMarks/{id}
DELETE	/api/StudentMarks/{id}

The 'Students' section is partially visible at the bottom of the page.

