


Q-On a Cisco Layer 3 switch, create three VLANs (e.g., VLAN 10 for 'Sales', VLAN 20 for 'Support', VLAN 30 for 'Marketing') and assign at least one interface to each VLAN.

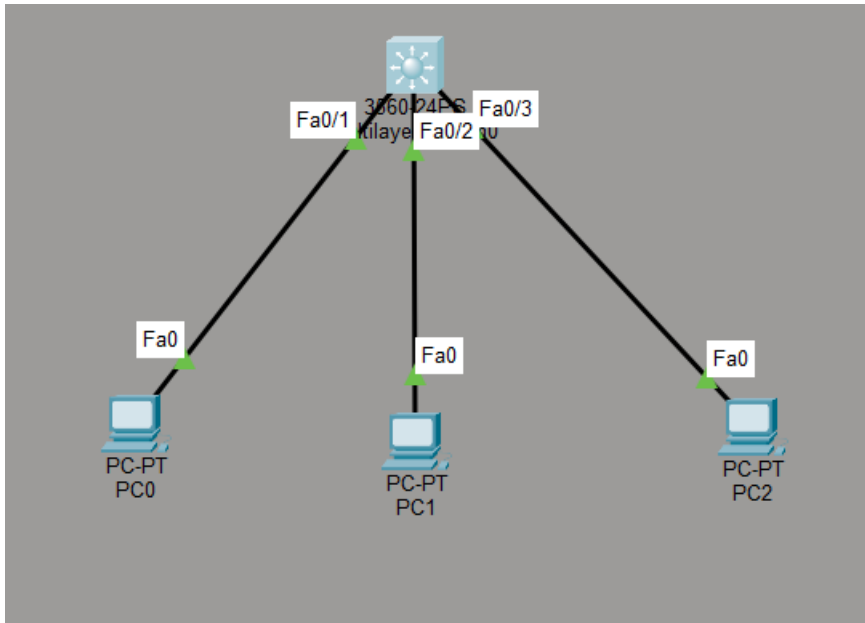

```
Switch>en
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#vlan 10
Switch(config-vlan)#name Sales
Switch(config-vlan)#exit
Switch(config)#vlan 20
Switch(config-vlan)#name Support
Switch(config-vlan)#exit
Switch(config)#vlan 30
Switch(config-vlan)#name Marketing
Switch(config-vlan)#exit
Switch(config)#int f 0/1
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 10
Switch(config-if)#exit
Switch(config)#int f 0/2
Switch(config-if)#switchport mode access
Switch(config-if)#switchport mode vlan 20
Switch(config-if)#exit
Switch(config)#int f 0/3
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 30
Switch(config-if)#exit
Switch(config)#do wr
Building configuration...
[OK]
Switch(config)#exit
Switch#
%SYS-5-CONFIG_I: Configured from console by console
```

```
Switch#show vlan brief
```

VLAN	Name	Status	Ports
1	default	active	Fa0/4, Fa0/5, Fa0/6, Fa0/7, Fa0/8, Fa0/9, Fa0/10, Fa0/11, Fa0/12, Fa0/13, Fa0/14, Fa0/15, Fa0/16, Fa0/17, Fa0/18, Fa0/19, Fa0/20, Fa0/21, Fa0/22, Fa0/23, Fa0/24, Gig0/1, Gig0/2
10	Sales	active	Fa0/1
20	Support	active	Fa0/2
30	Marketing	active	Fa0/3
1002	fddi-default	active	
1003	token-ring-default	active	
1004	fddinet-default	active	
1005	trnet-default	active	

```
Switch#
```