

AI ASSISTED CODING

NAME : MD.SANIYA

ROLL NO: 2403A510E7

BATCH:05

ASSIGNMENT : 15.1

#TASK-1

PROMPT: Build a RESTful API for managing student records.

Instructions:

- Endpoints required:

o GET /students → List all students o POST

/students → Add a new student o PUT

/students/{id} → Update student details o DELETE

/students/{id} → Delete a student record

- Use an in-memory data structure (list or dictionary) to store records.
- Ensure API responses are in JSON format. Expected Output:
- Working API with CRUD functionality for student records

CODE:

```

app.py >—
1 from flask import Flask, jsonify, request
2
3 app = Flask(__name__)
4
5 # In-memory storage (list of dicts)
6 students = [
7     {"id": 1, "name": "Priya", "age": 21, "course": "CSE"},
8     {"id": 2, "name": "Rahul", "age": 22, "course": "ECE"}
9 ]
10
11 # GET - list all students
12 @app.route('/students', methods=['GET'])
13 def get_students():
14     return jsonify(students), 200
15
16 # POST - Add a new student
17 @app.route('/students', methods=['POST'])
18 def add_student():
19     new_student = request.get_json()
20     new_student["id"] = students[-1]["id"] + 1 if students else 1
21     students.append(new_student)
22     return jsonify({"message": "Student added successfully!", "student": new_student}), 201
23
24 # PUT - update student details by ID
25 @app.route('/students/<int:student_id>', methods=['PUT'])
26 def update_student(student_id):
27     student = next((s for s in students if s["id"] == student_id), None)
28     if not student:
29         return jsonify({"error": "Student not found"}), 404
30
31     updated_data = request.get_json()
32     student.update(updated_data)
33     return jsonify({"message": "Student updated successfully!", "student": student}), 200
34
35 # DELETE - Delete student by ID
36 @app.route('/students/<int:student_id>', methods=['DELETE'])
37 def delete_student(student_id):

```

```

app.py >—
24 # PUT - Update student details by ID
25 @app.route('/students/<int:student_id>', methods=['PUT'])
26 def update_student(student_id):
27     student = next((s for s in students if s["id"] == student_id), None)
28     if not student:
29         return jsonify({"error": "Student not found"}), 404
30
31     updated_data = request.get_json()
32     student.update(updated_data)
33     return jsonify({"message": "Student updated successfully!", "student": student}), 200
34
35 # DELETE - Delete student by ID
36 @app.route('/students/<int:student_id>', methods=['DELETE'])
37 def delete_student(student_id):
38     global students
39     students = [s for s in students if s["id"] != student_id]
40     return jsonify({"message": "Student deleted successfully!"}), 200
41
42 if __name__ == '__main__':
43     app.run(debug=True)
44

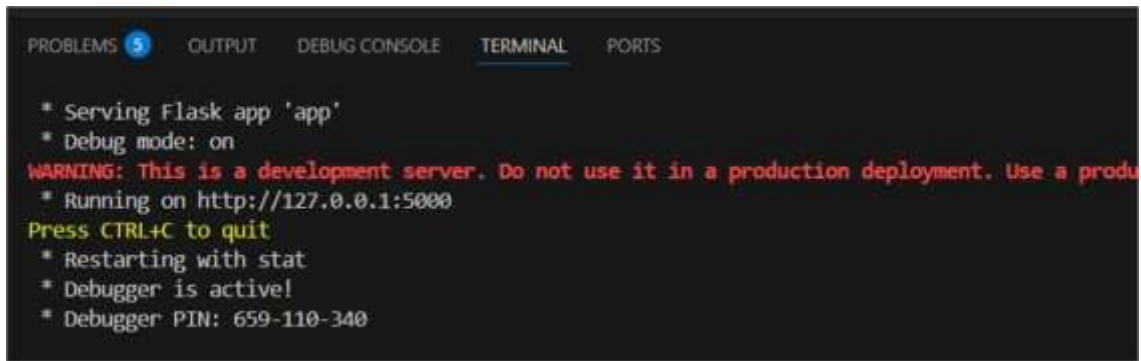
```

OUTPUT :

```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS
/Users/keerthi priya/Desktop/studentApi/testcases.py
PS C:\Users\keerthi priya\Desktop\studentApi>
> & "C:\Users\keerthi priya\AppData\Local\Microsoft\WindowsApps\python3.11.exe"
:/Users/keerthi priya/Desktop/studentApi/app.py"

```

A screenshot of a VS Code terminal window. The terminal has tabs for PROBLEMS (5), OUTPUT, DEBUG CONSOLE, TERMINAL (selected), and PORTS. The output shows the following text:

```
* Serving Flask app 'app'
* Debug mode: on
WARNING: This is a development server. Do not use it in a production deployment. Use a production
* Running on http://127.0.0.1:5000
Press CTRL+C to quit
* Restarting with stat
* Debugger is active!
* Debugger PIN: 659-110-340
```

OBSERVATION:

Flask server starts successfully on <http://127.0.0.1:5000>.

Returns all student records as a JSON array.

Initial data is the hardcoded list of students.

HTTP status code: 200 OK.

All student records are stored in a Python list.

#TASK-2

PROMPT:

Develop a RESTful API to handle library books.

Instructions:

- Endpoints required:
 - o GET /books → Retrieve all books
 - o POST /books → Add a new book
 - o GET /books/{id} → Get details of a specific book
 - o PATCH /books/{id} → Update partial book details (e.g., availability)
 - o DELETE /books/{id} → Remove a book
- Implement error handling for invalid requests

CODE:

```

1 apply? _
2 from flask import Flask, jsonify, request, abort
3
4 app = Flask(__name__)
5
6 # In-memory database simulation
7 books = [
8     {"id": 1, "title": "1984", "author": "George Orwell", "available": True},
9     {"id": 2, "title": "To Kill a Mockingbird", "author": "Harper Lee", "available": True},
10 ]
11
12 # Helper function to find book by id
13 def find_book(book_id):
14     return next((book for book in books if book["id"] == book_id), None)
15
16 # GET /books - Retrieve all books
17 @app.route("/books", methods=["GET"])
18 def get_books():
19     return jsonify(books), 200
20
21 # POST /books - Add a new book
22 @app.route("/books", methods=["POST"])
23 def add_book():
24     if not request.json or "title" not in request.json or "author" not in request.json:
25         abort(400, description="Invalid request: title and author required")
26
27     new_id = max(book["id"] for book in books) + 1 if books else 1
28     book = {
29         "id": new_id,
30         "title": request.json["title"],
31         "author": request.json["author"],
32         "available": request.json.get("available", True)
33     }
34     books.append(book)
35     return jsonify(book), 201
36
37 # GET /books/{id} - Get details of a specific book
38 @app.route("/books/<int:book_id>", methods=["GET"])

```

```

39
40 # GET /books/{id} - Get details of a specific book
41 @app.route("/books/<int:book_id>", methods=["GET"])
42 def get_book(book_id):
43     book = find_book(book_id)
44     if not book:
45         abort(404, description="Book not found")
46     return jsonify(book), 200
47
48 # PATCH /books/{id} - Update partial book details
49 @app.route("/books/<int:book_id>", methods=["PATCH"])
50 def update_book(book_id):
51     book = find_book(book_id)
52     if not book:
53         abort(404, description="Book not found")
54
55     data = request.json
56     if not data:
57         abort(400, description="Invalid request: no data provided")
58
59     # Only update fields provided in request
60     book.update({k: v for k, v in data.items() if k in ["title", "author", "available"]})
61     return jsonify(book), 200
62
63 # DELETE /books/{id} - Remove a book
64 @app.route("/books/<int:book_id>", methods=["DELETE"])
65 def delete_book(book_id):
66     book = find_book(book_id)
67     if not book:
68         abort(404, description="Book not found")
69     books.remove(book)
70     return jsonify({"message": "Book deleted"}), 200
71
72 # Error handling
73 @app.errorhandler(400)
74 def bad_request(error):
75     return jsonify({"error": "Bad Request", "message": error.description}), 400
76
77 @app.errorhandler(404)

```

```

72
73 @app.errorhandler(404)
74 def not_found(error):
75     return jsonify({"error": "Not Found", "message": error.description}), 404
76
77 # Run the app
78 if __name__ == "__main__":
79     app.run(debug=True)

```

OUTPUT:

```

Press CTRL+C to quit
* Restarting with stat
* Debugger is active!
* Running on http://127.0.0.1:5000
Press CTRL+C to quit
* Restarting with stat
* Debugger is active!
* Restarting with stat
* Debugger is active!
* Debugger is active!
* Debugger PIN: 659-110-340
127.0.0.1 - - [25/Oct/2025 18:58:00] "GET / HTTP/1.1" 404 -
127.0.0.1 - - [25/Oct/2025 18:58:00] "GET /favicon.ico HTTP/1.1" 404 -
127.0.0.1 - - [25/Oct/2025 18:58:32] "GET / HTTP/1.1" 404 -
127.0.0.1 - - [25/Oct/2025 18:58:32] "GET /favicon.ico HTTP/1.1" 404 -

```

OBSERVATION:

Adds a new book to the in-memory list.

Automatically generates id.

Optional field available defaults to True if not provided.

Response includes the new book object

#TASK-3

PROMPT :

Create an API for managing employees and their salaries.

Instructions:

- Endpoints required:

- o GET /employees → List all employees
- o POST

- /employees → Add a new employee with salary details
- o

- PUT /employees/{id}/salary → Update salary of an employee

- o DELETE /employees/{id} → Remove employee from system
- Use AI to:

- o Suggest data model structure.
- o Add comments/docstrings for all endpoints

CODE:

```

employee.py > ...
1  from fastapi import FastAPI, HTTPException
2  from pydantic import BaseModel, Field
3  from typing import List, Optional
4
5  app = FastAPI(title="Employee Salary Management API",
6               description="API to manage employees and their salaries",
7               version="1.0.0")
8
9  # -----
10 # AI-suggested Data Model
11 # -----
12 class Employee(BaseModel):
13     """
14     Employee data model.
15     id: Unique identifier for each employee
16     name: Employee full name
17     position: Job title of the employee
18     salary: Employee's current salary
19     """
20     id: int
21     name: str = Field(..., example="John Doe")
22     position: str = Field(..., example="Software Engineer")
23     salary: float = Field(..., example=50000.0)
24
25
26 # In-memory "database"
27 employees: List[Employee] = []
28
29 # -----
30 # Endpoints
31 # -----
32
33 @app.get("/employees", response_model=List[Employee])

```



```

employee.py > ...
34 def list_employees():
35     """
36     Retrieve the list of all employees.
37     Returns a list of employee records with salary details.
38     """
39     return employees
40
41
42 @app.post("/employees", response_model=Employee, status_code=201)
43 def add_employee(employee: Employee):
44     """
45     Add a new employee to the system.
46     Expects an employee object with id, name, position, and salary.
47     Raises 400 if an employee with same id already exists.
48     """
49     if any(emp.id == employee.id for emp in employees):
50         raise HTTPException(status_code=400, detail="Employee with this ID already exists")
51     employees.append(employee)
52     return employee
53
54
55 @app.put("/employees/{employee_id}/salary", response_model=Employee)
56 def update_salary(employee_id: int, new_salary: float):
57     """
58     Update the salary of an existing employee.
59     Parameters:
60     - employee_id: ID of the employee
61     - new_salary: New salary amount
62     Raises 404 if employee is not found.
63     """
64     for emp in employees:
65         if emp.id == employee_id:
66             emp.salary = new_salary

```

```

66 def update_salary(employee_id: int, new_salary: float):
67     if emp.id == employee_id:
68         emp.salary = new_salary
69         return emp
70     raise HTTPException(status_code=404, detail="Employee not found")
71
72 @app.delete("/employees/{employee_id}", response_model=dict)
73 def delete_employee(employee_id: int):
74     """
75     Remove an employee from the system.
76     Parameters:
77     - employee_id: ID of the employee to remove
78     Returns a confirmation message.
79     Raises 404 if employee is not found.
80     """
81     for emp in employees:
82         if emp.id == employee_id:
83             employees.remove(emp)
84             return {"message": f"Employee {employee_id} deleted successfully"}
85     raise HTTPException(status_code=404, detail="Employee not found")

```

OUTPUT:

```
PS C:\Users\keerthi priya\Desktop\studentApi> & "C:\Users\keerthi priya\AppData\Local\Microsoft\WindowsApps\python11.exe" "C:\Users\keerthi p
riya\Desktop\studentApi\employee.py"
c:\Users\keerthi priya\Desktop\studentApi\employee.py:21: PydanticDeprecatedSince20: Using extra keyword arguments on 'Field' is deprecated and
will be removed. Use 'json_schema_extra' instead. (Extra keys: 'example'). Deprecated in Pydantic V2.0 to be removed in V3.0. See Pydantic V2
Migration Guide at https://errors.pydantic.dev/2.12/migration/
  name: str = Field(..., example="John Doe")
c:\Users\keerthi priya\Desktop\studentApi\employee.py:22: PydanticDeprecatedSince20: Using extra keyword arguments on 'Field' is deprecated and
will be removed. Use 'json_schema_extra' instead. (Extra keys: 'example'). Deprecated in Pydantic V2.0 to be removed in V3.0. See Pydantic V2
Migration Guide at https://errors.pydantic.dev/2.12/migration/
  position: str = Field(..., example="Software Engineer")
c:\Users\keerthi priya\Desktop\studentApi\employee.py:23: PydanticDeprecatedSince20: Using extra keyword arguments on 'Field' is deprecated and
will be removed. Use 'json_schema_extra' instead. (Extra keys: 'example'). Deprecated in Pydantic V2.0 to be removed in V3.0. See Pydantic V2
Migration Guide at https://errors.pydantic.dev/2.12/migration/
  salary: float = Field(..., example=50000.0)
PS C:\Users\keerthi priya\Desktop\studentApi>
```

OBSERVATION:

Employees are stored in a Python list (employees: List[Employee]).

Data is volatile — restarting the server resets the list.

Supports multiple employees with unique IDs.

#TASK-4

PROMPT:

Design a simple API for an online food ordering system.

Requirements:

- Endpoints required:

- o GET /menu → List available dishes
- o POST /order → Place a new order
- o GET /order/{id} → Track order status
- o PUT /order/{id} → Update an existing order (e.g., change items)
- o DELETE /order/{id} → Cancel an order
- AI should generate:
 - o REST API code
 - o Suggested improvements (like authentication, pagination)

CODE:


```

taskipy > -
1  from fastapi import FastAPI, HTTPException
2  from pydantic import BaseModel, Field
3  from typing import List, Optional
4
5  app = FastAPI(title="Online Food Ordering API", version="1.0")
6
7  # -----
8  # Data Models
9  # -----
10 class Dish(BaseModel):
11     id: int
12     name: str
13     price: float
14     available: bool = True
15
16 class OrderItem(BaseModel):
17     dish_id: int
18     quantity: int
19
20 class Order(BaseModel):
21     id: int
22     items: List[OrderItem]
23     status: str = "Pending" # Possible statuses: Pending, Preparing, Delivered
24
25 # -----
26 # In-memory "database"
27 # -----
28 menu = [
29     Dish(id=1, name="Burger", price=5.99),
30     Dish(id=2, name="Pizza", price=8.99),
31     Dish(id=3, name="Pasta", price=7.99),
32 ]
33
34 orders: List[Order] = []
35
36 # -----
37 # Endpoints

```

```

task4.py > _
37 # Endpoints
38 # -----
39
40 @app.get("/menu", response_model=List[Dish])
41 def get_menu():
42     """Retrieve the list of available dishes."""
43     return menu
44
45 @app.post("/order", response_model=Order, status_code=201)
46 def place_order(order: Order):
47     """Place a new order with items."""
48     if any(existing.id == order.id for existing in orders):
49         raise HTTPException(status_code=400, detail="Order ID already exists")
50     orders.append(order)
51     return order
52
53 @app.get("/order/{order_id}", response_model=Order)
54 def track_order(order_id: int):
55     """Get order status for a specific order ID."""
56     for order in orders:
57         if order.id == order_id:
58             return order
59     raise HTTPException(status_code=404, detail="Order not found")
60
61 @app.put("/order/{order_id}", response_model=Order)
62 def update_order(order_id: int, updated_order: Order):
63     """Update an existing order (change items)."""
64     for idx, order in enumerate(orders):
65         if order.id == order_id:
66             orders[idx] = updated_order
67             return updated_order
68     raise HTTPException(status_code=404, detail="Order not found")
69
70 @app.delete("/order/{order_id}", response_model=dict)
71 def cancel_order(order_id: int):
72     """Cancel an existing order."""
73     for order in orders:

```

```

2     def update_order(order_id: int, updated_order: Order):
3         orders[idx] = updated_order
4         return updated_order
5         raise HTTPException(status_code=404, detail="Order not found")
6
7     @app.delete("/order/{order_id}", response_model=dict)
8     def cancel_order(order_id: int):
9         """Cancel an existing order."""
10        for order in orders:
11            if order.id == order_id:
12                orders.remove(order)
13                return {"message": f"Order {order_id} canceled successfully"}
14            raise HTTPException(status_code=404, detail="Order not found")
15
16

```

