This document provides additional assistance with wiring your Extron IP Link Pro Control Processor to your device. Different components may require a different wiring scheme than those listed below.

For complete operating instructions, refer to the user's manual for the specific IP Link Pro Control Processor or the documentation supplied by the manufacturer of the controlled device.

For more information on using Global Scripter Modules, refer to the "Guide to Using Scripter Modules" document.

Device Specifications

Device Type: Other
Manufacturer: Extron
Firmware Version: N/A
Model(s): MediaPort 200

Tested on the Following Software and Firmware Versions

IP Link Pro Control Processor Firmware	Global Scripter Version
3.09.0000-b009	2.6.0

Version History

Module Version	Date	Notes
1_3_0_0	8/6/2020	Updated Ethernet to support SSH. Renamed the following commands: Input Mic/Line Gain → Input Mic Line Gain Input Mic/Line Mute → Input Mic Line Mute
1_2_0_1	5/30/2018	Added commands that do not support one shot polling to note on status table.
1_2_0_0	5/1/2018	Added Commands: Input HDMI Gain, Input HDMI Mute, Input Line In Gain, Input Line In Mute, Input Mic/Line Gain, Input Mic/Line Mute, Input Pre-Mixer HDMI Gain, Input Pre-Mixer HDMI Mute, Input Pre-Mixer Line In Gain, Input Pre-Mixer Line In Mute, Input Pre-Mixer USB Communications Gain, Input Pre-Mixer USB Communications Mute, Input Pre-Mixer USB Playack Gain, Input Pre-Mixer USB Playack Mute, Input USB Communications Gain, Input USB Communications Mute, Input USB Playback Gain, Input USB Playback Mute,

		Output Aux Attenuation, Output Aux Mute, Output Line Attenuation, Output Line Mute, Output Reference Attenuation, Output Reference Mute, Output USB Attenuation, Output USB Mute.
1_1_0_1	9/27/2017	Updated module to Rev. B.
1_1_0_0	2/13/2017	Updated USB Host Status to include state ‘Suspended’. Added Video Send Status.
1_0_0_1	2/26/2016	Fixed update issue.
1_0_0_0	2/10/2016	Initial Version.

Module Notes

- Unidirectional variable must be set to 'True' if status is not required. Default value is 'False'.
  `Example: InterfaceName.Unidirectional = 'True'`

- connectionCounter variable must be set to the number of queries that will be sent to the device before displaying 'Disconnected' if no response is received. Default value is 15.
  `Example: InterfaceName.connectionCounter = 5`

- If login credentials are required, devicePassword and deviceUsername must be set accordingly. deviceUsername default value is admin respectively.
  `Example: InterfaceName.deviceUsername = 'extron'`

Supported Classes and Examples

SerialClass

```
    InterfaceName = ModuleName.SerialClass(ProcessorName, 'COM1', Model='MediaPort 200')
```

SerialOverEthernetClass

```
    InterfaceName = ModuleName.SerialOverEthernetClass('192.168.254.254', 2001, Model='MediaPort 200')
```

SSHClass

```
#Password Required
    InterfaceName = ModuleName.SSHClass('192.168.254.254', 22023, Credentials=('admin', 'extron'), Model='MediaPort 200')

#No Password Required
    InterfaceName = ModuleName.SSHClass('192.168.254.254', 22023, Credentials=('admin', ''), Model='MediaPort 200')
```

Control Commands

Format with Qualifier:

```
InterfaceName.Set(Command, Value, {'Qualifier Key': 'Qualifier Value'})
```

Format without Qualifier:

```
InterfaceName.Set(Command, Value)
```

Command	Value	Value	Value
AspectRatio	'Fill'	'Follow'	
`# AspectRatio example` `InterfaceName.Set('AspectRatio', 'Fill')`			
Command **AudioMute**	Value 'On'	Value 'Off'	
Qualifier Key **'Group'**	Qualifier Value 'Program' 'Far End to Ref'	Qualifier Value 'Mic to Far End' 'Mic to Aux'	Qualifier Value 'Program to Far End'
`# AudioMute example` `InterfaceName.Set('AudioMute', 'On', {'Group': 'Program'})`			
Command **AutoImage**	Value 'Execute'	Value 'Execute and Fill'	Value 'Execute and Follow'
`# AutoImage example` `InterfaceName.Set('AutoImage', 'Execute')`			
Command **AutoMemory**	Value 'On'	Value 'Off'	
`# AutoMemory example` `InterfaceName.Set('AutoMemory', 'On')`			
Command **DigitalInputMode**	Value 'Default Off' 'Mic Mute 1' 'Mic Mute 4' 'Preset Toggle 1'	Value 'Push to Mute' 'Mic Mute 2' 'Inc Group Master 1' 'Preset Toggle 2'	Value 'Push to Talk' 'Mic Mute 3' 'Dec Group Master 1'
Qualifier Key **'Input'**	Qualifier Value '1' – '2'		
`# DigitalInputMode example` `InterfaceName.Set('DigitalInputMode', 'Default Off', {'Input': '1'})`			
Command **DigitalOutputMode**	Value 'Output High' 'Follow Mute Inverted'	Value 'Output Low' 'Blink, Follow Input 1'	Value 'Follow Mute' 'Blink, Follow Input 2'
Qualifier Key **'Output'**	Qualifier Value '1' – '2'		
`# DigitalOutputMode example` `InterfaceName.Set('DigitalOutputMode', 'Output High', {'Output': '1'})`			
Command **ExecutiveMode**	Value 'On'	Value 'Off'	
`# ExecutiveMode example` `InterfaceName.Set('ExecutiveMode', 'On')`			
Command **Freeze**	Value 'On'	Value 'Off'	
`# Freeze example` `InterfaceName.Set('Freeze', 'On')`			
Command **HDCPAuthentication**	Value 'On'	Value 'Off'	

``# HDCPAuthentication example``` ```InterfaceName.Set('HDCPAuthentication', 'On')```			
Command **HDCPMode** [1]	Value 'Mode 1' 'Mode 4'	Value 'Mode 2'	Value 'Mode 3'
``# HDCPMode example``` ```InterfaceName.Set('HDCPMode', 'Mode 1')```			
Command **HDCPNotification**	Value 'On'	Value 'Off'	
``# HDCPNotification example``` ```InterfaceName.Set('HDCPNotification', 'On')```			
Command **HDMIInputEDID**	Value '640x480 60Hz' '1280x768 60Hz' '1360x768 60Hz' '1400x1050 60Hz' '1600x1200 60Hz' '480p 60Hz' '720p 24Hz' '720p 30Hz' '720p 60Hz' '1080i 60Hz' '1080p 25Hz' '1080p 50Hz' '2048x1080 23.98Hz' '2048x1080 29.97Hz' '2048x1080 59.94Hz'	Value '800x600 60Hz' '1280x800 60Hz' '1366x768 60Hz' '1600x900 60Hz' '1920x1200 60Hz' '576p 50Hz' '720p 25Hz' '720p 50Hz' '1080i 50Hz' '1080p 23.98Hz' '1080p 29.97Hz' '1080p 59.94Hz' '2048x1080 24Hz' '2048x1080 30Hz' '2048x1080 60Hz'	Value '1024x768 60Hz' '1280x1024 60Hz' '1440x900 60Hz' '1680x1050 60Hz' '480p 59.94Hz' '720p 23.98Hz' '720p 29.97Hz' '720p 59.94Hz' '1080i 59.94Hz' '1080p 24Hz' '1080p 30Hz' '1080p 60Hz' '2048x1080 25Hz' '2048x1080 50Hz'
``# HDMIInputEDID example``` ```InterfaceName.Set('HDMIInputEDID', '640x480 60Hz')```			
Command **HDMILoopFormat**	Value 'Auto' 'RGB 444 Limited' 'YUV 422 Full'	Value 'DVI RGB 444' 'YUV 444 Full' 'YUV 422 Limited'	Value 'RGB 444 Full' 'YUV 444 Limited'
``# HDMILoopFormat example``` ```InterfaceName.Set('HDMILoopFormat', 'Auto')```			
Command **InputHDMIGain**	Value -18 to 24 in steps of 0.1		
Qualifier Key **'L/R'**	Qualifier Value 'Left'	Qualifier Value 'Right'	
``# InputHDMIGain example``` ```InterfaceName.Set('InputHDMIGain', 24, {'L/R': 'Left'})```			
Command **InputHDMIMute**	Value 'On'	Value 'Off'	
Qualifier Key **'L/R'**	Qualifier Value 'Left'	Qualifier Value 'Right'	
``# InputHDMIMute example``` ```InterfaceName.Set('InputHDMIMute', 'On', {'L/R': 'Left'})```			
Command **InputLineInGain**	Value -18 to 24 in steps of 0.1		
Qualifier Key **'L/R'**	Qualifier Value 'Left'	Qualifier Value 'Right'	
``# InputLineInGain example``` ```InterfaceName.Set('InputLineInGain', 24, {'L/R': 'Left'})```			

Command **InputLineInMute**	Value 'On'	Value 'Off'
Qualifier Key **'L/R'**	Qualifier Value 'Left'	Qualifier Value 'Right'

```
# InputLineInMute example
InterfaceName.Set('InputLineInMute', 'On', {'L/R': 'Left'})
```

Command **InputMicLineGain**	Value -18 to 60 in steps of 0.1

```
# InputMicLineGain example
InterfaceName.Set('InputMicLineGain', 60)
```

Command **InputMicLineMute**	Value 'On'	Value 'Off'

```
# InputMicLineMute example
InterfaceName.Set('InputMicLineMute', 'On')
```

Command **InputPreMixerHDMIGain**	Value -100 to 12 in steps of 0.1

```
# InputPreMixerHDMIGain example
InterfaceName.Set('InputPreMixerHDMIGain', 12)
```

Command **InputPreMixerHDMIMute**	Value 'On'	Value 'Off'

```
# InputPreMixerHDMIMute example
InterfaceName.Set('InputPreMixerHDMIMute', 'On')
```

Command **InputPreMixerLineInGain**	Value -100 to 12 in steps of 0.1

```
# InputPreMixerLineInGain example
InterfaceName.Set('InputPreMixerLineInGain', 12)
```

Command **InputPreMixerLineInMute**	Value 'On'	Value 'Off'

```
# InputPreMixerLineInMute example
InterfaceName.Set('InputPreMixerLineInMute', 'On')
```

Command **InputPreMixerUSBCommunicationsGain**	Value -100 to 12 in steps of 0.1

```
# InputPreMixerUSBCommunicationsGain example
InterfaceName.Set('InputPreMixerUSBCommunicationsGain', 12)
```

Command **InputPreMixerUSBCommunicationsMute**	Value 'On'	Value 'Off'

```
# InputPreMixerUSBCommunicationsMute example
InterfaceName.Set('InputPreMixerUSBCommunicationsMute', 'On')
```

Command **InputPreMixerUSBPlaybackGain**	Value -100 to 12 in steps of 0.1

```
# InputPreMixerUSBPlaybackGain example
InterfaceName.Set('InputPreMixerUSBPlaybackGain', 12)
```

Command **InputPreMixerUSBPlaybackMute**	Value 'On'	Value 'Off'

```
# InputPreMixerUSBPlaybackMute example
InterfaceName.Set('InputPreMixerUSBPlaybackMute', 'On')
```

Command **InputUSBCommunicationsGain**	Value -100 to 0 in steps of 0.1	
Qualifier Key	Qualifier Value	Qualifier Value

'L/R'	'Left'	'Right'
`# InputUSBCommunicationsGain example` `InterfaceName.Set('InputUSBCommunicationsGain', 0, {'L/R': 'Left'})`		
Command **InputUSBCommunicationsMute**	Value 'On'	Value 'Off'
Qualifier Key **'L/R'**	Qualifier Value 'Left'	Qualifier Value 'Right'
`# InputUSBCommunicationsMute example` `InterfaceName.Set('InputUSBCommunicationsMute', 'On', {'L/R': 'Left'})`		
Command **InputUSBPlaybackGain**	Value -100 to 0 in steps of 0.1	
Qualifier Key **'L/R'**	Qualifier Value 'Left'	Qualifier Value 'Right'
`# InputUSBPlaybackGain example` `InterfaceName.Set('InputUSBPlaybackGain', 0, {'L/R': 'Left'})`		
Command **InputUSBPlaybackMute**	Value 'On'	Value 'Off'
Qualifier Key **'L/R'**	Qualifier Value 'Left'	Qualifier Value 'Right'
`# InputUSBPlaybackMute example` `InterfaceName.Set('InputUSBPlaybackMute', 'On', {'L/R': 'Left'})`		
Command **OutputAuxAttenuation**	Value -100 to 0 in steps of 0.1	
`# OutputAuxAttenuation example` `InterfaceName.Set('OutputAuxAttenuation', 0)`		
Command **OutputAuxMute**	Value 'On'	Value 'Off'
`# OutputAuxMute example` `InterfaceName.Set('OutputAuxMute', 'On')`		
Command **OutputLineAttenuation**	Value -100 to 0 in steps of 0.1	
`# OutputLineAttenuation example` `InterfaceName.Set('OutputLineAttenuation', 0)`		
Command **OutputLineMute**	Value 'On'	Value 'Off'
`# OutputLineMute example` `InterfaceName.Set('OutputLineMute', 'On')`		
Command **OutputReferenceAttenuation**	Value -100 to 0 in steps of 0.1	
`# OutputReferenceAttenuation example` `InterfaceName.Set('OutputReferenceAttenuation', 0)`		
Command **OutputReferenceMute**	Value 'On'	Value 'Off'
`# OutputReferenceMute example` `InterfaceName.Set('OutputReferenceMute', 'On')`		
Command **OutputUSBAttenuation**	Value -100 to 0 in steps of 0.1	
`# OutputUSBAttenuation example` `InterfaceName.Set('OutputUSBAttenuation', 0)`		
Command **OutputUSBMute**	Value 'On'	Value 'Off'

```
# OutputUSBMute example
InterfaceName.Set('OutputUSBMute', 'On')
```

Command	Value	Value	Value
OverscanMode	'0%'	'2.5%'	'5%'

```
# OverscanMode example
InterfaceName.Set('OverscanMode', '0%')
```

Command	Value	Value	Value
Preset	'Delete'	'Save'	'Recall'
Qualifier Key	Qualifier Value		
'Preset'	'1' – '16'		

```
# Preset example
InterfaceName.Set('Preset', 'Delete', {'Preset': '1'})
```

Command	Value	Value	Value
ScreenSaverMode	'Extron Logo'	'User Logo'	'Blue Screen or Bug'

```
# ScreenSaverMode example
InterfaceName.Set('ScreenSaverMode', 'Extron Logo')
```

Command	Value	Value
USBStreamingFormat	'MJPEG 422 Full'	'MJPEG 420 Full'

```
# USBStreamingFormat example
InterfaceName.Set('USBStreamingFormat', 'MJPEG 422 Full')
```

Command	Value	Value
USBTerminalType [2]	'Default'	'Echo Cancelling Speakerphone'

```
# USBTerminalType example
InterfaceName.Set('USBTerminalType', 'Default')
```

Command	Value	Value	Value
VideoMute [3]	'Mute Video to Black'	'Mute Sync and Video'	'Unmute Video/Sync'
Qualifier Key	Qualifier Value	Qualifier Value	
'Output'	'USB'	'HDMI Loop'	

```
# VideoMute example
InterfaceName.Set('VideoMute', 'Mute Video to Black', {'Output': 'USB'})
```

Command	Value		
Volume	-100 to 0 in steps of 0.1		
Qualifier Key	Qualifier Value	Qualifier Value	Qualifier Value
'Group'	'Program' 'Far End to Ref'	'Mic to Far End' 'Mic to Aux'	'Program to Far End'

```
# Volume example
InterfaceName.Set('Volume', 0, {'Group': 'Program'})
```

[1] Modes are as follows:

1. Continuous HDCP trials to HDMI sink.
   10 seconds of HDCP trials to DVI sink, then halts HDCP until HPD or power cycle.
   Encrypted output only when selected input is encrypted.
2. Continuous HDCP trials to HDMI sink.
   10 seconds of HDCP trials to DVI sink, then halts HDCP until HPD or power cycle.
   Encrypted output 100% of the time.
3. Continuous HDCP trials to HDMI sink.
   Continuous HDCP trials to DVI sink.
   Encrypted output only when selected input is encrypted.
4. Continuous HDCP trials to HDMI sink.
   Continuous HDCP trials to DVI sink.
   Encrypted output 100% of the time.

[2] After command is sent, the device will reboot.

[3] "Mute Sync and Video" is only available on Input 2.

Status Available

For all commands except for DigitalInputMode, DigitalInputStatus, DigitalOutputMode, ExecutiveMode, HDMIInputEDID, InputHDMIGain, InputHDMIMute, InputLineInGain, InputLineInMute, InputMicLineGain, InputPreMixerHDMIGain, InputPreMixerHDMIMute, InputPreMixerLineInGain, InputPreMixerLineInMute, InputPreMixerUSBCommunicationsGain, InputPreMixerUSBCommunicationsMute, InputPreMixerUSBPlaybackGain, InputPreMixerUSBPlaybackMute, InputUSBCommunicationsGain, InputUSBCommunicationsMute, InputUSBPlaybackGain, InputUSBPlaybackMute, OutputAuxAttenuation, OutputAuxMute, OutputLineAttenuation, OutputLineMute, OutputReferenceAttenuation, OutputReferenceMute, OutputUSBAttenuation, OutputUSBMute, ScreenSaverStatus, USBHostStatus, and VideoSendStatus, Update should be called only once since the command's status will be updated automatically as the device's status changes. ConnectionStatus does not support the Update function and is triggered by the device providing a successful response to other Update function calls.

Format with Qualifier:

```
	InterfaceName.Update(Command, {'Qualifier Key': 'Qualifier Value'})
	Value = InterfaceName.ReadStatus(Command, {'Qualifier Key': 'Qualifier Value'})
	InterfaceName.SubscribeStatus(Command, {'Qualifier Key': 'Qualifier Value'}, 
FeedbackHandler)
	FeedbackHandler will be called only when the specified qualifier gets a new status.
```

Format without Qualifier:

```
	InterfaceName.Update(Command)
	Value = InterfaceName.ReadStatus(Command)
	InterfaceName.SubscribeStatus(Command, None, FeedbackHandler)
	FeedbackHandler will be called when any qualifier gets a new status.
```

Command	Value	Value	
AspectRatio	'Fill'	'Follow'	

```
# AspectRatio example
InterfaceName.Update('AspectRatio')
Value = InterfaceName.ReadStatus('AspectRatio')
InterfaceName.SubscribeStatus('AspectRatio', None, FeedbackHandler)
```

Command	Value	Value	
AudioMute	'On'	'Off'	
Qualifier Key	Qualifier Value	Qualifier Value	Qualifier Value
'Group'	'Program'	'Mic to Far End'	'Program to Far End'
	'Far End to Ref'	'Mic to Aux'	

```
# AudioMute example
InterfaceName.Update('AudioMute', {'Group': 'Program'})
Value = InterfaceName.ReadStatus('AudioMute', {'Group': 'Program'})
InterfaceName.SubscribeStatus('AudioMute', None, FeedbackHandler)
```

Command	Value	Value	
AutoMemory	'On'	'Off'	

```
# AutoMemory example
InterfaceName.Update('AutoMemory')
Value = InterfaceName.ReadStatus('AutoMemory')
InterfaceName.SubscribeStatus('AutoMemory', None, FeedbackHandler)
```

Command	Value	Value	
ConnectionStatus	'Connected'	'Disconnected'	

```
# ConnectionStatus example
Value = InterfaceName.ReadStatus('ConnectionStatus')
InterfaceName.SubscribeStatus('ConnectionStatus', None, FeedbackHandler)
```

Command	Value	Value	Value
DigitalInputMode	'Default Off'	'Push to Mute'	'Push to Talk'

	'Mic Mute 1'	'Mic Mute 2'	'Mic Mute 3'
	'Mic Mute 4'	'Inc Group Master 1'	'Dec Group Master 1'
	'Preset Toggle 1'	'Preset Toggle 2'	
Qualifier Key **'Input'**	Qualifier Value '1' – '2'		

```
# DigitalInputMode example
InterfaceName.Update('DigitalInputMode', {'Input': '1'})
Value = InterfaceName.ReadStatus('DigitalInputMode', {'Input': '1'})
InterfaceName.SubscribeStatus('DigitalInputMode', None, FeedbackHandler)
```

Command	Value	Value	
DigitalInputStatus	'High'	'Low'	
Qualifier Key **'Input'**	Qualifier Value '1' – '2'		

```
# DigitalInputStatus example
InterfaceName.Update('DigitalInputStatus', {'Input': '1'})
Value = InterfaceName.ReadStatus('DigitalInputStatus', {'Input': '1'})
InterfaceName.SubscribeStatus('DigitalInputStatus', None, FeedbackHandler)
```

Command	Value	Value	Value
DigitalOutputMode	'Output High'	'Output Low'	'Follow Mute'
	'Follow Mute Inverted'	'Blink, Follow Input 1'	'Blink, Follow Input 2'
Qualifier Key **'Output'**	Qualifier Value '1' – '2'		

```
# DigitalOutputMode example
InterfaceName.Update('DigitalOutputMode', {'Output': '1'})
Value = InterfaceName.ReadStatus('DigitalOutputMode', {'Output': '1'})
InterfaceName.SubscribeStatus('DigitalOutputMode', None, FeedbackHandler)
```

Command	Value	Value	
ExecutiveMode	'On'	'Off'	

```
# ExecutiveMode example
InterfaceName.Update('ExecutiveMode')
Value = InterfaceName.ReadStatus('ExecutiveMode')
InterfaceName.SubscribeStatus('ExecutiveMode', None, FeedbackHandler)
```

Command	Value	Value	
Freeze	'On'	'Off'	

```
# Freeze example
InterfaceName.Update('Freeze')
Value = InterfaceName.ReadStatus('Freeze')
InterfaceName.SubscribeStatus('Freeze', None, FeedbackHandler)
```

Command	Value	Value	
HDCPAuthentication	'On'	'Off'	

```
# HDCPAuthentication example
InterfaceName.Update('HDCPAuthentication')
Value = InterfaceName.ReadStatus('HDCPAuthentication')
InterfaceName.SubscribeStatus('HDCPAuthentication', None, FeedbackHandler)
```

Command	Value	Value	Value
HDCPMode [1]	'Mode 1'	'Mode 2'	'Mode 3'
	'Mode 4'		

```
# HDCPMode example
InterfaceName.Update('HDCPMode')
Value = InterfaceName.ReadStatus('HDCPMode')
InterfaceName.SubscribeStatus('HDCPMode', None, FeedbackHandler)
```

Command	Value	Value	
HDCPNotification	'On'	'Off'	

```
# HDCPNotification example
InterfaceName.Update('HDCPNotification')
```

```
Value = InterfaceName.ReadStatus('HDCPNotification')
InterfaceName.SubscribeStatus('HDCPNotification', None, FeedbackHandler)
```

Command	Value	Value	Value
HDMIInputEDID	'640x480 60Hz'	'800x600 60Hz'	'1024x768 60Hz'
	'1280x768 60Hz'	'1280x800 60Hz'	'1280x1024 60Hz'
	'1360x768 60Hz'	'1366x768 60Hz'	'1440x900 60Hz'
	'1400x1050 60Hz'	'1600x900 60Hz'	'1680x1050 60Hz'
	'1600x1200 60Hz'	'1920x1200 60Hz'	'480p 59.94Hz'
	'480p 60Hz'	'576p 50Hz'	'720p 23.98Hz'
	'720p 24Hz'	'720p 25Hz'	'720p 29.97Hz'
	'720p 30Hz'	'720p 50Hz'	'720p 59.94Hz'
	'720p 60Hz'	'1080i 50Hz'	'1080i 59.94Hz'
	'1080i 60Hz'	'1080p 23.98Hz'	'1080p 24Hz'
	'1080p 25Hz'	'1080p 29.97Hz'	'1080p 30Hz'
	'1080p 50Hz'	'1080p 59.94Hz'	'1080p 60Hz'
	'2048x1080 23.98Hz'	'2048x1080 24Hz'	'2048x1080 25Hz'
	'2048x1080 29.97Hz'	'2048x1080 30Hz'	'2048x1080 50Hz'
	'2048x1080 59.94Hz'	'2048x1080 60Hz'	

```
# HDMIInputEDID example
InterfaceName.Update('HDMIInputEDID')
Value = InterfaceName.ReadStatus('HDMIInputEDID')
InterfaceName.SubscribeStatus('HDMIInputEDID', None, FeedbackHandler)
```

Command	Value	Value	Value
HDMILoopFormat	'Auto'	'DVI RGB 444'	'RGB 444 Full'
	'RGB 444 Limited'	'YUV 444 Full'	'YUV 444 Limited'
	'YUV 422 Full'	'YUV 422 Limited'	

```
# HDMILoopFormat example
InterfaceName.Update('HDMILoopFormat')
Value = InterfaceName.ReadStatus('HDMILoopFormat')
InterfaceName.SubscribeStatus('HDMILoopFormat', None, FeedbackHandler)
```

Command	Value	
InputHDMIGain	-18 to 24 in steps of 0.1	
Qualifier Key	Qualifier Value	Qualifier Value
'L/R'	'Left'	'Right'

```
# InputHDMIGain example
InterfaceName.Update('InputHDMIGain', {'L/R': 'Left'})
Value = InterfaceName.ReadStatus('InputHDMIGain', {'L/R': 'Left'})
InterfaceName.SubscribeStatus('InputHDMIGain', None, FeedbackHandler)
```

Command	Value	Value
InputHDMIMute	'On'	'Off'
Qualifier Key	Qualifier Value	Qualifier Value
'L/R'	'Left'	'Right'

```
# InputHDMIMute example
InterfaceName.Update('InputHDMIMute', {'L/R': 'Left'})
Value = InterfaceName.ReadStatus('InputHDMIMute', {'L/R': 'Left'})
InterfaceName.SubscribeStatus('InputHDMIMute', None, FeedbackHandler)
```

Command	Value	
InputLineInGain	-18 to 24 in steps of 0.1	
Qualifier Key	Qualifier Value	Qualifier Value
'L/R'	'Left'	'Right'

```
# InputLineInGain example
InterfaceName.Update('InputLineInGain', {'L/R': 'Left'})
Value = InterfaceName.ReadStatus('InputLineInGain', {'L/R': 'Left'})
InterfaceName.SubscribeStatus('InputLineInGain', None, FeedbackHandler)
```

Command	Value	Value
InputLineInMute	'On'	'Off'
Qualifier Key **'L/R'**	Qualifier Value 'Left'	Qualifier Value 'Right'

```
# InputLineInMute example
InterfaceName.Update('InputLineInMute', {'L/R': 'Left'})
Value = InterfaceName.ReadStatus('InputLineInMute', {'L/R': 'Left'})
InterfaceName.SubscribeStatus('InputLineInMute', None, FeedbackHandler)
```

Command	Value
InputMicLineGain	-18 to 60 in steps of 0.1

```
# InputMicLineGain example
InterfaceName.Update('InputMicLineGain')
Value = InterfaceName.ReadStatus('InputMicLineGain')
InterfaceName.SubscribeStatus('InputMicLineGain', None, FeedbackHandler)
```

Command	Value	Value
InputMicLineMute	'On'	'Off'

```
# InputMicLineMute example
InterfaceName.Update('InputMicLineMute')
Value = InterfaceName.ReadStatus('InputMicLineMute')
InterfaceName.SubscribeStatus('InputMicLineMute', None, FeedbackHandler)
```

Command	Value
InputPreMixerHDMIGain	-100 to 12 in steps of 0.1

```
# InputPreMixerHDMIGain example
InterfaceName.Update('InputPreMixerHDMIGain')
Value = InterfaceName.ReadStatus('InputPreMixerHDMIGain')
InterfaceName.SubscribeStatus('InputPreMixerHDMIGain', None, FeedbackHandler)
```

Command	Value	Value
InputPreMixerHDMIMute	'On'	'Off'

```
# InputPreMixerHDMIMute example
InterfaceName.Update('InputPreMixerHDMIMute')
Value = InterfaceName.ReadStatus('InputPreMixerHDMIMute')
InterfaceName.SubscribeStatus('InputPreMixerHDMIMute', None, FeedbackHandler)
```

Command	Value
InputPreMixerLineInGain	-100 to 12 in steps of 0.1

```
# InputPreMixerLineInGain example
InterfaceName.Update('InputPreMixerLineInGain')
Value = InterfaceName.ReadStatus('InputPreMixerLineInGain')
InterfaceName.SubscribeStatus('InputPreMixerLineInGain', None, FeedbackHandler)
```

Command	Value	Value
InputPreMixerLineInMute	'On'	'Off'

```
# InputPreMixerLineInMute example
InterfaceName.Update('InputPreMixerLineInMute')
Value = InterfaceName.ReadStatus('InputPreMixerLineInMute')
InterfaceName.SubscribeStatus('InputPreMixerLineInMute', None, FeedbackHandler)
```

Command	Value
InputPreMixerUSBCommunicationsGain	-100 to 12 in steps of 0.1

```
# InputPreMixerUSBCommunicationsGain example
InterfaceName.Update('InputPreMixerUSBCommunicationsGain')
Value = InterfaceName.ReadStatus('InputPreMixerUSBCommunicationsGain')
InterfaceName.SubscribeStatus('InputPreMixerUSBCommunicationsGain', None, FeedbackHandler)
```

Command	Value	Value
InputPreMixerUSBCommunicationsMute	'On'	'Off'

```
# InputPreMixerUSBCommunicationsMute example
InterfaceName.Update('InputPreMixerUSBCommunicationsMute')
```

```
Value = InterfaceName.ReadStatus('InputPreMixerUSBCommunicationsMute')
InterfaceName.SubscribeStatus('InputPreMixerUSBCommunicationsMute', None, FeedbackHandler)
```

Command	Value	
InputPreMixerUSBPlaybackGain	-100 to 12 in steps of 0.1	

```
# InputPreMixerUSBPlaybackGain example
InterfaceName.Update('InputPreMixerUSBPlaybackGain')
Value = InterfaceName.ReadStatus('InputPreMixerUSBPlaybackGain')
InterfaceName.SubscribeStatus('InputPreMixerUSBPlaybackGain', None, FeedbackHandler)
```

Command	Value	Value
InputPreMixerUSBPlaybackMute	'On'	'Off'

```
# InputPreMixerUSBPlaybackMute example
InterfaceName.Update('InputPreMixerUSBPlaybackMute')
Value = InterfaceName.ReadStatus('InputPreMixerUSBPlaybackMute')
InterfaceName.SubscribeStatus('InputPreMixerUSBPlaybackMute', None, FeedbackHandler)
```

Command	Value	
InputUSBCommunicationsGain	-100 to 0 in steps of 0.1	
Qualifier Key	Qualifier Value	Qualifier Value
'L/R'	'Left'	'Right'

```
# InputUSBCommunicationsGain example
InterfaceName.Update('InputUSBCommunicationsGain', {'L/R': 'Left'})
Value = InterfaceName.ReadStatus('InputUSBCommunicationsGain', {'L/R': 'Left'})
InterfaceName.SubscribeStatus('InputUSBCommunicationsGain', None, FeedbackHandler)
```

Command	Value	Value
InputUSBCommunicationsMute	'On'	'Off'
Qualifier Key	Qualifier Value	Qualifier Value
'L/R'	'Left'	'Right'

```
# InputUSBCommunicationsMute example
InterfaceName.Update('InputUSBCommunicationsMute', {'L/R': 'Left'})
Value = InterfaceName.ReadStatus('InputUSBCommunicationsMute', {'L/R': 'Left'})
InterfaceName.SubscribeStatus('InputUSBCommunicationsMute', None, FeedbackHandler)
```

Command	Value	
InputUSBPlaybackGain	-100 to 0 in steps of 0.1	
Qualifier Key	Qualifier Value	Qualifier Value
'L/R'	'Left'	'Right'

```
# InputUSBPlaybackGain example
InterfaceName.Update('InputUSBPlaybackGain', {'L/R': 'Left'})
Value = InterfaceName.ReadStatus('InputUSBPlaybackGain', {'L/R': 'Left'})
InterfaceName.SubscribeStatus('InputUSBPlaybackGain', None, FeedbackHandler)
```

Command	Value	Value
InputUSBPlaybackMute	'On'	'Off'
Qualifier Key	Qualifier Value	Qualifier Value
'L/R'	'Left'	'Right'

```
# InputUSBPlaybackMute example
InterfaceName.Update('InputUSBPlaybackMute', {'L/R': 'Left'})
Value = InterfaceName.ReadStatus('InputUSBPlaybackMute', {'L/R': 'Left'})
InterfaceName.SubscribeStatus('InputUSBPlaybackMute', None, FeedbackHandler)
```

Command	Value	
OutputAuxAttenuation	-100 to 0 in steps of 0.1	

```
# OutputAuxAttenuation example
InterfaceName.Update('OutputAuxAttenuation')
Value = InterfaceName.ReadStatus('OutputAuxAttenuation')
InterfaceName.SubscribeStatus('OutputAuxAttenuation', None, FeedbackHandler)
```

Command	Value	Value	Value
OutputAuxMute	'On'	'Off'	

```
# OutputAuxMute example
InterfaceName.Update('OutputAuxMute')
Value = InterfaceName.ReadStatus('OutputAuxMute')
InterfaceName.SubscribeStatus('OutputAuxMute', None, FeedbackHandler)
```

Command	Value
OutputLineAttenuation	-100 to 0 in steps of 0.1

```
# OutputLineAttenuation example
InterfaceName.Update('OutputLineAttenuation')
Value = InterfaceName.ReadStatus('OutputLineAttenuation')
InterfaceName.SubscribeStatus('OutputLineAttenuation', None, FeedbackHandler)
```

Command	Value	Value
OutputLineMute	'On'	'Off'

```
# OutputLineMute example
InterfaceName.Update('OutputLineMute')
Value = InterfaceName.ReadStatus('OutputLineMute')
InterfaceName.SubscribeStatus('OutputLineMute', None, FeedbackHandler)
```

Command	Value
OutputReferenceAttenuation	-100 to 0 in steps of 0.1

```
# OutputReferenceAttenuation example
InterfaceName.Update('OutputReferenceAttenuation')
Value = InterfaceName.ReadStatus('OutputReferenceAttenuation')
InterfaceName.SubscribeStatus('OutputReferenceAttenuation', None, FeedbackHandler)
```

Command	Value	Value
OutputReferenceMute	'On'	'Off'

```
# OutputReferenceMute example
InterfaceName.Update('OutputReferenceMute')
Value = InterfaceName.ReadStatus('OutputReferenceMute')
InterfaceName.SubscribeStatus('OutputReferenceMute', None, FeedbackHandler)
```

Command	Value
OutputUSBAttenuation	-100 to 0 in steps of 0.1

```
# OutputUSBAttenuation example
InterfaceName.Update('OutputUSBAttenuation')
Value = InterfaceName.ReadStatus('OutputUSBAttenuation')
InterfaceName.SubscribeStatus('OutputUSBAttenuation', None, FeedbackHandler)
```

Command	Value	Value
OutputUSBMute	'On'	'Off'

```
# OutputUSBMute example
InterfaceName.Update('OutputUSBMute')
Value = InterfaceName.ReadStatus('OutputUSBMute')
InterfaceName.SubscribeStatus('OutputUSBMute', None, FeedbackHandler)
```

Command	Value	Value	Value
OverscanMode	'0%'	'2.5%'	'5%'

```
# OverscanMode example
InterfaceName.Update('OverscanMode')
Value = InterfaceName.ReadStatus('OverscanMode')
InterfaceName.SubscribeStatus('OverscanMode', None, FeedbackHandler)
```

Command	Value	Value	Value
ScreenSaverMode	'Extron Logo'	'User Logo'	'Blue Screen or Bug'

```
# ScreenSaverMode example
InterfaceName.Update('ScreenSaverMode')
Value = InterfaceName.ReadStatus('ScreenSaverMode')
InterfaceName.SubscribeStatus('ScreenSaverMode', None, FeedbackHandler)
```

Command	Value	Value
ScreenSaverStatus	'On'	'Off'

```
# ScreenSaverStatus example
InterfaceName.Update('ScreenSaverStatus')
Value = InterfaceName.ReadStatus('ScreenSaverStatus')
InterfaceName.SubscribeStatus('ScreenSaverStatus', None, FeedbackHandler)
```

Command	Value	Value	Value
USBHostStatus	'Not Present'	'Present'	'Suspended' [2]

```
# USBHostStatus example
InterfaceName.Update('USBHostStatus')
Value = InterfaceName.ReadStatus('USBHostStatus')
InterfaceName.SubscribeStatus('USBHostStatus', None, FeedbackHandler)
```

Command	Value	Value
USBStreamingFormat	'MJPEG 422 Full'	'MJPEG 420 Full'

```
# USBStreamingFormat example
InterfaceName.Update('USBStreamingFormat')
Value = InterfaceName.ReadStatus('USBStreamingFormat')
InterfaceName.SubscribeStatus('USBStreamingFormat', None, FeedbackHandler)
```

Command	Value	Value
USBTerminalType	'Default'	'Echo Cancelling Speakerphone'

```
# USBTerminalType example
InterfaceName.Update('USBTerminalType')
Value = InterfaceName.ReadStatus('USBTerminalType')
InterfaceName.SubscribeStatus('USBTerminalType', None, FeedbackHandler)
```

Command	Value	Value	Value
VideoMute	'Mute Video to Black'	'Mute Sync and Video'	'Unmute Video/Sync'
Qualifier Key	Qualifier Value	Qualifier Value	
'Output'	'USB'	'HDMI Loop'	

```
# VideoMute example
InterfaceName.Update('VideoMute', {'Output': 'USB'})
Value = InterfaceName.ReadStatus('VideoMute', {'Output': 'USB'})
InterfaceName.SubscribeStatus('VideoMute', None, FeedbackHandler)
```

Command	Value	Value
VideoSendStatus	'On'	'Off'

```
# VideoSendStatus example
InterfaceName.Update('VideoSendStatus')
Value = InterfaceName.ReadStatus('VideoSendStatus')
InterfaceName.SubscribeStatus('VideoSendStatus', None, FeedbackHandler)
```

Command	Value	Value
VideoSignalPresence	'Signal'	'No Signal'

```
# VideoSignalPresence example
InterfaceName.Update('VideoSignalPresence')
Value = InterfaceName.ReadStatus('VideoSignalPresence')
InterfaceName.SubscribeStatus('VideoSignalPresence', None, FeedbackHandler)
```

Command	Value		
Volume	-100 to 0 in steps of 0.1		
Qualifier Key	Qualifier Value	Qualifier Value	Qualifier Value
'Group'	'Program' 'Far End to Ref'	'Mic to Far End' 'Mic to Aux'	'Program to Far End'

```
# Volume example
InterfaceName.Update('Volume', {'Group': 'Program'})
Value = InterfaceName.ReadStatus('Volume', {'Group': 'Program'})
InterfaceName.SubscribeStatus('Volume', None, FeedbackHandler)
```

[1] Modes are as follows:

1. Continuous HDCP trials to HDMI sink.
   10 seconds of HDCP trials to DVI sink, then halts HDCP until HPD or power cycle.
   Encrypted output only when selected input is encrypted.

2. Continuous HDCP trials to HDMI sink.
   10 seconds of HDCP trials to DVI sink, then halts HDCP until HPD or power cycle.
   Encrypted output 100% of the time.
3. Continuous HDCP trials to HDMI sink.
   Continuous HDCP trials to DVI sink.
   Encrypted output only when selected input is encrypted.
4. Continuous HDCP trials to HDMI sink.
   Continuous HDCP trials to DVI sink.
   Encrypted output 100% of the time.

[2] Status will only show if Host was present, and then was lost. For Windows and Mac hosts, USB extenders are required for this status to appear. Status will only return to ‘Not Present’ if USB cable is removed from MediaPort 200.

Cable and Adapter Requirements

Captive Screw to Captive Screw

Notes for the Device

Serial communication

Port Type:	RS-232	**Parity:**	None
Baud Rate:	9600	**Stop Bits:**	One
Data Bits:	8	**Flow Control:**	None

Pin Assignments Diagram

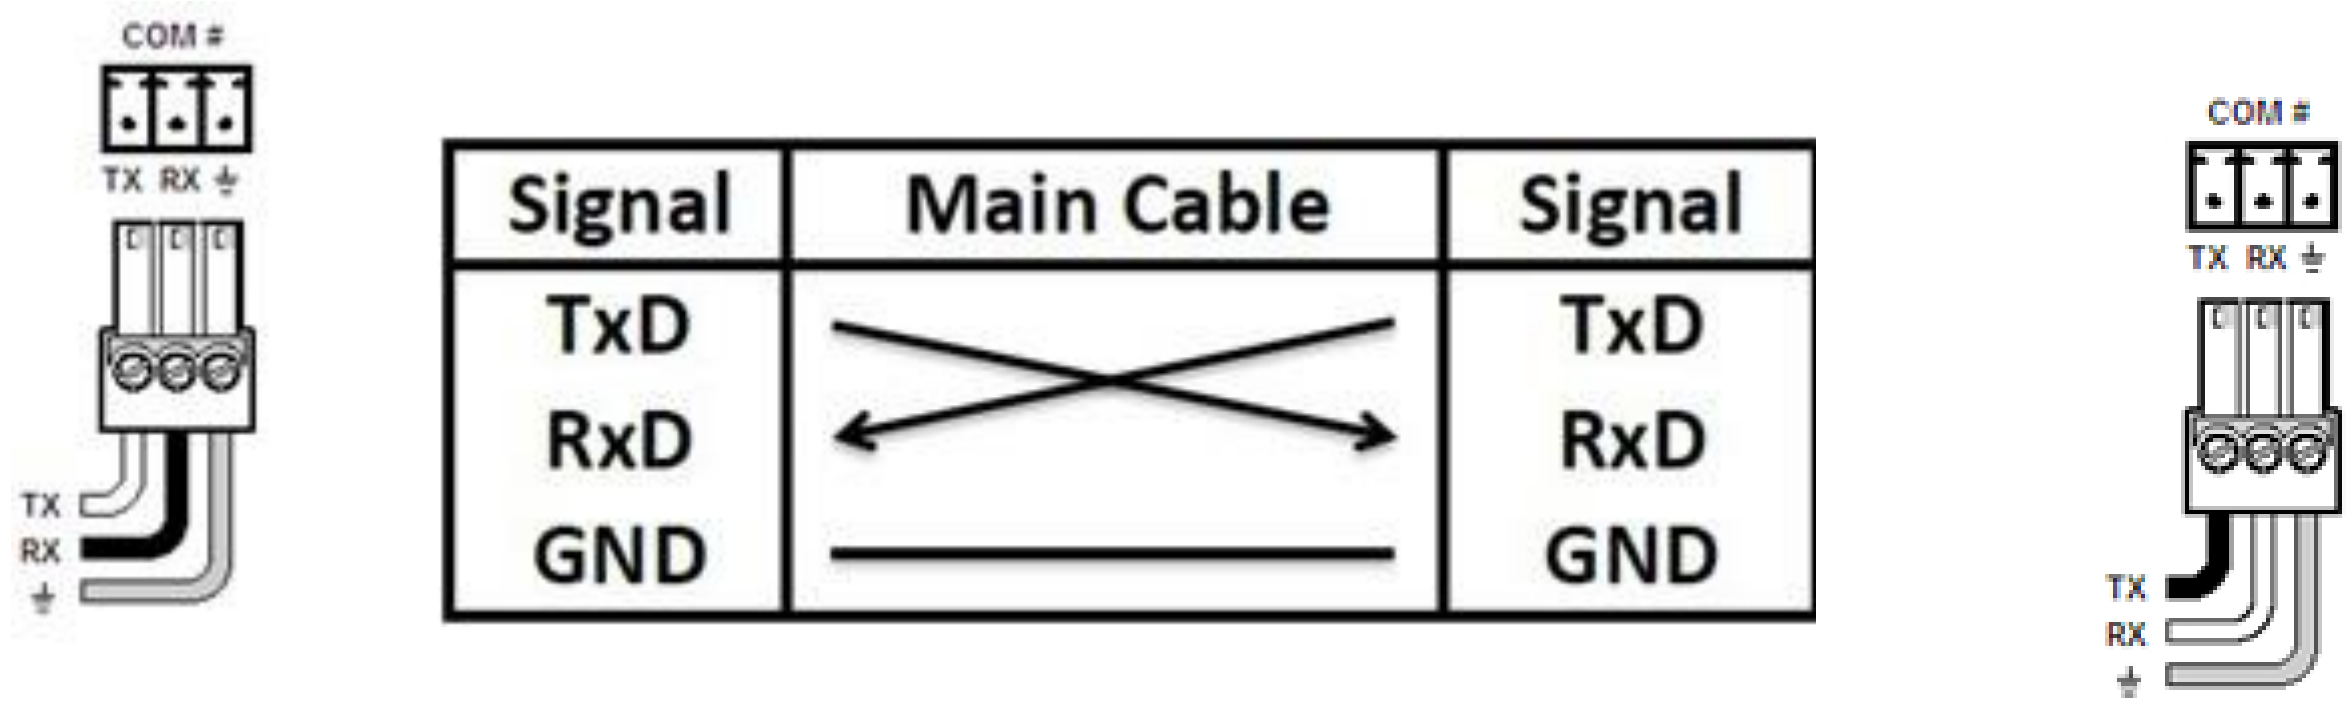

Network communication

When configuring the Ethernet module, be sure device settings match those of the Global Scripter ethernet interface.

Port Type:	Ethernet (SSH)
Default Port:	22023
Logon Credentials Supported:	Yes
Default Username:	admin
Default Password:	
Multi-Connection Capabilities:	Yes
Port Changeability:	Yes

Ethernet Module Configuration Description

- Please refer to user manual for settings and changes to the network communication parameters such as: Password and Port Number.
- Default Username is “admin” but can be changed to “user”
- If User password is used for authentication, control of the device may be limited.

Notes for the Device

Appendix A. Set Commands

Aspect Ratio Fill	w1*1ASPR\x0D
Aspect Ratio Follow	w1*2ASPR\x0D
Audio Mute Off Group Far End to Ref	wD8*0GRPM\x0D
Audio Mute Off Group Mic to Aux	wD10*0GRPM\x0D
Audio Mute Off Group Mic to Far End	wD4*0GRPM\x0D
Audio Mute Off Group Program	wD2*0GRPM\x0D
Audio Mute Off Group Program to Far End	wD6*0GRPM\x0D
Audio Mute On Group Far End to Ref	wD8*1GRPM\x0D
Audio Mute On Group Mic to Aux	wD10*1GRPM\x0D
Audio Mute On Group Mic to Far End	wD4*1GRPM\x0D
Audio Mute On Group Program	wD2*1GRPM\x0D
Audio Mute On Group Program to Far End	wD6*1GRPM\x0D
Auto Image Execute	A
Auto Image Execute and Fill	1*A
Auto Image Execute and Follow	2*A
Auto Memory Off	w1*0AMEM\x0D
Auto Memory On	w1*1AMEM\x0D
Digital Input Mode Dec Group Master 1 Input 1	w1*8GPIT\x0D
Digital Input Mode Dec Group Master 1 Input 2	w2*8GPIT\x0D
Digital Input Mode Default Off Input 1	w1*0GPIT\x0D
Digital Input Mode Default Off Input 2	w2*0GPIT\x0D
Digital Input Mode Inc Group Master 1 Input 1	w1*7GPIT\x0D
Digital Input Mode Inc Group Master 1 Input 2	w2*7GPIT\x0D
Digital Input Mode Mic Mute 1 Input 1	w1*3GPIT\x0D
Digital Input Mode Mic Mute 1 Input 2	w2*3GPIT\x0D
Digital Input Mode Mic Mute 2 Input 1	w1*4GPIT\x0D
Digital Input Mode Mic Mute 2 Input 2	w2*4GPIT\x0D
Digital Input Mode Mic Mute 3 Input 1	w1*5GPIT\x0D
Digital Input Mode Mic Mute 3 Input 2	w2*5GPIT\x0D
Digital Input Mode Mic Mute 4 Input 1	w1*6GPIT\x0D
Digital Input Mode Mic Mute 4 Input 2	w2*6GPIT\x0D
Digital Input Mode Preset Toggle 1 Input 1	w1*9GPIT\x0D
Digital Input Mode Preset Toggle 1 Input 2	w2*9GPIT\x0D
Digital Input Mode Preset Toggle 2 Input 1	w1*10GPIT\x0D
Digital Input Mode Preset Toggle 2 Input 2	w2*10GPIT\x0D
Digital Input Mode Push to Mute Input 1	w1*1GPIT\x0D
Digital Input Mode Push to Mute Input 2	w2*1GPIT\x0D
Digital Input Mode Push to Talk Input 1	w1*2GPIT\x0D
Digital Input Mode Push to Talk Input 2	w2*2GPIT\x0D
Digital Output Mode Blink, Follow Input 1 Output 1	w1*4GPOT\x0D
Digital Output Mode Blink, Follow Input 1 Output 2	w2*4GPOT\x0D
Digital Output Mode Blink, Follow Input 2 Output 1	w1*5GPOT\x0D

Digital Output Mode Blink, Follow Input 2 Output 2	w2*5GPOT\x0D
Digital Output Mode Follow Mute Inverted Output 1	w1*3GPOT\x0D
Digital Output Mode Follow Mute Inverted Output 2	w2*3GPOT\x0D
Digital Output Mode Follow Mute Output 1	w1*2GPOT\x0D
Digital Output Mode Follow Mute Output 2	w2*2GPOT\x0D
Digital Output Mode Output High Output 1	w1*0GPOT\x0D
Digital Output Mode Output High Output 2	w2*0GPOT\x0D
Digital Output Mode Output Low Output 1	w1*1GPOT\x0D
Digital Output Mode Output Low Output 2	w2*1GPOT\x0D
Executive Mode Off	0X
Executive Mode On	1X
Freeze Off	0F
Freeze On	1F
HDCP Authentication Off	wE1*0HDCP\x0D
HDCP Authentication On	wE1*1HDCP\x0D
HDCP Mode Mode 1	wS0HDCP\x0D
HDCP Mode Mode 2	wS1HDCP\x0D
HDCP Mode Mode 3	wS2HDCP\x0D
HDCP Mode Mode 4	wS3HDCP\x0D
HDCP Notification Off	wN0HDCP\x0D
HDCP Notification On	wN1HDCP\x0D
HDMI Input EDID 1024x768 60Hz	wA1*12EDID\x0D
HDMI Input EDID 1080i 50Hz	wA1*35EDID\x0D
HDMI Input EDID 1080i 59.94Hz	wA1*36EDID\x0D
HDMI Input EDID 1080i 60Hz	wA1*37EDID\x0D
HDMI Input EDID 1080p 23.98Hz	wA1*38EDID\x0D
HDMI Input EDID 1080p 24Hz	wA1*39EDID\x0D
HDMI Input EDID 1080p 25Hz	wA1*40EDID\x0D
HDMI Input EDID 1080p 29.97Hz	wA1*41EDID\x0D
HDMI Input EDID 1080p 30Hz	wA1*42EDID\x0D
HDMI Input EDID 1080p 50Hz	wA1*43EDID\x0D
HDMI Input EDID 1080p 59.94Hz	wA1*44EDID\x0D
HDMI Input EDID 1080p 60Hz	wA1*45EDID\x0D
HDMI Input EDID 1280x1024 60Hz	wA1*15EDID\x0D
HDMI Input EDID 1280x768 60Hz	wA1*13EDID\x0D
HDMI Input EDID 1280x800 60Hz	wA1*14EDID\x0D
HDMI Input EDID 1360x768 60Hz	wA1*16EDID\x0D
HDMI Input EDID 1366x768 60Hz	wA1*17EDID\x0D
HDMI Input EDID 1400x1050 60Hz	wA1*19EDID\x0D
HDMI Input EDID 1440x900 60Hz	wA1*18EDID\x0D
HDMI Input EDID 1600x1200 60Hz	wA1*22EDID\x0D
HDMI Input EDID 1600x900 60Hz	wA1*20EDID\x0D
HDMI Input EDID 1680x1050 60Hz	wA1*21EDID\x0D

HDMI Input EDID 1920x1200 60Hz	wA1*23EDID\x0D
HDMI Input EDID 2048x1080 23.98Hz	wA1*46EDID\x0D
HDMI Input EDID 2048x1080 24Hz	wA1*47EDID\x0D
HDMI Input EDID 2048x1080 25Hz	wA1*48EDID\x0D
HDMI Input EDID 2048x1080 29.97Hz	wA1*49EDID\x0D
HDMI Input EDID 2048x1080 30Hz	wA1*50EDID\x0D
HDMI Input EDID 2048x1080 50Hz	wA1*51EDID\x0D
HDMI Input EDID 2048x1080 59.94Hz	wA1*52EDID\x0D
HDMI Input EDID 2048x1080 60Hz	wA1*53EDID\x0D
HDMI Input EDID 480p 59.94Hz	wA1*24EDID\x0D
HDMI Input EDID 480p 60Hz	wA1*25EDID\x0D
HDMI Input EDID 576p 50Hz	wA1*26EDID\x0D
HDMI Input EDID 640x480 60Hz	wA1*10EDID\x0D
HDMI Input EDID 720p 23.98Hz	wA1*27EDID\x0D
HDMI Input EDID 720p 24Hz	wA1*28EDID\x0D
HDMI Input EDID 720p 25Hz	wA1*29EDID\x0D
HDMI Input EDID 720p 29.97Hz	wA1*30EDID\x0D
HDMI Input EDID 720p 30Hz	wA1*31EDID\x0D
HDMI Input EDID 720p 50Hz	wA1*32EDID\x0D
HDMI Input EDID 720p 59.94Hz	wA1*33EDID\x0D
HDMI Input EDID 720p 60Hz	wA1*34EDID\x0D
HDMI Input EDID 800x600 60Hz	wA1*11EDID\x0D
HDMI Loop Format Auto	w2*0VTPO\x0D
HDMI Loop Format DVI RGB 444	w2*1VTPO\x0D
HDMI Loop Format RGB 444 Full	w2*2VTPO\x0D
HDMI Loop Format RGB 444 Limited	w2*3VTPO\x0D
HDMI Loop Format YUV 422 Full	w2*6VTPO\x0D
HDMI Loop Format YUV 422 Limited	w2*7VTPO\x0D
HDMI Loop Format YUV 444 Full	w2*4VTPO\x0D
HDMI Loop Format YUV 444 Limited	w2*5VTPO\x0D
Input HDMI Gain -18 L/R Left	wG30002*-180AU\x0D
Input HDMI Gain -18 L/R Right	wG30003*-180AU\x0D
Input HDMI Gain 24 L/R Left	wG30002*240AU\x0D
Input HDMI Gain 24 L/R Right	wG30003*240AU\x0D
Input HDMI Mute Off L/R Left	wM30002*0AU\x0D
Input HDMI Mute Off L/R Right	wM30003*0AU\x0D
Input HDMI Mute On L/R Left	wM30002*1AU\x0D
Input HDMI Mute On L/R Right	wM30003*1AU\x0D
Input Line In Gain -18 L/R Left	wG30004*-180AU\x0D
Input Line In Gain -18 L/R Right	wG30005*-180AU\x0D
Input Line In Gain 24 L/R Left	wG30004*240AU\x0D
Input Line In Gain 24 L/R Right	wG30005*240AU\x0D
Input Line In Mute Off L/R Left	wM30004*0AU\x0D
Input Line In Mute Off L/R Right	wM30005*0AU\x0D

Input Line In Mute On L/R Left	wM30004*1AU\x0D
Input Line In Mute On L/R Right	wM30005*1AU\x0D
Input Mic Line Gain -18	wG40000*-180AU\x0D
Input Mic Line Gain 60	wG40000*600AU\x0D
Input Mic Line Mute Off	wM40000*0AU\x0D
Input Mic Line Mute On	wM40000*1AU\x0D
Input Pre-Mixer HDMI Gain -100	wG30102*-1000AU\x0DwG30103*-1000AU\x0D
Input Pre-Mixer HDMI Gain 12	wG30102*120AU\x0DwG30103*120AU\x0D
Input Pre-Mixer HDMI Mute Off	wM30102*0AU\x0DwM30103*0AU\x0D
Input Pre-Mixer HDMI Mute On	wM30102*1AU\x0DwM30103*1AU\x0D
Input Pre-Mixer Line In Gain -100	wG30104*-1000AU\x0DwG30105*-1000AU\x0D
Input Pre-Mixer Line In Gain 12	wG30104*120AU\x0DwG30105*120AU\x0D
Input Pre-Mixer Line In Mute Off	wM30104*0AU\x0DwM30105*0AU\x0D
Input Pre-Mixer Line In Mute On	wM30104*1AU\x0DwM30105*1AU\x0D
Input Pre-Mixer USB Communications Gain -100	wG30106*-1000AU\x0DwG30107*-1000AU\x0D
Input Pre-Mixer USB Communications Gain 12	wG30106*120AU\x0DwG30107*120AU\x0D
Input Pre-Mixer USB Communications Mute Off	wM30106*0AU\x0DwM30107*0AU\x0D
Input Pre-Mixer USB Communications Mute On	wM30106*1AU\x0DwM30107*1AU\x0D
Input Pre-Mixer USB Playback Gain -100	wG30100*-1000AU\x0DwG30101*-1000AU\x0D
Input Pre-Mixer USB Playback Gain 12	wG30100*120AU\x0DwG30101*120AU\x0D
Input Pre-Mixer USB Playback Mute Off	wM30100*0AU\x0DwM30101*0AU\x0D
Input Pre-Mixer USB Playback Mute On	wM30100*1AU\x0DwM30101*1AU\x0D
Input USB Communications Gain 0 L/R Left	wG30006*0AU\x0D
Input USB Communications Gain 0 L/R Right	wG30007*0AU\x0D
Input USB Communications Gain -100 L/R Left	wG30006*-1000AU\x0D
Input USB Communications Gain -100 L/R Right	wG30007*-1000AU\x0D
Input USB Communications Mute Off L/R Left	wM30006*0AU\x0D
Input USB Communications Mute Off L/R Right	wM30007*0AU\x0D
Input USB Communications Mute On L/R Left	wM30006*1AU\x0D
Input USB Communications Mute On L/R Right	wM30007*1AU\x0D
Input USB Playback Gain 0 L/R Left	wG30000*0AU\x0D
Input USB Playback Gain 0 L/R Right	wG30001*0AU\x0D
Input USB Playback Gain -100 L/R Left	wG30000*-1000AU\x0D
Input USB Playback Gain -100 L/R Right	wG30001*-1000AU\x0D
Input USB Playback Mute Off L/R Left	wM30000*0AU\x0D
Input USB Playback Mute Off L/R Right	wM30001*0AU\x0D
Input USB Playback Mute On L/R Left	wM30000*1AU\x0D
Input USB Playback Mute On L/R Right	wM30001*1AU\x0D
Output Aux Attenuation 0	wG60005*0AU\x0D
Output Aux Attenuation -100	wG60005*-1000AU\x0D
Output Aux Mute Off	wM60005*0AU\x0D
Output Aux Mute On	wM60005*1AU\x0D
Output Line Attenuation 0	wG60002*0AU\x0DwG60003*0AU\x0D
Output Line Attenuation -100	wG60002*-1000AU\x0DwG60003*-1000AU\x0D

Output Line Mute Off	wM60002*0AU\x0DwM60003*0AU\x0D
Output Line Mute On	wM60002*1AU\x0DwM60003*1AU\x0D
Output Reference Attenuation 0	wG60004*0AU\x0D
Output Reference Attenuation -100	wG60004*-1000AU\x0D
Output Reference Mute Off	wM60004*0AU\x0D
Output Reference Mute On	wM60004*1AU\x0D
Output USB Attenuation 0	wG60000*0AU\x0DwG60001*0AU\x0D
Output USB Attenuation -100	wG60000*-1000AU\x0DwG60001*-1000AU\x0D
Output USB Mute Off	wM60000*0AU\x0DwM60001*0AU\x0D
Output USB Mute On	wM60000*1AU\x0DwM60001*1AU\x0D
Overscan Mode 0%	w1*0OSCN\x0D
Overscan Mode 2.5%	w1*1OSCN\x0D
Overscan Mode 5%	w1*2OSCN\x0D
Preset Delete Preset 1	wX2*001PRST\x0D
Preset Delete Preset 16	wX2*016PRST\x0D
Preset Recall Preset 1	2*001.
Preset Recall Preset 16	2*016.
Preset Save Preset 1	2*001,
Preset Save Preset 16	2*016,
Screen Saver Mode Blue Screen or Bug	wM2SSAV\x0D
Screen Saver Mode Extron Logo	wM0SSAV\x0D
Screen Saver Mode User Logo	wM1SSAV\x0D
USB Streaming Format MJPEG 420 Full	w1*2OTYP\x0D
USB Streaming Format MJPEG 422 Full	w1*1OTYP\x0D
USB Terminal Type Default	wC1USBC\x0D
USB Terminal Type Echo Cancelling Speakerphone	wC2USBC\x0D
Video Mute Mute Sync and Video Output HDMI Loop	2*2B
Video Mute Mute Sync and Video Output USB	1*2B
Video Mute Mute Video to Black Output HDMI Loop	2*1B
Video Mute Mute Video to Black Output USB	1*1B
Video Mute Unmute Video/Sync Output HDMI Loop	2*0B
Video Mute Unmute Video/Sync Output USB	1*0B
Volume 0 Group Far End to Ref	wD7*0GRPM\x0D
Volume 0 Group Mic to Aux	wD9*0GRPM\x0D
Volume 0 Group Mic to Far End	wD3*0GRPM\x0D
Volume 0 Group Program	wD1*0GRPM\x0D
Volume 0 Group Program to Far End	wD5*0GRPM\x0D
Volume -100 Group Far End to Ref	wD7*-1000GRPM\x0D
Volume -100 Group Mic to Aux	wD9*-1000GRPM\x0D
Volume -100 Group Mic to Far End	wD3*-1000GRPM\x0D
Volume -100 Group Program	wD1*-1000GRPM\x0D
Volume -100 Group Program to Far End	wD5*-1000GRPM\x0D

Appendix B. Update Commands

Aspect Ratio	w1ASPR\x0D
Audio Mute Group Far End to Ref	wD8GRPM\x0D
Audio Mute Group Mic to Aux	wD10GRPM\x0D
Audio Mute Group Mic to Far End	wD4GRPM\x0D
Audio Mute Group Program	wD2GRPM\x0D
Audio Mute Group Program to Far End	wD6GRPM\x0D
Auto Memory	w1AMEM\x0D
Digital Input Mode Input 1	w1GPIT\x0D
Digital Input Mode Input 2	w2GPIT\x0D
Digital Input Status Input 1	w1GPI\x0D
Digital Input Status Input 2	w2GPI\x0D
Digital Output Mode Output 1	w1GPOT\x0D
Digital Output Mode Output 2	w2GPOT\x0D
Executive Mode	X
Freeze	F
HDCP Authentication	wE1HDCP\x0D
HDCP Mode	wSHDCP\x0D
HDCP Notification	wNHDCP\x0D
HDMI Input EDID	wA1EDID\x0D
HDMI Loop Format	w2VTPO\x0D
Input HDMI Gain L/R Left	wG30002AU\x0D
Input HDMI Gain L/R Right	wG30003AU\x0D
Input HDMI Mute L/R Left	wM30002AU\x0D
Input HDMI Mute L/R Right	wM30003AU\x0D
Input Line In Gain L/R Left	wG30004AU\x0D
Input Line In Gain L/R Right	wG30005AU\x0D
Input Line In Mute L/R Left	wM30004AU\x0D
Input Line In Mute L/R Right	wM30005AU\x0D
Input Mic Line Gain	wG40000AU\x0D
Input Mic Line Mute	wM40000AU\x0D
Input Pre-Mixer HDMI Gain	wG30102AU\x0D
Input Pre-Mixer HDMI Mute	wM30102AU\x0D
Input Pre-Mixer Line In Gain	wG30104AU\x0D
Input Pre-Mixer Line In Mute	wM30104AU\x0D
Input Pre-Mixer USB Communications Gain	wG30106AU\x0D
Input Pre-Mixer USB Communications Mute	wM30106AU\x0D
Input Pre-Mixer USB Playback Gain	wG30100AU\x0D
Input Pre-Mixer USB Playback Mute	wM30100AU\x0D
Input USB Communications Gain L/R Left	wG30006AU\x0D
Input USB Communications Gain L/R Right	wG30007AU\x0D
Input USB Communications Mute L/R Left	wM30006AU\x0D
Input USB Communications Mute L/R Right	wM30007AU\x0D

Input USB Playback Gain L/R Left	wG30000AU\x0D
Input USB Playback Gain L/R Right	wG30001AU\x0D
Input USB Playback Mute L/R Left	wM30000AU\x0D
Input USB Playback Mute L/R Right	wM30001AU\x0D
Output Aux Attenuation	wG60005AU\x0D
Output Aux Mute	wM60005AU\x0D
Output Line Attenuation	wG60002AU\x0D
Output Line Mute	wM60002AU\x0D
Output Reference Attenuation	wG60004AU\x0D
Output Reference Mute	wM60004AU\x0D
Output USB Attenuation	wG60000AU\x0D
Output USB Mute	wM60000AU\x0D
Overscan Mode	w1OSCN\x0D
Screen Saver Mode	wMSSAV\x0D
Screen Saver Status	wSSSAV\x0D
USB Host Status	35I\x0D
USB Streaming Format	w1OTYP\x0D
USB Terminal Type	wCUSBC\x0D
Video Mute Output HDMI Loop	B
Video Mute Output USB	B
Video Signal Presence	w0LS\x0D
Volume Group Far End to Ref	wD7GRPM\x0D
Volume Group Mic to Aux	wD9GRPM\x0D
Volume Group Mic to Far End	wD3GRPM\x0D
Volume Group Program	wD1GRPM\x0D
Volume Group Program to Far End	wD5GRPM\x0D