

# ASSIGNMENT-14.1

**NAME :- P. Shreyash**

**HTNO :- 2403A52048**

**BATCH NO :- 03**

## **Task 1:** Create a Responsive Web Page Layout

### ***Instructions:***

- Design a basic web page layout with a header, main content area, and footer using HTML and CSS.
- Use AI to assist in generating responsive CSS for different screen sizes.
- Ensure the layout is clean and visually organized.

### **CODE:-**

```
<!DOCTYPE html>

<html lang="en">

<head>

<meta charset="UTF-8">

<meta name="viewport" content="width=device-width, initial-scale=1.0">

<title>Responsive Web Page</title>

<style>

*{margin:0;padding:0;box-sizing:border-box;}

body{font-family:Arial,sans-serif;}

header,footer{background:#0077b6;color:white;text-align:center;padding:15px;}

nav ul{list-style:none;display:flex;justify-content:center;gap:20px;margin-top:10px;}

nav a{color:white;text-decoration:none;font-weight:bold;}

main{text-align:center;padding:20px;}

main img{width:100%;max-width:500px;border-radius:10px;margin-top:10px;}

footer{font-size:0.9em;}

@media(max-width:768px){
```

```
nav ul{flex-direction:column;gap:10px;}

}

</style>

</head>

<body>

<header>

  <h1>My Responsive Page</h1>

  <nav>

    <ul>

      <li><a href="#">Home</a></li>

      <li><a href="#">About</a></li>

      <li><a href="#">Services</a></li>

      <li><a href="#">Contact</a></li>

    </ul>

  </nav>

</header>

<main>

  <h2>Welcome!</h2>

  <p>This is a simple responsive web page using HTML and CSS.</p>

</main>

<footer>

  <p>&copy; 2025 My Website | Contact: info@example.com</p>

</footer>

</body>

</html>
```

OUTPUT -



## OBSERVATION :

- ? The HTML document defines the structure of the web page.
- ? The <head> section includes the page title, character encoding, and CSS styling.
- ? The <meta viewport> tag makes the page adjust to mobile and tablet screens.
- ? The <header> contains the website title and navigation links.
- ? The navigation menu helps users move between different sections.
- ? The <main> section holds the main content like headings, text, and an image.
- ? The <footer> displays copyright and contact information.
- ? CSS styles are written inside the <style> tag to give color, spacing, and alignment.
- ? The layout uses the flexbox property to arrange navigation links in a line.
- ? The background color, text color, and padding make the design clean and readable.
- ? The image in the main section is centered and adjusts to screen width.
- ? Media queries in CSS make the layout responsive for tablets and mobiles.
- ? On small screens, navigation links appear vertically for better readability.
- ? The overall design ensures that the web page looks good on all screen sizes.
- ? The page is simple, responsive, and visually organized with basic HTML and CSS.

## **Task 2: Interactive Button with JavaScript**

### ***Instructions:***

- The code is clean and well-commented Create a button on a web page.
- Use AI to generate JavaScript code that displays an alert message when the button is clicked.
- Ensure the code is clean and well-commented

### **CODE :**

```
<!DOCTYPEhtml>

<html lang="en">

<head>

  <meta charset="UTF-8">

  <meta name="viewport" content="width=device-width, initial-scale=1.0">

  <title>Interactive Button</title>

  <style>

    /* Simple styling for the button */

    body {

      font-family: Arial, sans-serif;

      text-align: center;

      margin-top: 100px;

    }

    button {

      background-color: #4CAF50;

      color: white;

      border: none;

      padding: 12px 24px;

      font-size: 16px;

      border-radius: 8px;

      cursor: pointer;

    }

    button:hover {

      background-color: #45a049;

    }

  </style>

</head>

<body>

  <button>Click Me</button>

</body>

</html>
```

```
</style>

</head>

<body>

  <!--Button Element -->

  <button id="alertButton">Click Me!</button>


  <script>

    //Get the button element by its ID

    const button = document.getElementById("alertButton");


    //Add a click event listener to the button

    button.addEventListener("click", function() {

      //Display an alert message when button is clicked

      alert("Hello! You clicked the button!");

    });

  </script>

</body>

</html>
```

## OUTPUT :



## EXPLANATION :

- ❓ HTML structure created with <button> element.
- ❓ CSS styles the page and button for a clean look.
- ❓ JavaScript selects the button using its id.
- ❓ An event listener waits for a "click" action.
- ❓ When clicked, an alert message is shown to the user.
- ❓ Code is properly commented and organized for readability.

### **Task 3: Formwith Validation**

#### ***Instructions:***

- Design a contact form with fields: Name, Email, Message.
- Use AI to generate JavaScript code for form validation (e.g., non-empty fields, valid email format).
- Add inline error messages if input is invalid.

#### **CODE :**

```
<!DOCTYPEhtml>

<html lang="en">

<head>


    <metacharset="UTF-8">

    <metaname="viewport" content="width=device-width, initial-scale=1.0">

    <title>Contact Form with Validation</title>

    <style>

        /*Basic page styling */

        body {

            font-family: Arial, sans-serif;

            margin: 50px;

            background-color: #f9f9f9;

        }


        h2{

            text-align: center;

        }


        form {

            max-width: 400px;

            margin: auto;

            background: #fff;

            padding: 20px;

            border-radius: 10px;

            box-shadow: 0 0 10px rgba(0,0,0,0.1);
```

```
}
```

```
label {
```

```
display: inline-block; margin-top:
```

```
10px; font-weight:
```

```
bold;
```

```
}
```

```
input, textarea {
```

```
width: 100%;
```

```
padding: 8px;
```

```
margin-top: 5px;
```

```
border: 1px solid #ccc;
```

```
border-radius: 5px;
```

```
}
```

```
button {
```

```
margin-top: 15px;
```

```
padding: 10px 15px;
```

```
background-color: #4CAF50;
```

```
color: white;
```

```
border: none;
```

```
border-radius: 5px;
```

```
cursor: pointer;
```

```
width: 100%;
```

```
}
```

```
button:hover {
```

```
background-color: #45a049;
```

```
}
```

```
/*Error message styling */
```

```
.error {
```

```
    color: red;

    font-size: 13px;
}

/*Success message */
.success {
    text-align: center;

    color: green;

    font-weight: bold;
}

</style>
</head>
<body>

<h2>Contact Form</h2>

<form id="contactForm">
    <label>Name:</label>
    <input type="text" id="name">
    <span class="error" id="nameError"></span>

    <label>Email:</label>
    <input type="text" id="email">
    <span class="error" id="emailError"></span>

    <label>Message:</label>
    <textarea id="message" rows="4"></textarea>
    <span class="error" id="messageError"></span>

    <button type="submit">Submit</button>
</form>

<p class="success" id="successMsg"></p>
```



```
<script>

//Get form elements

const form = document.getElementById("contactForm");

const name = document.getElementById("name");

const email = document.getElementById("email");

const message = document.getElementById("message");


const nameError = document.getElementById("nameError");

const emailError = document.getElementById("emailError");

const messageError = document.getElementById("messageError");

const successMsg = document.getElementById("successMsg");


//Function to validate email format using regex

function isValidEmail(email) {

    return /^[^\\s@]+@[^\\s@]+\\.([^\\s@]+)$/i.test(email);

}


//Validate form on submit

form.addEventListener("submit", function(e) {

    e.preventDefault(); // Prevent page reload


//Reset      error      messages

nameError.textContent = "";

emailError.textContent = "";

messageError.textContent = "";

successMsg.textContent = "";


let isValid = true;


//Check name

if(name.value.trim() === "") {

    nameError.textContent = "Name is required";
```

```
        isValid = false;
    }

    //Check email
    if(email.value.trim() === "") {
        emailError.textContent = "Email is required";
        isValid = false;
    }else if (!isValidEmail(email.value.trim())) {
        emailError.textContent = "Invalid email format";
        isValid = false;
    }

    //Check message
    if(message.value.trim() === "") {
        messageError.textContent = "Message cannot be empty";
        isValid = false;
    }

    //If all valid
    if(isValid) {
        successMsg.textContent = "Form submitted successfully!";
        form.reset(); // Clear form fields
    }
});
</script>
</body>
</html>
```

OUTPUT :

---

**Contact Form**

Name:

Email:

Message:

Submit

Some content has been disabled in this document

## EXPLANATION :

- ? HTML form created with fields: Name, Email, Message.
- ? CSS adds a simple, clean layout and styles for errors and success messages.
- ? JavaScript validates each field on form submission.
- ? Email validation uses a regular expression (regex).
- ? Inline error messages appear below invalid fields.
- ? If all fields are valid, a success message is displayed, and the form reset.

## ***Task 4: Dynamic Content Generation***

### ***Instructions:***

- Create a list of items (e.g., product names) using HTML.
- Use AI-generated JavaScript to dynamically add or remove items from the list when a button is clicked.

## **CODE:**

---

```
<!DOCTYPE html>

<html lang="en">

<head>

  <meta charset="UTF-8">

  <meta name="viewport" content="width=device-width, initial-scale=1.0">

  <title>Dynamic List Example</title>

  <style>
```

```
/*Page styling */  
  
body {  
  
    font-family: Arial, sans-serif;  
  
    text-align: center;  
  
    margin-top: 50px;  
  
    background-color: #f9f9f9;  
  
}  
  
  
ul{  
  
    list-style-type: none;  
  
    padding: 0;  
  
}  
  
  
li{  
  
    background-color: #e0f7fa;  
  
    margin: 5px auto;  
  
    padding: 10px;  
  
    width: 200px;  
  
    border-radius: 5px;  
  
    box-shadow: 0 0 5px rgba(0,0,0,0.1);  
  
}  
  
  
button {  
  
    margin: 10px;  
  
    padding: 10px 15px;  
  
    font-size: 16px;  
  
    border: none;  
  
    border-radius: 5px;  
  
    cursor: pointer;  
  
}  
  
  
#addBtn {  
  
    background-color: #4CAF50;
```

```
    color: white;
}

#removeBtn {
    background-color: #f44336;
    color: white;
}

button:hover {
    opacity: 0.9;
}
</style>
</head>
<body>

<h2>Product List</h2>

<!-- List of items -->
<ul id="itemList">
    <li>Product 1</li>
    <li>Product 2</li>
    <li>Product 3</li>
</ul>

<!-- Buttons to add or remove items -->
<button id="addBtn">Add Item</button>
<button id="removeBtn">Remove Item</button>

<script>
    // Get references to HTML elements
    const itemList = document.getElementById("itemList");
    const addBtn = document.getElementById("addBtn");
    const removeBtn = document.getElementById("removeBtn");
```

```

//Counter to keep track of added items
let itemCount = 3;


//Function to add a new item dynamically
addBtn.addEventListener("click", function() {
    itemCount++; // Increase count

    const newItem = document.createElement("li"); // Create new list item
    newItem.textContent = "Product " + itemCount; // Add text to new item
    itemList.appendChild(newItem); // Add to list
});

//Function to remove the last item dynamically
removeBtn.addEventListener("click", function() {
    if(itemList.lastElementChild) { // Check if list has items
        itemList.removeChild(itemList.lastElementChild); // Remove last item
        itemCount--; // Decrease count
    } else {
        alert("No more items to remove!"); // Show alert if list empty
    }
});
</script>
</body>
</html>

```

## OUTPUT:

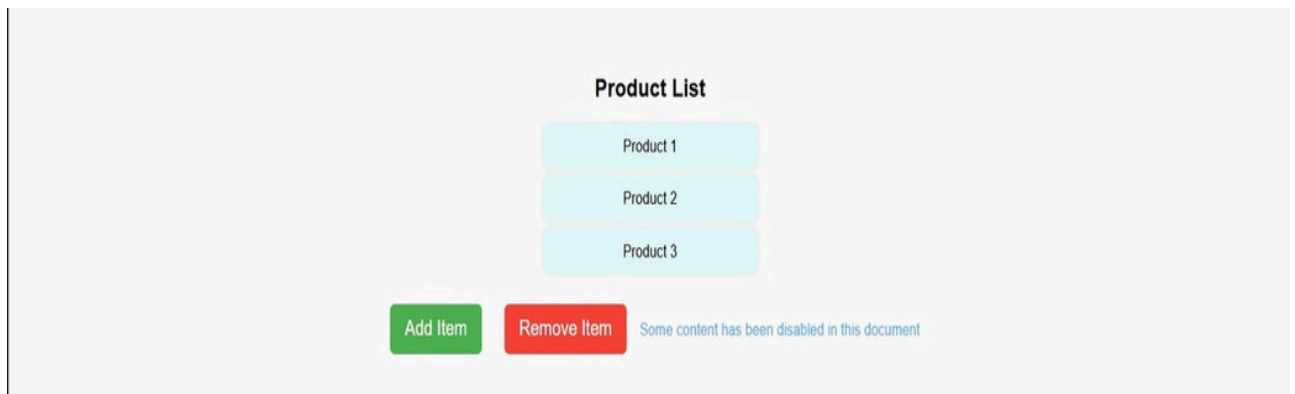

## EXPLANATION:

- ❓ Created an initial list (<ul>) with three product items.
- ❓ Added two buttons — Add Item and Remove Item.
- ❓ JavaScript increases the counter and adds a new <li> when Add Item is clicked.
- ❓ Remove Item deletes the last <li> element if the list is not empty.
- ❓ The list updates instantly without reloading the page.
- ❓ Clean, commented, and beginner-friendly implementation.

## **Task 5: Styled Modal Popup**

### ***Instructions:***

- Use AI to generate a modal popup that opens when a button is clicked.
- Style the modal using CSS with a semi-transparent overlay.
- Include a close button that hides the modal.

## CODE:

```
<!DOCTYPE html>

<html lang="en">

<head>

  <meta charset="UTF-8">

  <meta name="viewport" content="width=device-width, initial-scale=1.0">

  <title>Styled Modal Popup</title>

  <style>

    /*Basic page setup */

    body {

      font-family: Arial, sans-serif;

      text-align: center;

      background-color: #f4f4f4;

      margin-top: 100px;

    }

  </style>

  /*Button styling */
```

```
#openModalBtn {  
  padding: 10px 20px;  
  background-color: #4CAF50;  
  color: white;  
  border: none;  
  border-radius: 8px;  
  cursor: pointer;  
  font-size: 16px;  
}
```

```
#openModalBtn:hover {  
  background-color: #45a049;  
}
```

```
/*Modal background overlay (hidden by default) */  
.modal {  
  display: none; /* Hidden until triggered */ position: fixed; z-index: 1;  
  /* Stay on top */ left: 0; top: 0; width: 100%; height: 100%; overflow:  
  auto; background-color: rgba(0, 0, 0, 0.5); /* Semi-transparent  
  overlay */
```

```
}
```

```
/*Modal content box */  
.modal-content {  
  background-color: #fff;  
  margin: 15% auto;  
  padding: 20px;  
  border-radius: 10px;
```



```

width:80%;
max-width: 400px;
box-shadow: 0 5px 15px rgba(0, 0, 0, 0.3);
position: relative;
animation: fadeIn 0.3s;
}

/*Closebutton styling */
.close {
  position: absolute;
  top:10px;
  right:15px;
  font-size: 22px;
  font-weight: bold;
  color:#333;
  cursor:pointer;
}

.close:hover {
  color:red;
}

/*Fade-in animation */
@keyframes fadeIn {
  from{opacity: 0; transform: scale(0.9); }
  to{opacity: 1; transform: scale(1); }
}
</style>
</head>
<body>

<!-- Button to open the modal -->
<button id="openModalBtn">Open Modal</button>

```

```

<!--Modalstructure -->
<divid="myModal" class="modal">

  <divclass="modal-content">

    <spanclass="close">&times;</span>

    <h2>Welcome!</h2>

    <p>This is a styled modal popup window. Click "X" or outside the box to close it.</p>

  </div>
</div>


<script>

  //Getelements

  constmodal = document.getElementById("myModal");

  constopenBtn = document.getElementById("openModalBtn");

  constcloseBtn = document.querySelector(".close");


  //Whenthe "Open Modal" button is clicked

  openBtn.addEventListener("click", function() {

    modal.style.display = "block";

  });


  //Whenthe "X" button is clicked

  closeBtn.addEventListener("click", function() {

    modal.style.display = "none";

  });


  //Closemodal when clicking outside the content area

  window.addEventListener("click", function(event) {

    if(event.target === modal) {

      modal.style.display = "none";

    }

  });


</script>

```

```
</body>
```

```
</html>
```

## OUTPUT:

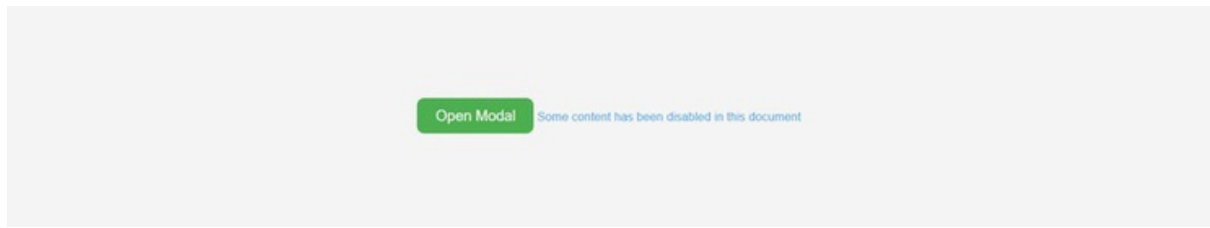

## EXPLANATION:

- ❓ A button labeled “Open Modal” is created.
- ❓ Modal box and semi-transparent overlay are styled using CSS.
- ❓ JavaScript shows the modal when the button is clicked.
- ❓ Clicking the “X” or outside the modal closes it.
- ❓ Smooth fade-in animation makes it visually appealing.
- ❓ Page doesn’t reload — all updates happen dynamically.