Università degli studi di Roma Tor Vergata

Facoltà di Ingegneria

Roma2LUG
Linux User Group

Roma2LUG Incontra

Music On Linux

Speaker
Giulia Cassarà

Speaker
Emanuele Savo

Raspberry Pi

Introduction to the Raspberry Pi 3 Model B Board

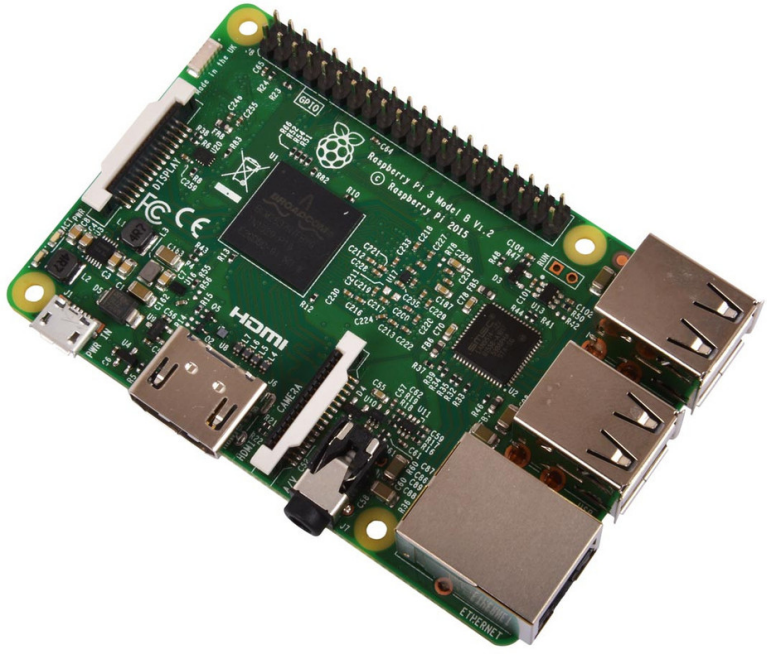

General features

- Born as a MiniPC
- Can reproduce HD movies
- The main difference with a PC are the GPIO ports

Raspberry Pi

Specs of the Raspberry Pi 3 Model B Board

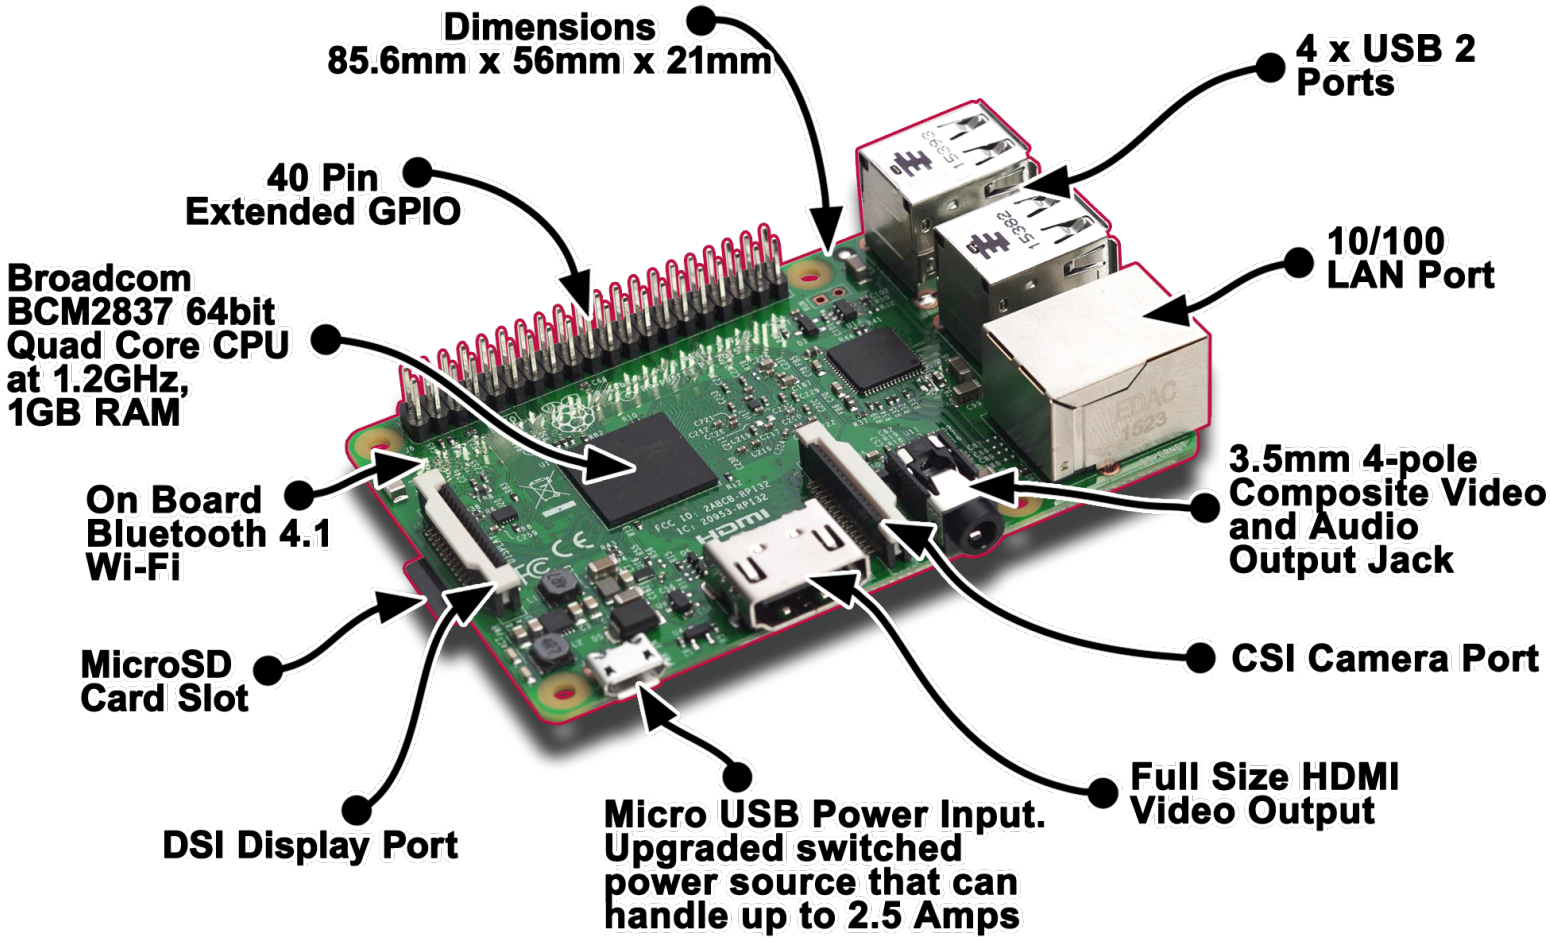

Raspberry Pi

GPIO ports mapping of the Raspberry Pi 3 Model B Board

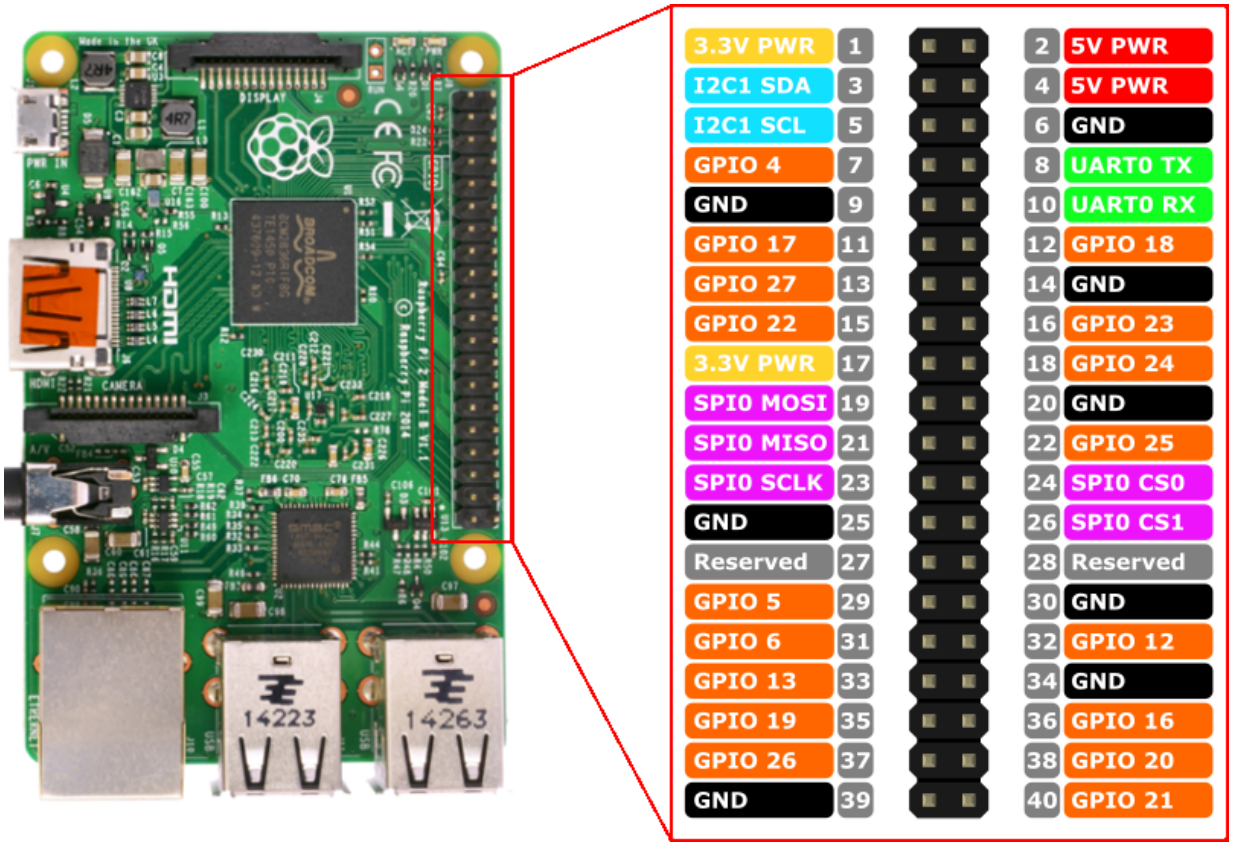

Raspbian OS installation

Download and unzip OS

- Download Raspbian OS lite version for the Raspberry Pi

```
$ wget https://downloads.raspberrypi.org/
    raspbian_lite_latest
```

- Unzip Raspbian OS for the Raspberry Pi

```
$ unzip xxxx-xx-xx-raspbian-jessie-lite.zip
```

After Download

Prepare SD card

- Insert SD card into the PC
- Search for device name of the SD card with this command:

```
$ sudo fdisk -l
```

- Search for info about your SD card. *Warning, be careful!*

```
Disk /dev/mmcblk0: 14,5 GiB, 15523119104 bytes, 30318592 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytesa
Disklabel type: dos
Disk identifier: 0x6f92008e
```

- Replace mmcblk0 with device name of your SD

```
$ sudo dd \
  if=/xxxx-xx-xx-raspbian-jessie-lite.img \
  of=/dev/mmcblk0
```

Boot

Boot the system and update packages

- Connect ethernet cable to the Raspberry Pi
- Connect HDMI cable to the Raspberry Pi
- Connect micro USB power cable to the Raspberry Pi
- Waiting for complete boot...
- Login
  - user: pi
  - password: raspberry
- Execute these commands:

```
$ sudo apt-get update
$ sudo apt-get dist-upgrade -y
$ sudo apt-get install rpi-upate -y
```

Configuration

Expand filesystem and configure your raspberry

- Config Raspbian OS with this tool

```
$ sudo raspi-config
```

  - Expand Filesystem
  - Internationalisation Options
    - Change Locale
    - Change Timezone
    - Change Keyboard Layout
    - Change wifi Country

```
$ sudo reboot
```

- Update Raspberry Pi firmware

```
$ sudo rpi-update
$ sudo reboot
```

WiringPi and GIT

Install necessary software

- Install library for gpio and other tools

```
$ sudo apt-get install -y wiringpi git vim
```

- Download the scripts

```
$ git clone https://github.com/Roma2Lug-
    Projects/MusicOnLinux.git
```

- Open the script

```
$ cd MusicOnLinux/Scripts
$ vim keyboard.sh
$ vim smario.sh
```

Final steps

Script's permission and execution

- Give execute permission

```
$ chmod +x keyboard.sh
$ chmod +x smario.sh
```

- Execute the scripts!

```
$ ./keyboard.sh
$ ./smario.sh
```

Tone function


```
#! /bin/bash
tone () {
  local note="$1"
  local duration="$2"
  if test "$note" -eq 0; then
    gpio -g mode 18 in
  else
    local period=$(python -c "print '{0:.0f}'.
      format(600000.0/440.0/2**(($note-69)
      /12.0))")
    gpio -g mode 18 pwm
    gpio pwmr "$(( period ))"
    gpio -g pwm 18 "$(( period/2 ))"
    gpio pwm-ms
    sleep $duration
    tone 0
  fi
}
```

Tone function in details (1)


```
tone () {
  local note="$1"
  local duration="$2"
  if test "$note" -eq 0; then
    gpio -g mode 18 in
  ...
```

- First parameter: note.
- Second parameter: duration of the note.
- Test if the note is 0 then put the GPIO in input mode, so the speaker doesn't make any sound.

Tone function in details (2)

```
...
else
  local period=$(python -c "print '{0:.0f}'.
     format(600000.0/440.0/2**(($note-69)
     /12.0))")
  ...
```

- We use the formula below to obtain the frequency of the speaker

$$K \cdot \frac{440}{2^{\frac{X-69}{12}}}$$

- $K = \frac{19.2MhZ}{32} = 600khZ$ is the base frequency of the speaker where 19.2MhZ is the speed of the raspberry internal clock.
- The twelfth root of two or $\sqrt[12]{2}$ is an algebraic irrational number. It is most important in music theory, where it represents the frequency ratio of a semitone in twelve-tone equal temperament.
- X is the range of the note, encoded in ASCII.

Tone function in details (3)


```
        ...
        gpio -g mode 18 pwm
        gpio pwmr "$(( period ))"
        gpio -g pwm 18 "$(( period/2 ))"
        gpio pwm-ms
        sleep $duration
        tone 0
    fi
}
```

- This is the core of the function. These lines of code give power to the connected speaker with a modulation technique called Pulse Width Modulation (PWM).
- The speaker beeps the "note" for a time "duration".
- Finally the last command mute the sound by recalling the tone function with 0. Without this line the speaker will sound indefinitily(!!!).

[DEMO]

Grazie per l'attenzione!