

OptForce Tutorial

Author: Sebastián N. Mendoza, Center for Mathematical Modelling, University of Chile.
snmendoz@uc.cl

Reviewers(s): -----

INTRODUCTION:

In this tutorial we will run optForce. For a detailed description of the procedure, please see [1]. Briefly, the problem is to find a set of interventions of size "K" such that when these interventions are applied to a wild-type strain, the mutant created will produce a particular target of interest in a higher rate than the wild-type strain. The interventions could be knockouts (lead to zero the flux for a particular reaction), upregulations (increase the flux for a particular reaction) and downregulations (decrease the flux for a particular reaction).

For example, imagine that we would like to increase the production of succinate in Escherichia coli. Which are the interventions needed to increase the production of succinate? We will approach this problem in this tutorial and we will see how each of the steps of OptForce are solved.

MATERIALS

EQUIPMENT

1. MATLAB
2. A solver for Mixed Integer Linear Programming (MILP) problems. For example, Gurobi.

EQUIPMENT SETUP


Use `changeCobraSolver` to choose the solver for MILP problems. Verify that the global variable `CBT_MILP_SOLVER` was assigned. It will be used when finding must and force sets (step 3 and 4).

PROCEDURE

The procedure consists on the following steps

- 1) Define constraints for both wild-type and mutant strain:
- 2) Perform flux variability analysis for both wild-type and mutant strain.
- 3) Find must sets, i.e, reactions that **MUST** increase or decrease their flux in order to achieve the phenotype in the mutant strain.

Figure 1.

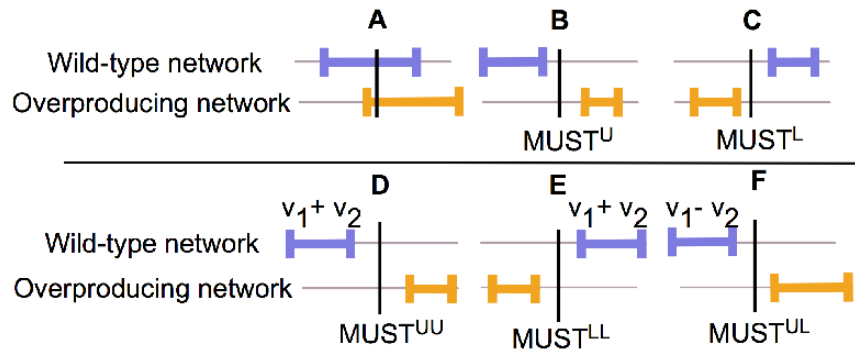

4) Find the interventions needed that will ensure a increased production of the target of interest

Now, we will approach each step in detail.

STEP 1: Define constraints for both wild-type and mutant strain


TIMING: This step should take a few days or weeks, depending on the information available for your species.

CRITICAL STEP: This is a manual task, so you should search for information in articles or even perform your own experiments. You can also make assumptions for describing the phenotypes of both strains which will make this task a little faster but make sure to have two strains different enough, because you should be able to find differences in reactions ranges.

First, we load the model. This model comprises only 90 reactions, which describe the central metabolism of *E. coli* [2].

Then, we change the objective function to maximize biomass ("R75"). We also change the lower bounds, so *E. coli* will be able to consume glucose, oxygen, sulfate, ammonium, citrate and glycerol. Finally, we change the reversibility flag because these reactions are now reversible

```
initCobraToolbox
```

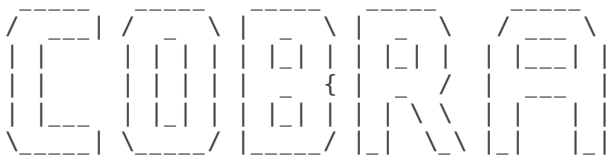

COstraint-Based Reconstruction and Analysis
The COBRA Toolbox - 2017

Documentation:
<http://opencobra.github.io/cobratoolbox>

```
> Checking if git is installed ... Done.
> Checking if the repository is tracked using git ... Done.
> Checking if curl is installed ... Done.
> Checking if remote can be reached ... Done.
> Initializing and updating submodules ... Done.
> Adding all the files of The COBRA Toolbox ... Done.
> Define CB map output... set to svg.
> Retrieving models ... Done.
> TranslateSBML is installed and working properly.
> Configuring solver environment variables ...
- [--*] ILOG_CPLEX_PATH: ~/Applications/IBM/ILOG/CPLEX_Studio1271/cplex/matlab/x86-64_osx
- [--*] GUROBI_PATH: /Library/gurobi702/mac64/matlab
- [----] TOMLAB_PATH : --> set this path manually after installing the solver ( see instructions )
- [----] MOSEK_PATH : --> set this path manually after installing the solver ( see instructions )
Done.
> Checking available solvers and solver interfaces ... Done.
> Setting default solvers ... Done.
```

```
> Saving the MATLAB path ... Done.
- The MATLAB path was saved in the default location.
```

```
> Summary of available solvers and solver interfaces
```

Support	LP	MILP	QP	MIQP	NLP		
cplex_direct	full			0	0	0	-
dqqMinos	full			1	-	-	-
glpk	full			1	1	-	-
gurobi	full			1	1	1	-
ibm_cplex	full			1	1	1	-
matlab	full			1	-	-	1
mosek	full			0	0	0	-
pdco	full			1	-	1	-
quadMinos	full			1	-	-	1
tomlab_cplex	full			0	0	0	-
qpng	experimental			-	-	1	-
tomlab_snopt	experimental			-	-	-	0
gurobi_mex	legacy			0	0	0	-
lindo_old	legacy			0	-	-	-
lindo_legacy	legacy			0	-	-	-
lp_solve	legacy			1	-	-	-
opti	legacy			0	0	0	0
Total	-			8	3	4	1 2

+ Legend: - = not applicable, 0 = solver not compatible or not installed, 1 = solver installed.

```
> You can solve LP problems using: 'dqqMinos' - 'glpk' - 'gurobi' - 'ibm_cplex' - 'matlab' - 'pdco' -
> You can solve MILP problems using: 'glpk' - 'gurobi' - 'ibm_cplex'
> You can solve QP problems using: 'gurobi' - 'ibm_cplex' - 'pdco' - 'qpng'
> You can solve MIQP problems using: 'gurobi'
> You can solve NLP problems using: 'matlab' - 'quadMinos'
```

```
> Checking for available updates ...
> There are 169 new commit(s) on <master> and 0 new commit(s) on <develop> [60c9b7 @ optForce]
> You can update The COBRA Toolbox by running updateCobraToolbox() (from within MATLAB).
```

```
changeCobraSolver('gurobi', 'all');
```

```
> Gurobi interface added to MATLAB path.
> Solver for LPproblems has been set to gurobi.

> Gurobi interface added to MATLAB path.
> Solver for MILPproblems has been set to gurobi.

> Gurobi interface added to MATLAB path.
> Solver for QPproblems has been set to gurobi.

> Gurobi interface added to MATLAB path.
> Solver for MIQPproblems has been set to gurobi.
> Solver gurobi not supported for problems of type NLP. Currently used: matlab
```

```
pathTutorial = which('tutorial_OptForce.mlx');
pathstr = fileparts(pathTutorial);
cd(pathstr)

load('AntCore.mat');
model.c(strcmp(model.rxns, 'R75')) = 1;
model = changeRxnBounds(model, 'EX_gluc', -100, 'l');
model = changeRxnBounds(model, 'EX_o2', -100, 'l');
model = changeRxnBounds(model, 'EX_so4', -100, 'l');
```

```

model = changeRxnBounds(model, 'EX_nh3', -100, 'l');
model = changeRxnBounds(model, 'EX_cit', -100, 'l');
model = changeRxnBounds(model, 'EX_glyc', -100, 'l');

```

We define constraints for each strain

```

constrWT = struct('rxnList', {'R75'}, 'rxnValues', 14, 'rxnBoundType', 'b');
constrMT = struct('rxnList', {'R75', 'EX_suc'}, 'rxnValues', [0, 155.55], 'rxnBoundType', 'b');

```

Step 2: Flux Variability Analysis

TIMING: This task should take from a few seconds to a few hours depending on the size of your reconstruction

We run the FVA analysis for both strains

```

[minFluxesW, maxFluxesW, minFluxesM, maxFluxesM, ~, ~] = FVA0ptForce(model, constrWT, constrMT);
disp([minFluxesW, maxFluxesW, minFluxesM, maxFluxesM]);

```

-90.1251	97.1300	44.4313	100.0000
0	86.0700	44.4375	100.0000
0	86.0700	44.4375	100.0000
-56.1567	86.0700	-44.4500	11.1143
21.3033	163.5300	55.5500	111.1143
-3.0777	154.8640	55.5500	111.1143
0	151.5086	0	55.5625
0	187.2551	0	55.5687
0	169.5163	0	0.0187
-10.0660	102.9449	0	0.0125
10.0660	66.5714	0	0.0063
-10.0660	102.9449	0	0.0125
-48.9454	7.5600	-0.0063	0
-53.9994	2.5060	-0.0063	0
-53.9994	2.5060	-0.0063	0
-2.5060	53.9994	0	0.0063
0	86.0700	0	55.5625
0	86.0700	0	55.5625
9.7020	114.6466	55.5500	55.5625
0	56.5564	55.5500	55.5571
16.0264	145.2048	155.5500	155.5563
16.0264	145.2048	155.5500	155.5563
0.9344	130.1128	155.5500	155.5562
-5.6736	123.5048	155.5500	155.5563
0	118.0576	0	0.0062
5.1940	123.2516	0	0.0062
-98.1150	123.2516	-55.5625	0.0062
0	151.5086	0	55.5625
0	151.5086	0	55.5625
0	254.5400	55.5500	777.7875
0	253.2493	0	722.2375
-7.1960	94.6056	0	0.0125
0	84.8467	88.8750	88.9000
0	84.8467	88.8750	88.9000
0	175.1064	188.8500	188.9000
0	175.1064	188.8500	188.9000
91.4130	107.1280	0	0
9.4500	9.4500	0	0
2.9400	2.9400	0	0
3.9340	3.9340	0	0
25.4520	56.8820	0	0
3.2060	3.2060	0	0

6.8320	6.8320	0	0
0	15.7150	0	0
-6.8880	8.8270	0	0
0.6790	16.3940	0	0
0	31.4300	0	0
3.2620	3.2620	0	0
4.5640	4.5640	0	0
4.5640	4.5640	0	0
7.2380	38.6680	0	0
2.0440	2.0440	0	0
5.6280	5.6280	0	0
5.9920	5.9920	0	0
3.8640	3.8640	0	0
2.4640	2.4640	0	0
1.8340	1.8340	0	0
0.7560	0.7560	0	0
1.2600	1.2600	0	0
2.0440	2.0440	0	0
1.2600	1.2600	0	0
79.7324	200.0000	199.9500	200.0000
0	118.0576	0	0.0062
-39.5563	353.9124	-22.2500	33.3500
0	253.2493	0	722.2375
40.6268	100.0000	99.9875	100.0000
15.0890	100.0000	99.9929	100.0000
-100.0000	84.8467	-100.0000	-99.9500
0	175.1064	188.8500	188.9000
0	101.8016	0	0.0125
134.9718	407.3274	311.1000	311.1187
62.1267	100.0000	99.9750	100.0000
97.4820	97.4820	0	0
3.2620	3.2620	0	0
14.0000	14.0000	0	0
0	175.1064	188.8500	188.9000
134.9718	407.3274	311.1000	311.1187
0	101.8016	0	0.0125
0	253.2493	0	722.2375
-100.0000	-40.6268	-100.0000	-99.9875
-100.0000	-15.0890	-100.0000	-99.9929
-100.0000	84.8467	-100.0000	-99.9500
-97.4820	-97.4820	0	0
-100.0000	-62.1267	-100.0000	-99.9750
-3.2620	-3.2620	0	0
0	105.4230	155.5500	155.5500
0	105.4230	155.5500	155.5500
11.6200	11.6200	0	0
5.0540	5.0540	0	0
5.9920	5.9920	0	0

Now, the run the next step of OptForce.

Step 3: Find Must Sets

TIMING: This task should take from a few seconds to a few hours depending on the size of your reconstruction

First, we define an ID for this run. Each time you run the functions associated to the optForce procedure, some folders can be generated to store inputs used in that run. Outputs are stored as well. These folder will be located inside the folder defined by your run ID. Thus, if your runID is "TestOptForce", the structure of the folders will be the following:

└─ CurrentFolder

```
| └─ TestOptForce
| | └─ Inputs
| | └─ Outputs
```

To avoid the generation of inputs and outputs folders, set `keepInputs = 0`, `printExcel = 0` and `printText = 0`.

Also, a report of the run is generated each time you run the functions associated to the `optForce` procedure. So, the idea is to give a different `runID` each time you run the functions, so you will be able to see the report (inputs used, outputs generated, errors in the run) for each run.

We define then our `runID`

```
runID = 'TestOptForceM';
```

Now, only functions to find first and second order must sets are supported in this third step. As depicted in **Figure 1**, the first order must sets are `MUSTU` and `MUSTL`; and second order must sets are `MUSTUU`, `MUSTLL` and `MUSTUL`.

A) Finding first order must sets

We define constraints

```
constrOpt = struct('rxnList', {'EX_gluc', 'R75', 'EX_suc'}, 'values', [-100, 0, 155.5]);
```

We then run the functions `findMustL.m` and `findMustU.m` that will allow us to find `mustU` and `mustL` sets, respectively.

i) MustL Set:

```
[mustLSet, pos_mustL] = findMustL(model, minFluxesW, maxFluxesW, 'constrOpt', constrOpt, ...
                                'runID', runID, 'outputFolder', 'OutputsFindMustL', ...
                                'outputFileName', 'MustL', 'printExcel', 1, 'printText', 1,
                                'printReport', 1, 'keepInputs', 1, 'verbose', 0);
```

Optimize a model with 710 rows, 798 columns and 2715 nonzeros

Variable types: 708 continuous, 90 integer (90 binary)

Coefficient statistics:

Matrix range [5e-02, 1e+03]

Objective range [1e+00, 1e+00]

Bounds range [1e+00, 1e+03]

RHS range [5e-01, 1e+03]

Presolve removed 564 rows and 482 columns

Presolve time: 0.10s

Presolved: 146 rows, 316 columns, 957 nonzeros

Variable types: 273 continuous, 43 integer (43 binary)

Root relaxation: objective 9.748200e+01, 161 iterations, 0.01 seconds

Nodes		Current Node		Objective Bounds			Work	
Expl	Unexpl	Obj	Depth	IntInf	Incumbent	BestBd	Gap	It/Node Time
*	0	0		0	97.4820000	97.48200	0.00%	- 0s

Explored 0 nodes (161 simplex iterations) in 0.33 seconds

Thread count was 4 (of 4 available processors)

Solution count 1: 97.482

Pool objective bound 97.482

Optimal solution found (tolerance 1.00e-12)
 Best objective 9.748200000003e+01, best bound 9.748200000003e+01, gap 0.0000%
 Optimize a model with 710 rows, 798 columns and 2710 nonzeros
 Variable types: 708 continuous, 90 integer (90 binary)
 Coefficient statistics:
 Matrix range [5e-02, 1e+03]
 Objective range [1e+00, 1e+00]
 Bounds range [1e+00, 1e+03]
 RHS range [5e-01, 1e+03]
 Presolve removed 564 rows and 483 columns
 Presolve time: 0.03s
 Presolved: 146 rows, 315 columns, 954 nonzeros
 Variable types: 273 continuous, 42 integer (42 binary)

Root relaxation: objective 9.141300e+01, 175 iterations, 0.01 seconds

Nodes		Current Node			Objective Bounds			Work	
Expl	Unexpl	Obj	Depth	IntInf	Incumbent	BestBd	Gap	It/Node	Time
*	0	0		0	91.4130000	91.41300	0.00%	-	0s

Explored 0 nodes (175 simplex iterations) in 0.10 seconds
 Thread count was 4 (of 4 available processors)

Solution count 1: 91.413
 Pool objective bound 91.413

Optimal solution found (tolerance 1.00e-12)
 Best objective 9.141300000002e+01, best bound 9.141300000002e+01, gap 0.0000%
 Optimize a model with 710 rows, 798 columns and 2705 nonzeros
 Variable types: 708 continuous, 90 integer (90 binary)
 Coefficient statistics:
 Matrix range [5e-02, 1e+03]
 Objective range [1e+00, 1e+00]
 Bounds range [1e+00, 1e+03]
 RHS range [5e-01, 1e+03]
 Presolve removed 564 rows and 484 columns
 Presolve time: 0.03s
 Presolved: 146 rows, 314 columns, 951 nonzeros
 Variable types: 273 continuous, 41 integer (41 binary)

Root relaxation: objective 2.545200e+01, 174 iterations, 0.00 seconds

Nodes		Current Node			Objective Bounds			Work	
Expl	Unexpl	Obj	Depth	IntInf	Incumbent	BestBd	Gap	It/Node	Time
*	0	0		0	25.4520000	25.45200	0.00%	-	0s

Explored 0 nodes (174 simplex iterations) in 0.09 seconds
 Thread count was 4 (of 4 available processors)

Solution count 1: 25.452
 Pool objective bound 25.452

Optimal solution found (tolerance 1.00e-12)
 Best objective 2.545200000001e+01, best bound 2.545200000001e+01, gap 0.0000%
 Optimize a model with 710 rows, 798 columns and 2700 nonzeros
 Variable types: 708 continuous, 90 integer (90 binary)
 Coefficient statistics:
 Matrix range [5e-02, 1e+03]
 Objective range [1e+00, 1e+00]
 Bounds range [1e+00, 1e+03]
 RHS range [5e-01, 1e+03]
 Presolve removed 564 rows and 485 columns
 Presolve time: 0.05s
 Presolved: 146 rows, 313 columns, 948 nonzeros
 Variable types: 273 continuous, 40 integer (40 binary)

Root relaxation: objective 1.162000e+01, 160 iterations, 0.01 seconds

Nodes		Current Node			Objective Bounds			Work	
Expl	Unexpl	Obj	Depth	IntInf	Incumbent	BestBd	Gap	It/Node	Time
*	0	0		0	11.6200000	11.62000	0.00%	-	0s

Explored 0 nodes (160 simplex iterations) in 0.13 seconds
Thread count was 4 (of 4 available processors)

Solution count 1: 11.62
Pool objective bound 11.62

Optimal solution found (tolerance 1.00e-12)
Best objective 1.162000000003e+01, best bound 1.162000000003e+01, gap 0.0000%
Optimize a model with 710 rows, 798 columns and 2695 nonzeros
Variable types: 708 continuous, 90 integer (90 binary)

Coefficient statistics:

Matrix range [5e-02, 1e+03]
Objective range [1e+00, 1e+00]
Bounds range [1e+00, 1e+03]
RHS range [5e-01, 1e+03]

Presolve removed 564 rows and 486 columns

Presolve time: 0.04s

Presolved: 146 rows, 312 columns, 945 nonzeros

Variable types: 273 continuous, 39 integer (39 binary)

Root relaxation: objective 1.000350e+01, 186 iterations, 0.01 seconds

Nodes		Current Node			Objective Bounds			Work	
Expl	Unexpl	Obj	Depth	IntInf	Incumbent	BestBd	Gap	It/Node	Time
*	0	0		0	10.0035000	10.00350	0.00%	-	0s

Explored 0 nodes (186 simplex iterations) in 0.13 seconds
Thread count was 4 (of 4 available processors)

Solution count 1: 10.0035
Pool objective bound 10.0035

Optimal solution found (tolerance 1.00e-12)
Best objective 1.000350000000e+01, best bound 1.000350000000e+01, gap 0.0000%
Optimize a model with 710 rows, 798 columns and 2690 nonzeros
Variable types: 708 continuous, 90 integer (90 binary)

Coefficient statistics:

Matrix range [5e-02, 1e+03]
Objective range [1e+00, 1e+00]
Bounds range [1e+00, 1e+03]
RHS range [5e-01, 1e+03]

Presolve removed 567 rows and 488 columns

Presolve time: 0.02s

Presolved: 143 rows, 310 columns, 933 nonzeros

Variable types: 272 continuous, 38 integer (38 binary)

Root relaxation: objective 9.450000e+00, 170 iterations, 0.00 seconds

Nodes		Current Node			Objective Bounds			Work	
Expl	Unexpl	Obj	Depth	IntInf	Incumbent	BestBd	Gap	It/Node	Time
*	0	0		0	9.4500000	9.45000	0.00%	-	0s

Explored 0 nodes (170 simplex iterations) in 0.07 seconds
Thread count was 4 (of 4 available processors)

Solution count 1: 9.45
Pool objective bound 9.45

Optimal solution found (tolerance 1.00e-12)
 Best objective 9.450000000029e+00, best bound 9.450000000029e+00, gap 0.0000%
 Optimize a model with 710 rows, 798 columns and 2685 nonzeros
 Variable types: 708 continuous, 90 integer (90 binary)
 Coefficient statistics:
 Matrix range [5e-02, 1e+03]
 Objective range [1e+00, 1e+00]
 Bounds range [1e+00, 1e+03]
 RHS range [5e-01, 1e+03]
 Presolve removed 567 rows and 489 columns
 Presolve time: 0.02s
 Presolved: 143 rows, 309 columns, 930 nonzeros
 Variable types: 272 continuous, 37 integer (37 binary)

Root relaxation: objective 7.238000e+00, 166 iterations, 0.00 seconds

Nodes			Current Node			Objective Bounds			Work	
Expl	Unexpl		Obj	Depth	IntInf	Incumbent	BestBd	Gap	It/Node	Time
*	0	0			0	7.2380000	7.23800	0.00%	-	0s

Explored 0 nodes (166 simplex iterations) in 0.06 seconds
 Thread count was 4 (of 4 available processors)

Solution count 1: 7.238
 Pool objective bound 7.238

Optimal solution found (tolerance 1.00e-12)
 Best objective 7.238000000012e+00, best bound 7.238000000012e+00, gap 0.0000%
 Optimize a model with 710 rows, 798 columns and 2680 nonzeros
 Variable types: 708 continuous, 90 integer (90 binary)
 Coefficient statistics:
 Matrix range [5e-02, 1e+03]
 Objective range [1e+00, 1e+00]
 Bounds range [1e+00, 1e+03]
 RHS range [5e-01, 1e+03]
 Presolve removed 567 rows and 490 columns
 Presolve time: 0.07s
 Presolved: 143 rows, 308 columns, 927 nonzeros
 Variable types: 272 continuous, 36 integer (36 binary)

Root relaxation: objective 6.832000e+00, 157 iterations, 0.02 seconds

Nodes			Current Node			Objective Bounds			Work	
Expl	Unexpl		Obj	Depth	IntInf	Incumbent	BestBd	Gap	It/Node	Time
*	0	0			0	6.8320000	6.83200	0.00%	-	0s

Explored 0 nodes (157 simplex iterations) in 0.18 seconds
 Thread count was 4 (of 4 available processors)

Solution count 1: 6.832
 Pool objective bound 6.832

Optimal solution found (tolerance 1.00e-12)
 Best objective 6.832000000029e+00, best bound 6.832000000029e+00, gap 0.0000%
 Optimize a model with 710 rows, 798 columns and 2675 nonzeros
 Variable types: 708 continuous, 90 integer (90 binary)
 Coefficient statistics:
 Matrix range [5e-02, 1e+03]
 Objective range [1e+00, 1e+00]
 Bounds range [1e+00, 1e+03]
 RHS range [5e-01, 1e+03]
 Presolve removed 567 rows and 491 columns
 Presolve time: 0.04s
 Presolved: 143 rows, 307 columns, 924 nonzeros
 Variable types: 272 continuous, 35 integer (35 binary)

Root relaxation: objective 5.992000e+00, 184 iterations, 0.01 seconds

Nodes		Current Node			Objective Bounds			Work	
Expl	Unexpl	Obj	Depth	IntInf	Incumbent	BestBd	Gap	It/Node	Time
*	0	0		0	5.9920000	5.99200	0.00%	-	0s

Explored 0 nodes (184 simplex iterations) in 0.24 seconds
Thread count was 4 (of 4 available processors)

Solution count 1: 5.992
Pool objective bound 5.992

Optimal solution found (tolerance 1.00e-12)
Best objective 5.992000000029e+00, best bound 5.992000000029e+00, gap 0.0000%
Optimize a model with 710 rows, 798 columns and 2670 nonzeros
Variable types: 708 continuous, 90 integer (90 binary)

Coefficient statistics:

Matrix range [5e-02, 1e+03]
Objective range [1e+00, 1e+00]
Bounds range [1e+00, 1e+03]
RHS range [5e-01, 1e+03]

Presolve removed 567 rows and 492 columns
Presolve time: 0.03s
Presolved: 143 rows, 306 columns, 921 nonzeros
Variable types: 272 continuous, 34 integer (34 binary)

Root relaxation: objective 5.992000e+00, 157 iterations, 0.01 seconds

Nodes		Current Node			Objective Bounds			Work	
Expl	Unexpl	Obj	Depth	IntInf	Incumbent	BestBd	Gap	It/Node	Time
*	0	0		0	5.9920000	5.99200	0.00%	-	0s

Note that the folder "TestOptForceM" was created. Inside this folder, two additional folders were created: "InputsMustL" and "OutputsMustL". In the inputs folder you will find all the inputs required to run the the function "findMustL.m". Additionally, in the outputs folder you will find the mustL set found, which were saved in two files (.xls and .txt). Furthermore, a report which summarize all the inputs and outputs used during your running was generated. The name of the report will be in this format "report-Day-Month-Year-Hour-Minutes". So, you can maintain a chronological order of your experiments.

We display the reactions that belongs to the mustL set

```
disp(mustLSet)
```

```
'R11'  
'R26'  
'R37'  
'R38'  
'R39'  
'R40'  
'R41'  
'R42'  
'R43'  
'R46'  
'R48'  
'R49'  
'R50'  
'R51'  
'R52'  
'R53'  
'R54'  
'R55'
```

```

'R56'
'R57'
'R58'
'R59'
'R60'
'R61'
'R73'
'R74'
'PSEUD0pyr_1'
'PSEUD0pep_1'
'PSEUD0co2_1'

```

ii) MustU set:

```

[mustUSet, pos_mustU] = findMustU(model, minFluxesW, maxFluxesW, 'constrOpt', constrOpt, ...
    'runID', runID, 'outputFolder', 'OutputsFindMustU', 'outputF
    'MustU' , 'printExcel', 1, 'printText', 1, ...
    'printReport', 1, 'keepInputs', 1, 'verbose', 0);

```

Optimize a model with 710 rows, 798 columns and 2769 nonzeros

Variable types: 708 continuous, 90 integer (90 binary)

Coefficient statistics:

Matrix range [5e-02, 1e+03]

Objective range [1e+00, 1e+00]

Bounds range [1e+00, 1e+03]

RHS range [5e-01, 1e+03]

Presolve removed 473 rows and 451 columns

Presolve time: 0.08s

Presolved: 237 rows, 347 columns, 1238 nonzeros

Variable types: 299 continuous, 48 integer (48 binary)

Root relaxation: objective 1.063553e+02, 182 iterations, 0.01 seconds

Nodes		Current Node			Objective Bounds			Work	
Expl	Unexpl	Obj	Depth	IntInf	Incumbent	BestBd	Gap	It/Node	Time
0	0	106.35533	0	2	-	106.35533	-	-	0s
*	0	0	0	0	97.4820000	97.48200	0.00%	-	0s

Cutting planes:

Gomory: 1

Implied bound: 1

Explored 0 nodes (204 simplex iterations) in 0.27 seconds

Thread count was 4 (of 4 available processors)

Solution count 1: 97.482

Pool objective bound 97.482

Optimal solution found (tolerance 1.00e-12)

Best objective 9.748199999997e+01, best bound 9.748199999997e+01, gap 0.0000%

Optimize a model with 710 rows, 798 columns and 2764 nonzeros

Variable types: 708 continuous, 90 integer (90 binary)

Coefficient statistics:

Matrix range [5e-02, 1e+03]

Objective range [1e+00, 1e+00]

Bounds range [1e+00, 1e+03]

RHS range [5e-01, 1e+03]

Presolve removed 473 rows and 452 columns

Presolve time: 0.10s

Presolved: 237 rows, 346 columns, 1235 nonzeros

Variable types: 299 continuous, 47 integer (47 binary)

Root relaxation: objective 1.063553e+02, 194 iterations, 0.03 seconds

Nodes		Current Node			Objective Bounds			Work	
Expl	Unexpl	Obj	Depth	IntInf	Incumbent	BestBd	Gap	It/Node	Time
	0	0	106.35533	0	2	-	106.35533	-	0s
*	0	0		0	50.0770000	50.07700	0.00%	-	0s

Cutting planes:

Gomory: 1

Implied bound: 1

Explored 0 nodes (225 simplex iterations) in 0.26 seconds

Thread count was 4 (of 4 available processors)

Solution count 1: 50.077

Pool objective bound 50.077

Optimal solution found (tolerance 1.00e-12)

Best objective 5.007699999997e+01, best bound 5.007699999997e+01, gap 0.0000%

Optimize a model with 710 rows, 798 columns and 2759 nonzeros

Variable types: 708 continuous, 90 integer (90 binary)

Coefficient statistics:

Matrix range [5e-02, 1e+03]

Objective range [1e+00, 1e+00]

Bounds range [1e+00, 1e+03]

RHS range [5e-01, 1e+03]

Presolve removed 473 rows and 453 columns

Presolve time: 0.04s

Presolved: 237 rows, 345 columns, 1231 nonzeros

Variable types: 299 continuous, 46 integer (46 binary)

Root relaxation: objective 1.063553e+02, 191 iterations, 0.01 seconds

Nodes		Current Node			Objective Bounds			Work	
Expl	Unexpl	Obj	Depth	IntInf	Incumbent	BestBd	Gap	It/Node	Time
	0	0	106.35533	0	2	-	106.35533	-	0s
*	0	0		0	31.9951818	31.99518	0.00%	-	0s

Cutting planes:

Gomory: 1

Implied bound: 1

Explored 0 nodes (235 simplex iterations) in 0.13 seconds

Thread count was 4 (of 4 available processors)

Solution count 1: 31.9952

Pool objective bound 31.9952

Optimal solution found (tolerance 1.00e-12)

Best objective 3.199518181815e+01, best bound 3.199518181815e+01, gap 0.0000%

Optimize a model with 710 rows, 798 columns and 2754 nonzeros

Variable types: 708 continuous, 90 integer (90 binary)

Coefficient statistics:

Matrix range [5e-02, 1e+03]

Objective range [1e+00, 1e+00]

Bounds range [1e+00, 1e+03]

RHS range [5e-01, 1e+03]

Presolve removed 477 rows and 455 columns

Presolve time: 0.03s

Presolved: 233 rows, 343 columns, 1216 nonzeros

Variable types: 298 continuous, 45 integer (45 binary)

Root relaxation: objective 1.063553e+02, 186 iterations, 0.01 seconds

Nodes		Current Node			Objective Bounds			Work	
Expl	Unexpl	Obj	Depth	IntInf	Incumbent	BestBd	Gap	It/Node	Time

	0	0	106.35533	0	2	-	106.35533	-	-	0s
*	0	0		0		25.3871818	25.38718	0.00%	-	0s

Cutting planes:
 Gomory: 1
 Implied bound: 1

Explored 0 nodes (207 simplex iterations) in 0.09 seconds
 Thread count was 4 (of 4 available processors)

Solution count 1: 25.3872
 Pool objective bound 25.3872

Optimal solution found (tolerance 1.00e-12)
 Best objective 2.538718181814e+01, best bound 2.538718181814e+01, gap 0.0000%
 Optimize a model with 710 rows, 798 columns and 2749 nonzeros
 Variable types: 708 continuous, 90 integer (90 binary)
 Coefficient statistics:
 Matrix range [5e-02, 1e+03]
 Objective range [1e+00, 1e+00]
 Bounds range [1e+00, 1e+03]
 RHS range [5e-01, 1e+03]
 Presolve removed 481 rows and 457 columns
 Presolve time: 0.06s
 Presolved: 229 rows, 341 columns, 1201 nonzeros
 Variable types: 297 continuous, 44 integer (44 binary)

Root relaxation: objective 1.063553e+02, 197 iterations, 0.01 seconds

Nodes		Current Node			Objective Bounds			Work		
Expl	Unexpl	Obj	Depth	IntInf	Incumbent	BestBd	Gap	It/Node	Time	
	0	0	106.35533	0	2	-	106.35533	-	-	0s
	0	0	13.39362	0	2	-	13.39362	-	-	0s
*	0	0		0		13.3936250	13.39363	0.00%	-	0s

Cutting planes:
 Gomory: 1
 Implied bound: 1

Explored 0 nodes (417 simplex iterations) in 0.17 seconds
 Thread count was 4 (of 4 available processors)

Solution count 1: 13.3936
 Pool objective bound 13.3936

Optimal solution found (tolerance 1.00e-12)
 Best objective 1.339362500000e+01, best bound 1.339362500000e+01, gap 0.0000%
 Optimize a model with 710 rows, 798 columns and 2744 nonzeros
 Variable types: 708 continuous, 90 integer (90 binary)
 Coefficient statistics:
 Matrix range [5e-02, 1e+03]
 Objective range [1e+00, 1e+00]
 Bounds range [1e+00, 1e+03]
 RHS range [5e-01, 1e+03]
 Presolve removed 484 rows and 459 columns
 Presolve time: 0.03s
 Presolved: 226 rows, 339 columns, 1189 nonzeros
 Variable types: 296 continuous, 43 integer (43 binary)

Root relaxation: objective 1.063553e+02, 164 iterations, 0.01 seconds

Nodes		Current Node			Objective Bounds			Work		
Expl	Unexpl	Obj	Depth	IntInf	Incumbent	BestBd	Gap	It/Node	Time	
	0	0	106.35533	0	2	-	106.35533	-	-	0s
*	0	0		0		13.3936250	13.39362	0.00%	-	0s

Cutting planes:
Gomory: 1
Implied bound: 1

Explored 0 nodes (201 simplex iterations) in 0.10 seconds
Thread count was 4 (of 4 available processors)

Solution count 1: 13.3936
Pool objective bound 13.3936

Optimal solution found (tolerance 1.00e-12)
Best objective 1.339362499996e+01, best bound 1.339362499996e+01, gap 0.0000%
Optimize a model with 710 rows, 798 columns and 2739 nonzeros
Variable types: 708 continuous, 90 integer (90 binary)
Coefficient statistics:
Matrix range [5e-02, 1e+03]
Objective range [1e+00, 1e+00]
Bounds range [1e+00, 1e+03]
RHS range [5e-01, 1e+03]
Presolve removed 487 rows and 461 columns
Presolve time: 0.04s
Presolved: 223 rows, 337 columns, 1177 nonzeros
Variable types: 295 continuous, 42 integer (42 binary)

Root relaxation: objective 1.063553e+02, 176 iterations, 0.02 seconds

Nodes		Current Node			Objective Bounds			Work	
Expl	Unexpl	Obj	Depth	IntInf	Incumbent	BestBd	Gap	It/Node	Time
0	0	106.35533	0	2	-	106.35533	-	-	0s
*	0	0	0		13.3936250	13.39362	0.00%	-	0s

Cutting planes:
Gomory: 1
Implied bound: 1

Explored 0 nodes (207 simplex iterations) in 0.16 seconds
Thread count was 4 (of 4 available processors)

Solution count 1: 13.3936
Pool objective bound 13.3936

Optimal solution found (tolerance 1.00e-12)
Best objective 1.339362499997e+01, best bound 1.339362499997e+01, gap 0.0000%
Optimize a model with 710 rows, 798 columns and 2734 nonzeros
Variable types: 708 continuous, 90 integer (90 binary)
Coefficient statistics:
Matrix range [5e-02, 1e+03]
Objective range [1e+00, 1e+00]
Bounds range [1e+00, 1e+03]
RHS range [5e-01, 1e+03]
Presolve removed 497 rows and 468 columns
Presolve time: 0.03s
Presolved: 213 rows, 330 columns, 1138 nonzeros
Variable types: 291 continuous, 39 integer (39 binary)

Root relaxation: objective 1.063553e+02, 192 iterations, 0.01 seconds

Nodes		Current Node			Objective Bounds			Work	
Expl	Unexpl	Obj	Depth	IntInf	Incumbent	BestBd	Gap	It/Node	Time
0	0	106.35533	0	2	-	106.35533	-	-	0s
0	0	29.81968	0	3	-	29.81968	-	-	0s
*	0	0	0		13.3936250	13.39363	0.00%	-	0s

Cutting planes:
Gomory: 1
Implied bound: 2

Flow cover: 1

Explored 0 nodes (232 simplex iterations) in 0.13 seconds
Thread count was 4 (of 4 available processors)

Solution count 1: 13.3936
Pool objective bound 13.3936

Optimal solution found (tolerance 1.00e-12)
Best objective 1.339362500000e+01, best bound 1.339362500000e+01, gap 0.0000%
Optimize a model with 710 rows, 798 columns and 2729 nonzeros
Variable types: 708 continuous, 90 integer (90 binary)
Coefficient statistics:
Matrix range [5e-02, 1e+03]
Objective range [1e+00, 1e+00]
Bounds range [1e+00, 1e+03]
RHS range [5e-01, 1e+03]
Presolve removed 493 rows and 465 columns
Presolve time: 0.13s
Presolved: 217 rows, 333 columns, 1153 nonzeros
Variable types: 293 continuous, 40 integer (40 binary)

Root relaxation: objective 1.063553e+02, 177 iterations, 0.00 seconds

Nodes		Current Node		Objective Bounds		Work
-------	--	--------------	--	------------------	--	------

Note that the folders "InputsMustU" and "OutputsFindMustU" were created. These folders contain the inputs and outputs of findMustU.m, respectively.

We display the reactions that belongs to the mustU set

```
disp(mustUSet)
```

```
'R21'  
'R22'  
'R23'  
'R24'  
'R33'  
'R34'  
'R35'  
'R36'  
'R69'  
'EX_pdo'  
'EX_nh3'  
'EX_so4'  
'SUCt'
```

B) Finding second order must sets

First, we define the reactions that will be excluded from the analysis. It is suggested to include in this list the reactions found in the previous step as well as exchange reactions

```
constrOpt = struct('rxnList', {'EX_gluc', 'R75', 'EX_suc'}, 'values', [-100, 0, 155.5]);  
exchangeRxns = model.rxnns(cellfun(@isempty, strfind(model.rxnns, 'EX_')) == 0);  
excludedRxns = unique([mustUSet; mustLSet; exchangeRxns]);
```

Now, we run the functions for finding second order must sets

i) MustUU:

```
[mustUU, pos_mustUU, mustUU_linear, pos_mustUU_linear] = ...
```

```

findMustUU(model, minFluxesW, maxFluxesW, 'constrOpt', constrOpt, ...
            'excludedRxns', excludedRxns, 'runID', runID, ...
            'outputFolder', 'OutputsFindMustUU', 'outputFileName', 'MustUU', ...
            'printExcel', 1, 'printText', 1, 'printReport', 1, 'keepInputs', 1, ...
            'verbose', 1);

```

Optimize a model with 1165 rows, 980 columns and 4128 nonzeros

Variable types: 800 continuous, 180 integer (180 binary)

Coefficient statistics:

Matrix range [5e-02, 2e+03]

Objective range [1e+00, 1e+00]

Bounds range [1e+00, 1e+03]

RHS range [1e-01, 2e+03]

Presolve removed 799 rows and 575 columns

Presolve time: 0.02s

Presolved: 366 rows, 405 columns, 1668 nonzeros

Variable types: 327 continuous, 78 integer (78 binary)

Root relaxation: objective 2.127107e+02, 268 iterations, 0.01 seconds

Nodes		Current Node			Objective Bounds			Work	
Expl	Unexpl	Obj	Depth	IntInf	Incumbent	BestBd	Gap	It/Node	Time
*	0	0		0	212.7106667	212.71067	0.00%	-	0s

Explored 0 nodes (397 simplex iterations) in 0.08 seconds

Thread count was 4 (of 4 available processors)

Solution count 1: 212.711

Pool objective bound 212.711

Optimal solution found (tolerance 1.00e-12)

Best objective 2.127106666667e+02, best bound 2.127106666667e+02, gap 0.0000%

Optimize a model with 1167 rows, 980 columns and 4132 nonzeros

Variable types: 800 continuous, 180 integer (180 binary)

Coefficient statistics:

Matrix range [5e-02, 2e+03]

Objective range [1e+00, 1e+00]

Bounds range [1e+00, 1e+03]

RHS range [1e-01, 2e+03]

Presolve removed 802 rows and 575 columns

Presolve time: 0.11s

Presolved: 365 rows, 405 columns, 1668 nonzeros

Variable types: 327 continuous, 78 integer (78 binary)

Root relaxation: objective 1.585013e+02, 246 iterations, 0.01 seconds

Nodes		Current Node			Objective Bounds			Work	
Expl	Unexpl	Obj	Depth	IntInf	Incumbent	BestBd	Gap	It/Node	Time
*	0	0		0	158.5013333	158.50133	0.00%	-	0s

Explored 0 nodes (307 simplex iterations) in 0.19 seconds

Thread count was 4 (of 4 available processors)

Solution count 1: 158.501

Pool objective bound 158.501

Optimal solution found (tolerance 1.00e-12)

Best objective 1.585013333333e+02, best bound 1.585013333333e+02, gap 0.0000%

Optimize a model with 1169 rows, 980 columns and 4136 nonzeros

Variable types: 800 continuous, 180 integer (180 binary)

Coefficient statistics:

Matrix range [5e-02, 2e+03]

Objective range [1e+00, 1e+00]

Bounds range [1e+00, 1e+03]


```

RHS range      [1e-01, 2e+03]
Presolve removed 803 rows and 575 columns
Presolve time: 0.06s
Presolved: 366 rows, 405 columns, 1674 nonzeros
Variable types: 327 continuous, 78 integer (78 binary)

Root relaxation: objective 1.237373e+02, 247 iterations, 0.01 seconds

```

Nodes		Current Node			Objective Bounds			Work	
Expl	Unexpl	Obj	Depth	IntInf	Incumbent	BestBd	Gap	It/Node	Time
0	0	123.73733	0	4	-	123.73733	-	-	0s
0	0	infeasible	0		-	infeasible	-	-	0s

```

Cutting planes:
  Gomory: 2
  MIR: 1
  Flow cover: 1

Explored 0 nodes (303 simplex iterations) in 0.57 seconds
Thread count was 4 (of 4 available processors)

Solution count 0

```

```

Model is infeasible
Best objective -, best bound -, gap -
a MustUU set was found
MustUU set was printed in MustUU.txt
MustUU set was also printed in MustUU_Info.txt

```

Note that the folders "InputsMustUU" and "OutputsFindMustUU" were created. These folders contain the inputs and outputs of findMustUU.m, respectively.

We display the reactions that belongs to the mustUU set

```

disp(mustUU);

'R30'    'R65'
'R31'    'R65'

```

ii) MustLL:

```

[mustLL, pos_mustLL, mustLL_linear, pos_mustLL_linear] = ...
    findMustLL(model, minFluxesW, maxFluxesW, 'constrOpt', constrOpt, ...
        'excludedRxns', excludedRxns, 'runID', runID, ...
        'outputFolder', 'OutputsFindMustLL', 'outputFileName', 'MustLL', ...
        'printExcel', 1, 'printText', 1, 'printReport', 1, 'keepInputs', 1, ...
        'verbose', 1);

```

```

Optimize a model with 1165 rows, 980 columns and 4074 nonzeros
Variable types: 800 continuous, 180 integer (180 binary)
Coefficient statistics:
  Matrix range      [5e-02, 2e+03]
  Objective range   [1e+00, 1e+00]
  Bounds range      [1e+00, 1e+03]
  RHS range         [1e-01, 2e+03]
Presolve removed 799 rows and 578 columns
Presolve time: 0.03s
Presolved: 366 rows, 402 columns, 1633 nonzeros
Variable types: 324 continuous, 78 integer (78 binary)

```

Root relaxation: infeasible, 235 iterations, 0.01 seconds

Nodes		Current Node			Objective Bounds			Work	
Expl	Unexpl	Obj	Depth	IntInf	Incumbent	BestBd	Gap	It/Node	Time
0	0	infeasible	0		-	infeasible	-	-	0s

Explored 0 nodes (235 simplex iterations) in 0.14 seconds
Thread count was 4 (of 4 available processors)

Solution count 0

Model is infeasible

Best objective -, best bound -, gap -

a MustLL set was not found

No mustLL set was not found. Therefore, no plain text file was generated

Note that the folders "InputsMustLL" and "OutputsFindMustLL" were created. These folders contain the inputs and outputs of findMustLL.m, respectively.

We display the reactions that belongs to the mustLL set. In this case, MustLL is an empty array because no reaction was found in the mustLL set.

```
disp(mustLL);
```

iii) MustUL:

```
[mustUL, pos_mustUL, mustUL_linear, pos_mustUL_linear] = ...  
    findMustUL(model, minFluxesW, maxFluxesW, 'constrOpt', constrOpt, ...  
                'excludedRxns', excludedRxns, 'runID', runID, ...  
                'outputFolder', 'OutputsFindMustUL', 'outputFileName', 'MustUL', ...  
                'printExcel', 1, 'printText', 1, 'printReport', 1, 'keepInputs', 1, ...  
                'verbose', 1);
```

Optimize a model with 1165 rows, 980 columns and 4101 nonzeros

Variable types: 800 continuous, 180 integer (180 binary)

Coefficient statistics:

Matrix range [5e-02, 2e+03]

Objective range [1e+00, 1e+00]

Bounds range [1e+00, 1e+03]

RHS range [1e-01, 2e+03]

Presolve removed 799 rows and 578 columns

Presolve time: 0.03s

Presolved: 366 rows, 402 columns, 1649 nonzeros

Variable types: 324 continuous, 78 integer (78 binary)

Root relaxation: objective 1.063553e+02, 243 iterations, 0.01 seconds

Nodes		Current Node			Objective Bounds			Work	
Expl	Unexpl	Obj	Depth	IntInf	Incumbent	BestBd	Gap	It/Node	Time
0	0	106.35533	0	2	-	106.35533	-	-	0s
0	0	infeasible	0		-	infeasible	-	-	0s

Cutting planes:

Gomory: 1

Flow cover: 1

Explored 0 nodes (249 simplex iterations) in 0.10 seconds

Thread count was 4 (of 4 available processors)

Solution count 0

```
Model is infeasible
Best objective -, best bound -, gap -
a MustUL set was not found
No mustUL set was not found. Therefore, no plain text file was generated
```

Note that the folders "InputsMustUL" and "OutputsFindMustUL" were created. These folders contain the inputs and outputs of findMustUL.m, respectively.

We display the reactions that belongs to the mustUL set. In this case, MustUL is an empty array because no reaction was found in the mustUL set.

```
disp(mustUL);
```

TROUBLESHOOTING 1: "I didn't find any reaction in my must sets"

TROUBLESHOOTING 2: "I got an error when running the findMustX.m functions (X = L or U or LL or UL or UU depending on the case)"

Step 4: OptForce

TIMING: This task should take from a few seconds to a few hours depending on the size of your reconstruction

We define constraints and we define "K" the number of interventions allowed, "nSets" the maximum number of sets to find, and "targetRxn" the reaction producing the metabolite of interest (in this case, succinate).

Additionally, we define the mustU set as the union of the reactions that must be upregulated in both first and second order must sets; and mustL set as the union of the reactions that must be downregulated in both first and second order must sets .

```
mustU = unique(union(mustUSet, mustUU));
mustL = unique(union(mustLSet, mustLL));
targetRxn = 'EX_suc';
k = 1;
nSets = 1;
constrOpt = struct('rxnList', {'EX_gluc', 'R75'}, 'values', [-100, 0]);
```

```
[optForceSets, posOptForceSets, typeRegOptForceSets, flux_optForceSets] = optForce(model, targetRxn, minFluxesW, 'k', k, 'nS', nSets, 'runID', runID, 'outputFile', 'printReport');
```

```
Optimize a model with 2062 rows, 1248 columns and 6306 nonzeros
Variable types: 978 continuous, 270 integer (270 binary)
Coefficient statistics:
  Matrix range      [5e-02, 1e+03]
  Objective range   [1e+00, 1e+00]
  Bounds range      [1e+00, 1e+03]
  RHS range         [1e+00, 1e+03]
Presolve removed 1216 rows and 437 columns
Presolve time: 0.21s
Presolved: 846 rows, 811 columns, 3005 nonzeros
Variable types: 678 continuous, 133 integer (133 binary)

Root relaxation: objective 1.555556e+02, 655 iterations, 0.10 seconds
```

Nodes		Current Node			Objective Bounds			Work		
Expl	Unexpl	Obj	Depth	IntInf	Incumbent	BestBd	Gap	It/Node	Time	
	0	0	155.55556	0	2	-	155.55556	-	-	0s
H	0	0				0.0000000	155.55556	-	-	0s
	0	0	155.55556	0	2	0.00000	155.55556	-	-	0s
	0	2	155.55556	0	2	0.00000	155.55556	-	-	0s
*	4	2		2		155.5500000	155.55556	0.00%	30.8	0s

Explored 60 nodes (3605 simplex iterations) in 1.02 seconds
Thread count was 4 (of 4 available processors)

Solution count 2: 155.55 8.73123e-09
Pool objective bound 155.55

Optimal solution found (tolerance 1.00e-12)
Best objective 1.555500000087e+02, best bound 1.555500000087e+02, gap 0.0000%
set n° 1 was found

optForce found 1 sets
Sets found by optForce were printed in OptForce.txt

Note that the folders "InputsOptForce" and "OutputsOptForce" were created. These folders contain the inputs and outputs of optForce.m, respectively.

We display the reactions found by optForce

```
disp(optForceSets)
```

```
'SUCt'
```

The reaction found was "SUCt", i.e. a transporter for succinate (a very intuitive solution).

Next, we will increase "k" and we will exclude "SUCt" from upregulations to found non-intuitive solutions. We will only search for the 20 best solutions, but you can try with a higher number.

We will change the runID to save this second result (K = 2) in a different folder than the previous result (K = 1)

```
k = 2;
nSets = 20;
runID = 'TestOptForceM2';
excludedRxns = struct('rxnList', {'SUCt'}, 'typeReg', 'U');
[optForceSets, posOptForceSets, typeRegOptForceSets, flux_optForceSets] = ...
    optForce(model, targetRxn, mustU, mustL, ...
        minFluxesW, maxFluxesW, minFluxesM, maxFluxesM, ...
        'k', k, 'nSets', nSets, 'constrOpt', constrOpt, ...
        'excludedRxns', excludedRxns, ...
        'runID', runID, 'outputFolder', 'OutputsOptForce', ...
        'outputFileName', 'OptForce', 'printExcel', 1, 'printText', 1, ...
        'printReport', 1, 'keepInputs', 1, 'verbose', 1);
```

Optimize a model with 2062 rows, 1248 columns and 6306 nonzeros
Variable types: 978 continuous, 270 integer (270 binary)
Coefficient statistics:
Matrix range [5e-02, 1e+03]
Objective range [1e+00, 1e+00]
Bounds range [1e+00, 1e+03]
RHS range [1e+00, 1e+03]

Presolve removed 1176 rows and 439 columns
 Presolve time: 0.06s
 Presolved: 886 rows, 809 columns, 3082 nonzeros
 Variable types: 677 continuous, 132 integer (132 binary)

Root relaxation: objective 1.555556e+02, 578 iterations, 0.06 seconds

Nodes		Current Node			Objective Bounds			Work	
Expl	Unexpl	Obj	Depth	IntInf	Incumbent	BestBd	Gap	It/Node	Time
	0	0	155.55556	0	4	-	155.55556	-	0s
H	0	0				0.0000000	155.55556	-	0s
	0	0	155.55556	0	4	0.00000	155.55556	-	0s
	0	2	155.55556	0	4	0.00000	155.55556	-	0s
*	695	78		39		0.0000000	155.55556	-	33.3 2s
*	1059	86		18		139.9900000	155.55556	11.1%	32.9 2s
*	1125	62		24		155.5500000	155.55556	0.00%	31.9 2s

Cutting planes:
 Cover: 1
 Inf proof: 2

Explored 1427 nodes (42791 simplex iterations) in 3.18 seconds
 Thread count was 4 (of 4 available processors)

Solution count 4: 155.55 139.99 8.84756e-09 8.73115e-09
 Pool objective bound 155.55

Optimal solution found (tolerance 1.00e-12)
 Best objective 1.555500000087e+02, best bound 1.555500000087e+02, gap 0.0000%
 set n° 1 was found

Optimize a model with 2063 rows, 1248 columns and 6308 nonzeros
 Variable types: 978 continuous, 270 integer (270 binary)

Coefficient statistics:

Matrix range [5e-02, 1e+03]
 Objective range [1e+00, 1e+00]
 Bounds range [1e+00, 1e+03]
 RHS range [1e+00, 1e+03]

Presolve removed 1176 rows and 439 columns
 Presolve time: 0.04s
 Presolved: 887 rows, 809 columns, 3084 nonzeros
 Variable types: 677 continuous, 132 integer (132 binary)

Root relaxation: objective 1.555556e+02, 578 iterations, 0.06 seconds

Nodes		Current Node			Objective Bounds			Work	
Expl	Unexpl	Obj	Depth	IntInf	Incumbent	BestBd	Gap	It/Node	Time
	0	0	155.55556	0	2	-	155.55556	-	0s
H	0	0				0.0000000	155.55556	-	0s
	0	0	155.55556	0	7	0.00000	155.55556	-	0s
	0	0	155.55556	0	2	0.00000	155.55556	-	0s
	0	2	155.55556	0	2	0.00000	155.55556	-	0s
*	8	6		3		155.5500000	155.55556	0.00%	28.9 0s

Cutting planes:
 Gomory: 2
 Cover: 5

Explored 259 nodes (6681 simplex iterations) in 0.87 seconds
 Thread count was 4 (of 4 available processors)

Solution count 2: 155.55 8.73115e-09
 Pool objective bound 155.55

Optimal solution found (tolerance 1.00e-12)
 Best objective 1.555500000087e+02, best bound 1.555500000087e+02, gap 0.0000%
 set n° 2 was found

Optimize a model with 2064 rows, 1248 columns and 6310 nonzeros

Variable types: 978 continuous, 270 integer (270 binary)

Coefficient statistics:

Matrix range [5e-02, 1e+03]

Objective range [1e+00, 1e+00]

Bounds range [1e+00, 1e+03]

RHS range [1e+00, 1e+03]

Presolve removed 1176 rows and 439 columns

Presolve time: 0.04s

Presolved: 888 rows, 809 columns, 3086 nonzeros

Variable types: 677 continuous, 132 integer (132 binary)

Root relaxation: objective 1.555556e+02, 578 iterations, 0.03 seconds

Nodes		Current Node			Objective Bounds		Gap	Work	
Expl	Unexpl	Obj	Depth	IntInf	Incumbent	BestBd		It/Node	Time
	0	0	155.55556	0	4	-	155.55556	-	0s
H	0	0				0.0000000	155.55556	-	0s
	0	0	155.55556	0	4	0.00000	155.55556	-	0s
	0	2	155.55556	0	4	0.00000	155.55556	-	0s
*	89	17		27		155.5500000	155.55556	0.00%	25.5 0s

Cutting planes:

Cover: 6

Implied bound: 1

Inf proof: 2

Explored 382 nodes (9575 simplex iterations) in 1.26 seconds

Thread count was 4 (of 4 available processors)

Solution count 2: 155.55 8.73115e-09

Pool objective bound 155.55

Optimal solution found (tolerance 1.00e-12)

Best objective 1.555500000087e+02, best bound 1.555500000087e+02, gap 0.0000%

set n° 3 was found

Optimize a model with 2065 rows, 1248 columns and 6312 nonzeros

Variable types: 978 continuous, 270 integer (270 binary)

Coefficient statistics:

Matrix range [5e-02, 1e+03]

Objective range [1e+00, 1e+00]

Bounds range [1e+00, 1e+03]

RHS range [1e+00, 1e+03]

Presolve removed 1176 rows and 439 columns

Presolve time: 0.10s

Presolved: 889 rows, 809 columns, 3088 nonzeros

Variable types: 677 continuous, 132 integer (132 binary)

Root relaxation: objective 1.555556e+02, 578 iterations, 0.14 seconds

Nodes		Current Node			Objective Bounds		Gap	Work	
Expl	Unexpl	Obj	Depth	IntInf	Incumbent	BestBd		It/Node	Time
	0	0	155.55556	0	2	-	155.55556	-	0s
H	0	0				0.0000000	155.55556	-	0s
	0	2	155.55556	0	2	0.00000	155.55556	-	0s
*	14	4		6		155.5437500	155.55556	0.01%	29.4 0s
*	154	20		22		155.5500000	155.55556	0.00%	15.9 0s

Cutting planes:

Cover: 4

Explored 276 nodes (6690 simplex iterations) in 1.25 seconds

Thread count was 4 (of 4 available processors)

Solution count 3: 155.55 155.544 8.73115e-09

Pool objective bound 155.55

Optimal solution found (tolerance 1.00e-12)
 Best objective 1.555500000087e+02, best bound 1.555500000087e+02, gap 0.0000%
 set n° 4 was found
 Optimize a model with 2066 rows, 1248 columns and 6314 nonzeros
 Variable types: 978 continuous, 270 integer (270 binary)
 Coefficient statistics:
 Matrix range [5e-02, 1e+03]
 Objective range [1e+00, 1e+00]
 Bounds range [1e+00, 1e+03]
 RHS range [1e+00, 1e+03]
 Presolve removed 1176 rows and 439 columns
 Presolve time: 0.11s
 Presolved: 890 rows, 809 columns, 3090 nonzeros
 Variable types: 677 continuous, 132 integer (132 binary)

Root relaxation: objective 1.555556e+02, 578 iterations, 0.06 seconds

Nodes		Current Node			Objective Bounds			Work	
Expl	Unexpl	Obj	Depth	IntInf	Incumbent	BestBd	Gap	It/Node	Time
	0	0	155.55556	0	2	-	155.55556	-	0s
H	0	0				0.0000000	155.55556	-	0s
	0	0	155.55556	0	2	0.00000	155.55556	-	0s
	0	2	155.55556	0	2	0.00000	155.55556	-	0s
*	13	8		5	155.5437500	155.55556	0.01%	33.3	0s
*	23	6		8	155.5500000	155.55556	0.00%	36.4	0s

Cutting planes:
 Cover: 2

Explored 301 nodes (7779 simplex iterations) in 1.42 seconds
 Thread count was 4 (of 4 available processors)

Solution count 3: 155.55 155.544 8.71086e-09
 Pool objective bound 155.55

Optimal solution found (tolerance 1.00e-12)
 Best objective 1.555500000087e+02, best bound 1.555500000087e+02, gap 0.0000%
 set n° 5 was found
 Optimize a model with 2067 rows, 1248 columns and 6316 nonzeros
 Variable types: 978 continuous, 270 integer (270 binary)
 Coefficient statistics:
 Matrix range [5e-02, 1e+03]
 Objective range [1e+00, 1e+00]
 Bounds range [1e+00, 1e+03]
 RHS range [1e+00, 1e+03]
 Presolve removed 1176 rows and 439 columns
 Presolve time: 0.04s
 Presolved: 891 rows, 809 columns, 3092 nonzeros
 Variable types: 677 continuous, 132 integer (132 binary)

Root relaxation: objective 1.555556e+02, 578 iterations, 0.03 seconds

Nodes		Current Node			Objective Bounds			Work	
Expl	Unexpl	Obj	Depth	IntInf	Incumbent	BestBd	Gap	It/Node	Time
	0	0	155.55556	0	3	-	155.55556	-	0s
H	0	0				0.0000000	155.55556	-	0s
	0	0	155.55556	0	3	0.00000	155.55556	-	0s
	0	2	155.55556	0	2	0.00000	155.55556	-	0s
*	64	21		26	155.5500000	155.55556	0.00%	14.2	0s
*	248	0		8	155.5500000	155.55556	0.00%	14.0	1s

Cutting planes:
 Inf proof: 1

Explored 252 nodes (6319 simplex iterations) in 1.10 seconds

Thread count was 4 (of 4 available processors)

Solution count 3: 155.55 155.55 8.73115e-09
Pool objective bound 155.55

Optimal solution found (tolerance 1.00e-12)
Best objective 1.555500000244e+02, best bound 1.555500000244e+02, gap 0.0000%
set n° 6 was found
Optimize a model with 2068 rows, 1248 columns and 6318 nonzeros
Variable types: 978 continuous, 270 integer (270 binary)
Coefficient statistics:
Matrix range [5e-02, 1e+03]
Objective range [1e+00, 1e+00]
Bounds range [1e+00, 1e+03]
RHS range [1e+00, 1e+03]
Presolve removed 1176 rows and 439 columns
Presolve time: 0.13s
Presolved: 892 rows, 809 columns, 3094 nonzeros
Variable types: 677 continuous, 132 integer (132 binary)

Root relaxation: objective 1.555556e+02, 578 iterations, 0.06 seconds

Nodes		Current Node			Objective Bounds			Work	
Expl	Unexpl	Obj	Depth	IntInf	Incumbent	BestBd	Gap	It/Node	Time
	0	0	155.55556	0	2	-	155.55556	-	0s
H	0	0				0.000000	155.55556	-	0s
	0	0	155.55556	0	2	0.00000	155.55556	-	0s
	0	2	155.55556	0	2	0.00000	155.55556	-	0s
*	116	4		32	14.2857143	155.55556	989%	21.1	0s
*	156	7		4	155.550000	155.55556	0.00%	20.1	0s

Cutting planes:
Cover: 4

Note that the folders "InputsOptForce" and "OutputsOptForce" were created inside TestOptForce2. These folders contain the inputs and outputs of optForce.m, respectively.

We display the reactions found by optForce

disp(optForceSets)

```
'R22'    'R25'  
'R24'    'R25'  
'R24'    'R26'  
'R22'    'R26'  
'R23'    'R25'  
'R24'    'R63'  
'R21'    'R63'  
'R21'    'R26'  
'R23'    'R26'  
'R22'    'R63'  
'R23'    'R63'  
'R21'    'R25'  
'R24'    'R26'  
'R22'    'R26'  
'R23'    'R26'  
'R21'    'R26'  
'R23'    'R4'  
'R21'    'R4'  
'R24'    'R4'
```


'R22' 'R4'

TIMING

1. STEP 1 ~ 1-2 seconds
2. STEP 2: ~ 2-5 seconds
3. STEP 3: ~ 10-20 seconds
4. STEP 4: ~ 10-20 seconds

TROUBLESHOOTING

1) problem: "I didn't find any reaction in my must sets"

possible reason: the wild-type or mutant strain is not constrained enough.

solution: add more constraints to your strains until you find differences in your reaction ranges. If you don't find any differences, it is better to change the approach and use another algorithm.

2) problem: "I got an error when running the findMust functions"

possible reason: inputs are not defined well or solver is not defined

solution: verify your inputs, use `changeCobraSolver`, verify that the global variable `CBT_MILP_SOLVER` is not empty. It should contain the identifier for a MILP solver.

ANTICIPATED RESULTS

In this tutorial some folders will be created inside the folder called "runID" to store inputs and outputs of the `optForce` functions (`findMustU.m`, `findMustL.m`, `findMustUU.m`, `findMustLL.m`, `findMustUL.m`, `optForce.m`)

In this case `runID = 'TestOptForce'`, so inside this folder the following folders will be created:

```
├── CurrentFolder
│   ├── TestOptForceM
│   │   ├── InputsFindMustL
│   │   ├── OutputsFindMustL
│   │   ├── InputsFindMustU
│   │   ├── OutputsFindMustU
│   │   ├── InputsFindMustLL
│   │   ├── OutputsFindMustLL
│   │   ├── InputsFindMustUU
│   │   ├── OutputsFindMustUU
│   │   └── InputsFindMustUL
```

```
| | └─ OutputsFindMustUL
| | └─ InputsOptForce
| | └─ OutputsOptForce
```

The input folders contain inputs (.mat files) for running the functions to solve each one of the bilevel problems. Output folders contain results of the algorithms (.xls and .txt files) as well as a report (.txt) summarizing the outcomes of the steps performed during the execution of the optForce functions.

The optForce algorithm will find sets of reactions that should increase the production of your target. The first sets found should be the best ones because the production rate will be the highest. The last ones should be the worse because the production rate will be slower. Be aware that some sets could not guarantee a minimum production rate for your target, so you always have to check the minimum production rate. You can do this using the function testOptForceSol.m. Some sets could allow a higher growth rate than others, so keep in mind this too when deciding which set is better.

Acknowledgments

I would like to thank the research group of Costas D. Maranas who provided the GAMS functions to solve this example. In particular I would like to thank to Chiam Yu Ng who kindly provides examples for using GAMS.

References

- [1] Ranganathan S, Suthers PF, Maranas CD (2010) OptForce: An Optimization Procedure for Identifying All Genetic Manipulations Leading to Targeted Overproductions. PLOS Computational Biology 6(4): e1000744. <https://doi.org/10.1371/journal.pcbi.1000744>.
- [2] Maciek R. Antoniewicz, David F. Kraynie, Lisa A. Laffend, Joanna González-Lergier, Joanne K. Kelleher, Gregory Stephanopoulos, Metabolic flux analysis in a nonstationary system: Fed-batch fermentation of a high yielding strain of E. coli producing 1,3-propanediol, Metabolic Engineering, Volume 9, Issue 3, May 2007, Pages 277-292, ISSN 1096-7176, <https://doi.org/10.1016/j.ymben.2007.01.003>.