

Get the ID of the Given API in Postman

Creating a Post on JSONPlaceholder and Verifying the Returned id

Hands-On	14
Scenario	Get the ID of the given API in Postman
Tool	Postman + JSONPlaceholder API
Method	POST
Endpoint URL	https://jsonplaceholder.typicode.com/posts
Auth	None (public fake API)
Expected Status	201 Created
Duration	10 minutes
Prerequisite	Workspace and Collection already created

Objective

The objective of this assignment is to send a **POST** request to the public **JSONPlaceholder** API to create a new **post** resource, and to inspect the response — in particular the newly-assigned **id** field that the server returns in the response body. This exercise reinforces the request/response cycle without the added complexity of authentication or environment variables.

About JSONPlaceholder

JSONPlaceholder (jsonplaceholder.typicode.com) is a free fake REST API for testing and prototyping. It ships with pre-loaded resources for posts, comments, albums, photos, todos, and users — all available without authentication. Write operations (POST / PUT / PATCH / DELETE) are *simulated*: the API responds as if the change happened, but nothing is actually persisted on the server. This makes it a perfect sandbox for learning Postman without worrying about cleaning up test data.

Important Note — Simulated Persistence

Because JSONPlaceholder does not actually persist new resources, the POST always returns **id: 101** (one greater than the 100 pre-loaded posts) regardless of what is sent. A subsequent GET `/posts/101` will return **404 Not Found** — the resource only exists in the response of the POST itself. This is expected behaviour for a fake API and does not indicate a bug.

Steps

1 Go to the Right Workspace

Open Postman and sign in if not already logged in.

Click the **Workspaces** dropdown and select the workspace used in earlier assignments.

2 Create a New Request

Inside the right collection, click the + button or **Add a request** link to create a new request.

Rename the request to something descriptive such as *Create Post* or *POST JSONPlaceholder Post*.

Save with **Ctrl + S / Cmd + S**.

3 Set Method and URL

Set the HTTP method to **POST**.

Enter the URL:

<https://jsonplaceholder.typicode.com/posts>

No Authorization header is needed — JSONPlaceholder is a fully open public API.

4 Add the Request Body (Sample JSON)

Click the **Body** tab below the URL bar.

Choose the **raw** radio option and select **JSON** from the format dropdown on the right (Postman will set the Content-Type: application/json header automatically).

Paste the JSON payload shown in the **Sample Request Body** section below into the editor.

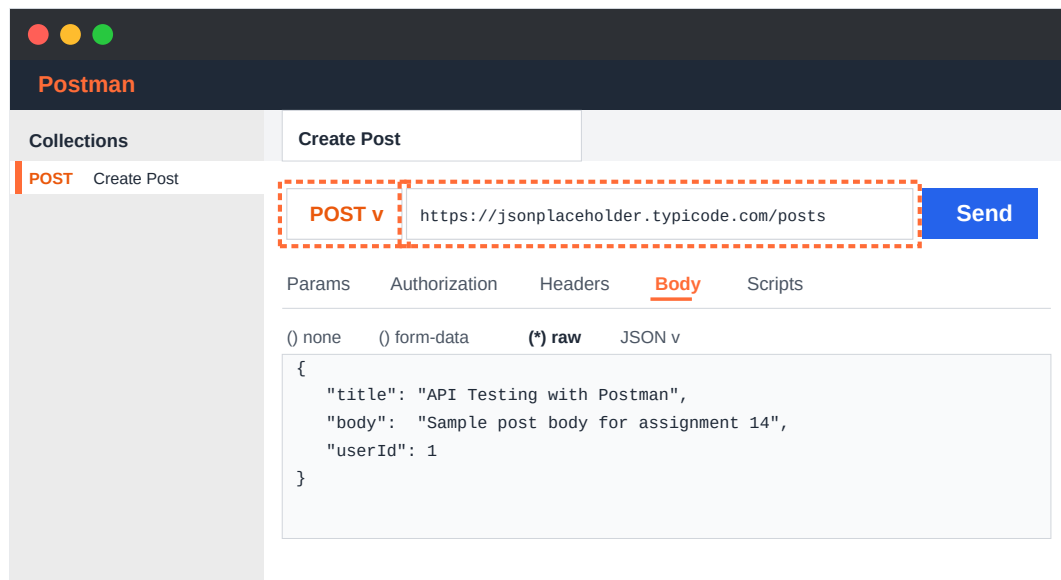


Figure 1 — Postman request configured with method **POST**, the JSONPlaceholder URL, and a JSON body containing the post fields.

Sample Request Body (Input)

The JSONPlaceholder posts resource has three writable fields: **title**, **body**, and **userId**. Use this payload as the request body:

```
{
  "title" : "API Testing with Postman",
  "body" : "Sample post body for assignment 14",
  "userId" : 1
}
```

The values can be anything — only the field names need to match. Title and body are strings, userId is a positive integer (1 to 10 are valid pre-loaded user ids).

5 Click Send and Verify the Status Code is 201

Click the blue **Send** button on the right side of the URL bar.

Postman dispatches the POST request and displays the response in the lower **Response** panel.

Verify the **Status** indicator shows **201 Created** in green — this is the expected status code for a successful POST that creates a new resource.

If a different status appears (such as 4xx or 5xx), check the URL spelling and the JSON body for syntax errors.

6 Verify the Response Body

Inspect the **Body** tab of the response panel.

The JSON should contain the same fields that were sent in the request body, plus a newly-assigned **id** field:

- **title**, **body**, **userId** — echoed back exactly as sent.
- **id** — **101** (the next available id after the 100 pre-loaded posts).

The presence of the **id** field confirms the API processed the POST and assigned a new identifier — the primary objective of this assignment.

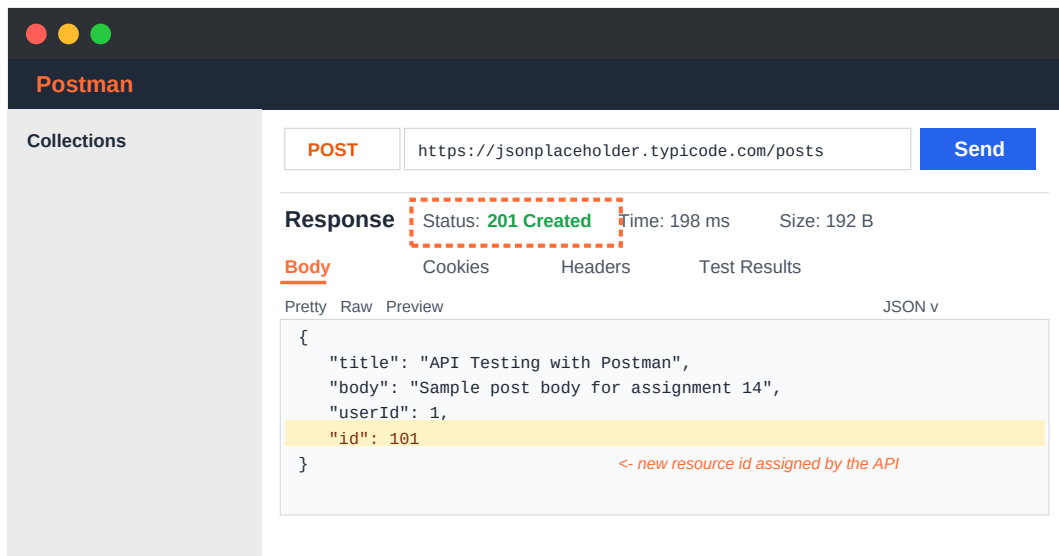


Figure 2 — Response panel showing **201 Created** and the JSON body with all the submitted fields plus the newly-assigned **id: 101** (highlighted).

Expected Response

On success, JSONPlaceholder returns **HTTP 201 Created** with a JSON body that echoes the submitted fields and adds an **id**:

```
{
  "title": "API Testing with Postman",
  "body": "Sample post body for assignment 14",
  "userId": 1,
  "id": 101
}
```

Optional — Capture the id with a Test Script

Just like in Assignment 12 with GoRest, the id from this response can be captured into a variable using a post-response script. Paste the following into the **Scripts** → **Post-response** editor:

```
// Capture the new post id into a global variable
var jsonData = pm.response.json();
pm.globals.set("POSTID", jsonData.id);

pm.test("Status code is 201", function () {
  pm.response.to.have.status(201);
});
```

```
});  
pm.test("Response has id field", function () {  
    pm.expect(jsonData).to.have.property("id");  
});
```

Verification Checklist

- 1 Response status is **201 Created** in green.
- 2 Response body contains the **title**, **body** and **userId** fields exactly as sent.
- 3 Response body contains a new **id** field with the value **101**.
- 4 **Time** and **Size** values are shown next to the status; the response is small (a few hundred bytes) and fast (typically under 500 ms).
- 5 Request is saved (**Ctrl + S** / **Cmd + S**) inside the collection.

Conclusion

A POST request to JSONPlaceholder's **/posts** endpoint has been successfully sent and the response verified. The presence of the new **id** field in the response demonstrates how a server communicates the identity of a newly-created resource back to the client — the cornerstone of every Create operation in REST. The same pattern (POST, capture the returned id, use it in follow-up requests) was already applied with GoRest and Restful Booker in earlier assignments.