

Experiment-3

Practice source code management on git-hub .Experiment with the source code in exercise1.

- Create a new folder for Experiment3.
- Use **git init** Command from the folder

```
Admin@DESKTOP-A5IG8HL MINGW64 /c (Main)
$ cd HarshiniDevops
```

- Copy and paste the **lab1.html** program in experiment3 in this folder and name it as **pgm1.html**.
- Use **git add pgm1.html**

```
Admin@DESKTOP-A5IG8HL MINGW64 /c/HarshiniDevops (master)
$ git init
Initialized empty Git repository in C:/HarshiniDevops/.git/

Admin@DESKTOP-A5IG8HL MINGW64 /c/HarshiniDevops (master)
$ git add pgm1.html
```

```
Admin@DESKTOP-A5IG8HL MINGW64 /c/HarshiniDevops (master)
$ git status
On branch master

No commits yet

Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
    new file:   pgm1.html
```

```
Admin@DESKTOP-A5IG8HL MINGW64 /c/HarshiniDevops (master)
$ git config user.email "v.harshini1817@gmail.com"

Admin@DESKTOP-A5IG8HL MINGW64 /c/HarshiniDevops (master)
$ git config user.name "harshiniadvik"


Admin@DESKTOP-A5IG8HL MINGW64 /c/HarshiniDevops (master)
$ ls
pgm1.html
```

➤ **git commit -m "lab pgm1"**


```
Admin@DESKTOP-A5IG8HL MINGW64 /c/HarshiniDevops (master)
$ git commit -m "lab pgm1.html"
[master (root-commit) 7445779] lab pgm1.html
 1 file changed, 84 insertions(+)
 create mode 100644 pgm1.html

Admin@DESKTOP-A5IG8HL MINGW64 /c/HarshiniDevops (master)
$ git branch -M main
```

Login to github

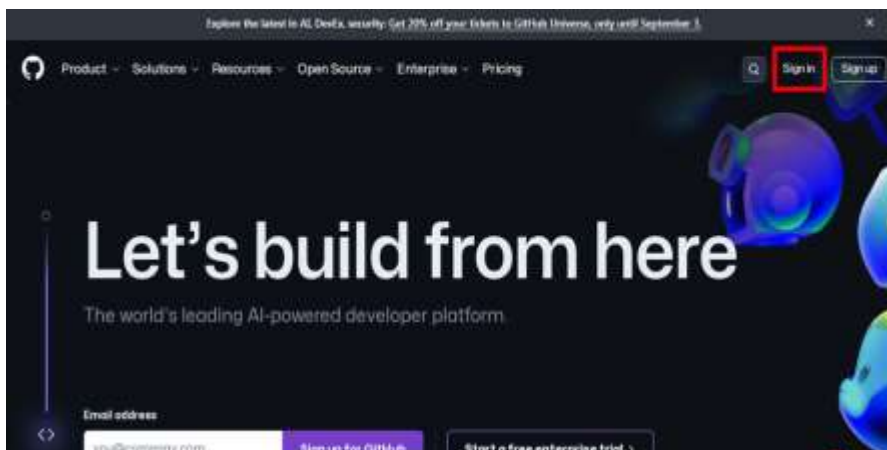

K.Harshini
DevOps(cse)

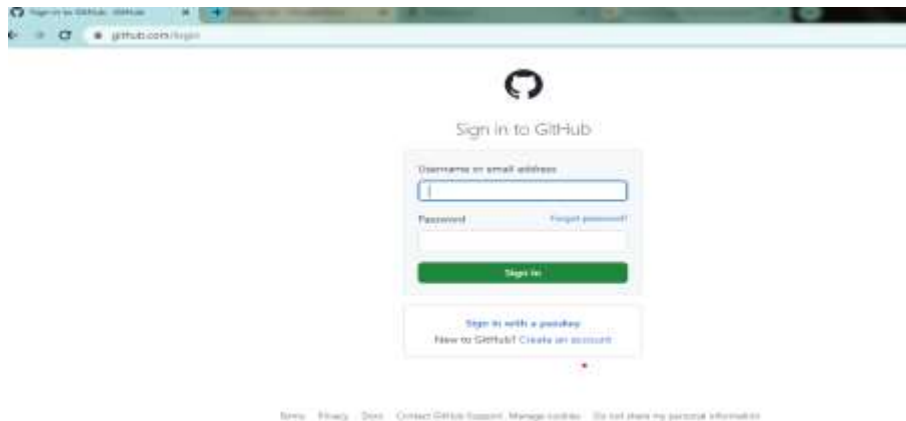

Give Repository name as experiment3, And click on create repository

Create a new repository [Try the new experience](#)

A repository contains all project files, including the revision history. Already have a project repository elsewhere? [Import a repository](#)

Required fields are marked with an asterisk (*).

Owner * harshiniadvik / Repository name * experiment3
experiment3 is available.

Great repository names are short and memorable. Need inspiration? How about [redesigned-invention](#)?

Description (optional)

- ☒ **Public**
Anyone on the Internet can see this repository. You choose who can commit.
- ☐ **Private**
You choose who can see and commit to this repository.

Initialize this repository with:

- ☐ **Add a README file**
This is where you can write a long description for your project. [Learn more about READMEs](#)

Add .gitignore

.gitignore template: None

Choose which files not to track from a list of templates. [Learn more about ignoring files](#)

Choose a license


License: None

A license tells others what they can and can't do with your code. [Learn more about licenses](#)

ⓘ You are creating a public repository in your personal account.

Create repository

K.Harshini
DevOps(cse)

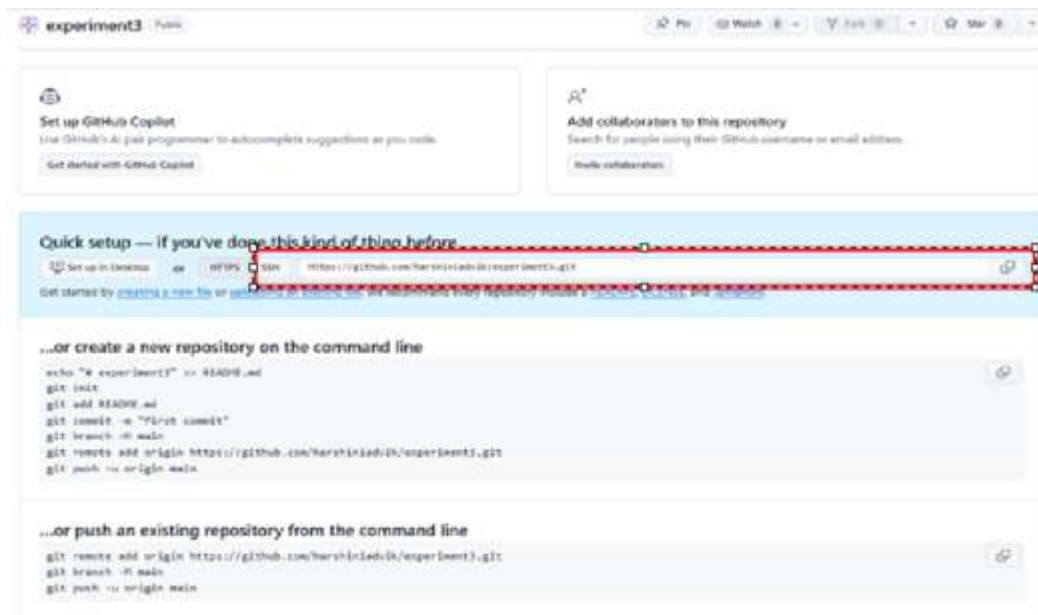


Copy the **url of repository** from previous screen and use **git remote** command and then **git push** it to repository.

```
Admin@DESKTOP-A5IG8HL MINGW64 /c/HarshiniDevops (master)
$ git branch -M main

Admin@DESKTOP-A5IG8HL MINGW64 /c/HarshiniDevops (main)
$ git remote add origin https://github.com/harshiniadvik/experiment3.git
```

```
Admin@DESKTOP-A5IG8HL MINGW64 /c/HarshiniDevops (main)
• $ git push -u origin main
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Delta compression using up to 8 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 946 bytes | 473.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/harshiniadvik/experiment3.git
 * [new branch]      main -> main
branch 'main' set up to track 'origin/main'.
```

Just verify the file in github

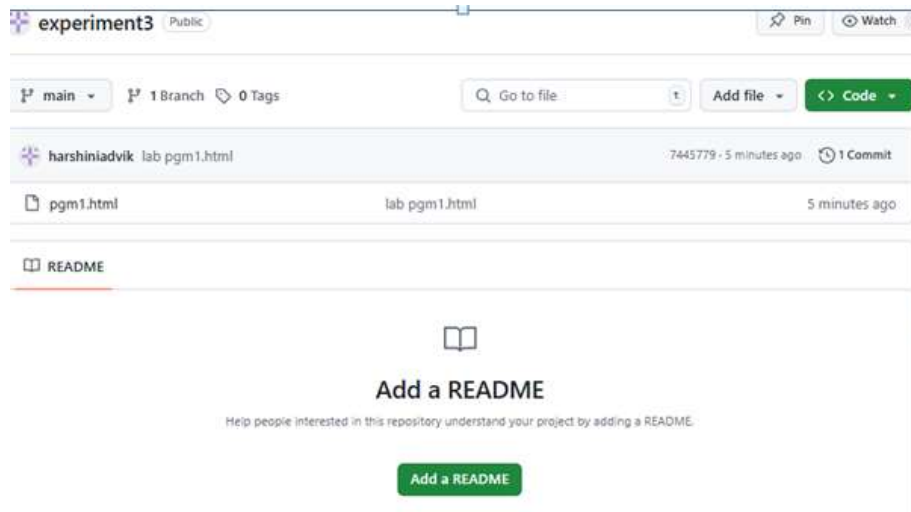

By this we can confirm that pgm1.html is pushed from local repo to github