



Parte 5: Esquemas del teclado

Valores ASCII implícitos generados por las teclas (HEX)

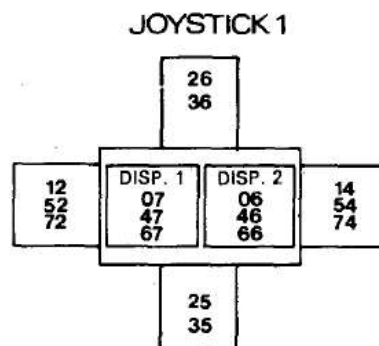

N/D	AF 21 31	7E 22 32	22 33	24 34	25 35	26 36	27 37	7B 28 38	7D 29 39	1F 5F 30	3D	1E A3 5E	10 10 10	7F 7F 7F	N/D	N/D	N/D
E1 09 09	11 51 71	17 57 77	05 45 65	12 52 72	14 54 74	19 59 79	15 55 75	09 49 69	0F 4F 6F	10 50 70	00 7C 40	1B 2A 5B	0D 0D 0D	N/D	N/D	N/D	
N/D	01 41 61	13 53 73	04 44 64	06 46 66	07 47 67	08 48 68	0A 4A 6A	0B 4B 6B	0C 4C 6C	A1 AB	3A 2B	1D 2B 5D		N/D	N/D	N/D	
N/D	1A 5A 7A	18 58 78	03 43 63	16 56 76	02 42 62	0E 4E 6E	0D 4D 6D	3C 2C	3E 2E	AE 3F 2F	1C 60 5C	N/D	N/D	F8 F4 F0	N/D	N/D	
N/D	E0 E0 E0	20 20										N/D	FA F6 F2	F9 F5 F1	FB F7 F3		

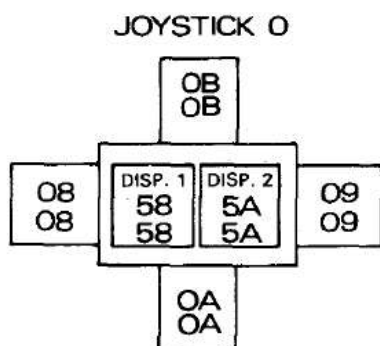

Códigos expansibles: posiciones y valores implícitos



N/D	N/D	N/D	N/D	N/D	N/D	N/D	N/D	N/D	N/D	N/D	N/D	N/D	N/D	N/D	135	136	137
															135	136	137
N/D	N/D	N/D	N/D	N/D	N/D	N/D	N/D	N/D	N/D	N/D	N/D	N/D	N/D	N/D	132	133	134
															132	133	134
N/D	N/D	N/D	N/D	N/D	N/D	N/D	N/D	N/D	N/D	N/D	N/D	N/D	N/D	N/D	129	130	131
															129	130	131
N/D	N/D	N/D	N/D	N/D	N/D	N/D	N/D	N/D	N/D	N/D	N/D	N/D	N/D	N/D	128	N/D	138
															128		138
N/D	N/D	N/D										140			N/D	N/D	N/D
												139					

Código expansible	Asignación implícita	
	Carácter	Valor ASCII
0(128)	0	&30
1(129)	1	&31
2(130)	2	&32
3(131)	3	&33
4(132)	4	&34
5(133)	5	&35
6(134)	6	&36
7(135)	7	&37
8(136)	8	&38
9(137)	9	&39
10(138)	.	&2E
11(139)	[RETURN]	&0D
12(140)	RUN"[RETURN]	&52&55&4E&22&0D
Nota. Los caracteres expansibles 13 a 31 (141 a 159) no tienen asignada ninguna cadena de expansión. Su expansión se puede definir con la orden KEY de BASIC, y se los puede asignar a teclas concretas con la Orden KEY DEF.		

Números de las teclas y los joysticks



66	64	65	57	56	49	48	41	40	33	32	25	24	16	79	10	11	3
68	67	59	58	50	51	43	42	35	34	27	26	17	18	20	12	4	
70	69	60	61	53	52	44	45	37	36	29	28	19		13	14	5	
21	71	63	62	55	54	46	38	39	31	30	22	21	15	0	7		
23	9	47										6	8	2	1		

