

AI ASSISTED LAB ASSIGNMENT – 5.1

Ethical Foundations – Responsible AI Coding Practices

Name: N. Adithya

Roll_no:2503A52413

Batch_no:14

Task-1: (Privacy in API Usage)

Input:

#generate a Python program that connects to a weather API.

```
import os
```

```
import requests
```

```
def fetch_weather(city: str) -> dict:
```

```
    """Return current weather for *city* using OpenWeatherMap."""
```

```
    api_key = os.environ.get("WEATHER_API_KEY")
```

```
    if not api_key:
```

```
        raise RuntimeError("Set the WEATHER_API_KEY environment variable first.")
```

```
    response = requests.get(
```

```
        "https://api.openweathermap.org/data/2.5/weather",
```

```
        params={"q": city, "appid": api_key, "units": "metric"},
```

```
        timeout=10,
```

```

)

response.raise_for_status()

return response.json()

if __name__ == "__main__":
    city = input("Enter a city: ").strip()

    try:
        weather = fetch_weather(city)


        print(
            f"{weather['name']}: {weather['main']['temp']}°C, "
            f"{weather['weather'][0]['description']}"
        )
    except (requests.RequestException, KeyError, RuntimeError) as error:
        print(f"Unable to fetch weather: {error}")

```

Explanation:

This task demonstrates how to use a weather API securely without exposing the API key in Python code. An API key is a secret password that allows an application to access an API.

Output:

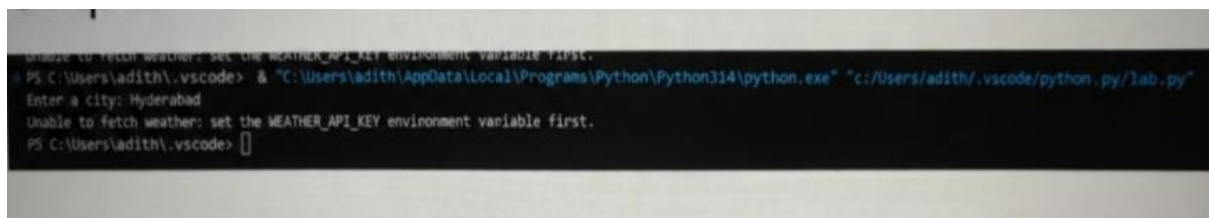

```

Unable to fetch weather: set the WEATHER_API_KEY environment variable first.
PS C:\Users\adith\.vscode> & "C:\Users\adith\AppData\Local\Programs\Python\Python314\python.exe" "c:/Users/adith/.vscode/python.py/lab.py"
Enter a city: Hyderabad
Unable to fetch weather: set the WEATHER_API_KEY environment variable first.
PS C:\Users\adith\.vscode>

```

Task-2:(Privacy & Security in File Handling)

Input:

#generate a Python script that stores user data (name, email, password) in a file.

```
import base64
```

```
import hashlib
```

```
import json
```

```
import secrets
```

```
from pathlib import Path
```

```
USER_FILE = Path("users.json")
```

```
def hash_password(password: str) -> tuple[str, str]:
```

```
    """Return a unique salt and a slow, one-way password hash."""
```

```
    salt = secrets.token_bytes(16)
```

```
    password_hash = hashlib.pbkdf2_hmac(
```

```
        "sha256", password.encode("utf-8"), salt, 600_000
```

```
    )
```

```
    return (
```

```
        base64.b64encode(salt).decode("ascii"),
```

```
        base64.b64encode(password_hash).decode("ascii"),
```

```
    )
```

```
def save_user(name: str, email: str, password: str) -> None:
```

```
    salt, password_hash = hash_password(password)
```

```
    user = {
```

```
        "name": name,
```

```

    "email": email,
    "password_hash": password_hash,
    "password_salt": salt,
}
USER_FILE.write_text(json.dumps(user, indent=2), encoding="utf-8")

def main() -> None:
    name = input("Name: ")
    email = input("Email: ")
    password = input("Password: ")
    save_user(name, email, password)

    print("\nPrivacy analysis:")
    print("- Plain-text passwords would allow anyone with the file to log in.")
    print("- Passwords in logs, backups, or source code could also be exposed.")
    print("- This version stores a salted PBKDF2 hash instead of the password.")
    print(f"\nUser saved securely to {USER_FILE}.")
    print(USER_FILE.read_text(encoding="utf-8"))

if __name__ == "__main__":
    main()

```

Explanation:

An insecure AI-generated version might write the password directly:

```
{"name": name, "email": email, "password": password}
```

That creates a serious privacy risk: anyone who reads the file can use the password, and the password may also be exposed through backups or logs.

Passwords should be salted and hashed, not stored in plain text.

Output:

```
Problems  Output  Debug Console  Terminal  Ports

Privacy analysis:
- Plain-text passwords would allow anyone with the file to log in.
- Passwords in logs, backups, or source code could also be exposed.
- This version stores a salted PBKDF2 hash instead of the password.

User saved securely to users.json.
{
  "name": "adithya",
  "email": "adithya@gmail.com",
  "password_hash": "N8KXBS5ilvAoAbqfJcawwIvpz/4c/rL3y8TMZmH1Gps=",
  "password_salt": "d0d/rx8dFkqiMT5nawzSmA=="
}
PS C:\Users\adith\OneDrive\Desktop\task> |
```

Task-3: (Transparency in Algorithm Design)

Input:

generate an Armstrong number checking function with comments and explanations.

```
def is_armstrong(number):
```

```
    """Return True when number is an Armstrong number; otherwise return False."""
```

```
    # Armstrong numbers are normally defined for non-negative integers.
```

```
    if not isinstance(number, int) or number < 0:
```

```
        return False
```

```
    # Convert the number to text so that its digits can be examined easily.
```

```
    digits = str(number)
```

```

number_of_digits = len(digits)

# Add each digit raised to the power of the number of digits.
digit_power_sum = sum(int(digit) ** number_of_digits for digit in digits)

# The number is Armstrong when the calculated sum equals the original value.
return digit_power_sum == number

# Ask the user for a number and remove extra spaces from the input.
user_input = input("Enter a non-negative integer: ").strip()

try:
    # Convert the user's text into an integer.
    value = int(user_input)

    # Display the result produced by the checking function.
    if is_armstrong(value):
        print(f"{value} is an Armstrong number.")
    else:
        print(f"{value} is not an Armstrong number.")
except ValueError:
    # Explain the problem instead of allowing invalid input to crash the program.
    print("Invalid input. Please enter a whole number.")


```

Explanation:

An Armstrong number is a number equal to the sum of its digits, where each digit is raised to the power of the total number of digits.

For example: $153 = 1^3 + 5^3 + 3^3 = 153$.

Output:

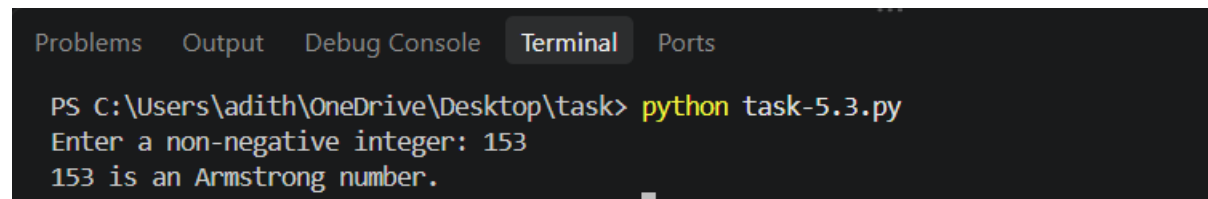A screenshot of a terminal window with a dark background. At the top, there are tabs labeled 'Problems', 'Output', 'Debug Console', 'Terminal' (which is active), and 'Ports'. The terminal shows the command 'python task-5.3.py' being executed. The prompt is 'PS C:\Users\adith\OneDrive\Desktop\task>'. The output shows 'Enter a non-negative integer: 153' followed by '153 is an Armstrong number.' on the next line.

```
PS C:\Users\adith\OneDrive\Desktop\task> python task-5.3.py
Enter a non-negative integer: 153
153 is an Armstrong number.
```

Task-4: (Transparency in Algorithm Comparison)

Input:

Generate Python code for QuickSort and BubbleSort, and include comments explaining step-by-step how each works and where they differ

```
def quick_sort(values):
```

```
    """Return a sorted copy of *values* using the QuickSort algorithm.
```

```
    QuickSort chooses a pivot, divides the remaining values into values that
    are less than or equal to the pivot and values greater than the pivot,
    then recursively sorts both partitions.
```

```
    """
```

```
    if len(values) <= 1:
```

```
        return values.copy()
```

```
    pivot = values[len(values) // 2]
```

```
    smaller = [value for value in values if value < pivot]
```

```
    equal = [value for value in values if value == pivot]
```

```
    larger = [value for value in values if value > pivot]
```

```
return quick_sort(smaller) + equal + quick_sort(larger)
```

```
def bubble_sort(values):
```

```
    """Return a sorted copy of *values* using the BubbleSort algorithm.
```

```
    BubbleSort repeatedly compares neighboring values. If they are in the
    wrong order, it swaps them. After each pass, the largest unsorted value
    has "bubbled" to the end of the list.
```

```
    """
```

```
    result = values.copy()
```

```
    # Each pass checks the portion that has not already been sorted.
```

```
    for end in range(len(result) - 1, 0, -1):
```

```
        swapped = False
```

```
        # Compare neighboring values from left to right.
```

```
        for index in range(end):
```

```
            if result[index] > result[index + 1]:
```

```
                # Swap adjacent values that are out of order.
```

```
                result[index], result[index + 1] = (
```

```
                    result[index + 1],
```

```
                    result[index],
```

```
                )
```

```
                swapped = True
```

```
    # Stop early when a complete pass makes no swaps.
```

```
    if not swapped:
```

```
        break
```

```
return result
```

```
numbers = [64, 34, 25, 12, 22, 11, 90]
```

```
print("Original list: ", numbers)
```


```
print("QuickSort:  ", quick_sort(numbers))
```

```
print("BubbleSort: ", bubble_sort(numbers))
```

Explanation:

This program sorts the same list using two sorting algorithms: QuickSort and BubbleSort.

Output:

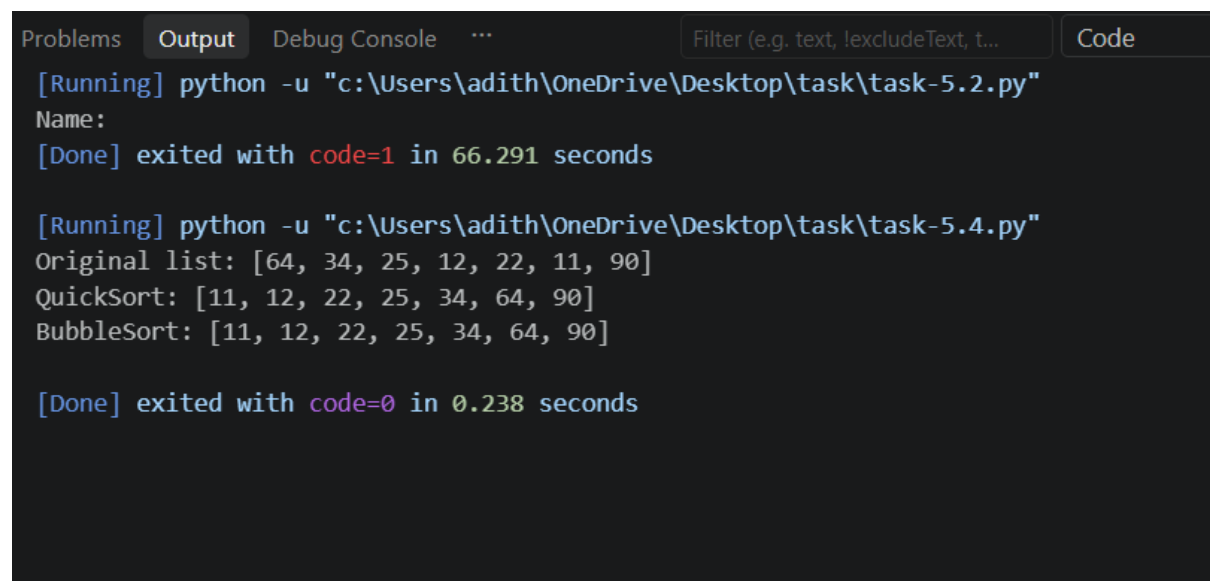

```
Problems Output Debug Console ... Filter (e.g. text, lexcludeText, t... Code
[Running] python -u "c:\Users\adith\OneDrive\Desktop\task\task-5.2.py"
Name:
[Done] exited with code=1 in 66.291 seconds

[Running] python -u "c:\Users\adith\OneDrive\Desktop\task\task-5.4.py"
Original list: [64, 34, 25, 12, 22, 11, 90]
QuickSort: [11, 12, 22, 25, 34, 64, 90]
BubbleSort: [11, 12, 22, 25, 34, 64, 90]

[Done] exited with code=0 in 0.238 seconds
```

Task-5: (Transparency in AI Recommendations)

Input:

#Generate a recommendation system that also provides reasons for each Suggestion.

```
"""Product recommendation system with explanations."""
```

```
from dataclasses import dataclass
```

```
from typing import List, Set, Tuple
```

```
@dataclass(frozen=True)
```

```
class Product:
```

```
    name: str
```

```
    category: str
```

```
    price: float
```

```
    features: Set[str]
```

```
    description: str
```

```
PRODUCTS = [
```

```
    Product(
```

```
        "SoundMax Wireless Headphones",
```

```
        "electronics",
```

```
        79.99,
```

```
        {"wireless", "noise cancellation", "bluetooth", "long battery"},
```

```
        "Comfortable headphones for music, travel, and online classes.",
```

```
    ),
```

```
Product(  
    "FitTrack Smartwatch",  
    "electronics",  
    99.99,  
    {"fitness tracking", "bluetooth", "water resistant", "long battery"},  
    "A smartwatch for tracking exercise, sleep, and daily activity.",  
),
```

```
Product(  
    "ReadPro E-Reader",  
    "electronics",  
    129.99,  
    {"wireless", "long battery", "lightweight", "reading"},  
    "A lightweight e-reader with a glare-free display.",  
),
```

```
Product(  
    "ErgoComfort Office Chair",  
    "furniture",  
    149.99,  
    {"ergonomic", "adjustable", "comfortable", "back support"},  
    "An adjustable chair designed for comfortable long work sessions.",  
),
```

```
Product(  
    "UrbanTrail Backpack",  
    "bags",  
    49.99,  
    {"water resistant", "lightweight", "laptop compartment", "travel"},  
    "A durable backpack for school, work, and travel.",  
),
```

```

Product(
    "BrewMate Coffee Maker",
    "kitchen",
    59.99,
    {"automatic", "programmable", "compact", "easy to clean"},
    "A compact programmable coffee maker for home or office use.",
),
]

```

```

def recommend_products(
    preferences: Set[str],
    budget: float,
    category: str = "",
    number_of_recommendations: int = 3,
) -> List[Tuple[Product, int, List[str]]]:
    """Return products ranked by preference matches, affordability, and category."""
    recommendations = []

    for product in PRODUCTS:
        if product.price > budget:
            continue

        matching_features = preferences.intersection(product.features)
        score = len(matching_features) * 3

        reasons = [f"matches your preference for {feature}" for feature in
sorted(matching_features)]

        if category and product.category.lower() == category.lower():

```

```
score += 2
```

```
reasons.append(f"is in your preferred {category.lower()} category")
```

```
if not reasons:
```

```
    reasons.append("fits within your budget")
```

```
recommendations.append((product, score, reasons))
```

```
return sorted(
```

```
    recommendations,
```

```
    key=lambda item: (-item[1], item[0].price),
```

```
)[:number_of_recommendations]
```

```
def main() -> None:
```

```
    print("=== AI Product Recommendation System ===")
```

```
    print("Available preferences include: wireless, fitness tracking, ergonomic, travel, and  
more.")
```

```
    preferences = {
```

```
        preference.strip().lower()
```

```
        for preference in input("Enter your preferences (comma-separated): ").split(",")
```

```
        if preference.strip()
```

```
    }
```

```
    budget = float(input("Enter your maximum budget: "))
```

```
    category = input("Enter a preferred category (optional): ").strip()
```

```
    recommendations = recommend_products(preferences, budget, category)
```

```
if not recommendations:
```

```
    print("\nNo products match your preferences and budget.")
```

```
    return
```

```
print("\nRecommended products:")
```

```
for position, (product, score, reasons) in enumerate(recommendations, start=1):
```

```
    print(f"\n{position}. {product.name} - ${product.price:.2f}")
```

```
    print(f"  {product.description}")
```

```
    print(f"  Why this is recommended (score {score}):")
```

```
    for reason in reasons:
```

```
        print(f"      - {reason}")
```

```
if __name__ == "__main__":
```

```
    main()
```

Explanation:

This Python program is a simple product recommendation system. It recommends products based on the user's preferences, budget, and category.

Output:

```
Problems  Output  Debug Console  Terminal  Ports

PS C:\Users\adith\OneDrive\Desktop\task> python task-5.5.py
=== AI Product Recommendation System ===
Available preferences include: wireless, fitness tracking, ergonomic, travel, and more.
Enter your preferences (comma-separated): wireless
Enter your maximum budget: 200
Enter a preferred category (optional): travel

Recommended products:

1. SoundMax Wireless Headphones - $79.99
   Comfortable headphones for music, travel, and online classes.
   Why this is recommended (score 3):
   - matches your preference for wireless

2. ReadPro E-Reader - $129.99
   A lightweight e-reader with a glare-free display.
   Why this is recommended (score 3):
   - matches your preference for wireless

3. UrbanTrail Backpack - $49.99
   A durable backpack for school, work, and travel.
   Why this is recommended (score 0):
   - fits within your budget
PS C:\Users\adith\OneDrive\Desktop\task> |
```