

# Crunchy Data Postgres Operator

## Contents

Deployment Requirements . . . . .	13
Documentation . . . . .	13
Provisioning . . . . .	14
Custom Resource Definitions . . . . .	14
Event Listeners . . . . .	16
REST API . . . . .	16
Command Line Interface . . . . .	16
Direct API Calls . . . . .	16
Node Affinity . . . . .	17
Fail-over . . . . .	17
pgbackrest Integration . . . . .	17
pgbackrest Restore . . . . .	19
pgbackrest AWS S3 Support . . . . .	19
PGO Scheduler . . . . .	21
Schedule Expression Format . . . . .	21
pgBackRest Schedules . . . . .	21
pgBaseBackup Schedules . . . . .	21
Policy Schedules . . . . .	21
Custom Resource Definitions . . . . .	21
Considerations for Multi-zone Cloud Environments . . . . .	22
Custom Postgres Configurations . . . . .	23
Custom Postgres SSL Configurations . . . . .	24
Operator Eventing . . . . .	26
Event Watching . . . . .	26
Event Topics . . . . .	26
Event Types . . . . .	26
Event Testing . . . . .	26
Event Deployment . . . . .	26
Operator Namespaces . . . . .	27
Namespace Watching . . . . .	27
OwnNamespace Example . . . . .	27
SingleNamespace Example . . . . .	27
MultiNamespace Example . . . . .	28
AllNamespaces Example . . . . .	28
RBAC . . . . .	28

pgo Clients and Namespaces . . . . .	30
Operator Lifecycle Management . . . . .	30
Operator Hub . . . . .	30
pgo update pgouser . . . . .	30
Synopsis . . . . .	31
Options . . . . .	31
Options inherited from parent commands . . . . .	31
SEE ALSO . . . . .	31
pgo update user . . . . .	31
Synopsis . . . . .	31
Options . . . . .	31
Options inherited from parent commands . . . . .	31
SEE ALSO . . . . .	32
pgo upgrade . . . . .	32
Synopsis . . . . .	32
Options . . . . .	32
Options inherited from parent commands . . . . .	32
SEE ALSO . . . . .	32
pgo user . . . . .	32
Synopsis . . . . .	32
Options . . . . .	33
Options inherited from parent commands . . . . .	33
SEE ALSO . . . . .	33
pgo version . . . . .	33
Synopsis . . . . .	33
Options . . . . .	33
Options inherited from parent commands . . . . .	33
SEE ALSO . . . . .	33
pgo watch . . . . .	34
Synopsis . . . . .	34
Options . . . . .	34
Options inherited from parent commands . . . . .	34
SEE ALSO . . . . .	34
Configuring Encryption of PostgreSQL Operator API Connection . . . . .	34
PostgreSQL Operator RBAC . . . . .	35
Making Security Changes . . . . .	37
Installation of PostgreSQL Operator RBAC . . . . .	37
<b>Prerequisites</b>	<b>37</b>
Upgrading the Operator . . . . .	38
Upgrading to Version 4.1.0 From Previous Versions . . . . .	38
Upgrading to Version 3.5.0 From Previous Versions . . . . .	38
Upgrading a Cluster from Version 3.5.x to 4.0 . . . . .	38
Documentation . . . . .	39

Hosting Hugo Locally (Optional)	39
Contributing to the Documentation	39
Default Installation - Create Project Structure	40
Default Installation - Configure Environment	40
Default Installation - Namespace Creation	40
Default Installation - Configure Operator Templates	41
Storage	41
Operator Security	42
Default Installation - Create Kube RBAC Controls	42
Default Installation - Deploy the Operator	42
Default Installation - Completely Cleaning Up	42
pgo CLI Installation	43
Verify the Installation	43
<b>Developing</b>	<b>43</b>
Create Kubernetes Cluster	44
Create a Local Development Host	44
Perform Manual Install	44
Build Locally	44
Get Build Dependencies	44
Compile	44
Release	44
Deploy	44
Debug	45
<b>Install the Postgres Operator (pgo) Client</b>	<b>45</b>
Prerequisites	45
Linux and MacOS	45
Installing the Client	45
Windows	46
Installing the Client	47
Verify the Client Installation	48
<b>Crunchy Data PostgreSQL Operator Playbooks</b>	<b>48</b>
Features	48
Resources	48
<b>Prerequisites</b>	<b>48</b>
Kubernetes Installs	49
OpenShift Installs	49
Installing from a Windows Host	49
Permissions	49
Obtaining Operator Ansible Role	49
GitHub Installation	49
RPM Installation using Yum	49

Configuring the Inventory File . . . . .	50
Minimal Variable Requirements . . . . .	52
Storage . . . . .	53
Examples . . . . .	54
Considerations for Multi-Zone Cloud Environments . . . . .	54
Resource Configuration . . . . .	54
Understanding pgo_operator_namespace & namespace . . . . .	55
Single Namespace . . . . .	55
Multiple Namespaces . . . . .	55
Deploying Multiple Operators . . . . .	55
Deploying Grafana and Prometheus . . . . .	56
Installing Ansible on Linux, MacOS or Windows Ubuntu Subsystem . . . . .	56
Install Google Cloud SDK (Optional) . . . . .	56
<b>Installing</b>	<b>56</b>
Installing on Linux . . . . .	56
Installing on MacOS . . . . .	57
Installing on Windows Ubuntu Subsystem . . . . .	57
Verifying the Installation . . . . .	57
Configure Environment Variables . . . . .	57
Verify pgo Connection . . . . .	57
<b>Installing</b>	<b>58</b>
Prerequisites . . . . .	58
Installing on Linux . . . . .	58
Installing on MacOS . . . . .	59
Installing on Windows . . . . .	59
Verifying the Installation . . . . .	59
Verify Grafana . . . . .	59
Verify Prometheus . . . . .	59
<b>Updating</b>	<b>60</b>
Updating on Linux . . . . .	60
Updating on MacOS . . . . .	60
Updating on Windows Ubuntu Subsystem . . . . .	60
Verifying the Update . . . . .	60
Configure Environment Variables . . . . .	61
Verify pgo Connection . . . . .	61
<b>Uninstalling PostgreSQL Operator</b>	<b>61</b>
Deleting pgo Client . . . . .	61

<b>Uninstalling the Metrics Stack</b>	<b>62</b>
Container Dependencies . . . . .	62
Operating Systems . . . . .	62
Kubernetes Distributions . . . . .	62
Storage . . . . .	62
Releases . . . . .	62
conf Directory . . . . .	62
conf/postgres-operator/pgo.yaml . . . . .	63
conf/postgres-operator Directory . . . . .	63
Security . . . . .	63
Local pgo CLI Configuration . . . . .	63
Namespace Configuration . . . . .	63
<b>pgo.yaml Configuration</b>	<b>63</b>
Storage . . . . .	64
Storage Configuration Examples . . . . .	64
HostPath Example . . . . .	65
NFS Example . . . . .	65
Storage Class Example . . . . .	65
Container Resources . . . . .	65
Miscellaneous (Pgo) . . . . .	65
Storage Configuration Details . . . . .	66
Container Resources Details . . . . .	66
Overriding Storage Configuration Defaults . . . . .	67
Using Storage Configurations for Disaster Recovery . . . . .	67
Node Affinity in PostgreSQL Operator . . . . .	67
Storage and the PostgreSQL Operator . . . . .	67
PostgreSQL Operator Backup and Restore Capability . . . . .	68
pgBackRest Integration . . . . .	68
Support for pgBackRest Use of S3 Buckets . . . . .	69
PostgreSQL Operator Custom Resource Definitions . . . . .	69
Cluster (pgclusters) . . . . .	69
Backup (pgbackups) . . . . .	70
Tasks (pgtask) . . . . .	70
Replica (pgreplica) . . . . .	70
PostgreSQL Operator Overview . . . . .	70
PGO Scheduler . . . . .	71
Schedule Expression Format . . . . .	71
pgBackRest Schedules . . . . .	71
pgBaseBackup Schedules . . . . .	72
Policy Schedules . . . . .	72
User Roles in the PostgreSQL Operator . . . . .	72
Platform Administrator . . . . .	72
Platform User . . . . .	72

PostgreSQL User . . . . .	72
Failover in the PostgreSQL Operator . . . . .	73
PostgreSQL Cluster Architecture . . . . .	73
Manual Failover . . . . .	73
Automatic Failover . . . . .	73
Kubernetes Namespaces and the PostgreSQL Operator . . . . .	73
PostgreSQL Operator Containers Overview . . . . .	74
PostgreSQL Server and Extensions . . . . .	74
Backup and Restore . . . . .	74
Administration Tools . . . . .	74
Metrics and Monitoring . . . . .	75
Connection Pooling and Load Balancing . . . . .	75
Syntax . . . . .	75
Operations . . . . .	75
Common Operations . . . . .	76
Cluster Operations . . . . .	76
Label Operations . . . . .	77
Policy Operations . . . . .	77
Operator Status . . . . .	78
Fail-over Operations . . . . .	79
Add-On Operations . . . . .	80
Scheduled Tasks . . . . .	80
Benchmark Clusters . . . . .	81
Complex Deployments . . . . .	81
pgo Global Flags . . . . .	82
pgo Global Environment Variables . . . . .	83
pgo . . . . .	83
Synopsis . . . . .	83
Options . . . . .	83
SEE ALSO . . . . .	83
pgo apply . . . . .	84
Synopsis . . . . .	84
Options . . . . .	84
Options inherited from parent commands . . . . .	84
SEE ALSO . . . . .	84
pgo backup . . . . .	84
Synopsis . . . . .	84
Options . . . . .	85
Options inherited from parent commands . . . . .	85
SEE ALSO . . . . .	85
pgo benchmark . . . . .	85
Synopsis . . . . .	85
Options . . . . .	85
Options inherited from parent commands . . . . .	85

SEE ALSO	86
pgo cat	86
Synopsis	86
Options	86
Options inherited from parent commands	86
SEE ALSO	86
pgo clidoc	86
Synopsis	86
Options	87
Options inherited from parent commands	87
SEE ALSO	87
pgo create	87
Synopsis	87
Options	87
Options inherited from parent commands	87
SEE ALSO	87
pgo create cluster	88
Synopsis	88
Options	88
Options inherited from parent commands	88
SEE ALSO	89
pgo create namespace	89
Synopsis	89
Options	89
Options inherited from parent commands	89
SEE ALSO	89
pgo create pgbouncer	89
Synopsis	89
Options	90
Options inherited from parent commands	90
SEE ALSO	90
pgo create pgorole	90
Synopsis	90
Options	90
Options inherited from parent commands	90
SEE ALSO	90
pgo create pgouser	90
Synopsis	91
Options	91
Options inherited from parent commands	91
SEE ALSO	91
pgo create pgpool	91
Synopsis	91
Options	91

Options inherited from parent commands	91
SEE ALSO	92
pgo create policy	92
Synopsis	92
Options	92
Options inherited from parent commands	92
SEE ALSO	92
pgo create schedule	92
Synopsis	92
Options	93
Options inherited from parent commands	93
SEE ALSO	93
pgo create user	93
Synopsis	93
Options	93
Options inherited from parent commands	94
SEE ALSO	94
pgo delete	94
Synopsis	94
Options	94
Options inherited from parent commands	94
SEE ALSO	94
pgo delete backup	95
Synopsis	95
Options	95
Options inherited from parent commands	95
SEE ALSO	95
pgo delete benchmark	95
Synopsis	95
Options	96
Options inherited from parent commands	96
SEE ALSO	96
pgo delete cluster	96
Synopsis	96
Options	96
Options inherited from parent commands	96
SEE ALSO	96
pgo delete label	97
Synopsis	97
Options	97
Options inherited from parent commands	97
SEE ALSO	97
pgo delete namespace	97
Synopsis	97



Options	97
Options inherited from parent commands	97
SEE ALSO	98
pgo delete pgbouncer	98
Synopsis	98
Options	98
Options inherited from parent commands	98
SEE ALSO	98
pgo delete pgorole	98
Synopsis	98
Options	99
Options inherited from parent commands	99
SEE ALSO	99
pgo delete pgouser	99
Synopsis	99
Options	99
Options inherited from parent commands	99
SEE ALSO	99
pgo delete pgpool	99
Synopsis	100
Options	100
Options inherited from parent commands	100
SEE ALSO	100
pgo delete policy	100
Synopsis	100
Options	100
Options inherited from parent commands	100
SEE ALSO	101
pgo delete schedule	101
Synopsis	101
Options	101
Options inherited from parent commands	101
SEE ALSO	101
pgo delete upgrade	101
Synopsis	101
Options	102
Options inherited from parent commands	102
SEE ALSO	102
pgo delete user	102
Synopsis	102
Options	102
Options inherited from parent commands	102
SEE ALSO	102
pgo df	102

Synopsis . . . . .	103
Options . . . . .	103
Options inherited from parent commands . . . . .	103
SEE ALSO . . . . .	103
pgo failover . . . . .	103
Synopsis . . . . .	103
Options . . . . .	103
Options inherited from parent commands . . . . .	103
SEE ALSO . . . . .	104
pgo label . . . . .	104
Synopsis . . . . .	104
Options . . . . .	104
Options inherited from parent commands . . . . .	104
SEE ALSO . . . . .	104
pgo load . . . . .	104
Synopsis . . . . .	105
Options . . . . .	105
Options inherited from parent commands . . . . .	105
SEE ALSO . . . . .	105
pgo ls . . . . .	105
Synopsis . . . . .	105
Options . . . . .	105
Options inherited from parent commands . . . . .	105
SEE ALSO . . . . .	105
pgo reload . . . . .	106
Synopsis . . . . .	106
Options . . . . .	106
Options inherited from parent commands . . . . .	106
SEE ALSO . . . . .	106
pgo restore . . . . .	106
Synopsis . . . . .	106
Options . . . . .	106
Options inherited from parent commands . . . . .	107
SEE ALSO . . . . .	107
pgo scale . . . . .	107
Synopsis . . . . .	107
Options . . . . .	107
Options inherited from parent commands . . . . .	107
SEE ALSO . . . . .	108
pgo scaledown . . . . .	108
Synopsis . . . . .	108
Options . . . . .	108
Options inherited from parent commands . . . . .	108
SEE ALSO . . . . .	108

pgo show	108
Synopsis	109
Options	109
Options inherited from parent commands	109
SEE ALSO	109
pgo show backup	109
Synopsis	109
Options	110
Options inherited from parent commands	110
SEE ALSO	110
pgo show benchmark	110
Synopsis	110
Options	110
Options inherited from parent commands	110
SEE ALSO	110
pgo show cluster	110
Synopsis	111
Options	111
Options inherited from parent commands	111
SEE ALSO	111
pgo show config	111
Synopsis	111
Options	111
Options inherited from parent commands	111
SEE ALSO	112
pgo show namespace	112
Synopsis	112
Options	112
Options inherited from parent commands	112
SEE ALSO	112
pgo show pgorole	112
Synopsis	112
Options	113
Options inherited from parent commands	113
SEE ALSO	113
pgo show pgouser	113
Synopsis	113
Options	113
Options inherited from parent commands	113
SEE ALSO	113
pgo show policy	113
Synopsis	114
Options	114
Options inherited from parent commands	114

SEE ALSO	114
pgo show pvc	114
Synopsis	114
Options	114
Options inherited from parent commands	114
SEE ALSO	115
pgo show schedule	115
Synopsis	115
Options	115
Options inherited from parent commands	115
SEE ALSO	115
pgo show upgrade	115
Synopsis	116
Options	116
Options inherited from parent commands	116
SEE ALSO	116
pgo show user	116
Synopsis	116
Options	116
Options inherited from parent commands	116
SEE ALSO	117
pgo show workflow	117
Synopsis	117
Options	117
Options inherited from parent commands	117
SEE ALSO	117
pgo status	117
Synopsis	117
Options	118
Options inherited from parent commands	118
SEE ALSO	118
pgo test	118
Synopsis	118
Options	118
Options inherited from parent commands	118
SEE ALSO	118
pgo update	119
Synopsis	119
Options	119
Options inherited from parent commands	119
SEE ALSO	119
pgo update cluster	119
Synopsis	119
Options	120

Options inherited from parent commands . . . . .	120
SEE ALSO . . . . .	120
pgo update namespace . . . . .	120
Synopsis . . . . .	120
Options . . . . .	120
Options inherited from parent commands . . . . .	120
SEE ALSO . . . . .	120
pgo update pgorole . . . . .	120
Synopsis . . . . .	121
Options . . . . .	121
Options inherited from parent commands . . . . .	121
SEE ALSO . . . . .	121

Latest Release: 4.1.0

The *postgres-operator* is a controller that runs within a Kubernetes cluster that provides a means to deploy and manage PostgreSQL clusters.

Use the postgres-operator to:

- deploy PostgreSQL containers including streaming replication clusters
- scale up PostgreSQL clusters with extra replicas
- add pgpool, pgbouncer, and metrics sidecars to PostgreSQL clusters
- apply SQL policies to PostgreSQL clusters
- assign metadata tags to PostgreSQL clusters
- maintain PostgreSQL users and passwords
- perform minor upgrades to PostgreSQL clusters
- load simple CSV and JSON files into PostgreSQL clusters
- perform database backups

## Deployment Requirements

The Operator is validated for deployment on Kubernetes, OpenShift, and VMware Enterprise PKS clusters. Some form of storage is required, NFS, HostPath, and Storage Classes are currently supported.

The Operator includes various components that get deployed to your Kubernetes cluster as shown in the following diagram and detailed in the [Design](#).

The Operator is developed and tested on CentOS and RHEL Linux platforms but is known to run on other Linux variants.

## Documentation

The following documentation is provided:

- [pgo CLI Syntax and Examples](#)
- [Installation](#)
- [Configuration](#)
- [pgo.yaml Configuration](#)
- [Security](#)
- [Design Overview](#)
- [Developing](#)
- [Upgrading the Operator](#)
- [Contributing](#)

If you are new to the Crunchy PostgreSQL Operator and interested in installing the Crunchy PostgreSQL Operator in your environment, please start here: - [Installation via Bash](#) - [Installation via Ansible](#)

If you have the Crunchy PostgreSQL Operator installed in your environment, and are interested in installation of the client interface, please start here: - [PGO Client Install](#)

If you have the Crunchy PostgreSQL and Client Interface installed in your environment and are interested in guidance on the use of the Crunchy PostgreSQL Operator, please start here: - [PGO CLI Overview](#) — title: “Design” date: draft: false weight: 4 —



Figure 1: Architecture

## Provisioning

So, what does the Postgres Operator actually deploy when you create a cluster?

On this diagram, objects with dashed lines are components that are optionally deployed as part of a PostgreSQL Cluster by the operator. Objects with solid lines are the fundamental and required components.

For example, within the Primary Deployment, the *metrics* container is completely optional. That component can be deployed using either the operator configuration or command line arguments if you want to cause metrics to be collected from the Postgres container.

Replica deployments are similar to the primary deployment but are optional. A replica is not required to be created unless the capability for one is necessary. As you scale up the Postgres cluster, the standard set of components gets deployed and replication to the primary is started.

Notice that each cluster deployment gets its own unique Persistent Volumes. Each volume can use different storage configurations which provides fine grained placement of the database data files.

There is a Service created for the primary Postgres deployment and a Service created for any replica Postgres deployments within a given Postgres cluster. Primary services match Postgres deployments using a label *service-name* of the following format:

```
service-name=mycluster
service-name=mycluster-replica
```

## Custom Resource Definitions

Kubernetes Custom Resource Definitions are used in the design of the PostgreSQL Operator to define the following:

- Cluster - *pgclusters*
- Backup - *pgbackups*
- Policy - *pgpolicies*
- Tasks - *pgtasks*



Figure 2: Reference

Metadata about the Postgres cluster deployments are stored within these CRD resources which act as the source of truth for the Operator.

The *postgres-operator* design incorporates the following concepts:

## Event Listeners

Kubernetes events are created for the Operator CRD resources when new resources are made, deleted, or updated. These events are processed by the Operator to perform asynchronous actions.

As events are captured, controller logic is executed within the Operator to perform the bulk of operator logic.

## REST API

A feature of the Operator is to provide a REST API upon which users or custom applications can inspect and cause actions within the Operator such as provisioning resources or viewing status of resources.

This API is secured by a RBAC (role based access control) security model whereby each API call has a permission assigned to it. API roles are defined to provide granular authorization to Operator services.

## Command Line Interface

One of the unique features of the Operator is the pgo command line interface (CLI). This tool is used by a normal end-user to create databases or clusters, or make changes to existing databases.

The CLI interacts with the REST API deployed within the *postgres-operator* deployment.

## Direct API Calls

The API can also be accessed by interacting directly with the API server. This can be done by making curl calls to POST or GET information from the server. In order to make these calls you will need to provide certificates along with your request using the `--cacert`, `--key`, and `--cert` flags. Next you will need to provide the username and password for the RBAC along with a header that includes the content type and the `--insecure` flag. These flags will be the same for all of your interactions with the API server and can be seen in the following examples.

The most basic example of this interaction is getting the version of the API server. You can send a GET request to `$PGO_APISERVER_URL/version` and this will send back a json response including the API server version. This is important because the server version and the client version must match. If you are using `pgo` this means you must have the correct version of the client but with a direct call you can specify the client version as part of the request.

Get API Server Version

```
curl --cacert $PGO_CA_CERT --key $PGO_CLIENT_KEY --cert $PGO_CA_CERT \
-u username:password -H "Content-Type:application/json" --insecure \
-X GET $PGO_APISERVER_URL/version
```

You can create a cluster by sending a POST request to `$PGO_APISERVER_URL/clusters`. In this example `--data` is being sent to the API URL that includes the client version that was returned from the version call, the namespace where the cluster should be created, the name of the new cluster and the series number. Series sets the number of clusters that will be created in the namespace.

Create Cluster

```
curl --cacert $PGO_CA_CERT --key $PGO_CLIENT_KEY --cert $PGO_CA_CERT \
-u username:password -H "Content-Type:application/json" --insecure \
-X POST --data '{ \
  "ClientVersion":"4.0.0", \
  "Namespace":"pgouser1", \
  "Name":"mycluster", \
  "Series":1}' \
$PGO_APISERVER_URL/clusters
```

The last two examples show you how to `show` and `delete` a cluster. Notice how instead of passing `"Name":"mycluster"` you pass `"Clustername":"mycluster"` to reference a cluster that has already been created. For the show cluster example you can replace `"Clustername":"mycluster"` with `"AllFlag":true` to show all of the clusters that are in the given namespace.

Show Cluster



```
curl --cacert $PGO_CA_CERT --key $PGO_CLIENT_KEY --cert $PGO_CA_CERT \
-u username:password -H "Content-Type:application/json" --insecure \
-X POST --data '{ \
  "ClientVersion":"4.0.0", \
  "Namespace":"pgouser1", \
  "Clustername":"mycluster"}' \
$PGO_APISERVER_URL/showclusters
```

## Delete Cluster

```
curl --cacert $PGO_CA_CERT --key $PGO_CLIENT_KEY --cert $PGO_CA_CERT \
-u username:password -H "Content-Type:application/json" --insecure \
-X POST --data '{ \
  "ClientVersion":"4.0.0", \
  "Namespace":"pgouser1", \
  "Clustername":"mycluster"}' \
$PGO_APISERVER_URL/clustersdelete
```

The API server is setup to work with the pgo command line interface so the parameters that are passed to the server can be found by looking at the related flags. For example, the series parameter used in the **create** example is the same as the **-e**, **--series** flag that is described in the [pgo cli docs](#).

## Node Affinity

You can have the Operator add a node affinity section to a new Cluster Deployment if you want to cause Kubernetes to attempt to schedule a primary cluster to a specific Kubernetes node.

You can see the nodes on your Kube cluster by running the following:

```
kubect1 get nodes
```

You can then specify one of those names (e.g. kubeadm-node2) when creating a cluster;

```
pgo create cluster thatcluster --node-label=kubeadm-node2
```

The affinity rule inserted in the Deployment uses a *preferred* strategy so that if the node were down or not available, Kubernetes will go ahead and schedule the Pod on another node.

When you scale up a Cluster and add a replica, the scaling will take into account the use of **--node-label**. If it sees that a cluster was created with a specific node name, then the replica Deployment will add an affinity rule to attempt to schedule

## Fail-over

Manual and automated fail-over are supported in the Operator within a single Kubernetes cluster.

Manual failover is performed by API actions involving a *query* and then a *target* being specified to pick the fail-over replica target.

Automatic fail-over is performed by the Operator by evaluating the readiness of a primary. Automated fail-over can be globally specified for all clusters or specific clusters.

Users can configure the Operator to replace a failed primary with a new replica if they want that behavior.

The fail-over logic includes:

- deletion of the failed primary Deployment
- pick the best replica to become the new primary
- label change of the targeted Replica to match the primary Service
- execute the PostgreSQL promote command on the targeted replica

## pgbackrest Integration

The Operator integrates various features of the [pgbackrest backup and restore project](#). A key component added to the Operator is the *pgo-backrest-repo* container, this container acts as a pgBackRest remote repository for the Postgres cluster to use for storing archive files and backups.

The following diagrams depicts some of the integration features:

In this diagram, starting from left to right we see the following:

Architecture: Postgres Operator -> pgbackrest Integration

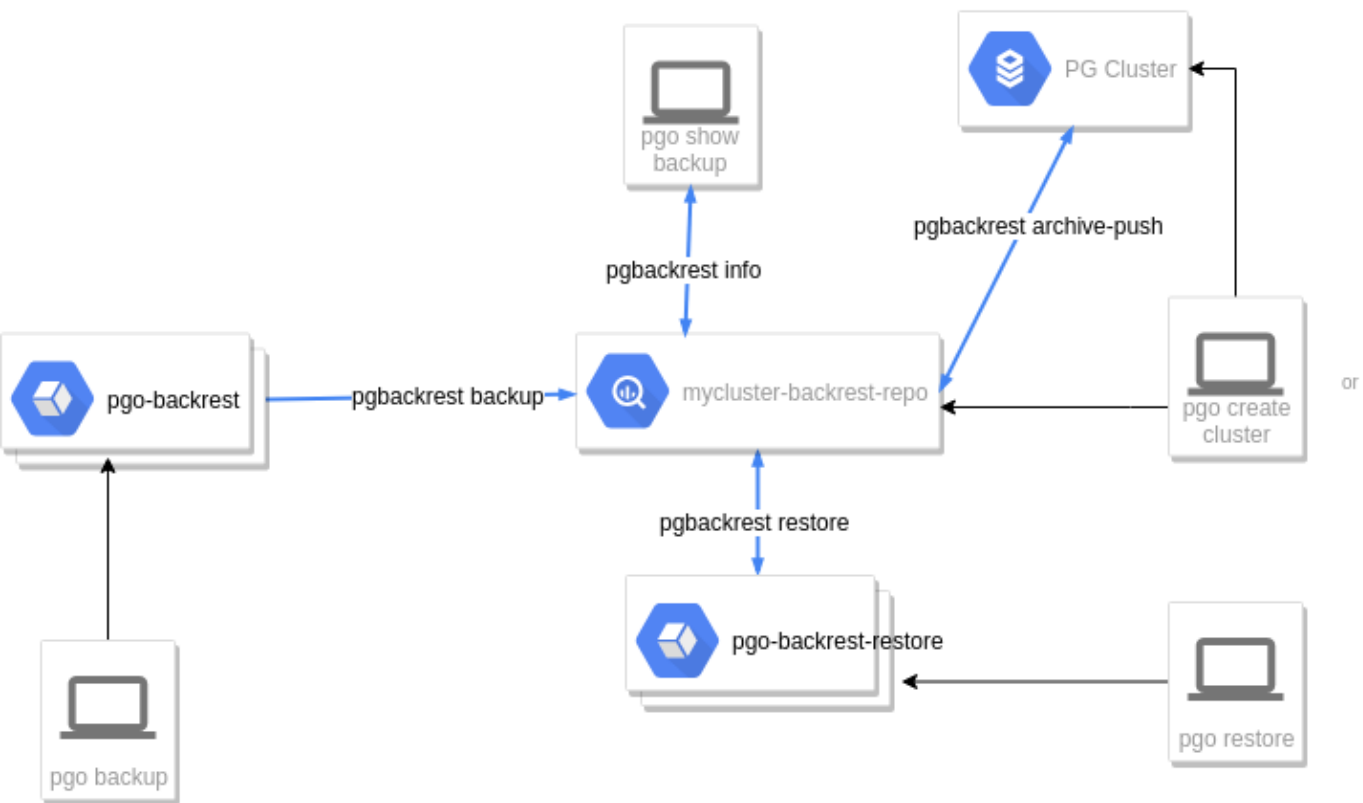


Figure 3: alt text

- a user when they enter *pgo backup mycluster --backup-type=pgbackrest* will cause a pgo-backrest container to be run as a Job, that container will execute a *pgbackrest backup* command in the pgBackRest repository container to perform the backup function.
- a user when they enter *pgo show backup mycluster --backup-type=pgbackrest* will cause a *pgbackrest info* command to be executed on the pgBackRest repository container, the *info* output is sent directly back to the user to view
- the Postgres container itself will use an archive command, *pgbackrest archive-push* to send archives to the pgBackRest repository container
- the user entering *pgo create cluster mycluster --pgbackrest* will cause a pgBackRest repository container deployment to be created, that repository is exclusively used for this Postgres cluster
- lastly, a user entering *pgo restore mycluster* will cause a *pgo-backrest-restore* container to be created as a Job, that container executes the *pgbackrest restore* command

## pgbackrest Restore

The pgbackrest restore command is implemented as the *pgo restore* command. This command is destructive in the sense that it is meant to *restore* a PG cluster meaning it will revert the PG cluster to a restore point that is kept in the pgbackrest repository. The prior primary data is not deleted but left in a PVC to be manually cleaned up by a DBA. The restored PG cluster will work against a new PVC created from the restore workflow.

When doing a *pgo restore*, here is the workflow the Operator executes:

- turn off autofail if it is enabled for this PG cluster
- allocate a new PVC to hold the restored PG data
- delete the the current primary database deployment
- update the pgbackrest repo for this PG cluster with a new data path of the new PVC
- create a pgo-backrest-restore job, this job executes the *pgbackrest restore* command from the pgo-backrest-restore container, this Job mounts the newly created PVC
- once the restore job completes, a new primary Deployment is created which mounts the restored PVC volume

At this point the PG database is back in a working state. DBAs are still responsible to re-enable autofail using *pgo update cluster* and also perform a pgBackRest backup after the new primary is ready. This version of the Operator also does not handle any errors in the PG replicas after a restore, that is left for the DBA to handle.

Other things to take into account before you do a restore:

- if a schedule has been created for this PG cluster, delete that schedule prior to performing a restore
- If your database has been paused after the target restore was completed, then you would need to run the psql command `select pg_wal_replay_resume()` to complete the recovery, on PG 9.6/9.5 systems, the command you will use is `select pg_xlog_replay_resume()`. You can confirm the status of your database by using the built in postgres admin functions found [here:] (<https://www.postgresql.org/docs/current/functions-admin.html#FUNCTIONS-RECOVERY-CONTROL-TABLE>)
- a pgBackRest restore is destructive in the sense that it deletes the existing primary deployment for the cluster prior to creating a new deployment containing the restored primary database. However, in the event that the pgBackRest restore job fails, the **pgo restore** command can be run again, and instead of first deleting the primary deployment (since one no longer exists), a new primary will simply be created according to any options specified. Additionally, even though the original primary deployment will be deleted, the original primary PVC will remain.
- there is currently no Operator validation of user entered pgBackRest command options, you will need to make sure to enter these correctly, if not the pgBackRest restore command can fail.
- the restore workflow does not perform a backup after the restore nor does it verify that any replicas are in a working status after the restore, it is possible you might have to take actions on the replica to get them back to replicating with the new restored primary.
- pgbackrest.org suggests running a pgbackrest backup after a restore, this needs to be done by the DBA as part of a restore
- when performing a pgBackRest restore, the **node-label** flag can be utilized to target a specific node for both the pgBackRest restore job and the new (i.e. restored) primary deployment that is then created for the cluster. If a node label is not specified, the restore job will not target any specific node, and the restored primary deployment will inherit any node labels defined for the original primary deployment.

## pgbackrest AWS S3 Support

The Operator supports the use AWS S3 storage buckets for the pgbackrest repository in any pgbackrest-enabled cluster. When S3 support is enabled for a cluster, all archives will automatically be pushed to a pre-configured S3 storage bucket, and that same bucket can then be utilized for the creation of any backups as well as when performing restores. Please note that once a storage type has been selected for a cluster during cluster creation (specifically *local*, *s3*, or *both*, as described in detail below), it cannot be changed.

The Operator allows for the configuration of a single storage bucket, which can then be utilized across multiple clusters. Once S3 support has been enabled for a cluster, pgbackrest will create a **backrestrepo** directory in the root of the configured S3 storage bucket (if it does not already exist), and subdirectories will then be created under the **backrestrepo** directory for each cluster created with S3 storage enabled.

**S3 Configuration** In order to enable S3 storage, you must provide the required AWS S3 configuration information prior to deploying the Operator. First, you will need to add the proper S3 bucket name, AWS S3 endpoint and AWS S3 region to the **Cluster** section of the `pgo.yaml` configuration file (additional information regarding the configuration of the `pgo.yaml` file can be found [here](#)) :

```
Cluster:
  BackrestS3Bucket: containers-dev-pgbackrest
  BackrestS3Endpoint: s3.amazonaws.com
  BackrestS3Region: us-east-1
```

You will then need to specify the proper credentials for authenticating into the S3 bucket specified by adding a **key** and **key secret** to the `$PGOROOT/conf/pgo-backrest-repo/aws-s3-credentials.yaml` configuration file:

```
---
aws-s3-key: ABCDEFGHIJKLMNOPQRST
aws-s3-key-secret: ABCDEFG/HIJKLMNOPQSTU/VWXYZABCDEFGHIJKLM
```

Once the above configuration details have been provided, you can deploy the Operator per the [PGO installation instructions](#).

**Enabling S3 Storage in a Cluster** With S3 storage properly configured within your PGO installation, you can now select either local storage, S3 storage, or *both* when creating a new cluster. The type of storage selected upon creation of the cluster will determine the type of storage that can subsequently be used when performing pgbackrest backups and restores. A storage type is specified using the `--pgbackrest-storage-type` flag, and can be one of the following values:

- **local** - pgbackrest will use volumes local to the container (e.g. Persistent Volumes) for storing archives, creating backups and locating backups for restores. This is the default value for the `--pgbackrest-storage-type` flag.
- **s3** - pgbackrest will use the pre-configured AWS S3 storage bucket for storing archives, creating backups and locating backups for restores
- **local,s3** (both) - pgbackrest will use both volumes local to the container (e.g. persistent volumes), as well as the pre-configured AWS S3 storage bucket, for storing archives. Also allows the use of local and/or S3 storage when performing backups and restores.

For instance, the following command enables both **local** and **s3** storage in a new cluster:

```
pgo create cluster mycluster --pgbackrest-storage-type=local,s3 -n pgouser1
```

As described above, this will result in pgbackrest pushing archives to both local and S3 storage, while also allowing both local and S3 storage to be utilized for backups and restores. However, you could also enable S3 storage only when creating the cluster:

```
pgo create cluster mycluster --pgbackrest-storage-type=s3 -n pgouser1
```

Now all archives for the cluster will be pushed to S3 storage only, and local storage will not be utilized for storing archives (nor can local storage be utilized for backups and restores).

**Using S3 to Backup & Restore** As described above, once S3 storage has been enabled for a cluster, it can also be used when backing up or restoring a cluster. Here a both local and S3 storage is selected when performing a backup:

```
pgo backup mycluster --backup-type=pgbackrest --pgbackrest-storage-type=local,s3 -n pgouser1
```

This results in pgbackrest creating a backup in a local volume (e.g. a persistent volume), while also creating an additional backup in the configured S3 storage bucket. However, a backup can be created using S3 storage only:

```
pgo backup mycluster --backup-type=pgbackrest --pgbackrest-storage-type=s3 -n pgouser1
```

Now pgbackrest will only create a backup in the S3 storage bucket only.

When performing a restore, either **local** or **s3** must be selected (selecting both for a restore will result in an error). For instance, the following command specifies S3 storage for the restore:

```
pgo restore mycluster --pgbackrest-storage-type=s3 -n pgouser1
```

This will result in a full restore utilizing the backups and archives stored in the configured S3 storage bucket.

*Please note that because **local** is the default storage type for the **backup** and **restore** commands, **s3** must be explicitly set using the `--pgbackrest-storage-type` flag when performing backups and restores on clusters where only S3 storage is enabled.*

**AWS Certificate Authority** The Operator installation includes a default certificate bundle that is utilized by default to establish trust between pgbackrest and the AWS S3 endpoint used for S3 storage. Please modify or replace this certificate bundle as needed prior to deploying the Operator if another certificate authority is needed to properly establish trust between pgbackrest and your S3 endpoint.

The certificate bundle can be found here: `$PGROOT/pgo-backrest-repo/aws-s3-ca.crt`.

When modifying or replacing the certificate bundle, please be sure to maintain the same path and filename.

## PGO Scheduler

The Operator includes a cronlike scheduler application called `pgo-scheduler`. Its purpose is to run automated tasks such as PostgreSQL backups or SQL policies against PostgreSQL clusters created by the Operator.

PGO Scheduler watches Kubernetes for configmaps with the label `crunchy-scheduler=true` in the same namespace the Operator is deployed. The configmaps are json objects that describe the schedule such as:

- Cron like schedule such as: `* * * * *`
- Type of task: `pgbackrest`, `pgbasebackup` or `policy`

Schedules are removed automatically when the configmaps are deleted.

PGO Scheduler uses the UTC timezone for all schedules.

### Schedule Expression Format

Schedules are expressed using the following rules:

Field name	Mandatory?	Allowed values	Allowed special characters
-----	-----	-----	-----
Seconds	Yes	0-59	* / , -
Minutes	Yes	0-59	* / , -
Hours	Yes	0-23	* / , -
Day of month	Yes	1-31	* / , - ?
Month	Yes	1-12 or JAN-DEC	* / , -
Day of week	Yes	0-6 or SUN-SAT	* / , - ?

### pgBackRest Schedules

pgBackRest schedules require pgBackRest enabled on the cluster to backup. The scheduler will not do this on its own.

### pgBaseBackup Schedules

pgBaseBackup schedules require a backup PVC to already be created. The operator will make this PVC using the backup commands:

```
pgo backup mycluster
```

### Policy Schedules

Policy schedules require a SQL policy already created using the Operator. Additionally users can supply both the database in which the policy should run and a secret that contains the username and password of the PostgreSQL role that will run the SQL. If no user is specified the scheduler will default to the replication user provided during cluster creation.

## Custom Resource Definitions

The Operator makes use of custom resource definitions to maintain state and resource definitions as offered by the Operator.

In this above diagram, the CRDs heavily used by the Operator include:

- `pgcluster` - defines the Postgres cluster definition, new cluster requests are captured in a unique `pgcluster` resource for that Postgres cluster
- `pgtask` - workflow and other related administration tasks are captured within a set of `pgtasks` for a given `pgcluster`
- `pgbackup` - when you run a `pgbasebackup`, a `pgbackup` is created to hold the workflow and status of the last backup job, this CRD will eventually be deprecated in favor of a more general `pgtask` resource
- `pgreplica` - when you create a Postgres replica, a `pgreplica` CRD is created to define that replica



Figure 4: Reference

## Considerations for Multi-zone Cloud Environments

**Overview** When using the Operator in a Kubernetes cluster consisting of nodes that span multiple zones, special consideration must be taken to ensure all pods and the volumes they require are scheduled and provisioned within the same zone. Specifically, being that a pod is unable to mount a volume that is located in another zone, any volumes that are dynamically provisioned must be provisioned in a topology-aware manner according to the specific scheduling requirements for the pod. For instance, this means ensuring that the volume containing the database files for the primary DB in a new PG cluster is provisioned in the same zone as the node containing the PG primary pod that will be using it.

**Default Behavior** By default, the Kubernetes scheduler will ensure any pods created that claim a specific volume via a PVC are scheduled on a node in the same zone as that volume. This is part of the [multi-zone support](#) that is included in Kubernetes by default. However, when using dynamic provisioning, volumes are not provisioned in a topology-aware manner by default, which means a volume will not be provisioned according to the same scheduling requirements that will be placed on the pod that will be using it (e.g. it will not consider node selectors, resource requirements, pod affinity/anti-affinity, and various other scheduling requirements). Rather, PVCs are immediately bound as soon as they are requested, which means volumes are provisioned without knowledge of these scheduling requirements. This behavior is the result of the `volumeBindingMode` defined on the Storage Class being utilized to dynamically provision the volume, which is set to `Immediate` by default. This can be seen in the following Storage Class definition, which defines a Storage Class for a Google Cloud Engine Persistent Disk (GCE PD) that uses the default value of `Immediate` for its `volumeBindingMode`:

```
kind: StorageClass
apiVersion: storage.k8s.io/v1
metadata:
  name: example-sc
provisioner: kubernetes.io/gce-pd
parameters:
  type: pd-standard
volumeBindingMode: Immediate
```

Unfortunately, using `Immediate` for the `volumeBindingMode` in a multi-zone cluster can result in undesired behavior when using the Operator, being that the scheduler will ignore any requested (*but not mandatory*) scheduling requirements if necessary to ensure the pod can be scheduled. Specifically, the scheduler will ultimately schedule the pod on a node in the same zone as the volume, even if another node was requested for scheduling that pod. For instance, a node label might be specified using the `--node-label` option when creating

a cluster using the `pgo create cluster` command in order target a specific node (or nodes) for the deployment of that cluster. Within the Operator, a **node label** is implemented as a `preferredDuringSchedulingIgnoredDuringExecution` node affinity rule, which is an affinity rule that Kubernetes will attempt to adhere to when scheduling any pods for the cluster, but *will not guarantee* (more information on node affinity rules can be found [here](#)). Therefore, if the volume ends up in a zone other than the zone containing the node (or nodes) defined by the node label, the node label will be ignored, and the pod will be scheduled according to the zone containing the volume.

**Topology Aware Volumes** In order to overcome the behavior described above in a multi-zone cluster, volumes must be made topology aware. This is accomplished by setting the `volumeBindingMode` for the storage class to `WaitForFirstConsumer`, which delays the dynamic provisioning of a volume until a pod using it is created. In other words, the PVC is no longer bound as soon as it is requested, but rather waits for a pod utilizing it to be creating prior to binding. This change ensures that volume can take into account the scheduling requirements for the pod, which in the case of a multi-zone cluster means ensuring the volume is provisioned in the same zone containing the node where the pod has be scheduled. This also means the scheduler should no longer ignore a node label in order to follow a volume to another zone when scheduling a pod, since the volume will now follow the pod according to the pods specificscheduling requirements. The following is an example of the the same Storage Class defined above, only with `volumeBindingMode` now set to `WaitForFirstConsumer`:

```
kind: StorageClass
apiVersion: storage.k8s.io/v1
metadata:
  name: example-sc
provisioner: kubernetes.io/gce-pd
parameters:
  type: pd-standard
volumeBindingMode: WaitForFirstConsumer
```

**Additional Solutions** If you are using a version of Kubernetes that does not support `WaitForFirstConsumer`, an alternate (*and now deprecated*) solution exists in the form of parameters that can be defined on the Storage Class definition to ensure volumes are provisioned in a specific zone (or zones). For instance, when defining a Storage Class for a GCE PD for use in Google Kubernetes Engine (GKE) cluster, the **zone** parameter can be used to ensure any volumes dynamically provisioned using that Storage Class are located in that specific zone. The following is an example of a Storage Class for a GKE cluster that will provision volumes in the **us-east1** zone:

```
kind: StorageClass
apiVersion: storage.k8s.io/v1
metadata:
  name: example-sc
provisioner: kubernetes.io/gce-pd
parameters:
  type: pd-standard
  replication-type: none
  zone: us-east1
```

Once storage classes have been defined for one or more zones, they can then be defined as one or more storage configurations within the `pgo.yaml` configuration file (as described in the [PGO YAML configuration guide](#)). From there those storage configurations can then be selected when creating a new cluster, as shown in the following example:

```
pgo create cluster mycluster --storage-config=example-sc
```

With this approach, the pod will once again be scheduled according to the zone in which the volume was provisioned. However, the zone parameters defined on the Storage Class bring consistency to scheduling by guaranteeing that the volume, and therefore also the pod using that volume, are scheduled in a specific zone as defined by the user, bringing consistency and predictability to volume provisioning and pod scheduling in multi-zone clusters.

For more information regarding the specific parameters available for the Storage Classes being utilizing in your cloud environment, please see the [Kubernetes documentation for Storage Classes](#).

Lastly, while the above applies to the dynamic provisioning of volumes, it should be noted that volumes can also be manually provisioned in desired zones in order to achieve the desired topology requirements for any pods and their volumes.

## Custom Postgres Configurations

Users and administrators can specify a custom set of Postgres configuration files be used when creating a new Postgres cluster. The configuration files you can change include -

- `postgresql.conf`
- `pg_hba.conf`

- `setup.sql`

Different configurations for PostgreSQL might be defined for the following -

- OLTP types of databases
- OLAP types of databases
- High Memory
- Minimal Configuration for Development
- Project Specific configurations
- Special Security Requirements

**Global ConfigMap** If you create a *configMap* called *pgo-custom-pg-config* with any of the above files within it, new clusters will use those configuration files when setting up a new database instance. You do *NOT* have to specify all of the configuration files. It is entirely up to your use case to determine which to use.

An example set of configuration files and a script to create the global configMap is found at

```
$PGROOT/examples/custom-config
```

If you run the *create.sh* script there, it will create the configMap that will include the PostgreSQL configuration files within that directory.

**Config Files Purpose** The *postgresql.conf* file is the main Postgresql configuration file that allows the definition of a wide variety of tuning parameters and features.

The *pg\_hba.conf* file is the way Postgresql secures client access.

The *setup.sql* file is a Crunchy Container Suite configuration file used to initially populate the database after the initial *initdb* is run when the database is first created. Changes would be made to this if you wanted to define which database objects are created by default.

**Granular Config Maps** Granular config maps can be defined if it is necessary to use a different set of configuration files for different clusters rather than having a single configuration (e.g. Global Config Map). A specific set of ConfigMaps with their own set of PostgreSQL configuration files can be created. When creating new clusters, a `--custom-config` flag can be passed along with the name of the ConfigMap which will be used for that specific cluster or set of clusters.

**Defaults** If there is no reason to change the default PostgreSQL configuration files that ship with the Crunchy Postgres container, there is no requirement to. In this event, continue using the Operator as usual and avoid defining a global configMap.

## Custom Postgres SSL Configurations

The Crunchy Data Postgres Operator can create clusters that use SSL authentication by utilizing custom configmaps.

**Configuration Files for SSL Authentication** Users and administrators can specify a custom set of Postgres configuration files to be used when creating a new Postgres cluster. This example uses the files below-

- `postgresql.conf`
- `pg_hba.conf`
- `pg_ident.conf`

along with generated security certificates, to setup a custom SSL configuration.

**Config Files Purpose** The *postgresql.conf* file is the main Postgresql configuration file that allows the definition of a wide variety of tuning parameters and features.

The *pg\_hba.conf* file is the way Postgresql secures client access.

The *pg\_ident.conf* is the ident map file and defines user name maps.



**ConfigMap Creation** This example shows how you can configure PostgreSQL to use SSL for client authentication.

The example requires SSL certificates and keys to be created. Included in the examples directory is the script called by create.sh to create self-signed certificates (server and client) for the example:

```
$PGOROOT/examples/ssl-creator.sh.
```

Additionally, this script requires the certstrap utility to be installed. An install script is provided to install the correct version for the example if not already installed.

The relevant configuration files are located in the configs directory and will configure the cluster to use SSL client authentication. These, along with the client certificate for the user ‘testuser’ and a server certificate for ‘pgo-custom-ssl-container’, will make up the necessary configuration items to be stored in the ‘pgo-custom-ssl-config’ configmap.

**Example Steps** Run the script as follow:

```
cd $PGOROOT/examples/custom-config-ssl
./create.sh
```

This will generate a configmap named ‘pgo-custom-ssl-config’.

Once this configmap is created, run

```
pgo create cluster customsslcluster --custom-config pgo-custom-ssl-config -n ${PGO_NAMESPACE}
```

A required step to make this example work is to define in your /etc/hosts file an entry that maps ‘pgo-custom-ssl-container’ to the service cluster IP address for the container created above.

For instance, if your service has an address as follows:

<code>\${PGO_CMD} get service -n \${PGO_NAMESPACE}</code>				
NAME	CLUSTER-IP	EXTERNAL-IP	PORT(S)	AGE
customsslcluster	172.30.211.108	<none>	5432/TCP	

Then your /etc/hosts file needs an entry like this:

```
172.30.211.108 pgo-custom-ssl-container
```

For production Kubernetes and OpenShift installations, it will likely be preferred for DNS names to resolve to the PostgreSQL service name and generate server certificates using the DNS names instead of the example name pgo-custom-ssl-container.

If as a client it’s required to confirm the identity of the server, verify-full can be specified for ssl-mode in the connection string. This will check if the server and the server certificate have the same name. Additionally, the proper connection parameters must be specified in the connection string for the certificate information required to trust and verify the identity of the server (sslrootcert and sslcr1), and to authenticate the client using a certificate (sslcert and sslkey):

```
psql
"postgresql://testuser@pgo-custom-ssl-container:5432/userdb?sslmode=verify-full&sslrootcert=/home/
```

To connect via IP, sslmode can be changed to require. This will verify the server by checking the certificate chain up to the trusted certificate authority, but will not verify that the hostname matches the certificate, as occurs with verify-full. The same connection parameters as above can be then provided for the client and server certificate information. i

```
psql
"postgresql://testuser@IP_OF_PGSQL:5432/userdb?sslmode=require&sslrootcert=/home/pgo/odev/src/gith
```

You should see a connection that looks like the following:

```
psql (11.5)
SSL connection (protocol: TLSv1.2, cipher: ECDHE-RSA-AES256-GCM-SHA384, bits: 256, compression:
off)
Type "help" for help.

userdb=>
```

**Important Notes** Because SSL will be required for connections, certain features of the Operator will not function as expected. These include the following:

```
pgo test
pgo load
pgo apply
```

# Operator Eventing

The Operator creates events from the various life-cycle events going on within the Operator logic and driven by pgo users as they interact with the Operator and as Postgres clusters come and go or get updated.

## Event Watching

There is a pgo CLI command:

```
pgo watch alltopic
```

This command connects to the event stream and listens on a topic for event real-time. The command will not complete until the pgo user enters ctrl-C.

This command will connect to localhost:14150 (default) to reach the event stream. If you have the correct privileges to connect to the Operator pod, you can port forward as follows to form a connection to the event stream:

```
kubectll port-forward postgres-operator-XXXXXX 14150:4150 -n pgo
```

## Event Topics

The following topics exist that hold the various Operator generated events:

```
alltopic
clustertopic
backuptopic
loadtopic
postgresusertopic
policytopic
pgpooltopic
pgbouncertopic
pgotopic
pgousertopic
```

## Event Types

The various event types are found in the source code at <https://github.com/CrunchyData/postgres-operator/blob/master/events/eventtype.g>

## Event Testing

To test the event logic, you can run the test case for events as follows:

```
# create a connection locally to the event stream
kubectll port-forward postgres-operator-XXXXXX 14150:4150 -n pgo

# specify the event address
export EVENT_ADDR=localhost:14150

# run the test using foomatic as the name of the test cluster
# and pgouser1 as the name of the namespace to test against
cd testing/events
go test -run TestEventCreate -v --kubeconfig=/home/<yourhomedir>/.kube/config
    -clustername=foomatic -namespace=pgouser1
```

## Event Deployment

The Operator events are published and subscribed via the NSQ project software (<https://nsq.io/>). NSQ is found in the pgo-event container which is part of the postgres-operator deployment.

You can see the pgo-event logs by issuing the elog bash function found in the examples/envs.sh script.

NSQ looks for events currently at port 4150. The Operator sends events to the NSQ address as defined in the EVENT\_ADDR environment variable.

If you want to disable eventing when installing with Bash, set the following environment variable in the Operator Deployment: “name”: “DISABLE\_EVENTING” “value”: “true”

To disable eventing when installing with Ansible, add the following to your inventory file: pgo\_disable\_eventing=‘true’ — title: “Namespace” date: draft: false weight: 6 —

## Operator Namespaces

The Operator itself knows which namespace it is running within by referencing the PGO\_OPERATOR\_NAMESPACE environment variable at startup time from within its Deployment definition.

The PGO\_OPERATOR\_NAMESPACE environment variable a user sets in their .bashrc file is used to determine what namespace the Operator is deployed into. The PGO\_OPERATOR\_NAMESPACE variable is referenced by the Operator during deployment.

The .bashrc NAMESPACE environment variable a user sets determines which namespaces the Operator will watch.

## Namespace Watching

The Operator at startup time determines which namespaces it will service based on what it finds in the NAMESPACE environment variable that is passed into the Operator containers within the deployment.json file.

The NAMESPACE variable can hold different values which determine the namespaces which will be *watched* by the Operator.

The format of the NAMESPACE value is modeled after the following document:

<https://github.com/operator-framework/operator-lifecycle-manager/blob/master/Documentation/design/operatorgroups.md>

## OwnNamespace Example

Prior to version 4.0, the Operator was deployed into a single namespace and Postgres Clusters created by it were created in that same namespace.

To achieve that same deployment model you would use variable settings as follows:

```
export PGO_OPERATOR_NAMESPACE=pgo
export NAMESPACE=pgo
```

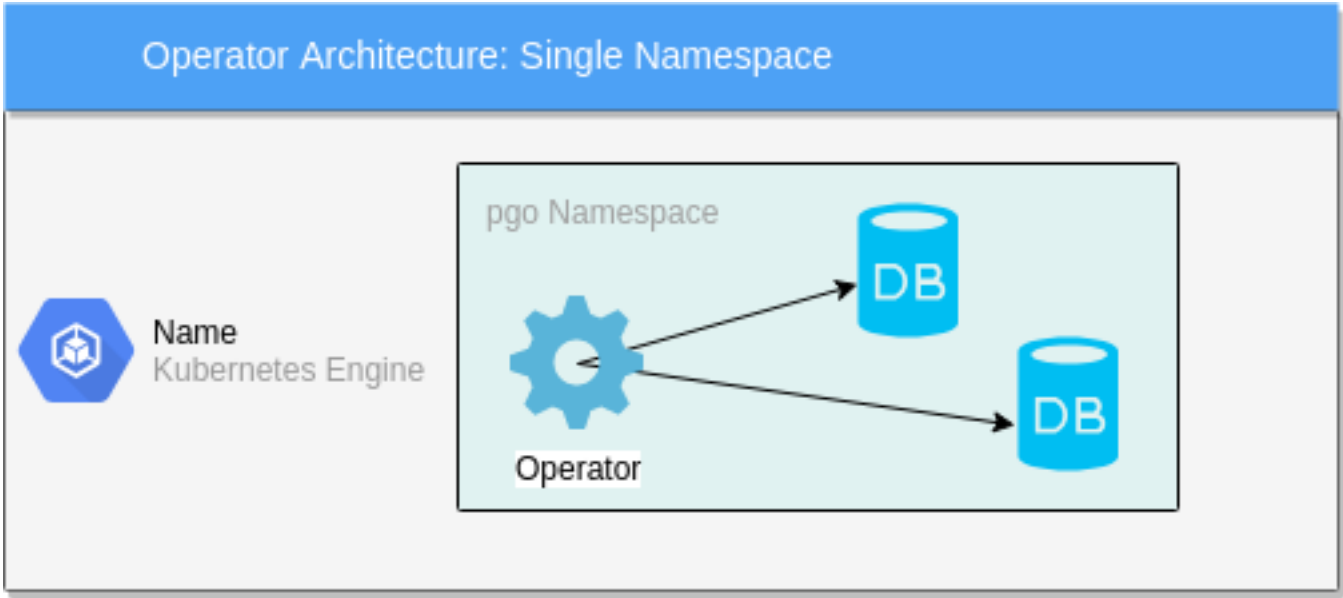


Figure 5: Reference

## SingleNamespace Example

To have the Operator deployed into its own namespace but create Postgres Clusters into a different namespace the variables would be as follows:

```
export PGO_OPERATOR_NAMESPACE=pgo
export NAMESPACE=pgouser1
```

## Operator Architecture: Different Namespaces for Operator and Targets



Figure 6: Reference

### MultiNamespace Example

To have the Operator deployed into its own namespace but create Postgres Clusters into more than one namespace the variables would be as follows:

```
export PGO_OPERATOR_NAMESPACE=pgo
export NAMESPACE=pgouser1,pgouser2
```

### AllNamespaces Example

To have the Operator deployed into its own namespace but create Postgres Clusters into any target namespace the variables would be as follows:

```
export PGO_OPERATOR_NAMESPACE=pgo
export NAMESPACE=
```

Here the empty string value represents *all* namespaces.

### RBAC

To support multiple namespace watching, the Operator deployment process changes somewhat from 3.X releases.

Each namespace to be watched requires its own copy of the the following resources for working with the Operator:

```
serviceaccount/pgo-backrest
secret/pgo-backrest-repo-config
role/pgo-role
rolebinding/pgo-role-binding
role/pgo-backrest-role
rolebinding/pgo-backrest-role-binding
```

When you run the `install-rbac.sh` script, it iterates through the list of namespaces to be watched and creates these resources into each of those namespaces.

## Operator Architecture: Different Namespaces for Operator and Targets



Figure 7: Reference

## Operator Architecture: Operator Watching All Namespaces



Figure 8: Reference

If you need to add a new namespace that the Operator will watch after an initial execution of install-rbac.sh, you will need to run the following for each new namespace:

```
create-target-rbac.sh YOURNEWNAMESPACE $PGO_OPERATOR_NAMESPACE
```

The example deployment creates the following RBAC structure on your Kube system after running the install scripts:



Figure 9: Reference

## pgo Clients and Namespaces

The *pgo* CLI now is required to identify which namespace it wants to use when issuing commands to the Operator. Users of *pgo* can either create a PGO\_NAMESPACE environment variable to set the namespace in a persistent manner or they can specify it on the *pgo* command line using the *-namespace* flag. If a *pgo* request does not contain a valid namespace the request will be rejected.

## Operator Lifecycle Management

The Postgres Operator supports Redhats OLM (operator lifecycle manager) to a degree starting with pgo 4.0. The Postgres Operator supports the different deployment models as documented here: <https://github.com/operator-framework/operator-lifecycle-manager/blob/master/Documentation/design/operatorgroups.md>

## Operator Hub

The Operator shows up on the Redhat Operator Hub at the following location: <https://www.operatorhub.io/operator/postgres-operator.v3.5.0>

## pgo update pgouser

Update a pgouser

Synopsis

UPDATE allows you to update a pgo user. For example: pgo update pgouser myuser -pgouser-roles=somerole pgo update pgouser myuser -pgouser-password=somepassword -pgouser-roles=somerole pgo update pgouser myuser -pgouser-password=somepassword -no-prompt

pgo update pgouser [flags]

Options

--all-namespaces	all namespaces.
-h, --help	help for pgouser
--no-prompt	No command line confirmation.
--pgouser-namespaces string	The namespaces to use for updating the pgouser roles.
--pgouser-password string	The password to use for updating the pgouser password.
--pgouser-roles string	The roles to use for updating the pgouser roles.

Options inherited from parent commands

--apiserver-url string	The URL for the PostgreSQL Operator apiserver.
--debug	Enable debugging when true.
-n, --namespace string	The namespace to use for pgo requests.
--pgo-ca-cert string	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-cert string	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-key string	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

SEE ALSO

- [pgo update](#) - Update a pgouser, pgorole, or cluster

Auto generated by spf13/cobra on 15-Aug-2019

pgo update user

Update a postgres user

Synopsis

UPDATE allows you to update a pgo user. For example: //change a password pgo update user mycluster -username=someuser -password=foo -update-passwords -expired=200 //expire password for a user pgo update user mycluster -username=someuser -expire-user

pgo update user [flags]

Options

--all	all clusters.
--expire-user	Performs expiring a user if set to true.
--expired string	required flag when updating passwords that will expire in X days using --update-passwords flag.
-h, --help	help for user
--password string	Specifies the user password when updating a user password or creating a new user.
--password-length int	If no password is supplied, this is the length of the auto generated password (default 22)
-s, --selector string	The selector to use for cluster filtering.
--username string	Updates the postgres user on selective clusters.
--valid-days int	Sets passwords for new users to X days. (default 30)

Options inherited from parent commands

```

--apiserver-url string    The URL for the PostgreSQL Operator apiserver.
--debug                  Enable debugging when true.
-n, --namespace string   The namespace to use for pgo requests.
--pgo-ca-cert string     The CA Certificate file path for authenticating to the PostgreSQL
    Operator apiserver.
--pgo-client-cert string  The Client Certificate file path for authenticating to the
    PostgreSQL Operator apiserver.
--pgo-client-key string   The Client Key file path for authenticating to the PostgreSQL
    Operator apiserver.

```

## SEE ALSO

- [pgo update](#) - Update a pgouser, pgorole, or cluster

Auto generated by spf13/cobra on 15-Aug-2019

## pgo upgrade

Perform an upgrade

### Synopsis

UPGRADE performs an upgrade on a PostgreSQL cluster. For example:

```
pgo upgrade mycluster
```

```
pgo upgrade [flags]
```

### Options

```

--ccp-image-tag string  The CCPImageTag to use for cluster creation. If specified,
    overrides the pgo.yaml setting.
-h, --help              help for upgrade

```

### Options inherited from parent commands

```

--apiserver-url string    The URL for the PostgreSQL Operator apiserver.
--debug                  Enable debugging when true.
-n, --namespace string   The namespace to use for pgo requests.
--pgo-ca-cert string     The CA Certificate file path for authenticating to the PostgreSQL
    Operator apiserver.
--pgo-client-cert string  The Client Certificate file path for authenticating to the
    PostgreSQL Operator apiserver.
--pgo-client-key string   The Client Key file path for authenticating to the PostgreSQL
    Operator apiserver.

```

## SEE ALSO

- [pgo](#) - The pgo command line interface.

Auto generated by spf13/cobra on 15-Aug-2019

## pgo user

Manage PostgreSQL users

### Synopsis

USER allows you to manage users and passwords across a set of clusters. For example:

```
pgo user --selector=name=mycluster --update-passwords
```

```
pgo user --change-password=bob --expired=300 --selector=name=mycluster --password=newpass
```

```
pgo user [flags]
```



Options

--change-password string	Updates the password for a user on selective clusters.
--db string	Grants the user access to a database.
--expired string	required flag when updating passwords that will expire in X days
using --update-passwords flag.	
-h, --help	help for user
--password string	Specifies the user password when updating a user password or creating a new user.
--password-length int	If no password is supplied, this is the length of the auto generated password (default 12)
-s, --selector string	The selector to use for cluster filtering.
--update-passwords	Performs password updating on expired passwords.
--valid-days int	Sets passwords for new users to X days. (default 30)

Options inherited from parent commands

--apiserver-url string	The URL for the PostgreSQL Operator apiserver.
--debug	Enable debugging when true.
-n, --namespace string	The namespace to use for pgo requests.
--pgo-ca-cert string	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-cert string	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-key string	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

SEE ALSO

- [pgo](#) - The pgo command line interface.

Auto generated by spf13/cobra on 23-Jul-2019

pgo version

Print version information for the PostgreSQL Operator

Synopsis

VERSION allows you to print version information for the postgres-operator. For example:

```
pgo version
```

```
pgo version [flags]
```

Options

-h, --help	help for version
------------	------------------

Options inherited from parent commands

--apiserver-url string	The URL for the PostgreSQL Operator apiserver.
--debug	Enable debugging when true.
-n, --namespace string	The namespace to use for pgo requests.
--pgo-ca-cert string	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-cert string	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-key string	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

SEE ALSO

- [pgo](#) - The pgo command line interface.

Auto generated by spf13/cobra on 15-Aug-2019

# pgo watch

Print watch information for the PostgreSQL Operator

## Synopsis

WATCH allows you to watch event information for the postgres-operator. For example: `pgo watch -pgo-event-address=localhost:14150 alltopic pgo watch alltopic`

```
pgo watch [flags]
```

## Options

```
-h, --help                help for watch
-a, --pgo-event-address string  The address (host:port) where the event stream is. (default "localhost:14150")
```

## Options inherited from parent commands

```
--apiserver-url string  The URL for the PostgreSQL Operator apiserver.
--debug                Enable debugging when true.
-n, --namespace string  The namespace to use for pgo requests.
--pgo-ca-cert string    The CA Certificate file path for authenticating to the PostgreSQL
                        Operator apiserver.
--pgo-client-cert string The Client Certificate file path for authenticating to the
                        PostgreSQL Operator apiserver.
--pgo-client-key string  The Client Key file path for authenticating to the PostgreSQL
                        Operator apiserver.
```

## SEE ALSO

- [pgo](#) - The pgo command line interface.

Auto generated by spf13/cobra on 15-Aug-2019

# Configuring Encryption of PostgreSQL Operator API Connection

The PostgreSQL Operator REST API connection is encrypted with keys stored in the *pgo.tls* Secret.

The pgo.tls Secret can be generated prior to starting the PostgreSQL Operator or you can let the PostgreSQL Operator generate the Secret for you if the Secret does not exist.

Adjust the default keys to meet your security requirements using your own keys. The *pgo.tls* Secret is created when you run:

```
make deployoperator
```

The keys are generated when the RBAC script is executed by the cluster admin:

```
make installrbac
```

In some scenarios like an OLM deployment, it is preferable for the Operator to generate the Secret keys at runtime, if the pgo.tls Secret does not exit when the Operator starts, a new TLS Secret will be generated.

In this scenario, you can extract the generated Secret TLS keys using:

```
kubect1 cp <pgo-namespace>/<pgo-pod>:/tmp/server.key /tmp/server.key -c apiserver
kubect1 cp <pgo-namespace>/<pgo-pod>:/tmp/server.crt /tmp/server.crt -c apiserver
```

example of the command below:

```
kubect1 cp pgo/postgres-operator-585584f57d-ntwr5:tmp/server.key /tmp/server.key -c apiserver
kubect1 cp pgo/postgres-operator-585584f57d-ntwr5:tmp/server.crt /tmp/server.crt -c apiserver
```

This server.key and server.crt can then be used to access the *pgo-apiserver* from the pgo CLI by setting the following variables in your client environment:

```
export PGO_CA_CERT=/tmp/server.crt
export PGO_CLIENT_CERT=/tmp/server.crt
export PGO_CLIENT_KEY=/tmp/server.key
```

You can view the TLS secret using:

```
kubect1 get secret pgo.tls -n pgo
```

or

```
oc get secret pgo.tls -n pgo
```

If you create the Secret outside of the Operator, for example using the default installation script, the key and cert that are generated by the default installation are found here:

```
$PGOROOT/conf/postgres-operator/server.crt
$PGOROOT/conf/postgres-operator/server.key
```

The key and cert are generated using the *deploy/gen-api-keys.sh* script.

That script gets executed when running:

```
make installrbac
```

You can extract the server.key and server.crt from the Secret using the following:

```
oc get secret pgo.tls -n $PGO_OPERATOR_NAMESPACE -o jsonpath='{.data.tls\.key}' | base64 --decode
> /tmp/server.key
oc get secret pgo.tls -n $PGO_OPERATOR_NAMESPACE -o jsonpath='{.data.tls\.cert}' | base64 --decode
> /tmp/server.crt
```

This server.key and server.crt can then be used to access the *pgo-apiserver* REST API from the pgo CLI on your client host.

## PostgreSQL Operator RBAC

The *conf/postgres-operator/pgorole* file is read at start up time when the operator is deployed to the Kubernetes cluster. This file defines the PostgreSQL Operator roles whereby PostgreSQL Operator API users can be authorized.

The *conf/postgres-operator/pgouser* file is read at start up time also and contains username, password, role, and namespace information as follows:

```
username:password:pgoadmin:
pgouser1:password:pgoadmin:pgouser1
pgouser2:password:pgoadmin:pgouser2
pgouser3:password:pgoadmin:pgouser1,pgouser2
readonlyuser:password:pgoreader:
```

The format of the pgouser server file is:

```
<username>:<password>:<role>:<namespace,namespace>
```

The namespace is a comma separated list of namespaces that user has access to. If you do not specify a namespace, then all namespaces is assumed, meaning this user can access any namespace that the Operator is watching.

A user creates a *.pgouser* file in their \$HOME directory to identify themselves to the Operator. An entry in *.pgouser* will need to match entries in the *conf/postgres-operator/pgouser* file. A sample *.pgouser* file contains the following:

```
username:password
```

The format of the *.pgouser* client file is:

```
<username>:<password>
```

The users pgouser file can also be located at:

*/etc/pgo/pgouser*

or it can be found at a path specified by the PGOUSER environment variable.

If the user tries to access a namespace that they are not configured for within the server side *pgouser* file then they will get an error message as follows:

```
Error: user [pgouser1] is not allowed access to namespace [pgouser2]
```

The following list shows the current complete list of possible pgo permissions that you can specify within the *pgorole* file when creating roles:

Permission	Description
ApplyPolicy	allow <i>pgo apply</i>
Cat	allow <i>pgo cat</i>
CreateBackup	allow <i>pgo backup</i>
CreateBenchmark	allow <i>pgo create benchmark</i>
CreateCluster	allow <i>pgo create cluster</i>
CreateDump	allow <i>pgo create pgdump</i>
CreateFailover	allow <i>pgo failover</i>
CreatePgbouncer	allow <i>pgo create pgbouncer</i>
CreatePgpool	allow <i>pgo create pgpool</i>
CreatePolicy	allow <i>pgo create policy</i>
CreateSchedule	allow <i>pgo create schedule</i>
CreateUpgrade	allow <i>pgo upgrade</i>
CreateUser	allow <i>pgo create user</i>
DeleteBackup	allow <i>pgo delete backup</i>
DeleteBenchmark	allow <i>pgo delete benchmark</i>
DeleteCluster	allow <i>pgo delete cluster</i>
DeletePgbouncer	allow <i>pgo delete pgbouncer</i>
DeletePgpool	allow <i>pgo delete pgpool</i>
DeletePolicy	allow <i>pgo delete policy</i>
DeleteSchedule	allow <i>pgo delete schedule</i>
DeleteUpgrade	allow <i>pgo delete upgrade</i>
DeleteUser	allow <i>pgo delete user</i>
DfCluster	allow <i>pgo df</i>
Label	allow <i>pgo label</i>
Load	allow <i>pgo load</i>
Ls	allow <i>pgo ls</i>
Reload	allow <i>pgo reload</i>
Restore	allow <i>pgo restore</i>
RestoreDump	allow <i>pgo restore</i> for pgdumps
ShowBackup	allow <i>pgo show backup</i>
ShowBenchmark	allow <i>pgo show benchmark</i>
ShowCluster	allow <i>pgo show cluster</i>
ShowConfig	allow <i>pgo show config</i>
ShowPolicy	allow <i>pgo show policy</i>
ShowPVC	allow <i>pgo show pvc</i>
ShowSchedule	allow <i>pgo show schedule</i>
ShowNamespace	allow <i>pgo show namespace</i>
ShowUpgrade	allow <i>pgo show upgrade</i>
ShowWorkflow	allow <i>pgo show workflow</i>
Status	allow <i>pgo status</i>
TestCluster	allow <i>pgo test</i>
UpdateCluster	allow <i>pgo update cluster</i>
User	allow <i>pgo user</i>
Version	allow <i>pgo version</i>

If the user is unauthorized for a pgo command, the user will get back this response:

```
Error: Authentication Failed: 401
```

## Making Security Changes

Importantly, it is necessary to redeploy the PostgreSQL Operator prior to giving effect to the user security changes in the pgouser and pgorole files:

```
make deployoperator
```

Performing this command will recreate the *pgo-config* ConfigMap that stores these files and is mounted by the Operator during its initialization.

## Installation of PostgreSQL Operator RBAC

Please note, installation of the PostgreSQL Operator RBAC requires Kubernetes Cluster-Admin.

The first step is to install the PostgreSQL Operator RBAC configuration. This can be accomplished by running:

```
make installrbac
```

This script will install the PostgreSQL Operator Custom Resource Definitions, CRD's and creates the following RBAC resources on your Kubernetes cluster:

Setting	Definition
Custom Resource Definitions (crd.yaml)	pgbackups
	pgclusters
	pgpolicies
	pgreplicas
	pgtasks
	pgupgrades
Cluster Roles (cluster-roles.yaml)	pgopclusterrole
	pgopclusterrolecrd
Cluster Role Bindings (cluster-roles-bindings.yaml)	pgopclusterbinding
	pgopclusterbindingcrd
Service Account (service-accounts.yaml)	postgres-operator
	pgo-backrest
Roles (rbac.yaml)	pgo-role
	pgo-backrest-role
Role Bindings (rbac.yaml)	pgo-backrest-role-binding
	pgo-role-binding

Note that the cluster role bindings have a naming convention of `pgopclusterbinding-PGO_OPERATOR_NAMESPACE` and `pgopclusterbinding-PGO_OPERATOR_NAMESPACE`. The `PGO_OPERATOR_NAMESPACE` environment variable is added to make each cluster role binding name unique and to support more than a single PostgreSQL Operator being deployed on the same Kubernetes cluster.

## Prerequisites

The following is required prior to installing PostgreSQL Operator:

- Kubernetes v1.13+
- Red Hat OpenShift v3.11+
- VMWare Enterprise PKS 1.3+
- `kubectl` or `oc` configured to communicate with Kubernetes

# Upgrading the Operator

Various Operator releases will require action by the Operator administrator of your organization in order to upgrade to the next release of the Operator. Some upgrade steps are automated within the Operator but not all are possible at this time.

This section of the documentation shows specific steps required to the latest version from the previous version.

## Upgrading to Version 4.1.0 From Previous Versions

- The pgouser and pgorole files are no longer used for authentication with the server. The users and roles are now created using Kubernetes secrets and commands that are built into the operator. To migrate the users and roles that are currently setup in the operator you can run the upgrade script. The `upgrade-creds.sh` script in the `$PGOROOT/deploy` directory and will use the pgouser and pgorole files that are in `$PGOROOT/conf/postgres-operator` directory by default. You can also pass in the path to the files as command line arguments by running `$PGOROOT/deploy/upgrade-creds.sh /path/to/pgorole /path/to/pgouser`. The new secrets can be see by running `kubectl get secrets -n $PGO_OPERATOR_NAMESPACE`.

## Upgrading to Version 3.5.0 From Previous Versions

- For clusters created in prior versions that used pgbackrest, you will be required to first create a pgbasebackup for those clusters, and after upgrading to Operator 3.5, you will need to restore those clusters from the pgbasebackup into a new cluster with *pgbackrest* enabled, this is due to the new pgbackrest shared repository being implemented in 3.5. This is a breaking change for anyone that used pgbackrest in Operator versions prior to 3.5.
- The pgingest CRD is removed. You will need to manually remove it from any deployments of the operator after upgrading to this version. This includes removing ingest related permissions from the pgorole file. Additionally, the API server now removes the ingest related API endpoints.
- Primary and replica labels are only applicable at cluster creation and are not updated after a cluster has executed a failover. A new *service-name* label is applied to PG cluster components to indicate whether a deployment/pod is a primary or replica. *service-name* is also the label now used by the cluster services to route with. This scheme allows for an almost immediate failover promotion and avoids the pod having to be bounced as part of a failover. Any existing PostgreSQL clusters will need to be updated to specify them as a primary or replica using the new *service-name* labeling scheme.
- The autofail label was moved from deployments and pods to just the pgcluster CRD to support autofail toggling.
- The storage configurations in *pgo.yaml* support the MatchLabels attribute for NFS storage. This will allow users to have more than a single NFS backend,. When set, this label (key=value) will be used to match the labels on PVs when a PVC is created.
- The UpdateCluster permission was added to the sample pgorole file to support the new pgo update CLI command. It was also added to the pgoperm file.
- The pgo.yaml adds the PreferredFailoverNode setting. This is a Kubernetes selector string (e.g. key=value). This value if set, will cause fail-over targets to be preferred based on the node they run on if that node is in the set of *preferred*.
- The ability to select nodes based on a selector string was added. For this to feature to be used, multiple replicas have to be in a ready state, and also at the same replication status. If those conditions are not met, the default fail-over target selection is used.
- The pgo.yaml file now includes a new storage configuration, XlogStorage, which when set will cause the xlog volume to be allocated using this storage configuration. If not set, the PrimaryStorage configuration will be used.
- The pgo.yaml file now includes a new storage configuration, BackrestStorage, will cause the pgbackrest shared repository volume to be allocated using this storage configuration.
- The pgo.yaml file now includes a setting, AutofailReplaceReplica, which will enable or disable whether a new replica is created as part of a fail-over. This is turned off by default.

See the GitHub Release notes for the features and other notes about a specific release.

## Upgrading a Cluster from Version 3.5.x to 4.0

This section will outline the procedure to upgrade a given cluster created using Postgres Operator 3.5.x to 4.0.

- 1) Create a new Centos/Redhat user with the same permissions are the existing user used to install the Crunchy Postgres Operator. This is necessary to avoid any issues with environment variable differences between 3.5 and 4.0.
- 2) For the cluster(s) you wish to upgrade, scale down any replicas, if necessary, then delete the cluster  
pgo delete cluster

IMPORTANT NOTES: Please note the name of each cluster, the namespace used, and be sure not to delete the associated PVCs or CRDs!

- 3) Delete the 3.5.x version of the operator by executing:  
`COROOT/deploy/cleanup.shCOROOT/deploy/remove-crd.sh`
- 4) Log in as your new Linux user and install the 4.0 Postgres Operator. Be sure to add the existing namespace to the list of watched namespaces (see the ‘Getting Started->Design->Namespace’ section of this document for more information) and make sure to avoid overwriting any existing data storage.
- 5) Once the Operator is installed and functional, create a new 4.0 cluster with the same name as was used previously. This will allow the new cluster to utilize the existing PVCs.  
`pgo create cluster -n`
- 6) Manually update the old leftover Secrets to use the new label as defined in 4.0:  
`kubectrl label secret/-postgres-secret pg-cluster= -n kubectrl label secret/-primaryuser-secret pg-cluster= -n kubectrl label secret/-testuser-secret pg-cluster= -n`
- 7) To verify cluster status, run `pgo test -n` Output should be similar to:  

```
psql -p 5432 -h 10.104.74.189 -U postgres postgres is Working
psql -p 5432 -h 10.104.74.189 -U postgres userdb is Working
psql -p 5432 -h 10.104.74.189 -U primaryuser postgres is Working
psql -p 5432 -h 10.104.74.189 -U primaryuser userdb is Working
psql -p 5432 -h 10.104.74.189 -U testuser postgres is Working
psql -p 5432 -h 10.104.74.189 -U testuser userdb is Working
```
- 8) Scale up to the required number of replicas, as needed.

## Documentation

The [documentation website](#) is generated using [Hugo](#).

## Hosting Hugo Locally (Optional)

If you would like to build the documentation locally, view the [official Installing Hugo](#) guide to set up Hugo locally.

You can then start the server by running the following commands -

```
cd $COROOT/hugo/
hugo server
```

The local version of the Hugo server is accessible by default from `localhost:1313`. Once you’ve run `hugo server`, that will let you interactively make changes to the documentation as desired and view the updates in real-time.

## Contributing to the Documentation

All documentation is in Markdown format and uses Hugo weights for positioning of the pages.

The current production release documentation is updated for every tagged major release.

When you’re ready to commit a change, please verify that the documentation generates locally.

If you would like to submit an feature / issue for us to consider please submit an to the official [GitHub Repository](#).

If you would like to work the issue, please add that information in the issue so that we can confirm we are not already working no need to duplicate efforts.

If you have any question you can submit a Support - Question and Answer issue and we will work with you on how you can get more involved.

So you decided to submit an issue and work it. Great! Let’s get it merged in to the codebase. The following will go a long way to helping get the fix merged in quicker.

1. Create a Pull Request from your Fork to the Develop branch.
2. Update the checklists in the Pull Request Description.
3. Reference which issues this Pull Request is resolving.

A full installation of the Operator includes the following steps:

- create a project structure
- configure your environment variables
- configure Operator templates
- create security resources
- deploy the operator
- install pgo CLI (end user command tool)

Operator end-users are only required to install the pgo CLI client on their host and can skip the server-side installation steps. pgo CLI clients are provided for Linux, Mac, and Windows clients.

The Operator can be deployed by multiple methods including:

- default installation
- Ansible playbook installation
- Openshift Console installation using OLM

## Default Installation - Create Project Structure

The Operator follows a go-lang project structure, you can create a structure as follows on your local Linux host:

```
mkdir -p $HOME/odev/src/github.com/crunchydata $HOME/odev/bin $HOME/odev/pkg
cd $HOME/odev/src/github.com/crunchydata
git clone https://github.com/CrunchyData/postgres-operator.git
cd postgres-operator
git checkout 4.1.0
```

This creates a directory structure under your HOME directory name *odev* and clones the current Operator version to that structure.

## Default Installation - Configure Environment

Environment variables control aspects of the Operator installation. You can copy a sample set of Operator environment variables and aliases to your *.bashrc* file to work with.

```
cat $HOME/odev/src/github.com/crunchydata/postgres-operator/examples/envs.sh >> $HOME/.bashrc
source $HOME/.bashrc
```

For various scripts used by the Operator, the *expenv* utility is required, download this utility from the Github Releases page, and place it into your PATH (e.g. \$HOME/odev/bin). {{% notice tip %}}There is also a Makefile target that includes *expenv* and several other dependencies that are only needed if you plan on building from source:

```
make setup
```

{{% /notice %}}

## Default Installation - Namespace Creation

The default installation will create 3 namespaces to use for deploying the Operator into and for holding Postgres clusters created by the Operator.

Creating Kube namespaces is typically something that only a privileged Kube user can perform so log into your Kube cluster as a user that has the necessary privileges.

On Openshift if you do not want to install the Operator as the system administrator, you can grant cluster-admin privileges to a user as follows:

```
oc adm policy add-cluster-role-to-user cluster-admin pgoinstaller
```

In the above command, you are granting cluster-admin privileges to a user named pgoinstaller.

The *NAMESPACE* environment variable is a comma separated list of namespaces that specify where the Operator will be provisioning PG clusters into, specifically, the namespaces the Operator is watching for Kube events. This value is set as follows:

```
export NAMESPACE=pgouser1,pgouser2
```

This means namespaces called *pgouser1* and *pgouser2* will be created as part of the default installation.

The *PGO\_OPERATOR\_NAMESPACE* environment variable is a comma separated list of namespace values that the Operator itself will be deployed into. For the installation example, this value is set as follows:



```
export PGO_OPERATOR_NAMESPACE=pgo
```

This means a *pgo* namespace will be created and the Operator will be deployed into that namespace.

Create the Operator namespaces using the Makefile target:

```
make setupnamespaces
```

The [Design](#) section of this documentation talks further about the use of namespaces within the Operator.

## Default Installation - Configure Operator Templates

Within the Operator *conf* directory are several configuration files and templates used by the Operator to determine the various resources that it deploys on your Kubernetes cluster, specifically the PostgreSQL clusters it deploys.

When you install the Operator you must make choices as to what kind of storage the Operator has to work with for example. Storage varies with each installation. As an installer, you would modify these configuration templates used by the Operator to customize its behavior.

**Note:** when you want to make changes to these Operator templates and configuration files after your initial installation, you will need to re-deploy the Operator in order for it to pick up any future configuration changes.

Here are some common examples of configuration changes most installers would make:

### Storage

Inside *conf/postgres-operator/pgo.yaml* there are various storage configurations defined.

```
PrimaryStorage: gce
XlogStorage: gce
ArchiveStorage: gce
BackupStorage: gce
ReplicaStorage: gce
gce:
  AccessMode:  ReadWriteOnce
  Size:        1G
  StorageType: dynamic
  StorageClass: standard
  Fsgroup:     26
```

Listed above are the *pgo.yaml* sections related to storage choices. *PrimaryStorage* specifies the name of the storage configuration used for PostgreSQL primary database volumes to be provisioned. In the example above, a NFS storage configuration is picked. That same storage configuration is selected for the other volumes that the Operator will create.

This sort of configuration allows for a PostgreSQL primary and replica to use different storage if you want. Other storage settings like *AccessMode*, *Size*, *StorageType*, *StorageClass*, and *Fsgroup* further define the storage configuration. Currently, NFS, HostPath, and Storage Classes are supported in the configuration.

As part of the Operator installation, you will need to adjust these storage settings to suit your deployment requirements. For users wanting to try out the Operator on Google Kubernetes Engine you would make the following change to the storage configuration in *pgo.yaml*:

For NFS Storage, it is assumed that there are sufficient Persistent Volumes (PV) created for the Operator to use when it creates Persistent Volume Claims (PVC). The creation of Persistent Volumes is something a Kubernetes cluster-admin user would typically provide before installing the Operator. There is an example script which can be used to create NFS Persistent Volumes located here:

```
./pv/create-nfs-pv.sh
```

That script looks for the IP address of an NFS server using the environment variable *PGO\_NFS\_IP* you would set in your *.bashrc* environment.

A similar script is provided for HostPath persistent volume creation if you wanted to use HostPath for testing:

```
./pv/create-pv.sh
```

Adjust the above PV creation scripts to suit your local requirements, the purpose of these scripts are solely to produce a test set of Volume to test the Operator.

Other settings in *pgo.yaml* are described in the [pgo.yaml Configuration](#) section of the documentation.

# Operator Security

The Operator implements its own RBAC (Role Based Access Controls) for authenticating Operator users access to the Operator REST API.

A default admin user is created when the operator is deployed. Create a .pgouser in your home directory and insert the text from below:

```
pgoadmin:examplepassword
```

The format of the .pgouser client file is:

```
<username>:<password>
```

To create a unique administrator user on deployment of the operator edit this file and update the .pgouser file accordingly:

```
$PGOROOT/deploy/install-bootstrap-creds.sh
```

After installation users can create optional Operator users as follows:

```
pgo create pgouser someuser --pgouser-namespaces="pgouser1,pgouser2"
--pgouser-password=somepassword --pgouser-roles="somerole,someotherrole"
```

Note, you can also store the pgouser file in alternate locations, see the Security documentation for details.

Operator security is discussed in the Security section [Security](#) of the documentation.

Adjust these settings to meet your local requirements.

## Default Installation - Create Kube RBAC Controls

The Operator installation requires Kubernetes administrators to create Resources required by the Operator. These resources are only allowed to be created by a cluster-admin user. To install on Google Cloud, you will need a user account with cluster-admin priviledges. If you own the GKE cluster you are installing on, you can add cluster-admin role to your account as follows:

```
kubect1 create clusterrolebinding cluster-admin-binding --clusterrole cluster-admin --user
$(gcloud config get-value account)
```

Specifically, Custom Resource Definitions for the Operator, and Service Accounts used by the Operator are created which require cluster permissions.

Tor create the Kube RBAC used by the Operator, run the following as a cluster-admin Kube user:

```
make installrbac
```

This set of Resources is created a single time unless a new Operator release requires these Resources to be recreated. Note that when you run *make installrbac* the set of keys used by the Operator REST API and also the pgbackrest ssh keys are generated.

Verify the Operator Custom Resource Definitions are created as follows:

```
kubect1 get crd
```

You should see the *pgclusters* CRD among the listed CRD resource types.

See the Security documentation for a description of the various RBAC resources created and used by the Operator.

## Default Installation - Deploy the Operator

At this point, you as a normal Kubernetes user should be able to deploy the Operator. To do this, run the following Makefile target:

```
make deployoperator
```

This will cause any existing Operator to be removed first, then the configuration to be bundled into a ConfigMap, then the Operator Deployment to be created.

This will create a postgres-operator Deployment and a postgres-operator Service.Operator administrators needing to make changes to the Operator configuration would run this make target to pick up any changes to pgo.yaml, pgo users/roles, or the Operator templates.

## Default Installation - Completely Cleaning Up

You can completely remove all the namespaces you have previously created using the default installation by running the following:

```
make cleannamespaces
```

This will permanently delete each namespace the Operator installation created previously.

## pgo CLI Installation

Most users will work with the Operator using the *pgo* CLI tool. That tool is downloaded from the GitHub Releases page for the Operator (<https://github.com/crunchydata/postgres-operator/releases>). Crunchy Enterprise Customer can download the pgo binaries from <https://access.crunchydata.com/> on the downloads page.

The *pgo* client is provided in Mac, Windows, and Linux binary formats, download the appropriate client to your local laptop or workstation to work with a remote Operator.

Prior to using *pgo*, users testing the Operator on a single host can specify the *postgres-operator* URL as follows:

```
$ kubectl get service postgres-operator -n pgo
NAME                CLUSTER-IP      EXTERNAL-IP      PORT(S)          AGE
postgres-operator   10.104.47.110    <none>           8443/TCP         7m
$ export PGO_APISERVER_URL=https://10.104.47.110:8443
pgo version
```

That URL address needs to be reachable from your local *pgo* client host. Your Kubernetes administrator will likely need to create a network route, ingress, or LoadBalancer service to expose the Operator REST API to applications outside of the Kubernetes cluster. Your Kubernetes administrator might also allow you to run the Kubernetes port-forward command, contact your adminstrator for details.

Next, the *pgo* client needs to reference the keys used to secure the Operator REST API:

```
export PGO_CA_CERT=$PGOROOT/conf/postgres-operator/server.crt
export PGO_CLIENT_CERT=$PGOROOT/conf/postgres-operator/server.crt
export PGO_CLIENT_KEY=$PGOROOT/conf/postgres-operator/server.key
```

You can also specify these keys on the command line as follows:

```
pgo version --pgo-ca-cert=$PGOROOT/conf/postgres-operator/server.crt
--pgo-client-cert=$PGOROOT/conf/postgres-operator/server.crt
--pgo-client-key=$PGOROOT/conf/postgres-operator/server.key
```

{{% notice tip %}} if you are running the Operator on Google Cloud, you would open up another terminal and run *kubectl port-forward* ... to forward the Operator pod port 8443 to your localhost where you can access the Operator API from your local workstation. {{%/notice %}}

At this point, you can test connectivity between your laptop or workstation and the Postgres Operator deployed on a Kubernetes cluster as follows:

```
pgo version
```

You should get back a valid response showing the client and server version numbers.

## Verify the Installation

Now that you have deployed the Operator, you can verify that it is running correctly.

You should see a pod running that contains the Operator:

```
kubectl get pod --selector=name=postgres-operator -n pgo
NAME                READY    STATUS    RESTARTS    AGE
postgres-operator-79bf94c658-zczf6   3/3     Running   0           47s
```

That pod should show 3 of 3 containers in *running* state and that the operator is installed into the *pgo* namespace.

The sample environment script, *examples/env.sh*, if used creates some bash functions that you can use to view the Operator logs. This is useful in case you find one of the Operator containers not in a running status.

Using the pgo CLI, you can verify the versions of the client and server match as follows:

```
pgo version
```

This also tests connectivity between your pgo client host and the Operator server.

## Developing

The [Postgres-Operator](#) is an open source project hosted on GitHub.

Developers that wish to build the Operator from source or contribute to the project via pull requests would set up a development environment through the following steps.

# Create Kubernetes Cluster

We use either OpenShift Container Platform or kubeadm to install development clusters.

## Create a Local Development Host

We currently build on CentOS 7 and RHEL 7 hosts. Others operating systems are possible, however we do not support building or running the Operator on other operating systems at this time.

## Perform Manual Install

You can follow the manual installation method described in this documentation to make sure you can deploy from your local development host to your Kubernetes cluster.

## Build Locally

You can now build the Operator from source on local on your development host. Here are some steps to follow:

### Get Build Dependencies

Run the following target to install a go lang compiler, and any other build dependencies:

```
make setup
```

### Compile

You will build all the Operator binaries and Docker images by running:

```
make all
```

This assumes you have Docker installed and running on your development host.

The project uses the go lang dep package manager to vendor all the go lang source dependencies into the *vendor* directory. You typically do not need to run any *dep* commands unless you are adding new go lang package dependencies into the project outside of what is within the project for a given release.

After a full compile, you will have a *pgo* binary in `$HOME/odev/bin` and the Operator images in your local Docker registry.

### Release

You can perform a release build by running:

```
make release
```

This will compile the Mac and Windows versions of *pgo*.

### Deploy

Now that you have built the Operator images, you can push them to your Kubernetes cluster if that cluster is remote to your development host.

You would then run:

```
make deployoperator
```

To deploy the Operator on your Kubernetes cluster. If your Kubernetes cluster is not local to your development host, you will need to specify a config file that will connect you to your Kubernetes cluster. See the Kubernetes documentation for details.

## Debug

Debug level logging is turned on by default when deploying the Operator.

Sample bash functions are supplied in *examples/envs.sh* to view the Operator logs.

You can view the Operator REST API logs with the *alog* bash function.

You can view the Operator core logic logs with the *olog* bash function.

You can view the Scheduler logs with the *slog* bash function.

You can enable the *pgo* CLI debugging with the following flag:

```
pgo version --debug
```

You can set the REST API URL as follows after a deployment if you are developing on your local host by executing the *setip* bash function.

## Install the Postgres Operator (pgo) Client

The following will install and configure the **pgo** client on all systems. For the purpose of these instructions it's assumed that the Crunchy PostgreSQL Operator is already deployed.

### Prerequisites

- For Kubernetes deployments: [kubectl](#) configured to communicate with Kubernetes
- For OpenShift deployments: [oc](#) configured to communicate with OpenShift

The Crunchy Postgres Operator also requires the following in order to authenticate with the apiserver:

- Client CA Certificate
- Client TLS Certificate
- Client Key
- **pgouser** file containing `<username>:<password>`

All of the requirements above should be obtained from an administrator who installed the Crunchy PostgreSQL Operator.

## Linux and MacOS

The following will setup the **pgo** client to be used on a Linux or MacOS system.

### Installing the Client

First, download the **pgo** client from the [GitHub official releases](#). Crunchy Enterprise Customers can download the pgo binaries from <https://access.crunchydata.com/> on the downloads page.

Next, install **pgo** in `/usr/local/bin` by running the following:

```
sudo mv /PATH/TO/pgo /usr/local/bin/pgo
sudo chmod +x /usr/local/bin/pgo
```

Verify the **pgo** client is accessible by running the following in the terminal:

```
pgo --help
```

**Configuring Client TLS** With the client TLS requirements satisfied we can setup **pgo** to use them.

First, create a directory to hold these files by running the following command:

```
mkdir ${HOME?}/.pgo
chmod 700 ${HOME?}/.pgo
```

Next, copy the certificates to this new directory:

```
cp /PATH/TO/client.crt ${HOME?}/.pgo/client.crt && chmod 600 ${HOME?}/.pgo/client.crt
cp /PATH/TO/client.pem ${HOME?}/.pgo/client.pem && chmod 400 ${HOME?}/.pgo/client.pem
```

Finally, set the following environment variables to point to the client TLS files:

```
cat <<EOF >> ${HOME?}/.bashrc
export PGO_CA_CERT="${HOME?}/.pgo/client.crt"
export PGO_CLIENT_CERT="${HOME?}/.pgo/client.crt"
export PGO_CLIENT_KEY="${HOME?}/.pgo/client.pem"
EOF
```

Apply those changes to the current session by running:

```
source ~/.bashrc
```

**Configuring pgouser** The `pgouser` file contains the username and password used for authentication with the Crunchy PostgreSQL Operator.

To setup the `pgouser` file, run the following:

```
echo "<USERNAME_HERE>:<PASSWORD_HERE>" > ${HOME?}/.pgo/pgouser
```

```
cat <<EOF >> ${HOME?}/.bashrc
export PGOUSER="${HOME?}/.pgo/pgouser"
EOF
```

Apply those changes to the current session by running:

```
source ${HOME?}/.bashrc
```

**Configuring the API Server URL** If the Crunchy PostgreSQL Operator is not accessible outside of the cluster, it's required to setup a port-forward tunnel using the `kubectl` or `oc` binary.

In a separate terminal we need to setup a port forward to the Crunchy PostgreSQL Operator to ensure connection can be made outside of the cluster:

```
# If deployed to Kubernetes
kubectl port-forward <OPERATOR_POD_NAME> -n <OPERATOR_NAMESPACE> 8443:8443

# If deployed to OpenShift
oc port-forward <OPERATOR_POD_NAME> -n <OPERATOR_NAMESPACE> 8443:8443
```

**Note:** the port-forward will be required for the duration of `pgo` usage.

Next, set the following environment variable to configure the API server address:

```
cat <<EOF >> ${HOME?}/.bashrc
export PGO_APISERVER_URL="https://<IP_OF_OPERATOR_API>:8443"
EOF
```

**Note:** if port-forward is being used, the IP of the Operator API is `127.0.0.1`

Apply those changes to the current session by running:

```
source ${HOME?}/.bashrc
```

## Windows

The following will setup the `pgo` client to be used on a Windows system.

## Installing the Client

First, download the `pgo.exe` client from the [GitHub official releases](#).

Next, create a directory for `pgo` using the following:

- Left click the *Start* button in the bottom left corner of the taskbar
- Type `cmd` to search for *Command Prompt*
- Right click the *Command Prompt* application and click “Run as administrator”
- Enter the following command: `mkdir "%ProgramFiles%\postgres-operator"`

Within the same terminal copy the `pgo.exe` binary to the directory created above using the following command:

```
copy %HOMEPATH%\Downloads\pgo.exe "%ProgramFiles%\postgres-operator"
```

Finally, add `pgo.exe` to the system path by running the following command in the terminal:

```
setx path "%path%;C:\Program Files\postgres-operator"
```

Verify the `pgo.exe` client is accessible by running the following in the terminal:

```
pgo --help
```

**Configuring Client TLS** With the client TLS requirements satisfied we can setup `pgo` to use them.

First, create a directory to hold these files using the following:

- Left click the *Start* button in the bottom left corner of the taskbar
- Type `cmd` to search for *Command Prompt*
- Right click the *Command Prompt* application and click “Run as administrator”
- Enter the following command: `mkdir "%HOMEPATH%\pgo"`

Next, copy the certificates to this new directory:

```
copy \PATH\TO\client.crt "%HOMEPATH%\pgo"  
copy \PATH\TO\client.pem "%HOMEPATH%\pgo"
```

Finally, set the following environment variables to point to the client TLS files:

```
setx PGO_CA_CERT "%HOMEPATH%\pgo\client.crt"  
setx PGO_CLIENT_CERT "%HOMEPATH%\pgo\client.crt"  
setx PGO_CLIENT_KEY "%HOMEPATH%\pgo\client.pem"
```

**Configuring pgouser** The `pgouser` file contains the username and password used for authentication with the Crunchy PostgreSQL Operator.

To setup the `pgouser` file, run the following:

- Left click the *Start* button in the bottom left corner of the taskbar
- Type `cmd` to search for *Command Prompt*
- Right click the *Command Prompt* application and click “Run as administrator”
- Enter the following command: `echo USERNAME_HERE:PASSWORD_HERE > %HOMEPATH%\pgo\pgouser`

Finally, set the following environment variable to point to the `pgouser` file:

```
setx PGOUSER "%HOMEPATH%\pgo\pgouser"
```

**Configuring the API Server URL** If the Crunchy PostgreSQL Operator is not accessible outside of the cluster, it’s required to setup a port-forward tunnel using the `kubect1` or `oc` binary.

In a separate terminal we need to setup a port forward to the Crunchy PostgreSQL Operator to ensure connection can be made outside of the cluster:

```
# If deployed to Kubernetes
kubect1 port-forward <OPERATOR_POD_NAME> -n <OPERATOR_NAMESPACE> 8443:8443

# If deployed to OpenShift
oc port-forward <OPERATOR_POD_NAME> -n <OPERATOR_NAMESPACE> 8443:8443
```

**Note:** the port-forward will be required for the duration of `pgo` usage.

Next, set the following environment variable to configure the API server address:

- Left click the *Start* button in the bottom left corner of the taskbar
- Type `cmd` to search for *Command Prompt*
- Right click the *Command Prompt* application and click “Run as administrator”
- Enter the following command: `setx PGO_APISERVER_URL "https://<IP_OF_OPERATOR_API>:8443"`
- Note: if port-forward is being used, the IP of the Operator API is `127.0.0.1`

## Verify the Client Installation

After completing all of the steps above we can verify `pgo` is configured properly by simply running the following:

```
pgo version
```

If the above command outputs versions of both the client and API server, the Crunchy PostgreSQL Operator client has been installed successfully.

## Crunchy Data PostgreSQL Operator Playbooks

The Crunchy Data PostgreSQL Operator Playbooks contain [Ansible](#) roles for installing and managing the [Crunchy Data PostgreSQL Operator](#).

## Features

The playbooks provided allow users to:

- install PostgreSQL Operator on Kubernetes and OpenShift
- install PostgreSQL Operator from a Linux, Mac or Windows(Ubuntu subsystem)host
- generate TLS certificates required by the PostgreSQL Operator
- configure PostgreSQL Operator settings from a single inventory file
- support a variety of deployment models

## Resources

- [Ansible](#)
- [Crunchy Data](#)
- [Crunchy Data PostgreSQL Operator Documentation](#)
- [Crunchy Data PostgreSQL Operator Project](#)

## Prerequisites

The following is required prior to installing Crunchy PostgreSQL Operator using Ansible:

- [postgres-operator playbooks](#) source code for the target version
- Ansible 2.5+



## Kubernetes Installs

- Kubernetes v1.11+
- Cluster admin privileges in Kubernetes
- [kubect](#)l configured to communicate with Kubernetes

## OpenShift Installs

- OpenShift v3.09+
- Cluster admin privileges in OpenShift
- [oc](#) configured to communicate with OpenShift

## Installing from a Windows Host

If the Crunchy PostgreSQL Operator is being installed from a Windows host the following are required:

- [Windows Subsystem for Linux \(WSL\)](#)
- [Ubuntu for Windows](#)

## Permissions

The installation of the Crunchy PostgreSQL Operator requires elevated privileges. It is required that the playbooks are run as a `cluster-admin` to ensure the playbooks can install:

- Custom Resource Definitions
- Cluster RBAC
- Create required namespaces

## Obtaining Operator Ansible Role

There are two ways to obtain the Crunchy PostgreSQL Operator Roles:

- Clone the [postgres-operator project](#)
- `postgres-operator-playbooks` RPM provided for Crunchy customers via the [Crunchy Access Portal](#).

## GitHub Installation

All necessary files (inventory, main playbook and roles) can be found in the `ansible` directory in the [postgres-operator project](#).

## RPM Installation using Yum

Available to Crunchy customers is an RPM containing all the necessary Ansible roles and files required for installation using Ansible. The RPM can be found in Crunchy’s yum repository. For information on setting up yum to use the Crunchy repoistory, see the [Crunchy Access Portal](#).

To install the Crunchy PostgreSQL Operator Ansible roles using yum, run the following command on a RHEL or CentOS host:

```
sudo yum install postgres-operator-playbooks
```

- Ansible roles can be found in: `/usr/share/ansible/roles/crunchydata`
- Ansible playbooks/inventory files can be found in: `/usr/share/ansible/postgres-operator/playbooks`

Once installed users should take a copy of the `inventory` file included in the installation using the following command:

```
cp /usr/share/ansible/postgres-operator/playbooks/inventory ${HOME?}
```

## Configuring the Inventory File

The `inventory` file included with the PostgreSQL Operator Playbooks allows installers to configure how the operator will function when deployed into Kubernetes. This file should contain all configurable variables the playbooks offer.

The following are the variables available for configuration:

Name	Default	Description
archive_mode	true	Set to true enable archive logging on all newly created clusters.
archive_timeout	60	Set to a value in seconds to configure the timeout threshold for archiving.
auto_failover_replace_replica	false	Set to true to replace promoted replicas during failovers with a new replica on all new clusters.
auto_failover_sleep_secs	9	Set to a value in seconds to configure the sleep time before initiating a failover on all new clusters.
auto_failover	false	Set to true enable auto failover capabilities on all newly created cluster requests. This can be disabled.
backrest	false	Set to true enable pgBackRest capabilities on all newly created cluster request. This can be disabled.
backrest_aws_s3_key		Set to configure the key used by pgBackRest to authenticate with Amazon Web Service S3 for backrest.
backrest_aws_s3_secret		Set to configure the secret used by pgBackRest to authenticate with Amazon Web Service S3 for backrest.
backrest_aws_s3_bucket		Set to configure the bucket used by pgBackRest with Amazon Web Service S3 for backrest.
backrest_aws_s3_endpoint		Set to configure the endpoint used by pgBackRest with Amazon Web Service S3 for backrest.
backrest_aws_s3_region	storageos	Set to configure the region used by pgBackRest with Amazon Web Service S3 for backrest.
backrest_storage		Set to configure which storage definition to use when creating volumes used by pgBackRest.
badger		Set to true enable pgBadger capabilities on all newly created clusters. This can be disabled.
ccp_image_prefix		Configures the image prefix used when creating containers from Crunchy Container Suite.
ccp_image_tag		Configures the image tag (version) used when creating containers from Crunchy Container Suite.
cleanup	false	Set to configure the playbooks to delete all objects when uninstalling the Operator. Note: this can cause sensitive data to be lost.
crunchy_debug	false	Set to configure Operator to use debugging mode. Note: this can cause sensitive data to be lost.
db_name	userdb	Set to a value to configure the default database name on all newly created clusters.
db_password_age_days	60	Set to a value in days to configure the expiration age on PostgreSQL role passwords on all newly created clusters.
db_password_length	20	Set to configure the size of passwords generated by the operator on all newly created clusters.
db_port	5432	Set to configure the default port used on all newly created clusters.
db_replicas	1	Set to configure the amount of replicas provisioned on all newly created clusters.
db_user	testuser	Set to configure the username of the dedicated user account on all newly created clusters.
grafana_admin_username	admin	Set to configure the login username for the Grafana administrator.
grafana_admin_password		Set to configure the login password for the Grafana administrator.
grafana_install	true	Set to true to install Crunchy Grafana to visualize metrics.
grafana_storage_access_mode		Set to the access mode used by the configured storage class for Grafana persistent volumes.
grafana_storage_class_name		Set to the name of the storage class used when creating Grafana persistent volumes.
grafana_volume_size		Set to the size of persistent volume to create for Grafana.
kubernetes_context		When deploying to Kubernetes, set to configure the context name of the kubeconfig to use.
log_statement	none	Set to <code>none</code> , <code>ddl</code> , <code>mod</code> , or <code>all</code> to configure the statements that will be logged in PostgreSQL.
metrics	false	Set to true enable performance metrics on all newly created clusters. This can be disabled.
metrics_namespace	metrics	Configures the target namespace when deploying Grafana and/or Prometheus.
namespace		Set to a comma delimited string of all the namespaces Operator will manage.
openshift_host		When deploying to OpenShift, set to configure the hostname of the OpenShift cluster.
openshift_password		When deploying to OpenShift, set to configure the password used for login.
openshift_skip_tls_verify		When deploying to Openshift, set to ignore the integrity of TLS certificates for the OpenShift cluster.
openshift_token		When deploying to OpenShift, set to configure the token used for login (when not using a password).
openshift_user		When deploying to OpenShift, set to configure the username used for login.
pgo_installation_name		The name of the PGO installation.
pgo_admin_username	admin	Configures the pgo administrator username.
pgo_admin_password		Configures the pgo administrator password.
pgo_client_install	true	Configures the playbooks to install the <code>pgo</code> client if set to true.
pgo_client_version		Configures which version of <code>pgo</code> the playbooks should install.

Name	Default	Description
pgo_image_prefix	crunchydata	Configures the image prefix used when creating containers for the Crunchy PostgreSQL Operator.
pgo_image_tag		Configures the image tag used when creating containers for the Crunchy PostgreSQL Operator.
pgo_operator_namespace		Set to configure the namespace where Operator will be deployed.
pgo_tls_no_verify		Set to configure Operator to verify TLS certificates.
pgo_disable_tls	false	Set to configure whether or not TLS should be enabled for the Crunchy PostgreSQL Operator.

**pgo\_apiserver\_port** | 8443 | Set to configure the port used by the Crunchy PostgreSQL Operator apiserver. |  
**pgo\_disable\_eventing** | false | Set to configure whether or not eventing should be enabled for the Crunchy PostgreSQL Operator installation. |  
**primary\_storage** | storageos | Set to configure which storage definition to use when creating volumes used by PostgreSQL primaries on all newly created clusters. |  
**prometheus\_install** | true | Set to true to install Crunchy Prometheus timeseries database. |  
**prometheus\_storage\_access\_mode** | | Set to the access mode used by the configured storage class for Prometheus persistent volumes. |  
**prometheus\_storage\_class\_name** | | Set to the name of the storage class used when creating Prometheus persistent volumes. |  
**replica\_storage** | storageos | Set to configure which storage definition to use when creating volumes used by PostgreSQL replicas on all newly created clusters. |  
**scheduler\_timeout** | 3600 | Set to a value in seconds to configure the **pgo-scheduler** timeout threshold when waiting for schedules to complete. |  
**service\_type** | ClusterIP | Set to configure the type of Kubernetes service provisioned on all newly created clusters. |  
**delete\_operator\_namespace** | false | Set to configure whether or not the PGO operator namespace (defined using variable **pgo\_operator\_namespace**) is deleted when uninstalling the PGO. |  
**delete\_watched\_namespaces** | false | Set to configure whether or not the PGO watched namespaces (defined using variable **namespace**) are deleted when uninstalling the PGO. |  
**delete\_metrics\_namespace** | false | Set to configure whether or not the metrics namespace (defined using variable **metrics\_namespace**) is deleted when uninstalling the metrics infrastructure |  
**pgo\_cluster\_admin** | false | Determines whether or not the **cluster-admin** role is assigned to the PGO service account. Must be **true** to enable PGO namespace & role creation when installing in OpenShift. |

{{% notice tip %}} To retrieve the **kubernetes\_context** value for Kubernetes installs, run the following command:

```
kubect1 config current-context
```

{{% /notice %}}

### Minimal Variable Requirements

The following variables should be configured at a minimum to deploy the Crunchy PostgreSQL Operator:

- **kubernetes\_context**
- **openshift\_user**
- **openshift\_password**
- **openshift\_token**
- **openshift\_host**
- **openshift\_skip\_tls\_verify**
- **pgo\_installation\_name**
- **pgo\_admin\_username**
- **pgo\_admin\_password**
- **pgo\_admin\_role\_name**
- **pgo\_admin\_perms**
- **pgo\_operator\_namespace**
- **namespace**
- **pgo\_image\_prefix**
- **pgo\_image\_tag**
- **ccp\_image\_prefix**
- **ccp\_image\_tag**
- **pgo\_client\_version**
- **pgo\_tls\_no\_verify**
- **auto\_failover**

- `backrest`
- `badger`
- `metrics`
- `archive_mode`
- `archive_timeout`
- `auto_failover_sleep_secs`
- `db_password_age_days`
- `db_password_length`
- `db_port`
- `db_replicas`
- `db_user`
- `primary_storage`
- `replica_storage`
- `backrest_storage`
- `backup_storage`

Additionally, `storage` variables will need to be defined to provide the Crunchy PGO with any required storage configuration. Guidance for defining `storage` variables can be found in the next section.

{{% notice tip %}} Users should remove or comment out the `kubernetes` or `openshift` variables if they’re not being used from the inventory file. Both sets of variables cannot be used at the same time. {{%/notice %}}

## Storage

Kubernetes and OpenShift offer support for a wide variety of different storage types, and by default, the `inventory` is pre-populated with storage configurations for some of these storage types. However, the storage types defined in the `inventory` can be modified or removed as needed, while additional storage configurations can also be added to meet the specific storage requirements for your PG clusters.

The following `storage` variables are utilized to add or modify operator storage configurations in the `inventory`:

Name	Required	Description
<code>storage&lt;ID&gt;_name</code>	Yes	Set to specify a name for the storage configuration
<code>storage&lt;ID&gt;_access_mode</code>	Yes	Set to configure the access mode of the volumes created
<code>storage&lt;ID&gt;_size</code>	Yes	Set to configure the size of the volumes created
<code>storage&lt;ID&gt;_class</code>	Required when using the <code>dynamic</code> storage type	Set to configure the storage class name used when creating volumes
<code>storage&lt;ID&gt;_fs_group</code>	Required when using a storage class	Set to configure any filesystem groups that should be used
<code>storage&lt;ID&gt;_supplemental_groups</code>	Required when using NFS storage	Set to configure any supplemental groups that should be used
<code>storage&lt;ID&gt;_type</code>	Yes	Set to either <code>create</code> or <code>dynamic</code> to configure the storage type

The ID portion of `storage` prefix for each variable name above should be an integer that is used to group the various `storage` variables into a single storage configuration. For instance, the following shows a single storage configuration for NFS storage:

```
storage3_name='nfsstorage '  
storage3_access_mode='ReadWriteMany '  
storage3_size='1G '  
storage3_type='create '  
storage3_supplemental_groups=65534
```

As this example storage configuration shows, integer 3 is used as the ID for each of the `storage` variables, which together form a single storage configuration called `nfsstorage`. This approach allows different storage configurations to be created by defining the proper `storage` variables with a unique ID for each required storage configuration.

Additionally, once all storage configurations have been defined in the `inventory`, they can then be used to specify the default storage configuration that should be utilized for the various PG pods created by the operator. This is done using the following variables, which are also defined in the `inventory`:

```
backrest_storage='nfsstorage '  
backup_storage='nfsstorage '  
primary_storage='nfsstorage '  
replica_storage='nfsstorage '
```

With the configuration shown above, the `nfsstorage` storage configuration would be used by default for the various containers created for a PG cluster (i.e. containers for the primary DB, replica DB's, backups and/or `pgBackRest`).

## Examples

The following are additional examples of storage configurations for various storage types.

**Generic Storage Class** The following example defines a storageTo setup storage1 to use the storage class `fast`

```
storage5_name='storageos '  
storage5_access_mode='ReadWriteOnce '  
storage5_size='300M'  
storage5_type='dynamic '  
storage5_class='fast '  
storage5_fs_group=26
```

To assign this storage definition to all `primary` pods created by the Operator, we can configure the `primary_storage=storageos` variable in the inventory file.

**GKE** The storage class provided by Google Kubernetes Environment (GKE) can be configured to be used by the Operator by setting the following variables in the `inventory` file:

```
storage8_name='gce '  
storage8_access_mode='ReadWriteOnce '  
storage8_size='300M'  
storage8_type='dynamic '  
storage8_class='standard '  
storage8_fs_group=26
```

To assign this storage definition to all `primary` pods created by the Operator, we can configure the `primary_storage=gce` variable in the inventory file.

## Considerations for Multi-Zone Cloud Environments

When using the Operator in a Kubernetes cluster consisting of nodes that span multiple zones, special consideration must be taken to ensure all pods and the volumes they require are scheduled and provisioned within the same zone. Specifically, being that a pod is unable mount a volume that is located in another zone, any volumes that are dynamically provisioned must be provisioned in a topology-aware manner according to the specific scheduling requirements for the pod. For instance, this means ensuring that the volume containing the database files for the primary database in a new PostgreSQL cluster is provisioned in the same zone as the node containing the PostgreSQL primary pod that will be using it.

For instructions on setting up storage classes for multi-zone environments, see the [PostgreSQL Operator Documentation](#).

## Resource Configuration

Kubernetes and OpenShift allow specific resource requirements to be specified for the various containers deployed inside of a pod. This includes defining the required resources for each container, i.e. how much memory and CPU each container will need, while also allowing resource limits to be defined, i.e. the maximum amount of memory and CPU a container will be allowed to consume. In support of this capability, the Crunchy PGO allows any required resource configurations to be defined in the `inventory`, which can be utilized by the operator to set any desired resource requirements/limits for the various containers that will be deployed by the Crunchy PGO when creating and managing PG clusters.

The following `resource` variables are utilized to add or modify operator resource configurations in the `inventory`:

Name	Required	Description
<code>resource&lt;ID&gt;_requests_memory</code>	Yes	The amount of memory required by the container.
<code>resource&lt;ID&gt;_requests_cpu</code>	Yes	The amount of CPU required by the container.
<code>resource&lt;ID&gt;_limits_memory</code>	Yes	The maximum amount of memory that can be consumed by the container.
<code>resource&lt;ID&gt;_limits_cpu</code>	Yes	The maximum amount of CPU that can be consumed by the container.

The ID portion of **resource** prefix for each variable name above should be an integer that is used to group the various **resource** variables into a single resource configuration. For instance, the following shows a single resource configuration called **small**:

```
resource1_name='small '  
resource1_requests_memory='512Mi '  
resource1_requests_cpu=0.1  
resource1_limits_memory='512Mi '  
resource1_limits_cpu=0.1
```

As this example resource configuration shows, integer 1 is used as the ID for each of the **resource** variables, which together form a single resource configuration called **small**. This approach allows different resource configurations to be created by defining the proper **resource** variables with a unique ID for each required resource configuration.

Additionally, once all resource configurations have been defined in the **inventory**, they can then be used to specify the default resource configurations that should be utilized for the various PG containers created by the operator. This is done using the following variables, which are also defined in the **inventory**:

```
default_container_resources='small '  
default_load_resources='small '  
default_lspvc_resources='small '  
default_rmdata_resources='small '  
default_backup_resources='small '  
default_pgouncer_resources='small '  
default_pgpool_resources='small '
```

With the configuration shown above, the **large** resource configuration would be used by default for all database containers, while the **small** resource configuration would then be utilized by default for the various other containers created for a PG cluster.

## Understanding pgo\_operator\_namespace & namespace

The Crunchy PostgreSQL Operator can be configured to be deployed and manage a single namespace or manage several namespaces. The following are examples of different types of deployment models configurable in the **inventory** file.

### Single Namespace

To deploy the Crunchy PostgreSQL Operator to work with a single namespace (in this example our namespace is named **pgo**), configure the following **inventory** settings:

```
pgo_operator_namespace='pgo '  
namespace='pgo '
```

### Multiple Namespaces

To deploy the Crunchy PostgreSQL Operator to work with multiple namespaces (in this example our namespaces are named **pgo**, **pgouser1** and **pgouser2**), configure the following **inventory** settings:

```
pgo_operator_namespace='pgo '  
namespace='pgouser1 ,pgouser2 '
```

## Deploying Multiple Operators

The 4.0 release of the Crunchy PostgreSQL Operator allows for multiple operator deployments in the same cluster. To install the Crunchy PostgreSQL Operator to multiple namespaces, it’s recommended to have an **inventory** file for each deployment of the operator.

For each operator deployment the following inventory variables should be configured uniquely for each install.

For example, operator could be deployed twice by changing the **pgo\_operator\_namespace** and **namespace** for those deployments:

Inventory A would deploy operator to the **pgo** namespace and it would manage the **pgo** target namespace.

```
# Inventory A  
pgo_operator_namespace='pgo '  
namespace='pgo '  
...
```

Inventory B would deploy operator to the `pgo2` namespace and it would manage the `pgo2` and `pgo3` target namespaces.

```
# Inventory B
pgo_operator_namespace='pgo2'
namespace='pgo2,pgo3'
...
```

Each install of the operator will create a corresponding directory in `$HOME/.pgo/<PGO NAMESPACE>` which will contain the TLS and `pgouser` client credentials.

## Deploying Grafana and Prometheus

PostgreSQL clusters created by the operator can be configured to create additional containers for collecting metrics. These metrics are very useful for understanding the overall health and performance of PostgreSQL database deployments over time. The collectors included by the operator are:

- Node Exporter - Host metrics where the PostgreSQL containers are running
- PostgreSQL Exporter - PostgreSQL metrics

The operator, however, does not install the necessary timeseries database (Prometheus) for storing the collected metrics or the front end visualization (Grafana) of those metrics.

Included in these playbooks are roles for deploying Grafana and/or Prometheus. See the `inventory` file for options to install the metrics stack.

{{% notice tip %}} At this time the Crunchy PostgreSQL Operator Playbooks only support storage classes. {{% /notice %}}

## Installing Ansible on Linux, MacOS or Windows Ubuntu Subsystem

To install Ansible on Linux or MacOS, [see the official documentation](#) provided by Ansible.

## Install Google Cloud SDK (Optional)

If Crunchy PostgreSQL Operator is going to be installed in a Google Kubernetes Environment the Google Cloud SDK is required.

To install the Google Cloud SDK on Linux or MacOS, see the [official Google Cloud documentation](#).

When installing the Google Cloud SDK on the Windows Ubuntu Subsystem, run the following commands to install:

```
wget https://sdk.cloud.google.com --output-document=/tmp/install-gsdk.sh
# Review the /tmp/install-gsdk.sh prior to running
chmod +x /tmp/install-gsdk.sh
/tmp/install-gsdk.sh
```

## Installing

The following assumes the proper [prerequisites are satisfied](#) we can now install the PostgreSQL Operator.

The commands should be run in the directory where the Crunchy PostgreSQL Operator playbooks is stored. See the `ansible` directory in the Crunchy PostgreSQL Operator project for the inventory file, main playbook and ansible roles.

## Installing on Linux

On a Linux host with Ansible installed we can run the following command to install the PostgreSQL Operator:

```
ansible-playbook -i /path/to/inventory --tags=install --ask-become-pass main.yml
```

If the Crunchy PostgreSQL Operator playbooks were installed using `yum`, use the following commands:

```
export ANSIBLE_ROLES_PATH=/usr/share/ansible/roles/crunchydata

ansible-playbook -i /path/to/inventory --tags=install --ask-become-pass \
    /usr/share/ansible/postgres-operator/playbooks/main.yml
```



## Installing on MacOS

On a MacOS host with Ansible installed we can run the following command to install the PostgreSQL Operator.

```
ansible-playbook -i /path/to/inventory --tags=install --ask-become-pass main.yml
```

## Installing on Windows Ubuntu Subsystem

On a Windows host with an Ubuntu subsystem we can run the following commands to install the PostgreSQL Operator.

```
ansible-playbook -i /path/to/inventory --tags=install --ask-become-pass main.yml
```

## Verifying the Installation

This may take a few minutes to deploy. To check the status of the deployment run the following:

```
# Kubernetes
kubectl get deployments -n <NAMESPACE_NAME>
kubectl get pods -n <NAMESPACE_NAME>

# OpenShift
oc get deployments -n <NAMESPACE_NAME>
oc get pods -n <NAMESPACE_NAME>
```

## Configure Environment Variables

After the Crunchy PostgreSQL Operator has successfully been installed we will need to configure local environment variables before using the pgo client.

To configure the environment variables used by pgo run the following command:

Note: <PGO\_NAMESPACE> should be replaced with the namespace the Crunchy PostgreSQL Operator was deployed to.

```
cat <<EOF >> ~/.bashrc
export PGOUSER="${HOME?}/.pgo/<PGO_NAMESPACE>/pgouser"
export PGO_CA_CERT="${HOME?}/.pgo/<PGO_NAMESPACE>/client.crt"
export PGO_CLIENT_CERT="${HOME?}/.pgo/<PGO_NAMESPACE>/client.crt"
export PGO_CLIENT_KEY="${HOME?}/.pgo/<PGO_NAMESPACE>/client.pem"
export PGO_APISERVER_URL='https://127.0.0.1:8443 '
EOF
```

Apply those changes to the current session by running:

```
source ~/.bashrc
```

## Verify pgo Connection

In a separate terminal we need to setup a port forward to the Crunchy PostgreSQL Operator to ensure connection can be made outside of the cluster:

```
# If deployed to Kubernetes
kubectl port-forward <OPERATOR_POD_NAME> -n <OPERATOR_NAMESPACE> 8443:8443

# If deployed to OpenShift
oc port-forward <OPERATOR_POD_NAME> -n <OPERATOR_NAMESPACE> 8443:8443
```

On a separate terminal verify the pgo can communicate with the Crunchy PostgreSQL Operator:

```
pgo version
```

If the above command outputs versions of both the client and API server, the Crunchy PostgreSQL Operator has been installed successfully.

# Installing

PostgreSQL clusters created by the Crunchy PostgreSQL Operator can optionally be configured to serve performance metrics via Prometheus Exporters. The metric exporters included in the database pod serve realtime metrics for the database container. In order to store and view this data, Grafana and Prometheus are required. The Crunchy PostgreSQL Operator does not create this infrastructure, however, they can be installed using the provided Ansible roles.

## Prerequisites

The following assumes the proper [prerequisites are satisfied](#) we can now install the PostgreSQL Operator.

At a minimum, the following inventory variables should be configured to install the metrics infrastructure:

Name	Default	Description
ccp_image_prefix	crunchydata	Configures the image prefix used when creating containers from Crunchy Container S
ccp_image_tag		Configures the image tag (version) used when creating containers from Crunchy Con
grafana_admin_username	admin	Set to configure the login username for the Grafana administrator.
grafana_admin_password		Set to configure the login password for the Grafana administrator.
grafana_install	true	Set to true to install Crunchy Grafana to visualize metrics.
grafana_storage_access_mode		Set to the access mode used by the configured storage class for Grafana persistent vo
grafana_storage_class_name		Set to the name of the storage class used when creating Grafana persistent volumes.
grafana_volume_size		Set to the size of persistent volume to create for Grafana.
kubernetes_context		When deploying to Kubernetes, set to configure the context name of the kubeconfig
metrics	false	Set to true enable performance metrics on all newly created clusters. This can be dis
metrics_namespace	metrics	Configures the target namespace when deploying Grafana and/or Prometheus
openshift_host		When deploying to OpenShift, set to configure the hostname of the OpenShift cluste
openshift_password		When deploying to OpenShift, set to configure the password used for login.
openshift_skip_tls_verify		When deploying to Openshift, set to ignore the integrity of TLS certificates for the C
openshift_token		When deploying to OpenShift, set to configure the token used for login (when not us
openshift_user		When deploying to OpenShift, set to configure the username used for login.
prometheus_install	true	Set to true to install Crunchy Prometheus timeseries database.
prometheus_storage_access_mode		Set to the access mode used by the configured storage class for Prometheus persisten
prometheus_storage_class_name		Set to the name of the storage class used when creating Prometheus persistent volum

{{% notice tip %}} Administrators can choose to install Grafana, Prometheus or both by configuring the **grafana\_install** and **prometheus\_install** variables in the inventory files. {{% /notice %}}

The following commands should be run in the directory where the Crunchy PostgreSQL Operator playbooks are located. See the **ansible** directory in the Crunchy PostgreSQL Operator project for the inventory file, main playbook and ansible roles.

{{% notice tip %}} At this time the Crunchy PostgreSQL Operator Playbooks only support storage classes. For more information on storage classes see the [official Kubernetes documentation](#). {{% /notice %}}

## Installing on Linux

On a Linux host with Ansible installed we can run the following command to install the Metrics stack:

```
ansible-playbook -i /path/to/inventory --tags=install-metrics main.yml
```

If the Crunchy PostgreSQL Operator playbooks were installed using yum, use the following commands:

```
export ANSIBLE_ROLES_PATH=/usr/share/ansible/roles/crunchydata

ansible-playbook -i /path/to/inventory --tags=install-metrics --ask-become-pass \
    /usr/share/ansible/postgres-operator/playbooks/main.yml
```

## Installing on MacOS

On a MacOS host with Ansible installed we can run the following command to install the Metrics stack:

```
ansible-playbook -i /path/to/inventory --tags=install-metrics main.yml
```

## Installing on Windows

On a Windows host with the Ubuntu subsystem we can run the following commands to install the Metrics stack:

```
ansible-playbook -i /path/to/inventory --tags=install-metrics main.yml
```

## Verifying the Installation

This may take a few minutes to deploy. To check the status of the deployment run the following:

```
# Kubernetes
kubectl get deployments -n <NAMESPACE_NAME>
kubectl get pods -n <NAMESPACE_NAME>

# OpenShift
oc get deployments -n <NAMESPACE_NAME>
oc get pods -n <NAMESPACE_NAME>
```

## Verify Grafana

In a separate terminal we need to setup a port forward to the Crunchy Grafana deployment to ensure connection can be made outside of the cluster:

```
# If deployed to Kubernetes
kubectl port-forward <GRAFANA_POD_NAME> -n <METRICS_NAMESPACE> 3000:3000

# If deployed to OpenShift
oc port-forward <GRAFANA_POD_NAME> -n <METRICS_NAMESPACE> 3000:3000
```

In a browser navigate to <https://127.0.0.1:3000> to access the Grafana dashboard.

{{% notice tip %}} No metrics will be scraped if no exporters are available. To create a PostgreSQL cluster with metric exporters run the following command:

```
pgo create cluster <NAME OF CLUSTER> --metrics --namespace=<NAMESPACE>
```

{{% /notice %}}

## Verify Prometheus

In a separate terminal we need to setup a port forward to the Crunchy Prometheus deployment to ensure connection can be made outside of the cluster:

```
# If deployed to Kubernetes
kubectl port-forward <PROMETHEUS_POD_NAME> -n <METRICS_NAMESPACE> 9090:9090

# If deployed to OpenShift
oc port-forward <PROMETHEUS_POD_NAME> -n <METRICS_NAMESPACE> 9090:9090
```

In a browser navigate to <https://127.0.0.1:9090> to access the Prometheus dashboard.

{{% notice tip %}} No metrics will be scraped if no exporters are available. To create a PostgreSQL cluster with metric exporters run the following command:

```
pgo create cluster <NAME OF CLUSTER> --metrics --namespace=<NAMESPACE>
```

{{% /notice %}}

# Updating

Updating the Crunchy PostgreSQL Operator is essential to the lifecycle management of the service. Using the **update** flag will:

- Update and redeploy the operator deployment
- Recreate configuration maps used by operator
- Remove any deprecated objects
- Allow administrators to change settings configured in the **inventory**
- Reinstall the **pgo** client if a new version is specified

The following assumes the proper [prerequisites are satisfied](#) we can now update the PostgreSQL Operator.

The commands should be run in the directory where the Crunchy PostgreSQL Operator playbooks is stored. See the **ansible** directory in the Crunchy PostgreSQL Operator project for the inventory file, main playbook and ansible roles.

## Updating on Linux

On a Linux host with Ansible installed we can run the following command to update the PostgreSQL Operator:

```
ansible-playbook -i /path/to/inventory --tags=update --ask-become-pass main.yml
```

If the Crunchy PostgreSQL Operator playbooks were installed using yum, use the following commands:

```
export ANSIBLE_ROLES_PATH=/usr/share/ansible/roles/crunchydata

ansible-playbook -i /path/to/inventory --tags=update --ask-become-pass \
    /usr/share/ansible/postgres-operator/playbooks/main.yml
```

## Updating on MacOS

On a MacOS host with Ansible installed we can run the following command to update the PostgreSQL Operator.

```
ansible-playbook -i /path/to/inventory --tags=update --ask-become-pass main.yml
```

## Updating on Windows Ubuntu Subsystem

On a Windows host with an Ubuntu subsystem we can run the following commands to update the PostgreSQL Operator.

```
ansible-playbook -i /path/to/inventory --tags=update --ask-become-pass main.yml
```

## Verifying the Update

This may take a few minutes to deploy. To check the status of the deployment run the following:

```
# Kubernetes
kubectl get deployments -n <NAMESPACE_NAME>
kubectl get pods -n <NAMESPACE_NAME>

# OpenShift
oc get deployments -n <NAMESPACE_NAME>
oc get pods -n <NAMESPACE_NAME>
```

# Configure Environment Variables

After the Crunchy PostgreSQL Operator has successfully been updated we will need to configure local environment variables before using the pgo client.

To configure the environment variables used by pgo run the following command:

Note: <PGO\_NAMESPACE> should be replaced with the namespace the Crunchy PostgreSQL Operator was deployed to. Also, if TLS was disabled, or if the port was changed, update PGO\_APISERVER\_URL accordingly.

```
cat <<EOF >> ~/.bashrc
export PGOUSER="${HOME?}/.pgo/<PGO_NAMESPACE>/pgouser"
export PGO_CA_CERT="${HOME?}/.pgo/<PGO_NAMESPACE>/client.crt"
export PGO_CLIENT_CERT="${HOME?}/.pgo/<PGO_NAMESPACE>/client.crt"
export PGO_CLIENT_KEY="${HOME?}/.pgo/<PGO_NAMESPACE>/client.pem"
export PGO_APISERVER_URL='https://127.0.0.1:8443'
EOF
```

Apply those changes to the current session by running:

```
source ~/.bashrc
```

## Verify pgo Connection

In a separate terminal we need to setup a port forward to the Crunchy PostgreSQL Operator to ensure connection can be made outside of the cluster:

```
# If deployed to Kubernetes
kubectl port-forward <OPERATOR_POD_NAME> -n <OPERATOR_NAMESPACE> 8443:8443

# If deployed to OpenShift
oc port-forward <OPERATOR_POD_NAME> -n <OPERATOR_NAMESPACE> 8443:8443
```

Note: If a port other than 8443 was configured, update the above command accordingly.

On a separate terminal verify the pgo can communicate with the Crunchy PostgreSQL Operator:

```
pgo version
```

If the above command outputs versions of both the client and API server, the Crunchy PostgreSQL Operator has been updated successfully.

## Uninstalling PostgreSQL Operator

The following assumes the proper [prerequisites are satisfied](#) we can now uninstall the PostgreSQL Operator.

First, it is recommended to use the playbooks tagged with the same version of the PostgreSQL Operator currently deployed.

With the correct playbooks acquired and prerequisites satisfied, simply run the following command:

```
ansible-playbook -i /path/to/inventory --tags=uninstall --ask-become-pass main.yml
```

If the Crunchy PostgreSQL Operator playbooks were installed using yum, use the following commands:

```
export ANSIBLE_ROLES_PATH=/usr/share/ansible/roles/crunchydata

ansible-playbook -i /path/to/inventory --tags=uninstall --ask-become-pass \
    /usr/share/ansible/postgres-operator/playbooks/main.yml
```

## Deleting pgo Client

If variable pgo\_client\_install is set to true in the inventory file, the pgo client will also be removed when uninstalling.

Otherwise, the pgo client can be manually uninstalled by running the following command:

```
rm /usr/local/bin/pgo
```

# Uninstalling the Metrics Stack

The following assumes the proper [prerequisites are satisfied](#) we can now uninstall the PostgreSQL Operator Metrics Infrastructure. First, it is recommended to use the playbooks tagged with the same version of the Metrics stack currently deployed. With the correct playbooks acquired and prerequisites satisfied, simply run the following command:

```
ansible-playbook -i /path/to/inventory --tags=uninstall-metrics main.yml
```

If the Crunchy PostgreSQL Operator playbooks were installed using yum, use the following commands:

```
export ANSIBLE_ROLES_PATH=/usr/share/ansible/roles/crunchydata
ansible-playbook -i /path/to/inventory --tags=uninstall-metrics \
    /usr/share/ansible/postgres-operator/playbooks/main.yml
```

## Container Dependencies

The Operator depends on the Crunchy Containers and there are version dependencies between the two projects.

Operator Release	Container Release
4.1.0	2.4.2
3.5.2	2.3.1

Features sometimes are added into the underlying Crunchy Containers to support upstream features in the Operator thus dictating a dependency between the two projects at a specific version level.

## Operating Systems

The Operator is developed on both Centos 7 and RHEL 7 operating systems. The underlying containers are designed to use either Centos 7 or RHEL 7 as the base container image. Other Linux variants are possible but are not supported at this time.

## Kubernetes Distributions

The Operator is designed and tested on Kubernetes and Openshift Container Platform.

## Storage

The Operator is designed to support HostPath, NFS, and Storage Classes for persistence. The Operator does not currently include code specific to a particular storage vendor.

## Releases

The Operator is released on a quarterly basis often to coincide with Postgres releases. There are pre-release and or minor bug fix releases created on an as-needed basis. The operator is template-driven; this makes it simple to configure both the client and the operator.

## conf Directory

The Operator is configured with a collection of files found in the *conf* directory. These configuration files are deployed to your Kubernetes cluster when the Operator is deployed. Changes made to any of these configuration files currently require a redeployment of the Operator on the Kubernetes cluster. The server components of the Operator include Role Based Access Control resources which need to be created a single time by a Kubernetes cluster-admin user. See the Installation section for details on installing a Postgres Operator server.

The configuration files used by the Operator are found in 2 places: \* the pgo-config ConfigMap in the namespace the Operator is running in \* or, a copy of the configuration files are also included by default into the Operator container images themselves to support a very simplistic deployment of the Operator

If the pgo-config ConfigMap is not found by the Operator, it will use the configuration files that are included in the Operator container images.

The container included set of configuration files use the most basic setting values and the image versions of the Operator itself with the latest Crunchy Container image versions. The storage configurations are determined by using the default storage class on the system you are deploying the Operator into, the default storage class is one that is labeled as follows:

```
pgo-default-sc=true
```

If no storage class has that label, then the first storage class found on the system will be used. If no storage class is found on the system, the containers will not run and produce an error in the log.

## conf/postgres-operator/pgo.yaml

The *pgo.yaml* file sets many different Operator configuration settings and is described in the [pgo.yaml configuration]({{< ref “pgo-yaml-configuration.md” >}}) documentation section.

The *pgo.yaml* file is deployed along with the other Operator configuration files when you run:

```
make deployoperator
```

## conf/postgres-operator Directory

Files within the *conf/postgres-operator* directory contain various templates that are used by the Operator when creating Kubernetes resources. In an advanced Operator deployment, administrators can modify these templates to add their own custom meta-data or make other changes to influence the Resources that get created on your Kubernetes cluster by the Operator.

Files within this directory are used specifically when creating PostgreSQL Cluster resources. Sidecar components such as pgBouncer and pgPool II templates are also located within this directory.

As with the other Operator templates, administrators can make custom changes to this set of templates to add custom features or metadata into the Resources created by the Operator.

## Security

Setting up pgo users and general security configuration is described in the [Security](#) section of this documentation.

## Local pgo CLI Configuration

You can specify the default namespace you want to use by setting the PGO\_NAMESPACE environment variable locally on the host the pgo CLI command is running.

```
export PGO_NAMESPACE=pgouser1
```

When that variable is set, each command you issue with *pgo* will use that namespace unless you over-ride it using the *--namespace* command line flag.

```
pgo show cluster foo --namespace=pgouser2
```

## Namespace Configuration

The Design [Design](#) section of this documentation talks further about the use of namespaces within the Operator and configuring different deployment models of the Operator.

## pgo.yaml Configuration

The *pgo.yaml* file contains many different configuration settings as described in this section of the documentation.

The *pgo.yaml* file is broken into major sections as described below: ## Cluster

Setting	Definition
BasicAuth	if set to <i>true</i> will enable Basic Authentication
PrimaryNodeLabel	newly created primary deployments will specify this node label if specified, unless you override it using the <code>--primary-node-label</code> flag
ReplicaNodeLabel	newly created replica deployments will specify this node label if specified, unless you override it using the <code>--replica-node-label</code> flag
CCPIImagePrefix	newly created containers will be based on this image prefix (e.g. crunchydata), update this if you require a custom image
CCPIImageTag	newly created containers will be based on this image version (e.g. centos7-11.5-2.4.2), unless you override it using the <code>--ccpi-image-tag</code> flag
Port	the PostgreSQL port to use for new containers (e.g. 5432)
LogStatement	postgresql.conf log_statement value (required field)
LogMinDurationStatement	postgresql.conf log_min_duration_statement value (required field)
User	the PostgreSQL normal user name
Database	the PostgreSQL normal user database
Replicas	the number of cluster replicas to create for newly created clusters, typically users will scale up replicas on the fly
PgmonitorPassword	the password to use for pgmonitor metrics collection if you specify <code>--metrics</code> when creating a PG cluster
Metrics	boolean, if set to true will cause each new cluster to include crunchy-collect as a sidecar container for metrics collection
Badger	boolean, if set to true will cause each new cluster to include crunchy-pgbadger as a sidecar container for statistics
Policies	optional, list of policies to apply to a newly created cluster, comma separated, must be valid policies in the coredns version
PasswordAgeDays	optional, if set, will set the VALID UNTIL date on passwords to this many days in the future when creating passwords
PasswordLength	optional, if set, will determine the password length used when creating passwords, defaults to 8
ServiceType	optional, if set, will determine the service type used when creating primary or replica services, defaults to ClusterIP
Backrest	optional, if set, will cause clusters to have the pgbackrest volume PVC provisioned during cluster creation
BackrestPort	currently required to be port 2022
Autofail	optional, if set, will cause clusters to be checked for auto failover in the event of a non-Ready status
AutofailReplaceReplica	optional, default is false, if set, will determine whether a replica is created as part of a failover to replace the failed replica

Storage

Setting	Definition
PrimaryStorage	required, the value of the storage configuration to use for the primary PostgreSQL deployment
BackupStorage	required, the value of the storage configuration to use for backups, including the storage for pgbackrest repository
ReplicaStorage	required, the value of the storage configuration to use for the replica PostgreSQL deployments
ReplicaStorage	required, the value of the storage configuration to use for the replica PostgreSQL deployments
BackrestStorage	required, the value of the storage configuration to use for the pgbackrest shared repository deployment creation
StorageClass	for a dynamic storage type, you can specify the storage class used for storage provisioning(e.g. standard, glusterfs)
AccessMode	the access mode for new PVCs (e.g. ReadWriteMany, ReadWriteOnce, ReadOnlyMany). See below for details
Size	the size to use when creating new PVCs (e.g. 100M, 1Gi)
Storage.storage1.StorageType	supported values are either <i>dynamic</i> , <i>create</i> , if not supplied, <i>create</i> is used
Fsgroup	optional, if set, will cause a <i>SecurityContext</i> and <i>fsGroup</i> attributes to be added to generated Pod and Deployment definitions
SupplementalGroups	optional, if set, will cause a SecurityContext to be added to generated Pod and Deployment definitions
MatchLabels	optional, if set, will cause the PVC to add a <i>matchlabels</i> selector in order to match a PV, only useful when using dynamic provisioning

Storage Configuration Examples

In *pgo.yaml*, you will need to configure your storage configurations depending on which storage you are wanting to use for Operator provisioning of Persistent Volume Claims. The examples below are provided as a sample. In all the examples you are free to change the *Size* to meet your requirements of Persistent Volume Claim size.



### HostPath Example

HostPath is provided for simple testing and use cases where you only intend to run on a single Linux host for your Kubernetes cluster.

```
hostpathstorage:
  AccessMode:  ReadWriteMany
  Size:  1G
  StorageType:  create
```

### NFS Example

In the following NFS example, notice that the *SupplementalGroups* setting is set, this can be whatever GID you have your NFS mount set to, typically we set this *nfsnobody* as below. NFS file systems offer a *ReadWriteMany* access mode.

```
nfsstorage:
  AccessMode:  ReadWriteMany
  Size:  1G
  StorageType:  create
  SupplementalGroups:  65534
```

### Storage Class Example

In the following example, the important attribute to set for a typical Storage Class is the *Fsgroup* setting. This value is almost always set to *26* which represents the Postgres user ID that the Crunchy Postgres container runs as. Most Storage Class providers offer *ReadWriteOnce* access modes, but refer to your provider documentation for other access modes it might support.

```
storageos:
  AccessMode:  ReadWriteOnce
  Size:  1G
  StorageType:  dynamic
  StorageClass:  fast
  Fsgroup:  26
```

## Container Resources

Setting	Definition
DefaultContainerResource	optional, the value of the container resources configuration to use for all database containers, if not set, no resource request
DefaultLoadResource	optional, the value of the container resources configuration to use for pgo-load containers, if not set, no resource request
DefaultLspvcResource	optional, the value of the container resources configuration to use for pgo-lspvc containers, if not set, no resource request
DefaultRmdataResource	optional, the value of the container resources configuration to use for pgo-rmdata containers, if not set, no resource request
DefaultBackupResource	optional, the value of the container resources configuration to use for crunchy-backup containers, if not set, no resource request
DefaultPgbouncerResource	optional, the value of the container resources configuration to use for crunchy-pgbouncer containers, if not set, no resource request
DefaultPgpoolResource	optional, the value of the container resources configuration to use for crunchy-pgpool containers, if not set, no resource request
RequestsMemory	request size of memory in bytes
RequestsCPU	request size of CPU cores
LimitsMemory	request size of memory in bytes
LimitsCPU	request size of CPU cores

## Miscellaneous (Pgo)

Setting	Definition
PreferredFailoverNode	optional, a label selector (e.g. hosttype=offsite) that if set, will be used to pick the failover target which is running
COImagePrefix	image tag prefix to use for the Operator containers
COImageTag	image tag to use for the Operator containers

Setting	Definition
Audit	boolean, if set to true will cause each apiserver call to be logged with an <i>audit</i> marking

## Storage Configuration Details

You can define n-number of Storage configurations within the *pgo.yaml* file. Those Storage configurations follow these conventions -

- they must have lowercase name (e.g. storage1)
- they must be unique names (e.g. mydrstorage, faststorage, slowstorage)

These Storage configurations are referenced in the BackupStorage, ReplicaStorage, and PrimaryStorage configuration values. However, there are command line options in the *pgo* client that will let a user override these default global values to offer you the user a way to specify very targeted storage configurations when needed (e.g. disaster recovery storage for certain backups).

You can set the storage AccessMode values to the following:

- *ReadWriteMany* - mounts the volume as read-write by many nodes
- *ReadWriteOnce* - mounts the PVC as read-write by a single node
- *ReadOnlyMany* - mounts the PVC as read-only by many nodes

These Storage configurations are validated when the *pgo-apiserver* starts, if a non-valid configuration is found, the apiserver will abort. These Storage values are only read at *apiserver* start time.

The following StorageType values are possible -

- *dynamic* - this will allow for dynamic provisioning of storage using a StorageClass.
- *create* - This setting allows for the creation of a new PVC for each PostgreSQL cluster using a naming convention of *clustername*. When set, the *Size*, *AccessMode* settings are used in constructing the new PVC.

The operator will create new PVCs using this naming convention: *dbname* where *dbname* is the database name you have specified. For example, if you run:

```
pgo create cluster example1 -n pgouser1
```

It will result in a PVC being created named *example1* and in the case of a backup job, the pvc is named *example1-backup*

Note, when Storage Type is *create*, you can specify a storage configuration setting of *MatchLabels*, when set, this will cause a *selector* of *key=value* to be added into the PVC, this will let you target specific PV(s) to be matched for this cluster. Note, if a PV does not match the claim request, then the cluster will not start. Users that want to use this feature have to place labels on their PV resources as part of PG cluster creation before creating the PG cluster. For example, users would add a label like this to their PV before they create the PG cluster:

```
kubectl label pv somepv myzone=somezone -n pgouser1
```

If you do not specify *MatchLabels* in the storage configuration, then no match filter is added and any available PV will be used to satisfy the PVC request. This option does not apply to *dynamic* storage types.

Example PV creation scripts are provided that add labels to a set of PVs and can be used for testing: `$COROOT/pv/create-pv-nfs-labels.sh` in that example, a label of **crunchyzone=red** is set on a set of PVs to test with.

The *pgo.yaml* includes a storage config named **nfsstoragered** that when used will demonstrate the label matching. This feature allows you to support n-number of NFS storage configurations and supports spreading a PG cluster across different NFS storage configurations.

## Container Resources Details

In the *pgo.yaml* configuration file you have the option to configure a default container resources configuration that when set will add CPU and memory resource limits and requests values into each database container when the container is created.

You can also override the default value using the `--resources-config` command flag when creating a new cluster:

```
pgo create cluster testcluster --resources-config=large -n pgouser1
```

Note, if you try to allocate more resources than your host or Kube cluster has available then you will see your pods wait in a *Pending* status. The output from a `kubectl describe pod` command will show output like this in this event: Events:

Type	Reason	Age	From	Message
----	-----	----	----	-----
Warning	FailedScheduling	49s (x8 over 1m)	default-scheduler	No nodes are available that match all of the predicates: Insufficient memory (1).

## Overriding Storage Configuration Defaults

```
pgo create cluster testcluster --storage-config=bigdisk -n pgouser1
```

That example will create a cluster and specify a storage configuration of *bigdisk* to be used for the primary database storage. The replica storage will default to the value of ReplicaStorage as specified in *pgo.yaml*.

```
pgo create cluster testcluster2 --storage-config=fastdisk --replica-storage-config=slowdisk -n pgouser1
```

That example will create a cluster and specify a storage configuration of *fastdisk* to be used for the primary database storage, while the replica storage will use the storage configuration *slowdisk*.

```
pgo backup testcluster --storage-config=offsitestorage -n pgouser1
```

That example will create a backup and use the *offsitestorage* storage configuration for persisting the backup.

## Using Storage Configurations for Disaster Recovery

A simple mechanism for partial disaster recovery can be obtained by leveraging network storage, Kubernetes storage classes, and the storage configuration options within the Operator.

For example, if you define a Kubernetes storage class that refers to a storage backend that is running within your disaster recovery site, and then use that storage class as a storage configuration for your backups, you essentially have moved your backup files automatically to your disaster recovery site thanks to network storage.

## Node Affinity in PostgreSQL Operator

Kubernetes node affinity allows you to constrain which nodes your pod is eligible to be scheduled on, based on labels on the node.

The PostgreSQL Operator provides users with the ability to add a node affinity section to a new Cluster Deployment. By adding a node affinity section to the Cluster Deployment, users can direct Kubernetes to attempt to schedule a primary PostgreSQL instance within a cluster on a specific Kubernetes node.

As an example, you can see the nodes on your Kubernetes cluster by running the following:

```
kubectl get nodes
```

You can then specify one of those Kubernetes node names (e.g. kubeadm-node2) when creating a PostgreSQL cluster;

```
pgo create cluster thatcluster --node-label=kubeadm-node2
```

The node affinity rule inserted in the Deployment uses a *preferred* strategy so that if the node were down or not available, Kubernetes will go ahead and schedule the Pod on another node.

When you scale up a PostgreSQL cluster by adding a PostgreSQL replica instance, the scaling will take into account the use of `--node-label1`. If it sees that a PostgreSQL cluster was created with a specific node name, then the PostgreSQL replica Deployment will add an affinity rule to attempt to schedule the Pod.

## Storage and the PostgreSQL Operator

The PostgreSQL Operator allows for a variety of different configurations of persistent storage that can be leveraged by the PostgreSQL instances or clusters it deploys.

The PostgreSQL Operator works with several different storage types, HostPath, Network File System(NFS), and Dynamic storage.

- Hostpath is the simplest storage and useful for single node testing.
- NFS provides the ability to do single and multi-node testing.

Hostpath and NFS both require you to configure persistent volumes so that you can make claims towards those volumes. You will need to monitor the persistent volumes so that you do not run out of available volumes to make claims against.

Dynamic storage classes provide a means for users to request persistent volume claims and have the persistent volume dynamically created for you. You will need to monitor disk space with dynamic storage to make sure there is enough space for users to request a volume. There are multiple providers of dynamic storage classes to choose from. You will need to configure what works for your environment and size the Physical Volumes, Persistent Volumes (PVs), appropriately.

Once you have determined the type of storage you will plan on using and setup PV's you need to configure the Operator to know about it. You will do this in the pgo.yaml file.

If you are deploying to a cloud environment with multiple zones, for instance Google Kubernetes Engine (GKE), you will want to review topology aware storage class configurations.

# PostgreSQL Operator Backup and Restore Capability

The PostgreSQL Operator provides users with the ability to manage PostgreSQL cluster backups through both native PostgreSQL backup functionality, as well as using pgbackrest, an open source backup and restore solution designed to scale up to the largest databases. By default, beginning with verison 4.0, the PostgreSQL Operator backup command performs a PostgreSQL pgbackrest backup.

The three backup types that can be configured through the PostgreSQL Operator CLI are:

- pgbackrest a simple, reliable backup and restore solution that can seamlessly scale up to the largest databases and workloads. It provides full, incremental, differential backups, and point-in-time recovery.
- pg\_basebackup is used to take base backups of a running PostgreSQL database cluster. These are taken without affecting other clients to the database, and can be used both for point-in-time recovery and as the starting point for a log shipping or streaming replication standby servers.
- pg\_dump is a utility for backing up a single PostgreSQL database. It makes consistent backups even if the database is being used concurrently. pg\_dump does not block other users accessing the database (readers or writers).pg\_dump

## pgBackRest Integration

The PostgreSQL Operator integrates various features of the [pgbackrest backup and restore project](#) to support backup and restore capability. The *pgo-backrest-repo* container acts as a pgBackRest remote repository for the PostgreSQL cluster to use for storing archive files and backups.

The following diagrams depicts some of the integration features:

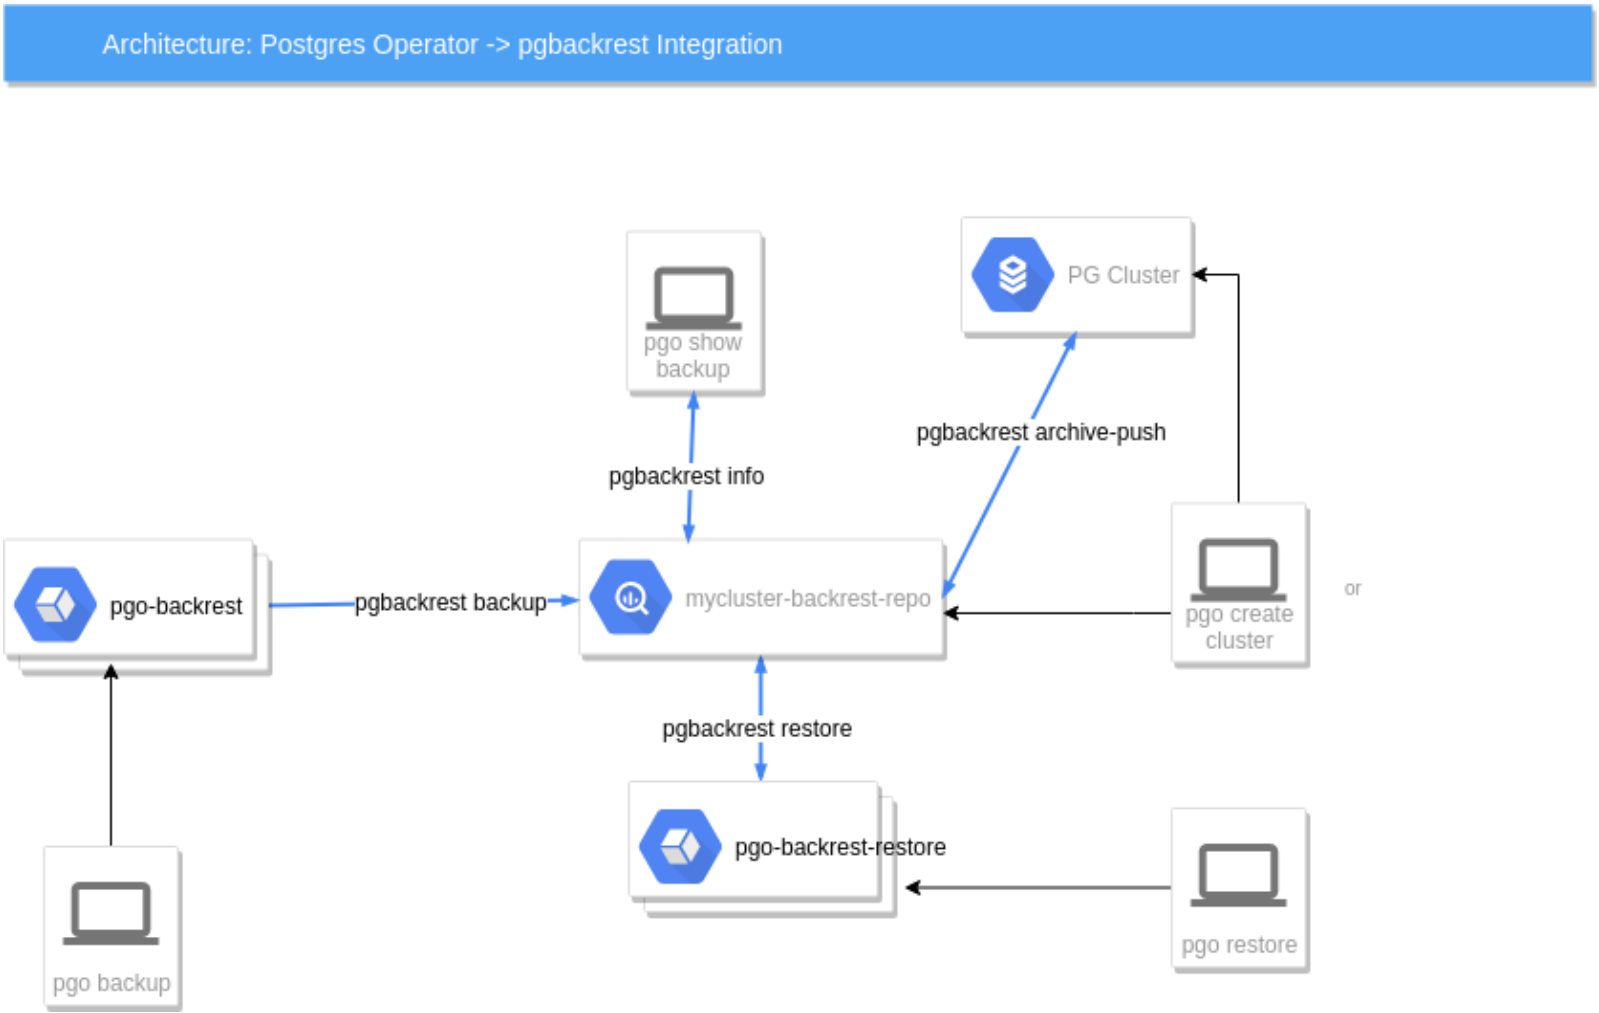


Figure 10: alt text

In this diagram, starting from left to right we see the following:

- a user when they enter `pgo backup mycluster -backup-type=pgbackrest` will cause a pgo-backrest container to be run as a Job, that container will execute a `pgbackrest backup` command in the pgBackRest repository container to perform the backup function.

- a user when they enter `pgo show backup mycluster --backup-type=pgbackrest` will cause a `pgbackrest info` command to be executed on the pgBackRest repository container, the `info` output is sent directly back to the user to view
- the PostgreSQL container itself will use an archive command, `pgbackrest archive-push` to send archives to the pgBackRest repository container
- the user entering `pgo create cluster mycluster --pgbackrest` will cause a pgBackRest repository container deployment to be created, that repository is exclusively used for this Postgres cluster
- lastly, a user entering `pgo restore mycluster` will cause a `pgo-backrest-restore` container to be created as a Job, that container executes the `pgbackrest restore` command

### Support for pgBackRest Use of S3 Buckets

The PostgreSQL Operator supports the use AWS S3 storage buckets for the pgbackrest repository in any pgbackrest-enabled cluster. When S3 support is enabled for a cluster, all archives will automatically be pushed to a pre-configured S3 storage bucket, and that same bucket can then be utilized for the creation of any backups as well as when performing restores. Please note that once a storage type has been selected for a cluster during cluster creation (specifically `local`, `s3`, or `both`, as described in detail below), it cannot be changed.

The PostgreSQL Operator allows for the configuration of a single storage bucket, which can then be utilized across multiple clusters. Once S3 support has been enabled for a cluster, pgbackrest will create a `backrestrepo` directory in the root of the configured S3 storage bucket (if it does not already exist), and subdirectories will then be created under the `backrestrepo` directory for each cluster created with S3 storage enabled.

### PostgreSQL Operator Custom Resource Definitions

The PostgreSQL Operator defines the following series of Kubernetes [Custom Resource Definitions \(CRDs\)](#):

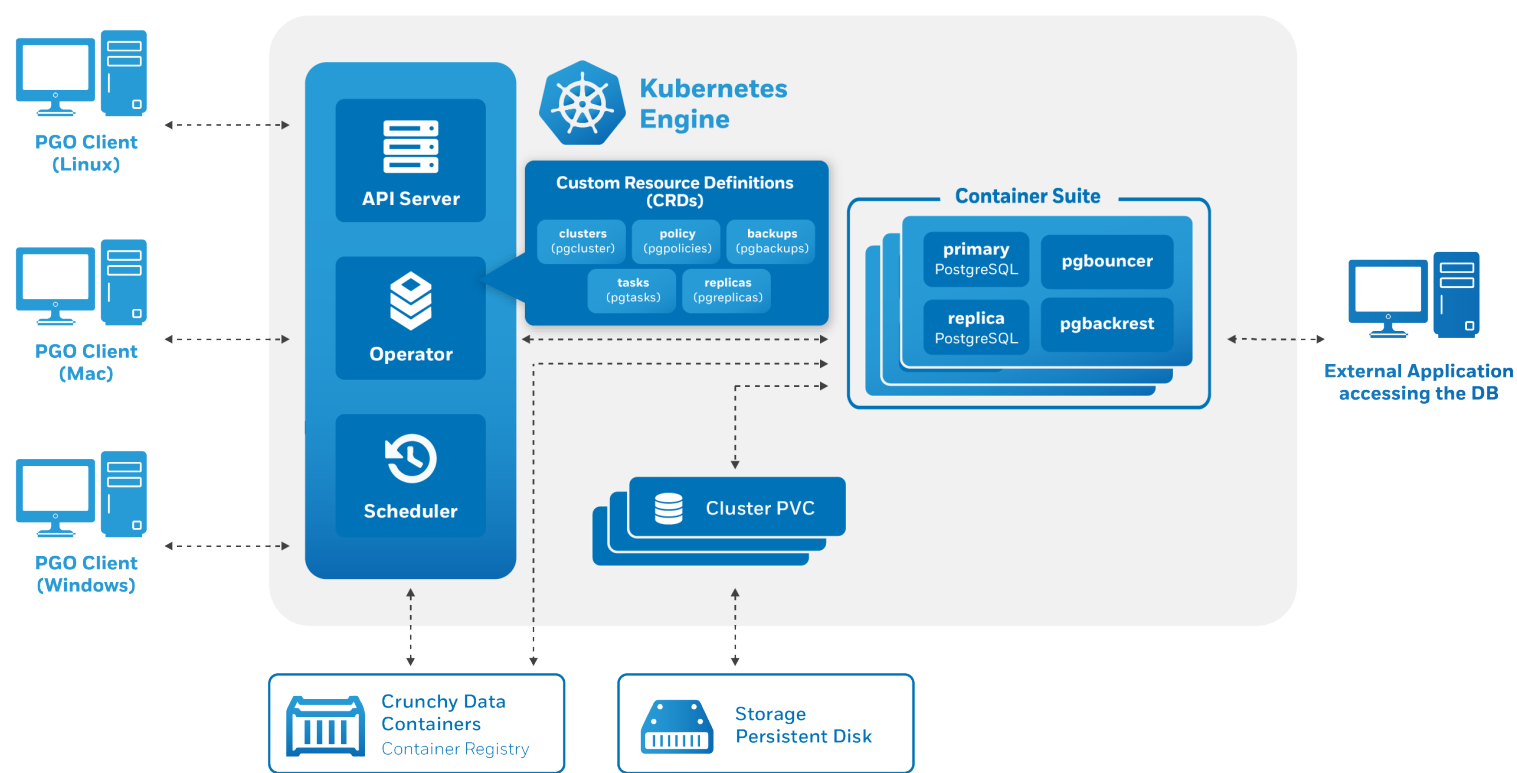


Figure 11: Operator Architecture with CRDs

Each of these CRDs are used in the design of the PostgreSQL Operator to perform PostgreSQL related operations in order to enable with on-demand, PostgreSQL-as-a-Service workflows.

#### Cluster (pgclusters)

The Cluster or pgcluster CRD is used by the PostgreSQL Operator to define the PostgreSQL cluster definition and make new PostgreSQL cluster requests.

### Backup (pgbackups)

The Backup or pgbackup CRD is used by the PostgreSQL Operator to perform a pgbasebackup and to hold the workflow and status of the last backup job. Crunchy Data plans to deprecate this CRD in a future release in favor of a more general pgtask resource

### Tasks (pgtask)

The Tasks or pgtask CRD is used by the PostgreSQL Operator to perform workflow and other related administration tasks. The pgtasks CRD captures workflows and administrative tasks for a given pgcluster.

### Replica (pgreplica)

The Replica or pgreplica CRD is used by the PostgreSQL Operator to create a PostgreSQL replica. When a user creates a PostgreSQL replica, a pgreplica CRD is created to define that replica.

Metadata about each PostgreSQL cluster deployed by the PostgreSQL Operator are stored within these CRD resources which act as the source of truth for the Operator. The PostgreSQL Operator makes use of CRDs to maintain state and resource definitions as offered by the PostgreSQL Operator.

## PostgreSQL Operator Overview

The PostgreSQL Operator extends Kubernetes to provide a higher- level abstraction enabling the rapid creation and management of PostgreSQL databases and clusters.

The PostgreSQL Operator include the following components:

- PostgreSQL Operator
- PostgreSQL Operator Containers
- PostgreSQL Operator PGO Client
- PostgreSQL Operator REST API Server
- PostgreSQL PGO Scheduler

The following diagram provides an overview of the components of the PostgreSQL Operator:

**PostgreSQL Operator** The PostgreSQL Operator makes use of Kubernetes “Custom Resource Definitions” or “CRDs” to extend Kubernetes with custom, PostgreSQL specific, Kubernetes objects such as “Database” and “Cluster”. The PostgreSQL Operator users these CRDs to enable users to deploy, configure and administer PostgreSQL databases and clusters as Kubernetes-native, open source PostgreSQL-as-a-Service infrastructure.

**PostgreSQL Operator Containers** The PostgreSQL Operator orchestrates a series of PostgreSQL and PostgreSQL related containers that enable rapid deployment of PostgreSQL, including administration and monitoring tools in a Kubernetes environment.

**PostgreSQL Operator PGO Client** The PostgreSQL Operator provides a command line interface (CLI), pgo. This CLI tool may be used by an end-user to create databases or clusters, or make changes to existing databases. The CLI interacts with the REST API deployed within the postgres-operator deployment.

**PostgreSQL Operator REST API Server** A feature of the PostgreSQL Operator is to provide a REST API upon which users or custom applications can inspect and cause actions within the Operator such as provisioning resources or viewing status of resources. This API is secured by a RBAC (role based access control) security model whereby each API call has a permission assigned to it. API roles are defined to provide granular authorization to Operator services.

**PostgreSQL Operator PGO Scheduler** The PostgreSQL Operator includes a cron like scheduler application called pgo-scheduler. The purpose of pgo-scheduler is to run automated tasks such as PostgreSQL backups or SQL policies against PostgreSQL clusters created by the PostgreSQL Operator. PGO Scheduler watches Kubernetes for configmaps with the label crunchy-scheduler=true in the same namespace where the PostgreSQL Operator is deployed.

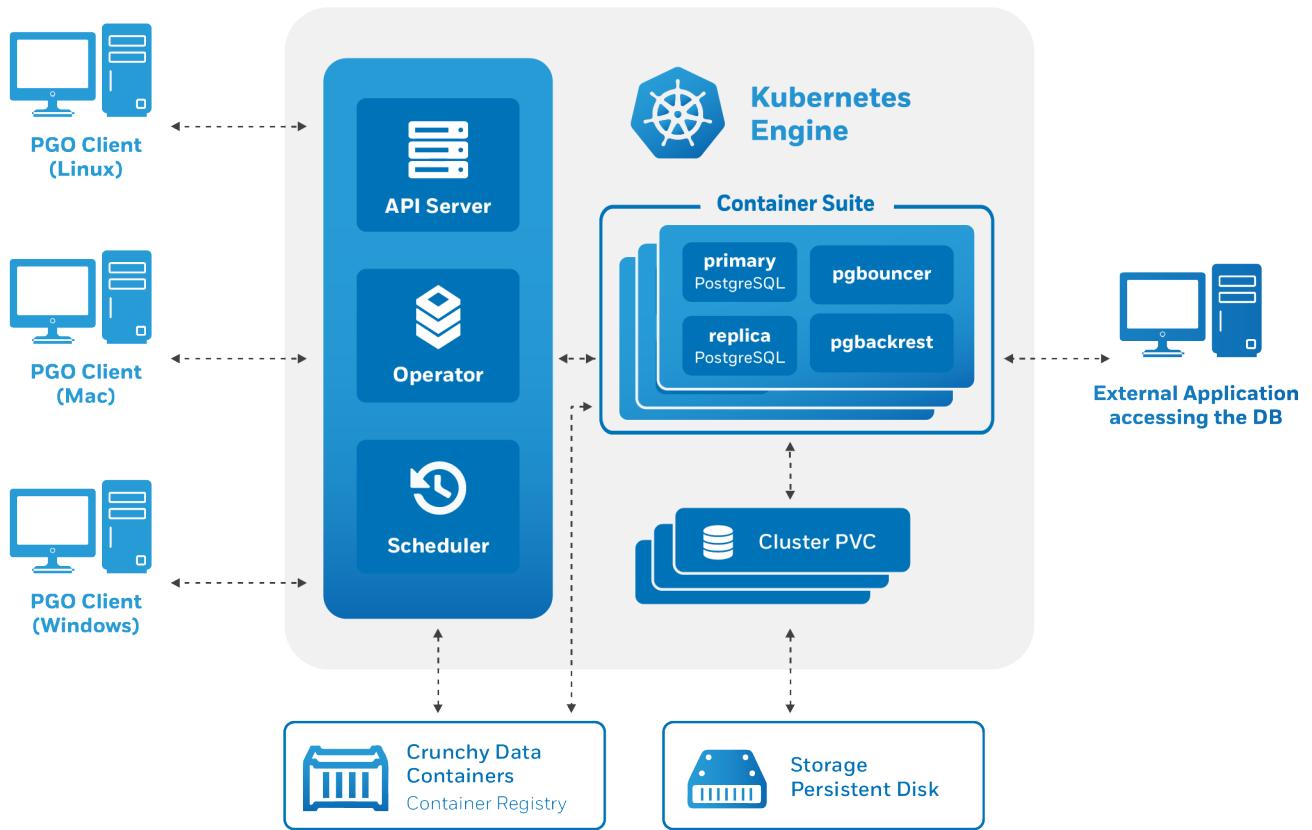


Figure 12: Operator Architecture

## PGO Scheduler

The PostgreSQL Operator includes a cronlike scheduler application called `pgo-scheduler`. Its purpose is to run automated tasks such as PostgreSQL backups or SQL policies against PostgreSQL instances and clusters created by the PostgreSQL Operator.

PGO Scheduler watches Kubernetes for configmaps with the label `crunchy-scheduler=true` in the same namespace the Operator is deployed. The configmaps are json objects that describe the schedule such as:

- Cron like schedule such as: `* * * * *`
- Type of task: `pgbackrest`, `pgbasebackup` or `policy`

Schedules are removed automatically when the configmaps are deleted.

PGO Scheduler uses the UTC timezone for all schedules.

## Schedule Expression Format

Schedules are expressed using the following rules:

Field name	Mandatory?	Allowed values	Allowed special characters
Seconds	Yes	0-59	* / , -
Minutes	Yes	0-59	* / , -
Hours	Yes	0-23	* / , -
Day of month	Yes	1-31	* / , - ?
Month	Yes	1-12 or JAN-DEC	* / , -
Day of week	Yes	0-6 or SUN-SAT	* / , - ?

## pgBackRest Schedules

pgBackRest schedules require pgBackRest enabled on the cluster to backup. The scheduler will not do this on its own.

## pgBaseBackup Schedules

pgBaseBackup schedules require a backup PVC to already be created. The operator will make this PVC using the backup commands:

```
pgo backup mycluster
```

## Policy Schedules

Policy schedules require a SQL policy already created using the Operator. Additionally users can supply both the database in which the policy should run and a secret that contains the username and password of the PostgreSQL role that will run the SQL. If no user is specified the scheduler will default to the replication user provided during cluster creation.

## User Roles in the PostgreSQL Operator

The PostgreSQL Operator, when used in conjunction with the associated PostgreSQL Containers and Kubernetes, provides you with the ability to host your own open source, Kubernetes native PostgreSQL-as-a-Service infrastructure.

In installing, configuring and operating the PostgreSQL Operator as a PostgreSQL-as-a-Service capability, the following user roles will be required:

Role	Applicable Component	Authorized Privileges and Functions Performed
Platform Administrator (Privileged User)	PostgreSQL Operator	The Platform Administrator is able to control all aspects of
Platform User	PostgreSQL Operator	The Platform User has access to a limited subset of PostgreSQL
PostgreSQL Administrator(Privileged Account)	PostgreSQL Containers	The PostgreSQL Administrator is the equivalent of a PostgreSQL
PostgreSQL User	PostgreSQL Containers	The PostgreSQL User has access to a PostgreSQL Instance or

As indicated in the above table, both the Operator Administrator and the PostgreSQL Administrators represent privilege users with components within the PostgreSQL Operator.

### Platform Administrator

For purposes of this User Guide, the “Platform Administrator” is a Kubernetes system user with PostgreSQL Administrator privileges and has PostgreSQL Operator admin rights. While PostgreSQL Operator admin rights are not required, it is helpful to have admin rights to be able to verify that the installation completed successfully. The Platform Administrator will be responsible for managing the installation of the Crunchy PostgreSQL Operator service in Kubernetes. That installation can be on RedHat OpenShift 3.11+, Kubeadm, or even Google’s Kubernetes Engine.

### Platform User

For purposes of this User Guide, a “Platform User” is a Kubernetes system user and has PostgreSQL Operator admin rights. While admin rights are not required for a typical user, testing out functionality will be easier, if you want to limit functionality to specific actions section 2.4.5 covers roles. The Platform User is anyone that is interacting with the Crunchy PostgreSQL Operator service in Kubernetes via the PGO CLI tool. Their rights to carry out operations using the PGO CLI tool is governed by PGO Roles(discussed in more detail later) configured by the Platform Administrator. If this is you, please skip to section 2.3.1 where we cover configuring and installing PGO.

### PostgreSQL User

In the context of the PostgreSQL Operator, the “PostgreSQL User” is any person interacting with the PostgreSQL database using database specific connections, such as a language driver or a database management GUI.

The default PostgreSQL instance installation via the PostgreSQL Operator comes with the following users:

Role name	Attributes
postgres	Superuser, Create role, Create DB, Replication, Bypass RLS
primaryuser	Replication
testuser	



The postgres user will be the admin user for the database instance. The primary user is used for replication between primary and replicas. The testuser is a normal user that has access to the database “userdb” that is created for testing purposes.

## Failover in the PostgreSQL Operator

There are a number of potential events that could cause a primary database instance or cluster to become unavailable during the course of normal operations, including:

- A database storage (disk) failure or any other hardware failure
- The network on which the database resides becomes unreachable
- The host operating system becomes unstable and crashes
- A key database file becomes corrupted
- Total loss of data center

There may also be downtime events that are due to the normal case of operations, such as performing a minor upgrade, security patching of operating system, hardware upgrade, or other maintenance.

To enable rapid recovery from the unavailability of the primary PostgreSQL instance within a PostgreSQL cluster, the PostgreSQL Operator supports both Manual and Automated failover within a single Kubernetes cluster.

### PostgreSQL Cluster Architecture

The failover from a primary PostgreSQL instances to a replica PostgreSQL instance within a PostgreSQL cluster.

#### Manual Failover

Manual failover is performed by PostgreSQL Operator API actions involving a *query* and then a *target* being specified to pick the fail-over replica target.

#### Automatic Failover

Automatic failover is performed by the PostgreSQL Operator by evaluating the readiness of a primary. Automated failover can be globally specified for all clusters or specific clusters. If desired, users can configure the PostgreSQL Operator to replace a failed primary PostgreSQL instance with a new PostgreSQL replica.

The PostgreSQL Operator automatic failover logic includes:

- deletion of the failed primary Deployment
- pick the best replica to become the new primary
- label change of the targeted Replica to match the primary Service
- execute the PostgreSQL promote command on the targeted replica

## Kubernetes Namespaces and the PostgreSQL Operator

In Kubernetes, namespaces provide the user the ability to divide cluster resources between multiple users (via resource quota).

The PostgreSQL Operator makes use of the Kubernetes Namespace support in order to define the Namespace to which the PostgreSQL Operator will deploy PostgreSQL clusters, enabling users to more easily allocate Kubernetes resources to specific areas within their business (users, projects, departments).

**Namespaces Applied to Organizational Requirements** Prior to version PostgreSQL Operator 4.0, the PostgreSQL Operator could only be deployed with a Namespace deployment pattern where both the PostgreSQL Operator and the PostgreSQL Clusters it deployed existed within a single Kubernetes namespace.

With the PostgreSQL Operator 4.0 release, the operator now supports a variety of Namespace deployment patterns, including:

- **OwnNamespace** Operator and PostgreSQL clusters deployed to the same Kubernetes Namespace
- **SingleNamespace and MultiNamespace** Operator and PostgreSQL clusters deployed to a predefined set of Kubernetes Namespaces
- **AllNamespaces** Operator deployed into a single Kubernetes Namespace but watching all Namespaces on a Kubernetes cluster

**Configuration of the Namespace to which PostgreSQL Operator is Deployed** In order to configure the Kubernetes Namespace within which the PostgreSQL Operator will run, it is necessary to configure the PGO\_OPERATOR\_NAMESPACE environment variable. Both the Ansible and Bash installation method enable you to modify this PGO\_OPERATOR\_NAMESPACE environment variable in connection with the PostgreSQL Operator installation.

**Configuration of the Namespaces to which PostgreSQL Operator will Deploy PostgreSQL Clusters** At startup time, the PostgreSQL Operator determines the Kubernetes Namespaces to which it will be able to deploy and administer PostgreSQL databases and clusters. The Kubernetes Namespace that the PostgreSQL Operator will be able to service is determined at startup time by the NAMESPACE environment variable. The NAMESPACE variable is set as part of the PostgreSQL Operator installation process. The format of the NAMESPACE value in the PostgreSQL Operator is modeled after the Operator Lifecycle Manager project.

## PostgreSQL Operator Containers Overview

The PostgreSQL Operator orchestrates a series of PostgreSQL and PostgreSQL related containers that enable rapid deployment of PostgreSQL, including administration and monitoring tools in a Kubernetes environment. The PostgreSQL Operator supports PostgreSQL 9.5+ with multiple PostgreSQL cluster deployment strategies and a variety of PostgreSQL related extensions and tools enabling enterprise grade PostgreSQL-as-a-Service. A full list of the containers supported by the PostgreSQL Operator is provided below.

### PostgreSQL Server and Extensions

- **PostgreSQL** (crunchy-postgres). PostgreSQL database server. The crunchy-postgres container image is unmodified, open source PostgreSQL packaged and maintained by Crunchy Data.
- **PostGIS** (crunchy-postgres-gis). PostgreSQL database server including the PostGIS extension. The crunchy-postgres-gis container image is unmodified, open source PostgreSQL packaged and maintained by Crunchy Data. This image is identical to the crunchy-postgres image except it includes the open source geospatial extension PostGIS for PostgreSQL in addition to the language extension PL/R which allows for writing functions in the R statistical computing language.

### Backup and Restore

- **pgBackRest** (crunchy-backrest-restore). pgBackRest is a high performance backup and restore utility for PostgreSQL. The crunchy-backrest-restore container executes the pgBackRest utility, allowing FULL and DELTA restore capability.
- **pg\_basebackup** (crunchy-backup). pg\_basebackup is used to take base backups of a running PostgreSQL database cluster. The crunchy-backup container executes a full backup against another database container using the standard pg\_basebackup utility that is included with PostgreSQL.
- **pgdump** (crunchy-pgdump). The crunchy-pgdump container executes either a pg\_dump or pg\_dumpall database backup against another PostgreSQL database.
- **crunchy-pgrestore** (restore). The restore image provides a means of performing a restore of a dump from pg\_dump or pg\_dumpall via psql or pg\_restore to a PostgreSQL container database.

### Administration Tools

- **pgAdmin4** (crunchy-pgadmin4). PGAdmin4 is a graphical user interface administration tool for PostgreSQL. The crunchy-pgadmin4 container executes the pgAdmin4 web application.
- **pgbadger** (crunchy-pgbadger). pgbadger is a PostgreSQL log analyzer with fully detailed reports and graphs. The crunchy-pgbadger container executes the pgBadger utility, which generates a PostgreSQL log analysis report using a small HTTP server running on the container.
- **pg\_upgrade** (crunchy-upgrade). The crunchy-upgrade container contains 9.5, 9.6, 10, and 11 PostgreSQL packages in order to perform a pg\_upgrade from 9.5 to 9.6, 9.6 to 10, and 10 to 11 versions.
- **scheduler** (crunchy-scheduler). The crunchy-scheduler container provides a cron like microservice for automating pgBaseBackup and pgBackRest backups within a single namespace.

## Metrics and Monitoring

- **Metrics Collection** (crunchy-collect). The crunchy-collect container provides real time metrics about the PostgreSQL database via an API. These metrics are scraped and stored by a Prometheus time-series database and are then graphed and visualized through the open source data visualizer Grafana.
- **Grafana** (crunchy-grafana). Grafana is an open source Visual dashboards are created from the collected and stored data that crunchy-collect and crunchy-prometheus provide for the crunchy-grafana container, which hosts an open source web-based graphing dashboard called Grafana.
- **Prometheus** (crunchy-prometheus). Prometheus is a multi-dimensional time series data model with an elastic query language. It is used in collaboration with Crunchy Collect and Grafana to provide metrics.

## Connection Pooling and Load Balancing

- **pgbouncer** (crunchy-pgbouncer). pgbouncer is a lightweight connection pooler for PostgreSQL. The crunchy-pgbouncer container provides a pgbouncer image.
- **pgpool** (crunchy-pgpool). pgPool II is a middleware that works between PostgreSQL servers and a PostgreSQL database client. The crunchy-pgpool container executes the utility. pgPool can be used to provide a smart PostgreSQL-aware proxy to a PostgreSQL cluster, both primary and replica, so that applications only have to work with a single database connection.

The command line tool, **pgo**, is used to interact with the Postgres Operator.

Most users will work with the Operator using the *pgo* CLI tool. That tool is downloaded from the [GitHub Releases page for the Operator](#).

The *pgo* client is provided in Mac, Windows, and Linux binary formats, download the appropriate client to your local laptop or workstation to work with a remote Operator.

## Syntax

Use the following syntax to run **pgo** commands from your terminal window:

```
pgo [command] ([TYPE] [NAME]) [flags]
```

Where *command* is a verb like:

- show
- create
- delete

And *type* is a resource type like:

- cluster
- policy
- user

And *name* is the name of the resource type like:

- mycluster
- somesqlpolicy
- john

To get detailed help information and command flag descriptions on each *pgo* command, enter:

```
pgo [command] -h
```

## Operations

The following table shows the *pgo* operations currently implemented:

Operation	Syntax	Description
apply	<code>pgo apply mypolicy --selector=name=mycluster</code>	Apply a SQL policy on a Postgres cluster(s) that have the selector.
backup	<code>pgo backup mycluster</code>	Perform a backup on a Postgres cluster(s)
create	<code>pgo create cluster mycluster</code>	Create an Operator resource type (e.g. cluster, policy, role, user, etc.)
delete	<code>pgo delete cluster mycluster</code>	Delete an Operator resource type (e.g. cluster, policy, role, user, etc.)
ls	<code>pgo ls mycluster filepath</code>	Perform a Linux <code>ls</code> command on the cluster.
cat	<code>pgo cat mycluster filepath</code>	Perform a Linux <code>cat</code> command on the cluster.
df	<code>pgo df mycluster</code>	Display the disk status/capacity of a Postgres cluster(s).
failover	<code>pgo failover mycluster</code>	Perform a manual failover of a Postgres cluster.
help	<code>pgo help</code>	Display general <code>pgo</code> help information.
label	<code>pgo label mycluster --label=environment=prod</code>	Create a metadata label for a Postgres cluster(s).
load	<code>pgo load --load-config=load.json --selector=name=mycluster</code>	Perform a data load into a Postgres cluster(s).
reload	<code>pgo reload mycluster</code>	Perform a <code>pg_ctl</code> reload command on a Postgres cluster(s).
restore	<code>pgo restore mycluster</code>	Perform a <code>pgbackrest</code> , <code>pgbasebackup</code> or <code>pgdump</code> restore on a Postgres cluster(s).
scale	<code>pgo scale mycluster</code>	Create a Postgres replica(s) for a given Postgres cluster(s).
scaledown	<code>pgo scaledown mycluster --query</code>	Delete a replica from a Postgres cluster.
show	<code>pgo show cluster mycluster</code>	Display Operator resource information (e.g. cluster, user, role, etc.)
status	<code>pgo status</code>	Display Operator status.
test	<code>pgo test mycluster</code>	Perform a SQL test on a Postgres cluster(s).
update	<code>pgo update cluster mycluster --autofail=false</code>	Update a Postgres cluster(s), <code>pgouser</code> , <code>pgorole</code> , <code>user</code> , or <code>policy</code> .
upgrade	<code>pgo upgrade mycluster</code>	Perform a minor upgrade to a Postgres cluster(s).
version	<code>pgo version</code>	Display Operator version information.

## Common Operations

In all the examples below, the user is specifying the *pgouser1* namespace as the target of the operator. Replace this value with your own namespace value. You can specify a default namespace to be used by setting the `PGO_NAMESPACE` environment variable on the *pgo* client environment.

### Cluster Operations

A user will typically start using the Operator by creating a Postgres cluster as follows:

```
pgo create cluster mycluster -n pgouser1
```

This command creates a Postgres cluster in the *pgouser1* namespace that has a single Postgres primary container.

You can see the Postgres cluster using the following:

```
pgo show cluster mycluster -n pgouser1
```

You can test the Postgres cluster by entering:

```
pgo test mycluster -n pgouser1
```

You can optionally add a Postgres replica to your Postgres cluster as follows:

```
pgo scale mycluster -n pgouser1
```

You can create a Postgres cluster initially with a Postgres replica as follows:

```
pgo create cluster mycluster --replica-count=1 -n pgouser1
```

To view the Postgres logs, you can enter commands such as:

```
pgo ls mycluster -n pgouser1 /pgdata/mycluster/pg_log
pgo cat mycluster -n pgouser1 /pgdata/mycluster/pg_log/postgresql-Mon.log | tail -3
```

**Backups** By default the Operator deploys pgbackrest for a Postgres cluster to hold database backup data.

You can create a pgbackrest backup job as follows:

```
pgo backup mycluster -n pgouser1
```

You can perform a pgbasebackup job as follows:

```
pgo backup mycluster --backup-type=pgbasebackup -n pgouser1
```

You can optionally pass pgbackrest command options into the backup command as follows:

```
pgo backup mycluster --backup-type=pgbackrest --backup-opts="--type=diff" -n pgouser1
```

See pgbackrest.org for command flag descriptions.

You can create a Postgres cluster that does not include pgbackrest if you specify the following:

```
pgo create cluster mycluster --pgbackrest=false -n pgouser1
```

You can show the current backups on a cluster with the following:

```
pgo show backup mycluster -n pgouser1
```

**Scaledown a Cluster** You can remove a Postgres replica using the following:

```
pgo scaledown mycluster --query -n pgouser1
pgo scaledown mycluster --target=sometarget -n pgouser1
```

**Delete a Cluster** You can remove a Postgres cluster by entering:

```
pgo delete cluster mycluster -n pgouser1
```

**Delete a Cluster and Its Persistent Volume Claims** You can remove the persistent volumes when removing a Postgres cluster by specifying the following command flag:

```
pgo delete cluster mycluster --delete-data -n pgouser1
```

**View Disk Utilization** You can see a comparison of Postgres data size versus the Persistent volume claim size by entering the following:

```
pgo df mycluster -n pgouser1
```

## Label Operations

**Apply a Label to a Cluster** You can apply a Kubernetes label to a Postgres cluster as follows:

```
pgo label mycluster --label=environment=prod -n pgouser1
```

In this example, the label key is *environment* and the label value is *prod*.

You can apply labels across a category of Postgres clusters by using the *--selector* command flag as follows:

```
pgo label --selector=clustertypes=research --label=environment=prod -n pgouser1
```

In this example, any Postgres cluster with the label of *clustertypes=research* will have the label *environment=prod* set.

In the following command, you can also view Postgres clusters by using the *--selector* command flag which specifies a label key value to search with:

```
pgo show cluster --selector=environment=prod -n pgouser1
```

## Policy Operations

**Create a Policy** To create a SQL policy, enter the following:

```
pgo create policy mypolicy --in-file=mypolicy.sql -n pgouser1
```

This examples creates a policy named *mypolicy* using the contents of the file *mypolicy.sql* which is assumed to be in the current directory.

You can view policies as following:

```
pgo show policy --all -n pgouser1
```

```
pgo apply mypolicy --selector=environment=prod
pgo apply mypolicy --selector=name=mycluster
```

## Operator Status

**Show Operator Version** To see what version of the Operator client and server you are using, enter:

```
pgo version
```

To see the Operator server status, enter:

```
pgo status -n pgouser1
```

To see the Operator server configuration, enter:

```
pgo show config -n pgouser1
```

To see what namespaces exist and if you have access to them, enter:

```
pgo show namespace pgouser1
```

```
pgo backup mycluster --backup-type=pgdump -n pgouser1
pgo backup mycluster --backup-type=pgdump --backup-opts="--dump-all --verbose" -n pgouser1
pgo backup mycluster --backup-type=pgdump --backup-opts="--schema=myschema" -n pgouser1
```

Note: To run `pgdump_all` instead of `pgdump`, pass `--dump-all` flag in `--backup-opts` as shown above. All `--backup-opts` should be space delimited.

```
pgo restore mycluster -n pgouser1
```

Or perform a restore based on a point in time:

```
pgo restore mycluster --pitr-target="2019-01-14 00:02:14.921404+00" --backup-opts="--type=time" -n
pgouser1
```

You can also set the any of the [pgbackrest restore options](#) :

```
pgo restore mycluster --pitr-target="2019-01-14 00:02:14.921404+00" --backup-opts=" see pgbackrest
options " -n pgouser1
```

You can also target specific nodes when performing a restore:

```
pgo restore mycluster --node-label=failure-domain.beta.kubernetes.io/zone=us-central1-a -n pgouser1
```

Here are some steps to test PITR:

- `pgo create cluster mycluster`
- Create a table on the new cluster called *beforebackup*
- `pgo backup mycluster -n pgouser1`
- create a table on the cluster called *afterbackup*
- Execute *select now()* on the database to get the time, use this timestamp minus a couple of minutes when you perform the restore
- `pgo restore mycluster --pitr-target="2019-01-14 00:02:14.921404+00" --backup-opts="--type=time --log-level-cons
-n pgouser1`
- Wait for the database to be restored
- Execute *\* in the database and you should see the database state prior to where the afterbackup\* table was created*

See the Design section of the Operator documentation for things to consider before you do a restore.

**Restore from pgbasebackup** You can find available pgbasebackup backups to use for a pgbasebackup restore using the `pgo show backup` command:

```
$ pgo show backup mycluster --backup-type=pgbasebackup -n pgouser1 | grep "Backup Path"
Backup Path:      mycluster-backups/2019-05-21-09-53-20
Backup Path:      mycluster-backups/2019-05-21-06-58-50
Backup Path:      mycluster-backups/2019-05-21-09-52-52
```

You can then perform a restore using any available backup path:

```
pgo restore mycluster --backup-type=pgbasebackup --backup-path=mycluster/2019-05-21-06-58-50
--backup-pvc=mycluster-backup -n pgouser1
```

When performing the restore, both the backup path and backup PVC can be omitted, and the Operator will use the last pgbasebackup backup created, along with the PVC utilized for that backup:

```
pgo restore mycluster --backup-type=pgbasebackup -n pgouser1
```

Once the pgbasebackup restore is complete, a new PVC will be available with a randomly generated ID that contains the restored database, e.g. PVC **mycluster-ieqe** in the output below:

```
$ pgo show pvc --all
All Operator Labeled PVCs
  mycluster
  mycluster-backup
  mycluster-ieqe
```

A new cluster can then be created with the same name as the new PVC, as well with the secrets from the original cluster, in order to deploy a new cluster using the restored database:

```
pgo create cluster mycluster-ieqe --secret-from=mycluster
```

If you would like to control the name of the PVC created when performing a pgbasebackup restore, use the `--restore-to-pvc` flag:

```
pgo restore mycluster --backup-type=pgbasebackup --restore-to-pvc=mycluster-restored -n pgouser1
```

```
pgo restore mycluster --backup-type=pgdump --backup-pvc=mycluster-pgdump-pvc
--pitr-target="2019-01-15-00-03-25" -n pgouser1
```

To restore the most recent pgdump at the default path, leave off a timestamp:

```
pgo restore mycluster --backup-type=pgdump --backup-pvc=mycluster-pgdump-pvc -n pgouser1
```

### Fail-over Operations

To perform a manual failover, enter the following:

```
pgo failover mycluster --query -n pgouser1
```

That example queries to find the available Postgres replicas that could be promoted to the primary.

```
pgo failover mycluster --target=sometarget -n pgouser1
```

That command chooses a specific target, and starts the failover workflow.

**Create a Cluster with Auto-fail Enabled** To support an automated failover, you can specify the `-autofail` flag on a Postgres cluster when you create it as follows:

```
pgo create cluster mycluster --autofail=true --replica-count=1 -n pgouser1
```

You can set the auto-fail flag on a Postgres cluster after it is created by the following command:

```
pgo update cluster --label=autofail=false -n pgouser1
pgo update cluster --label=autofail=true -n pgouser1
```

Note that if you do a pgbackrest restore, you will need to reset the autofail flag to true after the restore is completed.

## Add-On Operations

To add a pgbouncer Deployment to your Postgres cluster, enter:

```
pgo create cluster mycluster --pgbouncer -n pgouser1
```

You can add pgbouncer after a Postgres cluster is created as follows:

```
pgo create pgbouncer mycluster
pgo create pgbouncer --selector=name=mycluster
```

You can also specify a pgbouncer password as follows:

```
pgo create cluster mycluster --pgbouncer --pgbouncer-pass=somepass -n pgouser1
```

Note, the pgbouncer configuration defaults to specifying only a single entry for the primary database. If you want it to have an entry for the replica service, add the following configuration to pgbouncer.ini:

```
{{.PG_REPLICA_SERVICE_NAME}} = host={{.PG_REPLICA_SERVICE_NAME}} port={{.PG_PORT}}
    auth_user={{.PG_USERNAME}} dbname={{.PG_DATABASE}}
```

To add a pgpool Deployment to your Postgres cluster, enter:

```
pgo create cluster mycluster --pgpool -n pgouser1
```

You can also add a pgpool to a cluster after initial creation as follows:

```
pgo create pgpool mycluster -n pgouser1
```

You can remove a pgbouncer or pgpool from a cluster as follows:

```
pgo delete pgbouncer mycluster -n pgouser1
pgo delete pgpool mycluster -n pgouser1
```

You can create a pgbadger sidecar container in your Postgres cluster pod as follows:

```
pgo create cluster mycluster --pgbadger -n pgouser1
```

Likewise, you can add the Crunchy Collect Metrics sidecar container into your Postgres cluster pod as follows:

```
pgo create cluster mycluster --metrics -n pgouser1
```

Note: backend metric storage such as Prometheus and front end visualization software such as Grafana are not created automatically by the PostgreSQL Operator. For instructions on installing Grafana and Prometheus in your environment, see the [Crunchy Container Suite documentation](#).

## Scheduled Tasks

There is a cron based scheduler included into the Operator Deployment by default.

You can create automated full pgBackRest backups every Sunday at 1 am as follows:

```
pgo create schedule mycluster --schedule="0 1 * * SUN" \
    --schedule-type=pgbackrest --pgbackrest-backup-type=full -n pgouser1
```

You can create automated diff pgBackRest backups every Monday-Saturday at 1 am as follows:

```
pgo create schedule mycluster --schedule="0 1 * * MON-SAT" \
    --schedule-type=pgbackrest --pgbackrest-backup-type=diff -n pgouser1
```

You can create automated pgBaseBackup backups every day at 1 am as follows:

In order to have a backup PVC created, users should run the `pgo backup` command against the target cluster prior to creating this schedule.

```
pgo create schedule mycluster --schedule="0 1 * * *" \
    --schedule-type=pgbasebackup --pvc-name=mycluster-backup -n pgouser1
```

You can create automated Policy every day at 1 am as follows:

```
pgo create schedule --selector=pg-cluster=mycluster --schedule="0 1 * * *" \
    --schedule-type=policy --policy=mypolicy --database=userdb \
    --secret=mycluster-testuser-secret -n pgouser1
```



## Benchmark Clusters

The pgbench utility containerized and made available to Operator users.

To create a Benchmark via Cluster Name you enter:

```
pgo benchmark mycluster -n pgouser1
```

To create a Benchmark via Selector, enter:

```
pgo benchmark --selector=pg-cluster=mycluster -n pgouser1
```

To create a Benchmark with a custom transactions, enter:

```
pgo create policy --in-file=/tmp/transactions.sql mytransactions -n pgouser1
pgo benchmark mycluster --policy=mytransactions -n pgouser1
```

To create a Benchmark with custom parameters, enter:

```
pgo benchmark mycluster --clients=10 --jobs=2 --scale=10 --transactions=100 -n pgouser1
```

You can view benchmarks by entering:

```
pgo show benchmark -n pgouser1 mycluster
```

## Complex Deployments

```
pgo create cluster mycluster --storage-config=somestorageconfig -n pgouser1
```

Likewise, you can specify a storage configuration when creating a replica:

```
pgo scale mycluster --storage-config=someslowerstorage -n pgouser1
```

This example specifies the *somestorageconfig* storage configuration to be used by the Postgres cluster. This lets you specify a storage configuration that is defined in the *pgo.yaml* file specifically for a given Postgres cluster.

You can create a Cluster using a Preferred Node as follows:

```
pgo create cluster mycluster --node-label=speed=superfast -n pgouser1
```

That command will cause a node affinity rule to be added to the Postgres pod which will influence the node upon which Kubernetes will schedule the Pod.

Likewise, you can create a Replica using a Preferred Node as follows:

```
pgo scale mycluster --node-label=speed=slowerthannormal -n pgouser1
```

```
pgo create cluster mycluster --service-type=LoadBalancer -n pgouser1
```

This command will cause the Postgres Service to be of a specific type instead of the default ClusterIP service type.

**Namespace Operations** Create an Operator namespace where Postgres clusters can be created and managed by the Operator:

```
pgo create namespace mynamespace
```

Update a Namespace to be able to be used by the Operator:

```
pgo update namespace somenamespace
```

Delete a Namespace:

```
pgo delete namespace mynamespace
```

**PGO User Operations** PGO users are users defined for authenticating to the PGO REST API. You can manage those users with the following commands:

```
pgo create pgouser someuser --pgouser-namespaces="pgouser1,pgouser2"
--pgouser-password="somepassword" --pgouser-roles="pgoadmin"
pgo create pgouser otheruser --all-namespaces --pgouser-password="somepassword"
--pgouser-roles="pgoadmin"
```

Update a user:

```
pgo update pgouser someuser --pgouser-namespaces="pgouser1,pgouser2"
--pgouser-password="somepassword" --pgouser-roles="pgoadmin"
pgo update pgouser otheruser --all-namespaces --pgouser-password="somepassword"
--pgouser-roles="pgoadmin"
```

Delete a PGO user:

```
pgo delete pgouser someuser
```

PGO roles are also managed as follows:

```
pgo create pgorole somerole --permissions="Cat,Ls"
```

Delete a PGO role with:

```
pgo delete pgorole somerole
```

Update a PGO role with:

```
pgo update pgorole somerole --permissions="Cat,Ls"
```

**Postgres User Operations** Managed Postgres users can be viewed using the following command:

```
pgo show user mycluster
```

Postgres users can be created using the following command examples:

```
pgo create user mycluster --username=somepguser --password=somepassword --managed
pgo create user --selector=name=mycluster --username=somepguser --password=somepassword --managed
```

Those commands are identical in function, and create on the mycluster Postgres cluster, a user named *somepguser*, with a password of *somepassword*, the account is *managed* meaning that these credentials are stored as a Secret on the Kube cluster in the Operator namespace.

Postgres users can be deleted using the following command:

```
pgo delete user mycluster --username=somepguser
```

That command deletes the user on the mycluster Postgres cluster.

Postgres users can be updated using the following command:

```
pgo update user mycluster --username=somepguser --password=frodo
```

That command changes the password for the user on the mycluster Postgres cluster.

**Miscellaneous** Create a cluster using the Crunchy Postgres + PostGIS container image:

```
pgo create cluster mygiscluster --ccp-image=crunchy-postgres-gis -n pgouser1
```

Create a cluster with a Custom ConfigMap:

```
pgo create cluster mycustomcluster --custom-config myconfigmap -n pgouser1
```

## pgo Global Flags

*pgo* global command flags include:

Flag	Description
<code>-n</code>	namespace targeted for the command
<code>--apiserver-url</code>	URL of the Operator REST API service, override with <code>CO_APISERVER_URL</code> environment variable
<code>--debug</code>	Enable debug messages
<code>--pgo-ca-cert</code>	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver. Override with <code>PGO_CA_CERT</code>
<code>--pgo-client-cert</code>	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver. Override with <code>PGO_CLIENT_CERT</code>
<code>--pgo-client-key</code>	The Client Key file path for authenticating to the PostgreSQL Operator apiserver. Override with <code>PGO_CLIENT_KEY</code>

## pgo Global Environment Variables

*pgo* will pick up these settings if set in your environment:

Name	Description	NOTES
<code>PGOUSERNAME</code>	The username (role) used for auth on the operator apiserver.	Requires that <code>PGOUSERPASS</code> be set.
<code>PGOUSERPASS</code>	The password for used for auth on the operator apiserver.	Requires that <code>PGOUSERNAME</code> be set.
<code>PGOUSER</code>	The path to the pgorole file.	Will be ignored if either <code>PGOUSERNAME</code> or <code>PGOUSERPASS</code> are

## pgo

The pgo command line interface.

### Synopsis

The pgo command line interface lets you create and manage PostgreSQL clusters.

### Options

<code>--apiserver-url</code>	string	The URL for the PostgreSQL Operator apiserver.
<code>--debug</code>		Enable debugging when true.
<code>-h, --help</code>		help for pgo
<code>-n, --namespace</code>	string	The namespace to use for pgo requests.
<code>--pgo-ca-cert</code>	string	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
<code>--pgo-client-cert</code>	string	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
<code>--pgo-client-key</code>	string	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

### SEE ALSO

- [pgo apply](#) - Apply a policy
- [pgo backup](#) - Perform a Backup
- [pgo benchmark](#) - Perform a pgBench benchmark against clusters
- [pgo cat](#) - Perform a cat command on a cluster
- [pgo create](#) - Create a Postgres Operator resource
- [pgo delete](#) - Delete an Operator resource
- [pgo df](#) - Display disk space for clusters
- [pgo failover](#) - Performs a manual failover
- [pgo label](#) - Label a set of clusters
- [pgo load](#) - Perform a data load
- [pgo ls](#) - Perform a ls command on a cluster
- [pgo reload](#) - Perform a cluster reload
- [pgo restore](#) - Perform a restore from previous backup
- [pgo scale](#) - Scale a PostgreSQL cluster

- [pgo scaledown](#) - Scale down a PostgreSQL cluster
- [pgo show](#) - Show the description of a cluster
- [pgo status](#) - Display PostgreSQL cluster status
- [pgo test](#) - Test cluster connectivity
- [pgo update](#) - Update a pgouser, pgorole, or cluster
- [pgo upgrade](#) - Perform an upgrade
- [pgo version](#) - Print version information for the PostgreSQL Operator
- [pgo watch](#) - Print watch information for the PostgreSQL Operator

Auto generated by spf13/cobra on 15-Aug-2019

## pgo apply

Apply a policy

### Synopsis

APPLY allows you to apply a Policy to a set of clusters. For example:

```
pgo apply mypolicy1 --selector=name=mycluster
pgo apply mypolicy1 --selector=someotherpolicy
pgo apply mypolicy1 --selector=someotherpolicy --dry-run
```

```
pgo apply [flags]
```

### Options

<code>--dry-run</code>	Shows the clusters that the label would be applied to, without labelling them.
<code>-h, --help</code>	help for apply
<code>-s, --selector string</code>	The selector to use for cluster filtering.

### Options inherited from parent commands

<code>--apiserver-url string</code>	The URL for the PostgreSQL Operator apiserver.
<code>--debug</code>	Enable debugging when true.
<code>-n, --namespace string</code>	The namespace to use for pgo requests.
<code>--pgo-ca-cert string</code>	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
<code>--pgo-client-cert string</code>	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
<code>--pgo-client-key string</code>	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

### SEE ALSO

- [pgo](#) - The pgo command line interface.

Auto generated by spf13/cobra on 15-Aug-2019

## pgo backup

Perform a Backup

### Synopsis

BACKUP performs a Backup, for example:

```
pgo backup mycluster
```

```
pgo backup [flags]
```

Options

<code>--backup-opts string</code>	The pgbackup options to pass into pgbasebackup or pgbackrest.
<code>--backup-type string</code>	The backup type to perform. Default is pgbasebackup. Valid backup types are pgbasebackup, pgbackrest and pgdump. (default "pgbackrest")
<code>-h, --help</code>	help for backup
<code>--pgbackrest-storage-type string</code>	The type of storage to use when scheduling pgBackRest backups. Either "local", "s3" or both, comma separated. (default "local")
<code>--pvc-name string</code>	The PVC name to use for the backup instead of the default.
<code>-s, --selector string</code>	The selector to use for cluster filtering.
<code>--storage-config string</code>	The name of a Storage config in pgo.yaml to use for the cluster storage. Only applies to pgbasebackup backups.

Options inherited from parent commands

<code>--apiserver-url string</code>	The URL for the PostgreSQL Operator apiserver.
<code>--debug</code>	Enable debugging when true.
<code>-n, --namespace string</code>	The namespace to use for pgo requests.
<code>--pgo-ca-cert string</code>	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
<code>--pgo-client-cert string</code>	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
<code>--pgo-client-key string</code>	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

SEE ALSO

- [pgo](#) - The pgo command line interface.

Auto generated by [spf13/cobra](#) on 15-Aug-2019

pgo benchmark

Perform a pgBench benchmark against clusters

Synopsis

Benchmark run pgBench against PostgreSQL clusters, for example:

`pgo benchmark mycluster`

`pgo benchmark [flags]`

Options

<code>-b, --benchmark-opts string</code>	The extra flags passed to pgBench during the benchmark.
<code>-c, --clients int</code>	The number of clients to be used in the benchmark. (default 1)
<code>-d, --database string</code>	The database where the benchmark should be run. (default "postgres")
<code>-h, --help</code>	help for benchmark
<code>-i, --init-opts string</code>	The extra flags passed to pgBench during the initialization of the benchmark.
<code>-j, --jobs int</code>	The number of worker threads to use for the benchmark. (default 1)
<code>-p, --policy string</code>	The name of the policy specifying custom transaction SQL for advanced benchmarking.
<code>--scale int</code>	The number to scale the amount of rows generated for the benchmark. (default 1)
<code>-s, --selector string</code>	The selector to use for cluster filtering.
<code>-t, --transactions int</code>	The number of transaction each client should run in the benchmark. (default 1)

Options inherited from parent commands

<code>--apiserver-url string</code>	The URL for the PostgreSQL Operator apiserver.
<code>--debug</code>	Enable debugging when true.
<code>-n, --namespace string</code>	The namespace to use for pgo requests.
<code>--pgo-ca-cert string</code>	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
<code>--pgo-client-cert string</code>	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
<code>--pgo-client-key string</code>	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

## SEE ALSO

- [pgo](#) - The pgo command line interface.

Auto generated by spf13/cobra on 15-Aug-2019

## pgo cat

Perform a cat command on a cluster

### Synopsis

CAT performs a Linux cat command on a cluster file. For example:

```
pgo cat mycluster /pgdata/mycluster/postgresql.conf
```

```
pgo cat [flags]
```

### Options

```
-h, --help    help for cat
```

### Options inherited from parent commands

<code>--apiserver-url string</code>	The URL for the PostgreSQL Operator apiserver.
<code>--debug</code>	Enable debugging when true.
<code>-n, --namespace string</code>	The namespace to use for pgo requests.
<code>--pgo-ca-cert string</code>	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
<code>--pgo-client-cert string</code>	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
<code>--pgo-client-key string</code>	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

## SEE ALSO

- [pgo](#) - The pgo command line interface.

Auto generated by spf13/cobra on 15-Aug-2019

## pgo clidoc

Generate Markdown of CLI commandes

### Synopsis

The clidoc command allows you to generate markdown files for all CLI commands:

```
pgo clidoc
```

```
pgo clidoc [flags]
```

Options

```
-h, --help    help for clidoc
```

Options inherited from parent commands

```
--apiserver-url string    The URL for the PostgreSQL Operator apiserver.
--debug                  Enable debugging when true.
--namespace string       The namespace to use for pgo requests.
--pgo-ca-cert string      The CA Certificate file path for authenticating to the PostgreSQL
    Operator apiserver.
--pgo-client-cert string  The Client Certificate file path for authenticating to the
    PostgreSQL Operator apiserver.
--pgo-client-key string   The Client Key file path for authenticating to the PostgreSQL
    Operator apiserver.
```

SEE ALSO

- [pgo](#) - The pgo command line interface.

Auto generated by spf13/cobra on 21-Feb-2019

pgo create

Create a Postgres Operator resource

Synopsis

CREATE allows you to create a new Operator resource. For example: pgo create cluster pgo create pgbouncer pgo create pgpool pgo create pgouser pgo create pgorole pgo create policy pgo create namespace pgo create user

```
pgo create [flags]
```

Options

```
-h, --help    help for create
```

Options inherited from parent commands

```
--apiserver-url string    The URL for the PostgreSQL Operator apiserver.
--debug                  Enable debugging when true.
-n, --namespace string    The namespace to use for pgo requests.
--pgo-ca-cert string      The CA Certificate file path for authenticating to the PostgreSQL
    Operator apiserver.
--pgo-client-cert string  The Client Certificate file path for authenticating to the
    PostgreSQL Operator apiserver.
--pgo-client-key string   The Client Key file path for authenticating to the PostgreSQL
    Operator apiserver.
```

SEE ALSO

- [pgo](#) - The pgo command line interface.
- [pgo create cluster](#) - Create a PostgreSQL cluster
- [pgo create namespace](#) - Create a namespace
- [pgo create pgbouncer](#) - Create a pgbouncer
- [pgo create pgorole](#) - Create a pgorole
- [pgo create pgouser](#) - Create a pgouser
- [pgo create pgpool](#) - Create a pgpool
- [pgo create policy](#) - Create a SQL policy
- [pgo create schedule](#) - Create a cron-like scheduled task
- [pgo create user](#) - Create a PostgreSQL user

Auto generated by spf13/cobra on 15-Aug-2019

# pgo create cluster

Create a PostgreSQL cluster

## Synopsis

Create a PostgreSQL cluster consisting of a primary and a number of replica backends. For example:

```
pgo create cluster mycluster
```

```
pgo create cluster [flags]
```

## Options

<code>--autofail</code>	If set, will cause autofailover to be enabled on this cluster.
<code>--ccp-image string</code>	The CCPImage name to use for cluster creation. If specified, overrides the value <code>crunchy-postgres</code> .
<code>-c, --ccp-image-tag string</code>	The CCPImageTag to use for cluster creation. If specified, overrides the <code>pgo.yaml</code> setting.
<code>--custom-config string</code>	The name of a configMap that holds custom PostgreSQL configuration files used to override defaults.
<code>-h, --help</code>	help for cluster
<code>-l, --labels string</code>	The labels to apply to this cluster.
<code>--metrics</code>	Adds the <code>crunchy-collect</code> container to the database pod.
<code>--node-label string</code>	The node label (key=value) to use in placing the primary database. If not set, any node is used.
<code>-w, --password string</code>	The password to use for initial database users.
<code>--pgbackrest string</code>	Enables a <code>pgBackRest</code> volume for the database pod, "true" or "false". Default from <code>pgo.yaml</code> , command line overrides default.
<code>--pgbackrest-storage-type string</code>	The type of storage to use with <code>pgBackRest</code> . Either "local", "s3" or both, comma separated. (default "local")
<code>--pgbadger</code>	Adds the <code>crunchy-pgbadger</code> container to the database pod.
<code>--pgbouncer</code>	Adds a <code>crunchy-pgbouncer</code> deployment to the cluster.
<code>--pgbouncer-pass string</code>	Password for the <code>pgbouncer</code> user of the <code>crunchy-pgbouncer</code> deployment.
<code>--pgpool</code>	Adds the <code>crunchy-pgpool</code> container to the database pod.
<code>--pgpool-secret string</code>	The name of a <code>pgpool</code> secret to use for the <code>pgpool</code> configuration.
<code>-z, --policies string</code>	The policies to apply when creating a cluster, comma separated.
<code>--replica-count int</code>	The number of replicas to create as part of the cluster.
<code>--replica-storage-config string</code>	The name of a Storage config in <code>pgo.yaml</code> to use for the cluster replica storage.
<code>-r, --resources-config string</code>	The name of a container resource configuration in <code>pgo.yaml</code> that holds CPU and memory requests and limits.
<code>-s, --secret-from string</code>	The cluster name to use when restoring secrets.
<code>-e, --series int</code>	The number of clusters to create in a series. (default 1)
<code>--service-type string</code>	The Service type to use for the PostgreSQL cluster. If not set, the <code>pgo.yaml</code> default will be used.
<code>--storage-config string</code>	The name of a Storage config in <code>pgo.yaml</code> to use for the cluster storage.

## Options inherited from parent commands

<code>--apiserver-url string</code>	The URL for the PostgreSQL Operator apiserver.
<code>--debug</code>	Enable debugging when true.
<code>-n, --namespace string</code>	The namespace to use for pgo requests.
<code>--pgo-ca-cert string</code>	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
<code>--pgo-client-cert string</code>	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
<code>--pgo-client-key string</code>	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.



SEE ALSO

- [pgo create](#) - Create a Postgres Operator resource

Auto generated by spf13/cobra on 15-Aug-2019

pgo create namespace

Create a namespace

Synopsis

Create a namespace. For example:

```
pgo create namespace somenamespace
```

```
pgo create namespace [flags]
```

Options

```
-h, --help    help for namespace
```

Options inherited from parent commands

```
      --apiserver-url string    The URL for the PostgreSQL Operator apiserver.
      --debug                  Enable debugging when true.
-n, --namespace string         The namespace to use for pgo requests.
      --pgo-ca-cert string      The CA Certificate file path for authenticating to the PostgreSQL
      Operator apiserver.
      --pgo-client-cert string  The Client Certificate file path for authenticating to the
      PostgreSQL Operator apiserver.
      --pgo-client-key string   The Client Key file path for authenticating to the PostgreSQL
      Operator apiserver.
```

SEE ALSO

- [pgo create](#) - Create a Postgres Operator resource

Auto generated by spf13/cobra on 15-Aug-2019

pgo create pgbouncer

Create a pgbouncer

Synopsis

Create a pgbouncer. For example:

```
pgo create pgbouncer mycluster
```

```
pgo create pgbouncer [flags]
```

Options

-h, --help	help for pgbouncer
--pgbouncer-pass string	Password for the pgbouncer user of the crunchy-pgbouncer deployment.
-s, --selector string	The selector to use for cluster filtering.

Options inherited from parent commands

--apiserver-url string	The URL for the PostgreSQL Operator apiserver.
--debug	Enable debugging when true.
-n, --namespace string	The namespace to use for pgo requests.
--pgo-ca-cert string	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-cert string	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-key string	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

SEE ALSO

- [pgo create](#) - Create a Postgres Operator resource

Auto generated by spf13/cobra on 15-Aug-2019

pgo create pgorole

Create a pgorole

Synopsis

Create a pgorole. For example:

```
pgo create pgorole somerole --permissions="Cat,Ls"
```

```
pgo create pgorole [flags]
```

Options

-h, --help	help for pgorole
--permissions string	specify a comma separated list of permissions for a pgorole

Options inherited from parent commands

--apiserver-url string	The URL for the PostgreSQL Operator apiserver.
--debug	Enable debugging when true.
-n, --namespace string	The namespace to use for pgo requests.
--pgo-ca-cert string	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-cert string	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-key string	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

SEE ALSO

- [pgo create](#) - Create a Postgres Operator resource

Auto generated by spf13/cobra on 15-Aug-2019

pgo create pgouser

Create a pgouser

## Synopsis

Create a pgouser. For example:

```
pgo create pgouser someuser
```

```
pgo create pgouser [flags]
```

## Options

<code>--all-namespaces</code>	specifies this user will have access to all namespaces.
<code>-h, --help</code>	help for pgouser
<code>--pgouser-namespaces string</code>	specify a comma separated list of Namespaces for a pgouser
<code>--pgouser-password string</code>	specify a password for a pgouser
<code>--pgouser-roles string</code>	specify a comma separated list of Roles for a pgouser

## Options inherited from parent commands

<code>--apiserver-url string</code>	The URL for the PostgreSQL Operator apiserver.
<code>--debug</code>	Enable debugging when true.
<code>-n, --namespace string</code>	The namespace to use for pgo requests.
<code>--pgo-ca-cert string</code>	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
<code>--pgo-client-cert string</code>	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
<code>--pgo-client-key string</code>	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

## SEE ALSO

- [pgo create](#) - Create a Postgres Operator resource

Auto generated by spf13/cobra on 15-Aug-2019

## pgo create pgpool

Create a pgpool

## Synopsis

Create a pgpool. For example:

```
pgo create pgpool mycluster
```

```
pgo create pgpool [flags]
```

## Options

<code>-h, --help</code>	help for pgpool
<code>--pgpool-secret string</code>	The name of a pgpool secret to use for the pgpool configuration.

## Options inherited from parent commands

<code>--apiserver-url string</code>	The URL for the PostgreSQL Operator apiserver.
<code>--debug</code>	Enable debugging when true.
<code>-n, --namespace string</code>	The namespace to use for pgo requests.
<code>--pgo-ca-cert string</code>	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
<code>--pgo-client-cert string</code>	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
<code>--pgo-client-key string</code>	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

SEE ALSO

- [pgo create](#) - Create a Postgres Operator resource

Auto generated by spf13/cobra on 15-Aug-2019

pgo create policy

Create a SQL policy

Synopsis

Create a policy. For example:

```
pgo create policy mypolicy --in-file=/tmp/mypolicy.sql
```

```
pgo create policy [flags]
```

Options

-h, --help	help for policy
-i, --in-file string	The policy file path to use for adding a policy.
-u, --url string	The url to use for adding a policy.

Options inherited from parent commands

--apiserver-url string	The URL for the PostgreSQL Operator apiserver.
--debug	Enable debugging when true.
-n, --namespace string	The namespace to use for pgo requests.
--pgo-ca-cert string	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-cert string	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-key string	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

SEE ALSO

- [pgo create](#) - Create a Postgres Operator resource

Auto generated by spf13/cobra on 15-Aug-2019

pgo create schedule

Create a cron-like scheduled task

Synopsis

Schedule creates a cron-like scheduled task. For example:

```
pgo create schedule --schedule="* * * * *" --schedule-type=pghbackrest --pghbackrest-backup-type=full mycluster
```

```
pgo create schedule [flags]
```

Options

-c, --ccp-image-tag string	The CCPIimageTag to use for cluster creation. If specified, overrides the pgo.yaml setting.
--database string	The database to run the SQL policy against.
-h, --help	help for schedule
--pgbackrest-backup-type string	The type of pgBackRest backup to schedule (full or diff).
--pgbackrest-storage-type string	The type of storage to use when scheduling pgBackRest backups. Either "local", "s3" or both, comma separated. (default "local")
--policy string	The policy to use for SQL schedules.
--pvc-name string	The name of the backup PVC to use (only used in pgbasebackup schedules).
--schedule string	The schedule assigned to the cron task.
--schedule-opts string	The custom options passed to the create schedule API.
--schedule-type string	The type of schedule to be created (pgbackrest, pgbasebackup or policy).
--secret string	The secret name for the username and password of the PostgreSQL role for SQL schedules.
-s, --selector string	The selector to use for cluster filtering.

Options inherited from parent commands

--apiserver-url string	The URL for the PostgreSQL Operator apiserver.
--debug	Enable debugging when true.
-n, --namespace string	The namespace to use for pgo requests.
--pgo-ca-cert string	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-cert string	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-key string	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

SEE ALSO

- [pgo create](#) - Create a Postgres Operator resource

Auto generated by spf13/cobra on 15-Aug-2019

pgo create user

Create a PostgreSQL user

Synopsis

Create a postgres user. For example:

```
pgo create user --username=someuser --all --managed
pgo create user --username=someuser mycluster --managed
pgo create user --username=someuser -selector=name=mycluster --managed
pgo create user --username=user1 --selector=name=mycluster
```

```
pgo create user [flags]
```

Options

-h, --help	help for user
--managed	Creates a user with secrets that can be managed by the Operator.
--password string	The password to use for creating a new user which overrides a generated password.
--password-length int	If no password is supplied, this is the length of the auto generated password (default 22)
-s, --selector string	The selector to use for cluster filtering.
--username string	The username to use for creating a new user
--valid-days int	Sets passwords for new users to X days. (default 30)

Options inherited from parent commands

--apiserver-url string	The URL for the PostgreSQL Operator apiserver.
--debug	Enable debugging when true.
-n, --namespace string	The namespace to use for pgo requests.
--pgo-ca-cert string	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-cert string	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-key string	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

SEE ALSO

- [pgo create](#) - Create a Postgres Operator resource

Auto generated by spf13/cobra on 15-Aug-2019

pgo delete

Delete an Operator resource

Synopsis

The delete command allows you to delete an Operator resource. For example:

```
pgo delete backup mycluster
pgo delete benchmark mycluster
pgo delete cluster mycluster
pgo delete cluster mycluster --delete-data
pgo delete cluster mycluster --delete-data --delete-backups
pgo delete label mycluster --label=env=research
pgo delete pgbouncer mycluster
pgo delete pgpool mycluster
pgo delete pgouser someuser
pgo delete pgorole somerole
pgo delete policy mypolicy
pgo delete namespace mynamespace
pgo delete schedule --schedule-name=mycluster-pgbackrest-full
pgo delete schedule --selector=name=mycluster
pgo delete schedule mycluster
pgo delete user --username=testuser --selector=name=mycluster
```

```
pgo delete [flags]
```

Options

```
-h, --help    help for delete
```

Options inherited from parent commands

--apiserver-url string	The URL for the PostgreSQL Operator apiserver.
--debug	Enable debugging when true.
-n, --namespace string	The namespace to use for pgo requests.
--pgo-ca-cert string	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-cert string	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-key string	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

SEE ALSO

- [pgo](#) - The pgo command line interface.

- [pgo delete backup](#) - Delete a backup
- [pgo delete benchmark](#) - Delete benchmarks for a cluster
- [pgo delete cluster](#) - Delete a PostgreSQL cluster
- [pgo delete label](#) - Delete a label from clusters
- [pgo delete namespace](#) - Delete namespaces
- [pgo delete pgbouncer](#) - Delete a pgbouncer from a cluster
- [pgo delete pgorole](#) - Delete a pgorole
- [pgo delete pgouser](#) - Delete a pgouser
- [pgo delete pgpool](#) - Delete a pgpool from a cluster
- [pgo delete policy](#) - Delete a SQL policy
- [pgo delete schedule](#) - Delete a schedule
- [pgo delete user](#) - Delete a user

Auto generated by spf13/cobra on 15-Aug-2019

## pgo delete backup

Delete a backup

### Synopsis

Delete a backup. For example:

```
pgo delete backup mydatabase
```

```
pgo delete backup [flags]
```

### Options

```
-h, --help    help for backup
```

### Options inherited from parent commands

```
--apiserver-url string    The URL for the PostgreSQL Operator apiserver.
--debug                  Enable debugging when true.
-n, --namespace string    The namespace to use for pgo requests.
--pgo-ca-cert string      The CA Certificate file path for authenticating to the PostgreSQL
                           Operator apiserver.
--pgo-client-cert string  The Client Certificate file path for authenticating to the
                           PostgreSQL Operator apiserver.
--pgo-client-key string   The Client Key file path for authenticating to the PostgreSQL
                           Operator apiserver.
```

### SEE ALSO

- [pgo delete](#) - Delete an Operator resource

Auto generated by spf13/cobra on 15-Aug-2019

## pgo delete benchmark

Delete benchmarks for a cluster

### Synopsis

Delete benchmarks for a cluster. For example:

```
pgo delete benchmark mycluster
pgo delete benchmark --selector=env=test
```

```
pgo delete benchmark [flags]
```

Options

-h, --help	help for benchmark
-s, --selector string	The selector to use for cluster filtering.

Options inherited from parent commands

--apiserver-url string	The URL for the PostgreSQL Operator apiserver.
--debug	Enable debugging when true.
-n, --namespace string	The namespace to use for pgo requests.
--pgo-ca-cert string	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-cert string	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-key string	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

SEE ALSO

- [pgo delete](#) - Delete an Operator resource

Auto generated by spf13/cobra on 15-Aug-2019

pgo delete cluster

Delete a PostgreSQL cluster

Synopsis

Delete a PostgreSQL cluster. For example:

```
pgo delete cluster --all
pgo delete cluster mycluster
```

```
pgo delete cluster [flags]
```

Options

--all	all resources.
-b, --delete-backups	Causes the backups for this cluster to be removed permanently.
-d, --delete-data	Causes the data for this cluster to be removed permanently.
-h, --help	help for cluster
--no-prompt	No command line confirmation.
-s, --selector string	The selector to use for cluster filtering.

Options inherited from parent commands

--apiserver-url string	The URL for the PostgreSQL Operator apiserver.
--debug	Enable debugging when true.
-n, --namespace string	The namespace to use for pgo requests.
--pgo-ca-cert string	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-cert string	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-key string	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

SEE ALSO

- [pgo delete](#) - Delete an Operator resource

Auto generated by spf13/cobra on 15-Aug-2019



# pgo delete label

Delete a label from clusters

## Synopsis

Delete a label from clusters. For example:

```
pgo delete label mycluster --label=env=research
pgo delete label all --label=env=research
pgo delete label --selector=group=southwest --label=env=research
```

```
pgo delete label [flags]
```

## Options

-h, --help	help for label
--label string	The label to delete for any selected or specified clusters.
-s, --selector string	The selector to use for cluster filtering.

## Options inherited from parent commands

--apiserver-url string	The URL for the PostgreSQL Operator apiserver.
--debug	Enable debugging when true.
-n, --namespace string	The namespace to use for pgo requests.
--pgo-ca-cert string	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-cert string	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-key string	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

## SEE ALSO

- [pgo delete](#) - Delete an Operator resource

Auto generated by spf13/cobra on 15-Aug-2019

# pgo delete namespace

Delete namespaces

## Synopsis

Delete namespaces. For example:

```
pgo delete namespace mynamespace
pgo delete namespace --selector=env=test
```

```
pgo delete namespace [flags]
```

## Options

-h, --help	help for namespace
------------	--------------------

## Options inherited from parent commands

```
--apiserver-url string      The URL for the PostgreSQL Operator apiserver.
--debug                    Enable debugging when true.
-n, --namespace string      The namespace to use for pgo requests.
--pgo-ca-cert string        The CA Certificate file path for authenticating to the PostgreSQL
    Operator apiserver.
--pgo-client-cert string    The Client Certificate file path for authenticating to the
    PostgreSQL Operator apiserver.
--pgo-client-key string     The Client Key file path for authenticating to the PostgreSQL
    Operator apiserver.
```

## SEE ALSO

- [pgo delete](#) - Delete an Operator resource

Auto generated by spf13/cobra on 15-Aug-2019

## pgo delete pgbouncer

Delete a pgbouncer from a cluster

### Synopsis

Delete a pgbouncer from a cluster. For example:

```
pgo delete pgbouncer mycluster
```

```
pgo delete pgbouncer [flags]
```

### Options

```
-h, --help                help for pgbouncer
--no-prompt               No command line confirmation.
-s, --selector string     The selector to use for cluster filtering.
```

### Options inherited from parent commands

```
--apiserver-url string      The URL for the PostgreSQL Operator apiserver.
--debug                    Enable debugging when true.
-n, --namespace string      The namespace to use for pgo requests.
--pgo-ca-cert string        The CA Certificate file path for authenticating to the PostgreSQL
    Operator apiserver.
--pgo-client-cert string    The Client Certificate file path for authenticating to the
    PostgreSQL Operator apiserver.
--pgo-client-key string     The Client Key file path for authenticating to the PostgreSQL
    Operator apiserver.
```

## SEE ALSO

- [pgo delete](#) - Delete an Operator resource

Auto generated by spf13/cobra on 15-Aug-2019

## pgo delete pgorole

Delete a pgorole

### Synopsis

Delete a pgorole. For example:

```
pgo delete pgorole somerole
```

```
pgo delete pgorole [flags]
```

### Options

--all	all resources.
-h, --help	help for pgorole
--no-prompt	No command line confirmation.

### Options inherited from parent commands

--apiserver-url string	The URL for the PostgreSQL Operator apiserver.
--debug	Enable debugging when true.
-n, --namespace string	The namespace to use for pgo requests.
--pgo-ca-cert string	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-cert string	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-key string	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

### SEE ALSO

- [pgo delete](#) - Delete an Operator resource

Auto generated by spf13/cobra on 15-Aug-2019

## pgo delete pgouser

Delete a pgouser

### Synopsis

Delete a pgouser. For example:

```
pgo delete pgouser someuser
```

```
pgo delete pgouser [flags]
```

### Options

--all	all resources.
-h, --help	help for pgouser
--no-prompt	No command line confirmation.

### Options inherited from parent commands

--apiserver-url string	The URL for the PostgreSQL Operator apiserver.
--debug	Enable debugging when true.
-n, --namespace string	The namespace to use for pgo requests.
--pgo-ca-cert string	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-cert string	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-key string	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

### SEE ALSO

- [pgo delete](#) - Delete an Operator resource

Auto generated by spf13/cobra on 15-Aug-2019

## pgo delete pgpool

Delete a pgpool from a cluster

Synopsis

Delete a pgpool from a cluster. For example:

```
pgo delete pgpool mycluster
```

```
pgo delete pgpool [flags]
```

Options

-h, --help	help for pgpool
--no-prompt	No command line confirmation.
-s, --selector string	The selector to use for cluster filtering.

Options inherited from parent commands

--apiserver-url string	The URL for the PostgreSQL Operator apiserver.
--debug	Enable debugging when true.
-n, --namespace string	The namespace to use for pgo requests.
--pgo-ca-cert string	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-cert string	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-key string	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

SEE ALSO

- [pgo delete](#) - Delete an Operator resource

Auto generated by spf13/cobra on 15-Aug-2019

pgo delete policy

Delete a SQL policy

Synopsis

Delete a policy. For example:

```
pgo delete policy mypolicy
```

```
pgo delete policy [flags]
```

Options

--all	all resources.
-h, --help	help for policy
--no-prompt	No command line confirmation.

Options inherited from parent commands

--apiserver-url string	The URL for the PostgreSQL Operator apiserver.
--debug	Enable debugging when true.
-n, --namespace string	The namespace to use for pgo requests.
--pgo-ca-cert string	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-cert string	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-key string	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

SEE ALSO

- [pgo delete](#) - Delete an Operator resource

Auto generated by spf13/cobra on 15-Aug-2019

pgo delete schedule

Delete a schedule

Synopsis

Delete a cron-like schedule. For example:

```
pgo delete schedule mycluster
pgo delete schedule --selector=env=test
pgo delete schedule --schedule-name=mycluster-pgbackrest-full
```

```
pgo delete schedule [flags]
```

Options

-h, --help	help for schedule
--no-prompt	No command line confirmation.
--schedule-name string	The name of the schedule to delete.
-s, --selector string	The selector to use for cluster filtering.

Options inherited from parent commands

--apiserver-url string	The URL for the PostgreSQL Operator apiserver.
--debug	Enable debugging when true.
-n, --namespace string	The namespace to use for pgo requests.
--pgo-ca-cert string	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-cert string	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-key string	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

SEE ALSO

- [pgo delete](#) - Delete an Operator resource

Auto generated by spf13/cobra on 15-Aug-2019

pgo delete upgrade

Delete an upgrade

Synopsis

Delete an upgrade. For example:

```
pgo delete upgrade mydatabase
```

```
pgo delete upgrade [flags]
```

Options

-h, --help	help for upgrade
------------	------------------

Options inherited from parent commands

--apiserver-url string	The URL for the PostgreSQL Operator apiserver.
--debug	Enable debugging when true.
-n, --namespace string	The namespace to use for pgo requests.
--pgo-ca-cert string	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-cert string	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-key string	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

SEE ALSO

- [pgo delete](#) - Delete a backup, benchmark, cluster, pgbouncer, pgpool, label, policy, upgrade, or user

Auto generated by spf13/cobra on 27-Mar-2019

pgo delete user

Delete a user

Synopsis

Delete a user. For example:

```
pgo delete user --username=someuser --selector=name=mycluster
```

```
pgo delete user [flags]
```

Options

--all	all clusters.
-h, --help	help for user
--no-prompt	No command line confirmation.
-s, --selector string	The selector to use for cluster filtering.
--username string	The username to delete.

Options inherited from parent commands

--apiserver-url string	The URL for the PostgreSQL Operator apiserver.
--debug	Enable debugging when true.
-n, --namespace string	The namespace to use for pgo requests.
--pgo-ca-cert string	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-cert string	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-key string	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

SEE ALSO

- [pgo delete](#) - Delete an Operator resource

Auto generated by spf13/cobra on 15-Aug-2019

pgo df

Display disk space for clusters

## Synopsis

Displays the disk status for PostgreSQL clusters. For example:

```
pgo df mycluster
pgo df all
pgo df --selector=env=research
```

```
pgo df [flags]
```

## Options

```
-h, --help                help for df
-s, --selector string      The selector to use for cluster filtering.
```

## Options inherited from parent commands

```
      --apiserver-url string    The URL for the PostgreSQL Operator apiserver.
      --debug                  Enable debugging when true.
-n, --namespace string        The namespace to use for pgo requests.
      --pgo-ca-cert string      The CA Certificate file path for authenticating to the PostgreSQL
      Operator apiserver.
      --pgo-client-cert string  The Client Certificate file path for authenticating to the
      PostgreSQL Operator apiserver.
      --pgo-client-key string   The Client Key file path for authenticating to the PostgreSQL
      Operator apiserver.
```

## SEE ALSO

- [pgo](#) - The pgo command line interface.

Auto generated by spf13/cobra on 15-Aug-2019

## pgo failover

Performs a manual failover

## Synopsis

Performs a manual failover. For example:

```
pgo failover mycluster
```

```
pgo failover [flags]
```

## Options

```
      --autofail-replace-replica string  If 'true', causes a replica to be created to replace the
      promoted replica.  If 'false', causes a replica to not be created, if not set, the
      pgo.yaml AutofailReplaceReplica setting is used.
-h, --help                                help for failover
      --no-prompt                          No command line confirmation.
      --query                              Prints the list of failover candidates.
      --target string                      The replica target which the failover will occur on.
```

## Options inherited from parent commands

<code>--apiserver-url</code>	<code>string</code>	The URL for the PostgreSQL Operator apiserver.
<code>--debug</code>		Enable debugging when true.
<code>-n, --namespace</code>	<code>string</code>	The namespace to use for pgo requests.
<code>--pgo-ca-cert</code>	<code>string</code>	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
<code>--pgo-client-cert</code>	<code>string</code>	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
<code>--pgo-client-key</code>	<code>string</code>	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

## SEE ALSO

- [pgo](#) - The pgo command line interface.

Auto generated by spf13/cobra on 15-Aug-2019

## pgo label

Label a set of clusters

### Synopsis

LABEL allows you to add or remove a label on a set of clusters. For example:

```
pgo label mycluster yourcluster --label=environment=prod
pgo label all --label=environment=prod
pgo label --label=environment=prod --selector=name=mycluster
pgo label --label=environment=prod --selector=status=final --dry-run
```

```
pgo label [flags]
```

### Options

<code>--dry-run</code>		Shows the clusters that the label would be applied to, without labelling them.
<code>-h, --help</code>		help for label
<code>--label</code>	<code>string</code>	The new label to apply for any selected or specified clusters.
<code>-s, --selector</code>	<code>string</code>	The selector to use for cluster filtering.

### Options inherited from parent commands

<code>--apiserver-url</code>	<code>string</code>	The URL for the PostgreSQL Operator apiserver.
<code>--debug</code>		Enable debugging when true.
<code>-n, --namespace</code>	<code>string</code>	The namespace to use for pgo requests.
<code>--pgo-ca-cert</code>	<code>string</code>	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
<code>--pgo-client-cert</code>	<code>string</code>	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
<code>--pgo-client-key</code>	<code>string</code>	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

## SEE ALSO

- [pgo](#) - The pgo command line interface.

Auto generated by spf13/cobra on 15-Aug-2019

## pgo load

Perform a data load



Synopsis

LOAD performs a load. For example:

```
pgo load --load-config=./load.json --selector=project=xray
```

```
pgo load [flags]
```

Options

-h, --help	help for load
--load-config string	The load configuration to use that defines the load job.
--policies string	The policies to apply before loading a file, comma separated.
-s, --selector string	The selector to use for cluster filtering.

Options inherited from parent commands

--apiserver-url string	The URL for the PostgreSQL Operator apiserver.
--debug	Enable debugging when true.
-n, --namespace string	The namespace to use for pgo requests.
--pgo-ca-cert string	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-cert string	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-key string	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

SEE ALSO

- [pgo](#) - The pgo command line interface.

Auto generated by spf13/cobra on 15-Aug-2019

pgo ls

Perform a ls command on a cluster

Synopsis

LS performs a Linux ls command on a cluster directory. For example:

```
pgo ls mycluster /pgdata/mycluster/pg_log
```

```
pgo ls [flags]
```

Options

-h, --help	help for ls
------------	-------------

Options inherited from parent commands

--apiserver-url string	The URL for the PostgreSQL Operator apiserver.
--debug	Enable debugging when true.
-n, --namespace string	The namespace to use for pgo requests.
--pgo-ca-cert string	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-cert string	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-key string	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

SEE ALSO

- [pgo](#) - The pgo command line interface.

Auto generated by spf13/cobra on 15-Aug-2019

# pgo reload

Perform a cluster reload

## Synopsis

RELOAD performs a PostgreSQL reload on a cluster or set of clusters. For example:

```
pgo reload mycluster
```

```
pgo reload [flags]
```

## Options

-h, --help	help for reload
--no-prompt	No command line confirmation.
-s, --selector string	The selector to use for cluster filtering.

## Options inherited from parent commands

--apiserver-url string	The URL for the PostgreSQL Operator apiserver.
--debug	Enable debugging when true.
-n, --namespace string	The namespace to use for pgo requests.
--pgo-ca-cert string	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-cert string	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-key string	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

## SEE ALSO

- [pgo](#) - The pgo command line interface.

Auto generated by spf13/cobra on 15-Aug-2019

# pgo restore

Perform a restore from previous backup

## Synopsis

RESTORE performs a restore to a new PostgreSQL cluster. This includes stopping the database and recreating a new primary with the restored data. Valid backup types to restore from are pgbackrest, pgbasebackup and pgdump. For example:

```
pgo restore mycluster
```

```
pgo restore [flags]
```

## Options

--backup-opts string	The restore options for pgbackrest or pgdump.
--backup-path string	The path for the directory containing the pg_basebackup backup to be utilized for the restore. If omitted, defaults to the latest backup.
--backup-pvc string	The PVC containing the pgdump or pgbasebackup backup directory to restore from.
--backup-type string	The type of backup to restore from, default is pgbackrest. Valid types are pgbackrest, pgdump or pgbasebackup.
-h, --help	help for restore
--no-prompt	No command line confirmation.

<code>--node-label</code>	string	The node label (key=value) to use when scheduling the restore job, and in the case of a pgBackRest restore, also the new (i.e. restored) primary deployment. If not set, any node is used.
<code>--pgbackrest-storage-type</code>	string	The type of storage to use for a pgBackRest restore. Either "local", "s3". (default "local")
<code>--pitr-target</code>	string	The PITR target, being a PostgreSQL timestamp such as '2018-08-13 11:25:42.582117-04'.
<code>--restore-to-pvc</code>	string	The name of the PVC to restore into when restoring from a pgbasebackup backup.

### Options inherited from parent commands

<code>--apiserver-url</code>	string	The URL for the PostgreSQL Operator apiserver.
<code>--debug</code>		Enable debugging when true.
<code>-n, --namespace</code>	string	The namespace to use for pgo requests.
<code>--pgo-ca-cert</code>	string	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
<code>--pgo-client-cert</code>	string	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
<code>--pgo-client-key</code>	string	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

### SEE ALSO

- [pgo](#) - The pgo command line interface.

Auto generated by spf13/cobra on 15-Aug-2019

## pgo scale

Scale a PostgreSQL cluster

### Synopsis

The scale command allows you to adjust a Cluster’s replica configuration. For example:

```
pgo scale mycluster --replica-count=1
```

```
pgo scale [flags]
```

### Options

<code>--ccp-image-tag</code>	string	The CCPImageTag to use for cluster creation. If specified, overrides the .pgo.yaml setting.
<code>-h, --help</code>		help for scale
<code>--no-prompt</code>		No command line confirmation.
<code>--node-label</code>	string	The node label (key) to use in placing the primary database. If not set, any node is used.
<code>--replica-count</code>	int	The replica count to apply to the clusters. (default 1)
<code>--resources-config</code>	string	The name of a container resource configuration in pgo.yaml that holds CPU and memory requests and limits.
<code>--service-type</code>	string	The service type to use in the replica Service. If not set, the default in pgo.yaml will be used.
<code>--storage-config</code>	string	The name of a Storage config in pgo.yaml to use for the replica storage.

### Options inherited from parent commands

<code>--apiserver-url</code>	string	The URL for the PostgreSQL Operator apiserver.
<code>--debug</code>		Enable debugging when true.
<code>-n, --namespace</code>	string	The namespace to use for pgo requests.
<code>--pgo-ca-cert</code>	string	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.

```
--pgo-client-cert string    The Client Certificate file path for authenticating to the
                             PostgreSQL Operator apiserver.
--pgo-client-key string     The Client Key file path for authenticating to the PostgreSQL
                             Operator apiserver.
```

## SEE ALSO

- [pgo](#) - The pgo command line interface.

Auto generated by spf13/cobra on 15-Aug-2019

## pgo scaledown

Scale down a PostgreSQL cluster

### Synopsis

The scale command allows you to scale down a Cluster's replica configuration. For example:

To list targetable replicas:

```
pgo scaledown mycluster --query
```

To scale down a specific replica:

```
pgo scaledown mycluster --target=mycluster-replica-xxxx
```

```
pgo scaledown [flags]
```

### Options

-d, --delete-data	Causes the data for the scaled down replica to be removed permanently.
-h, --help	help for scaledown
--no-prompt	No command line confirmation.
--query	Prints the list of targetable replica candidates.
--target string	The replica to target for scaling down

### Options inherited from parent commands

--apiserver-url string	The URL for the PostgreSQL Operator apiserver.
--debug	Enable debugging when true.
-n, --namespace string	The namespace to use for pgo requests.
--pgo-ca-cert string	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-cert string	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-key string	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

## SEE ALSO

- [pgo](#) - The pgo command line interface.

Auto generated by spf13/cobra on 15-Aug-2019

## pgo show

Show the description of a cluster

## Synopsis

Show allows you to show the details of a policy, backup, pvc, or cluster. For example:

```
pgo show backup mycluster
pgo show backup mycluster --backup-type=pgbackrest
pgo show benchmark mycluster
pgo show cluster mycluster
pgo show config
pgo show pgouser someuser
pgo show policy policy1
pgo show pvc mycluster
pgo show namespace
pgo show workflow 25927091-b343-4017-be4b-71575f0b3eb5
pgo show user --selector=name=mycluster
```

```
pgo show [flags]
```

## Options

```
-h, --help    help for show
```

## Options inherited from parent commands

--apiserver-url string	The URL for the PostgreSQL Operator apiserver.
--debug	Enable debugging when true.
-n, --namespace string	The namespace to use for pgo requests.
--pgo-ca-cert string	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-cert string	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-key string	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

## SEE ALSO

- [pgo](#) - The pgo command line interface.
- [pgo show backup](#) - Show backup information
- [pgo show benchmark](#) - Show benchmark information
- [pgo show cluster](#) - Show cluster information
- [pgo show config](#) - Show configuration information
- [pgo show namespace](#) - Show namespace information
- [pgo show pgorole](#) - Show pgorole information
- [pgo show pgouser](#) - Show pgouser information
- [pgo show policy](#) - Show policy information
- [pgo show pvc](#) - Show PVC information
- [pgo show schedule](#) - Show schedule information
- [pgo show user](#) - Show user information
- [pgo show workflow](#) - Show workflow information

Auto generated by spf13/cobra on 15-Aug-2019

## pgo show backup

Show backup information

## Synopsis

Show backup information. For example:

```
pgo show backup mycluser
```

```
pgo show backup [flags]
```

Options

```
--backup-type string    The backup type output to list. Valid choices are pgbasebackup or
                        pgbackrest (default). (default "pgbackrest")
-h, --help              help for backup
```

Options inherited from parent commands

```
--apiserver-url string  The URL for the PostgreSQL Operator apiserver.
--debug                Enable debugging when true.
-n, --namespace string  The namespace to use for pgo requests.
--pgo-ca-cert string    The CA Certificate file path for authenticating to the PostgreSQL
                        Operator apiserver.
--pgo-client-cert string The Client Certificate file path for authenticating to the
                        PostgreSQL Operator apiserver.
--pgo-client-key string  The Client Key file path for authenticating to the PostgreSQL
                        Operator apiserver.
```

SEE ALSO

- [pgo show](#) - Show the description of a cluster

Auto generated by spf13/cobra on 15-Aug-2019

pgo show benchmark

Show benchmark information

Synopsis

Show benchmark results for clusters. For example:

```
pgo show benchmark mycluster
pgo show benchmark --selector=pg-cluster=mycluster
```

```
pgo show benchmark [flags]
```

Options

```
-h, --help              help for benchmark
-s, --selector string    The selector to use for cluster filtering.
```

Options inherited from parent commands

```
--apiserver-url string  The URL for the PostgreSQL Operator apiserver.
--debug                Enable debugging when true.
-n, --namespace string  The namespace to use for pgo requests.
--pgo-ca-cert string    The CA Certificate file path for authenticating to the PostgreSQL
                        Operator apiserver.
--pgo-client-cert string The Client Certificate file path for authenticating to the
                        PostgreSQL Operator apiserver.
--pgo-client-key string  The Client Key file path for authenticating to the PostgreSQL
                        Operator apiserver.
```

SEE ALSO

- [pgo show](#) - Show the description of a cluster

Auto generated by spf13/cobra on 15-Aug-2019

pgo show cluster

Show cluster information

## Synopsis

Show a PostgreSQL cluster. For example:

```
pgo show cluster --all
pgo show cluster mycluster
```

```
pgo show cluster [flags]
```

## Options

<code>--all</code>	show all resources.
<code>--ccp-image-tag string</code>	Filter the results based on the image tag of the cluster.
<code>-h, --help</code>	help for cluster
<code>-o, --output string</code>	The output format. Currently, json is the only supported value.
<code>-s, --selector string</code>	The selector to use for cluster filtering.

## Options inherited from parent commands

<code>--apiserver-url string</code>	The URL for the PostgreSQL Operator apiserver.
<code>--debug</code>	Enable debugging when true.
<code>-n, --namespace string</code>	The namespace to use for pgo requests.
<code>--pgo-ca-cert string</code>	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
<code>--pgo-client-cert string</code>	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
<code>--pgo-client-key string</code>	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

## SEE ALSO

- [pgo show](#) - Show the description of a cluster

Auto generated by spf13/cobra on 15-Aug-2019

## pgo show config

Show configuration information

## Synopsis

Show configuration information for the Operator. For example:

```
pgo show config
```

```
pgo show config [flags]
```

## Options

<code>-h, --help</code>	help for config
-------------------------	-----------------

## Options inherited from parent commands

<code>--apiserver-url string</code>	The URL for the PostgreSQL Operator apiserver.
<code>--debug</code>	Enable debugging when true.
<code>-n, --namespace string</code>	The namespace to use for pgo requests.
<code>--pgo-ca-cert string</code>	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
<code>--pgo-client-cert string</code>	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
<code>--pgo-client-key string</code>	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

SEE ALSO

- [pgo show](#) - Show the description of a cluster

Auto generated by spf13/cobra on 15-Aug-2019

pgo show namespace

Show namespace information

Synopsis

Show namespace information for the Operator. For example:

```
pgo show namespace
```

```
pgo show namespace [flags]
```

Options

```
    --all      show all resources.
-h, --help    help for namespace
```

Options inherited from parent commands

```
    --apiserver-url string    The URL for the PostgreSQL Operator apiserver.
    --debug                  Enable debugging when true.
-n, --namespace string      The namespace to use for pgo requests.
    --pgo-ca-cert string     The CA Certificate file path for authenticating to the PostgreSQL
    Operator apiserver.
    --pgo-client-cert string The Client Certificate file path for authenticating to the
    PostgreSQL Operator apiserver.
    --pgo-client-key string  The Client Key file path for authenticating to the PostgreSQL
    Operator apiserver.
```

SEE ALSO

- [pgo show](#) - Show the description of a cluster

Auto generated by spf13/cobra on 15-Aug-2019

pgo show pgorole

Show pgorole information

Synopsis

Show pgorole information . For example:

```
pgo show pgorole somerole
```

```
pgo show pgorole [flags]
```



Options

--all	show all resources.
-h, --help	help for pgorole

Options inherited from parent commands

--apiserver-url string	The URL for the PostgreSQL Operator apiserver.
--debug	Enable debugging when true.
-n, --namespace string	The namespace to use for pgo requests.
--pgo-ca-cert string	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-cert string	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-key string	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

SEE ALSO

- [pgo show](#) - Show the description of a cluster

Auto generated by spf13/cobra on 15-Aug-2019

pgo show pgouser

Show pgouser information

Synopsis

Show pgouser information for an Operator user. For example:

```
pgo show pgouser someuser
```

```
pgo show pgouser [flags]
```

Options

--all	show all resources.
-h, --help	help for pgouser

Options inherited from parent commands

--apiserver-url string	The URL for the PostgreSQL Operator apiserver.
--debug	Enable debugging when true.
-n, --namespace string	The namespace to use for pgo requests.
--pgo-ca-cert string	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-cert string	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-key string	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

SEE ALSO

- [pgo show](#) - Show the description of a cluster

Auto generated by spf13/cobra on 15-Aug-2019

pgo show policy

Show policy information

## Synopsis

Show policy information. For example:

```
pgo show policy --all
pgo show policy policy1
```

```
pgo show policy [flags]
```

## Options

```
    --all      show all resources.
-h, --help    help for policy
```

## Options inherited from parent commands

```
    --apiserver-url string    The URL for the PostgreSQL Operator apiserver.
    --debug                  Enable debugging when true.
-n, --namespace string      The namespace to use for pgo requests.
    --pgo-ca-cert string     The CA Certificate file path for authenticating to the PostgreSQL
                             Operator apiserver.
    --pgo-client-cert string The Client Certificate file path for authenticating to the
                             PostgreSQL Operator apiserver.
    --pgo-client-key string  The Client Key file path for authenticating to the PostgreSQL
                             Operator apiserver.
```

## SEE ALSO

- [pgo show](#) - Show the description of a cluster

Auto generated by spf13/cobra on 15-Aug-2019

## pgo show pvc

Show PVC information

## Synopsis

Show PVC information. For example:

```
pgo show pvc mycluster
pgo show pvc --all
pgo show pvc mycluster-backup
pgo show pvc mycluster-xlog
pgo show pvc a2-backup --pvc-root=a2-backups/2019-01-12-17-09-42
```

```
pgo show pvc [flags]
```

## Options

```
    --all      show all resources.
-h, --help    help for pvc
    --node-label string  The node label (key=value) to use
    --pvc-root string    The PVC directory to list.
```

## Options inherited from parent commands

<code>--apiserver-url</code>	string	The URL for the PostgreSQL Operator apiserver.
<code>--debug</code>		Enable debugging when true.
<code>-n, --namespace</code>	string	The namespace to use for pgo requests.
<code>--pgo-ca-cert</code>	string	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
<code>--pgo-client-cert</code>	string	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
<code>--pgo-client-key</code>	string	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

## SEE ALSO

- [pgo show](#) - Show the description of a cluster

Auto generated by spf13/cobra on 15-Aug-2019

## pgo show schedule

Show schedule information

### Synopsis

Show cron-like schedules. For example:

```
pgo show schedule mycluster
pgo show schedule --selector=pg-cluster=mycluster
pgo show schedule --schedule-name=mycluster-pgbackrest-full
```

```
pgo show schedule [flags]
```

### Options

<code>-h, --help</code>	help for schedule
<code>--no-prompt</code>	No command line confirmation.
<code>--schedule-name</code>	string The name of the schedule to show.
<code>-s, --selector</code>	string The selector to use for cluster filtering.

### Options inherited from parent commands

<code>--apiserver-url</code>	string	The URL for the PostgreSQL Operator apiserver.
<code>--debug</code>		Enable debugging when true.
<code>-n, --namespace</code>	string	The namespace to use for pgo requests.
<code>--pgo-ca-cert</code>	string	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
<code>--pgo-client-cert</code>	string	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
<code>--pgo-client-key</code>	string	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

## SEE ALSO

- [pgo show](#) - Show the description of a cluster

Auto generated by spf13/cobra on 15-Aug-2019

## pgo show upgrade

Show upgrade information

Synopsis

Show upgrade information. For example:

```
pgo show upgrade mycluster
```

```
pgo show upgrade [flags]
```

Options

```
-h, --help    help for upgrade
```

Options inherited from parent commands

--apiserver-url string	The URL for the PostgreSQL Operator apiserver.
--debug	Enable debugging when true.
-n, --namespace string	The namespace to use for pgo requests.
--pgo-ca-cert string	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-cert string	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-key string	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

SEE ALSO

- [pgo show](#) - Show the description of a cluster

Auto generated by spf13/cobra on 27-Mar-2019

pgo show user

Show user information

Synopsis

Show users on a cluster. For example:

```
pgo show user --all
pgo show user mycluster
pgo show user --selector=name=nycluster
```

```
pgo show user [flags]
```

Options

--all	show all clusters.
--expired string	Shows passwords that will expire in X days.
-h, --help	help for user
-s, --selector string	The selector to use for cluster filtering.

Options inherited from parent commands

--apiserver-url string	The URL for the PostgreSQL Operator apiserver.
--debug	Enable debugging when true.
-n, --namespace string	The namespace to use for pgo requests.
--pgo-ca-cert string	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-cert string	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-key string	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

SEE ALSO

- [pgo show](#) - Show the description of a cluster

Auto generated by spf13/cobra on 15-Aug-2019

pgo show workflow

Show workflow information

Synopsis

Show workflow information for a given workflow. For example:

```
pgo show workflow 25927091-b343-4017-be4b-71575f0b3eb5
```

```
pgo show workflow [flags]
```

Options

```
-h, --help    help for workflow
```

Options inherited from parent commands

```
    --apiserver-url string    The URL for the PostgreSQL Operator apiserver.
    --debug                  Enable debugging when true.
-n, --namespace string      The namespace to use for pgo requests.
    --pgo-ca-cert string     The CA Certificate file path for authenticating to the PostgreSQL
    Operator apiserver.
    --pgo-client-cert string The Client Certificate file path for authenticating to the
    PostgreSQL Operator apiserver.
    --pgo-client-key string  The Client Key file path for authenticating to the PostgreSQL
    Operator apiserver.
```

SEE ALSO

- [pgo show](#) - Show the description of a cluster

Auto generated by spf13/cobra on 15-Aug-2019

pgo status

Display PostgreSQL cluster status

Synopsis

Display namespace wide information for PostgreSQL clusters. For example:

```
pgo status
```

```
pgo status [flags]
```

Options

-h, --help	help for status
-o, --output string	The output format. Currently, json is the only supported value.

Options inherited from parent commands

--apiserver-url string	The URL for the PostgreSQL Operator apiserver.
--debug	Enable debugging when true.
-n, --namespace string	The namespace to use for pgo requests.
--pgo-ca-cert string	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-cert string	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-key string	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

SEE ALSO

- [pgo](#) - The pgo command line interface.

Auto generated by spf13/cobra on 15-Aug-2019

pgo test

Test cluster connectivity

Synopsis

TEST allows you to test the connectivity for a cluster. For example:

```
pgo test mycluster
pgo test --selector=env=research
pgo test --all
```

```
pgo test [flags]
```

Options

--all	test all resources.
-h, --help	help for test
-o, --output string	The output format. Currently, json is the only supported value.
-s, --selector string	The selector to use for cluster filtering.

Options inherited from parent commands

--apiserver-url string	The URL for the PostgreSQL Operator apiserver.
--debug	Enable debugging when true.
-n, --namespace string	The namespace to use for pgo requests.
--pgo-ca-cert string	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-cert string	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-key string	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

SEE ALSO

- [pgo](#) - The pgo command line interface.

Auto generated by spf13/cobra on 15-Aug-2019

# pgo update

Update a pgouser, pgorole, or cluster

## Synopsis

The update command allows you to update a pgouser, pgorole, or cluster. For example:

```
pgo update pgouser someuser --pgouser-password=somenewpassword
pgo update pgouser someuser --pgouser-roles="role1,role2"
pgo update pgouser someuser --pgouser-namespaces="pgouser2"
pgo update user mycluster --username=testuser --selector=name=mycluster --password=somepassword
pgo update pgorole somerole --pgorole-permission="Cat"
pgo update namespace mynamespace
pgo update cluster --selector=name=mycluster --autofail=false
pgo update cluster --all --autofail=true
```

```
pgo update [flags]
```

## Options

```
-h, --help    help for update
```

## Options inherited from parent commands

```
--apiserver-url string    The URL for the PostgreSQL Operator apiserver.
--debug                  Enable debugging when true.
-n, --namespace string    The namespace to use for pgo requests.
--pgo-ca-cert string      The CA Certificate file path for authenticating to the PostgreSQL
                           Operator apiserver.
--pgo-client-cert string  The Client Certificate file path for authenticating to the
                           PostgreSQL Operator apiserver.
--pgo-client-key string   The Client Key file path for authenticating to the PostgreSQL
                           Operator apiserver.
```

## SEE ALSO

- [pgo](#) - The pgo command line interface.
- [pgo update cluster](#) - Update a PostgreSQL cluster
- [pgo update namespace](#) - Update a namespace, applying Operator RBAC
- [pgo update pgorole](#) - Update a pgorole
- [pgo update pgouser](#) - Update a pgouser
- [pgo update user](#) - Update a postgres user

Auto generated by spf13/cobra on 15-Aug-2019

# pgo update cluster

Update a PostgreSQL cluster

## Synopsis

Update a PostgreSQL cluster. For example:

```
pgo update cluster mycluster --autofail=false
pgo update cluster mycluster myothercluster --autofail=false
pgo update cluster --selector=name=mycluster --autofail=false
pgo update cluster --all --autofail=true
```

```
pgo update cluster [flags]
```

Options

--all	all resources.
--autofail	autofail default is false.
-h, --help	help for cluster
--no-prompt	No command line confirmation.
-s, --selector string	The selector to use for cluster filtering.

Options inherited from parent commands

--apiserver-url string	The URL for the PostgreSQL Operator apiserver.
--debug	Enable debugging when true.
-n, --namespace string	The namespace to use for pgo requests.
--pgo-ca-cert string	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-cert string	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-key string	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

SEE ALSO

- [pgo update](#) - Update a pgouser, pgorole, or cluster

Auto generated by spf13/cobra on 15-Aug-2019

pgo update namespace

Update a namespace, applying Operator RBAC

Synopsis

UPDATE allows you to update a Namespace. For example: pgo update namespace mynamespace

```
pgo update namespace [flags]
```

Options

-h, --help	help for namespace
------------	--------------------

Options inherited from parent commands

--apiserver-url string	The URL for the PostgreSQL Operator apiserver.
--debug	Enable debugging when true.
-n, --namespace string	The namespace to use for pgo requests.
--pgo-ca-cert string	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-cert string	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-key string	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

SEE ALSO

- [pgo update](#) - Update a pgouser, pgorole, or cluster

Auto generated by spf13/cobra on 15-Aug-2019

pgo update pgorole

Update a pgorole



## Synopsis

UPDATE allows you to update a pgo role. For example: pgo update pgorole somerole --permissions="Cat,Ls

```
pgo update pgorole [flags]
```

## Options

-h, --help	help for pgorole
--no-prompt	No command line confirmation.
--permissions string	The permissions to use for updating the pgorole permissions.

## Options inherited from parent commands

--apiserver-url string	The URL for the PostgreSQL Operator apiserver.
--debug	Enable debugging when true.
-n, --namespace string	The namespace to use for pgo requests.
--pgo-ca-cert string	The CA Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-cert string	The Client Certificate file path for authenticating to the PostgreSQL Operator apiserver.
--pgo-client-key string	The Client Key file path for authenticating to the PostgreSQL Operator apiserver.

## SEE ALSO

- [pgo update](#) - Update a pgouser, pgorole, or cluster