Bitwise Operators & Logic

XOR, AND, OR, NOT, Bit-Shifting (<<, >>) & Precedence Evaluation

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Operator Precedence
Q1. What will be the output of the following pseudocode? Set Integer a = 18 Set Integer b = 5 Set Integer c = 2 display a - b * c + 6
(A) 10
(B) 14
(C) 16
(D) 19
Correct Answer: Option (B) : 14
Logic / Derivation: Multiplication first: 18 – (5×2) + 6 = 14.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Mixed Arithmetic
Q2. What will be the output of the following pseudocode? Set Integer x = 24 Set Integer y = 7 display (x / y) * y + (x % y)
(A) 21
(B) 24
(C) 25
(D) 28
Correct Answer: Option (B) : 24
Logic / Derivation: 24/7=3 and 24%7=3; 3×7+3 = 24.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Logical Operators
Q3. What will be the output of the following pseudocode? Set Integer a = 12 Set Integer b = 7 Set Integer c = 5 display (a > b) and ((b - c) == 2)
(A) true
(B) false
(C) 2
(D) 12
Correct Answer: Option (A) : true
Logic / Derivation: 12>7 is true and 7–5=2 is true, so the result is true.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Logical Operators
Q4. What will be the output of the following pseudocode? Set Integer x = 9 display (x % 2 == 0) or ((x > 5) and (x < 10))
(A) true
(B) false
(C) 9
(D) 0
Correct Answer: Option (A) : true
Logic / Derivation: First condition is false, but 9>5 and 9<10 are both true.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Bitwise XOR
Q5. What will be the output of the following pseudocode? Set Integer a = 15 Set Integer b = 9 Set Integer c = 6 display (a ^ b) + c
(A) 8
(B) 10
(C) 12
(D) 14
Correct Answer: Option (C) : 12
Logic / Derivation: Execution Trace: 1. Evaluate bitwise expressions following precedence (shifts before bitwise logic). 2. Convert operands to binary form and apply bitwise operations bit-by-bit. 3. Perform remaining arithmetic updates on the accumulated values. 4. The final printed output evaluates to Option (C) (12).

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Bitwise AND
Q6. What will be the output of the following pseudocode? Set Integer a = 27 Set Integer b = 14 display (a & b) + (a % b)
(A) 19
(B) 21
(C) 23
(D) 25
Correct Answer: Option (C) : 23
Logic / Derivation: 27&14 = 10 and 27%14 = 13; total = 23.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Bitwise OR
Q7. What will be the output of the following pseudocode? Set Integer a = 18 Set Integer b = 11 display (a | b) - (a & b)
(A) 21
(B) 23
(C) 25
(D) 27
Correct Answer: Option (C) : 25
Logic / Derivation: 18|11=27 and 18&11=2; 27–2=25.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: XOR + AND
Q8. What will be the output of the following pseudocode? Set Integer a = 13 Set Integer b = 7 display (a ^ b) + (a & b)
(A) 13
(B) 15
(C) 17
(D) 19
Correct Answer: Option (B) : 15
Logic / Derivation: 13^7=10 and 13&7=5; total = 15. Infosys Medium Pseudocode Practice • Page 33

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Pre/Post Increment
Q9. What will be the output of the following pseudocode? Set Integer x = 4 Set Integer y = x++ + ++x Set Integer z = y + x display z
(A) 14
(B) 15
(C) 16
(D) 17
Correct Answer: Option (C) : 16
Logic / Derivation: x++ contributes 4 and makes x=5; ++x makes x=6 and contributes 6. y=10; z=10+6=16.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Post/Pre Decrement
Q10. What will be the output of the following pseudocode? Set Integer x = 10 Set Integer y = --x Set Integer z = y + x-- display z
(A) 16
(B) 17
(C) 18
(D) 19
Correct Answer: Option (C) : 18
Logic / Derivation: --x makes x=9, y=9; x-- contributes 9, then x becomes 8. z=18.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Relational Logic
Q11. What will be the output of the following pseudocode? Set Integer p = 8 Set Integer q = 12 display (p + q > 20) and (q - p == 4)
(A) true
(B) false
(C) 4
(D) 20
Correct Answer: Option (B) : false
Logic / Derivation: p+q=20, so 20>20 is false. The second condition is true; false AND true = false.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Ternary Logic
Q12. What will be the output of the following pseudocode? Set Integer a = 14 Set Integer b = 9 Set Integer m = (a % 2 == 0) ? a/2 : b*2 display m + b
(A) 14
(B) 16
(C) 18
(D) 21
Correct Answer: Option (B) : 16
Logic / Derivation: a is even, so m=7; 7+9=16.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Compound Assignment
Q13. What will be the output of the following pseudocode? Set Integer x = 7 x = x * 3 - 4 x = x + (x % 5) display x
(A) 18
(B) 19
(C) 20
(D) 21
Correct Answer: Option (B) : 19
Logic / Derivation: 7×3–4=17; 17%5=2; final x=19.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Mixed Operators
Q14. What will be the output of the following pseudocode? Set Integer a = 20 Set Integer b = 6 display (a / b) + (a % b) * 2
(A) 5
(B) 7
(C) 9
(D) 11
Correct Answer: Option (B) : 7
Logic / Derivation: 20/6=3; 20%6=2; 3+2×2=7.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Left Shift
Q15. What will be the output of the following pseudocode? Set Integer x = 11 Set Integer y = 2 display (x << y) - x
(A) 22
(B) 33
(C) 44
(D) 55
Correct Answer: Option (B) : 33
Logic / Derivation: 11<<2 = 44; 44–11=33.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Right Shift
Q16. What will be the output of the following pseudocode? Set Integer x = 45 Set Integer y = 2 display (x >> y) + x % 4
(A) 10
(B) 11
(C) 12
(D) 13
Correct Answer: Option (C) : 12
Logic / Derivation: 45>>2 = 11; 45%4=1; total=12. Infosys Medium Pseudocode Practice • Page 34

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Left Shift in Expression
Q17. What will be the output of the following pseudocode? Set Integer a = 6 Set Integer b = 3 display (a << b) / 4
(A) 8
(B) 10
(C) 12
(D) 16
Correct Answer: Option (C) : 12
Logic / Derivation: Execution Trace: 1. Evaluate bitwise expressions following precedence (shifts before bitwise logic). 2. Convert operands to binary form and apply bitwise operations bit-by-bit. 3. Perform remaining arithmetic updates on the accumulated values. 4. The final printed output evaluates to Option (C) (12).

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Right Shift in Expression
Q18. What will be the output of the following pseudocode? Set Integer a = 50 display (a >> 1) - (a >> 3)
(A) 17
(B) 19
(C) 21
(D) 23
Correct Answer: Option (B) : 19
Logic / Derivation: 50>>1=25 and 50>>3=6; 25–6=19.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Shift + XOR
Q19. What will be the output of the following pseudocode? Set Integer x = 9 display (x << 1) ^ x
(A) 19
(B) 23
(C) 27
(D) 31
Correct Answer: Option (C) : 27
Logic / Derivation: 9<<1=18; 18 XOR 9 = 27.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Shift + AND
Q20. What will be the output of the following pseudocode? Set Integer x = 29 display (x >> 2) & 7
(A) 5
(B) 6
(C) 7
(D) 8
Correct Answer: Option (C) : 7
Logic / Derivation: 29>>2=7; 7 AND 7 = 7.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Double Shift
Q21. What will be the output of the following pseudocode? Set Integer x = 7 Set Integer y = (x << 2) display y >> 1
(A) 7
(B) 12
(C) 14
(D) 28
Correct Answer: Option (C) : 14
Logic / Derivation: Execution Trace: 1. Evaluate bitwise expressions following precedence (shifts before bitwise logic). 2. Convert operands to binary form and apply bitwise operations bit-by-bit. 3. Perform remaining arithmetic updates on the accumulated values. 4. The final printed output evaluates to Option (C) (14).

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Shift and Modulo
Q22. What will be the output of the following pseudocode? Set Integer x = 37 display (x >> 1) % 6
(A) 0
(B) 1
(C) 2
(D) 3
Correct Answer: Option (A) : 0
Logic / Derivation: Execution Trace: 1. Evaluate bitwise expressions following precedence (shifts before bitwise logic). 2. Convert operands to binary form and apply bitwise operations bit-by-bit. 3. Perform remaining arithmetic updates on the accumulated values. 4. The final printed output evaluates to Option (A) (0).

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Shift Condition
Q23. What will be the output of the following pseudocode? Set Integer x = 23 if ((x >> 2) >= 5) display x - 3 else display x + 3 end-if
(A) 20
(B) 23
(C) 26
(D) 28
Correct Answer: Option (A) : 20
Logic / Derivation: 23>>2=5, so the condition is true and 23–3=20.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Shift + Arithmetic
Q24. What will be the output of the following pseudocode? Set Integer a = 14 Set Integer b = 2 display (a << b) - (a >> b)
(A) 51
(B) 53
(C) 55
(D) 57
Correct Answer: Option (B) : 53
Logic / Derivation: 14<<2=56; 14>>2=3; 56–3=53. Infosys Medium Pseudocode Practice • Page 35

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Shift Chain
Q25. What will be the output of the following pseudocode? Set Integer x = 3 x = x << 2 x = x >> 1 x = x << 1 display x
(A) 6
(B) 10
(C) 12
(D) 24
Correct Answer: Option (C) : 12
Logic / Derivation: Execution Trace: 1. Evaluate bitwise expressions following precedence (shifts before bitwise logic). 2. Convert operands to binary form and apply bitwise operations bit-by-bit. 3. Perform remaining arithmetic updates on the accumulated values. 4. The final printed output evaluates to Option (C) (12).

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Shift + OR
Q26. What will be the output of the following pseudocode? Set Integer x = 5 display (x << 2) | 3
(A) 19
(B) 20
(C) 23
(D) 24
Correct Answer: Option (C) : 23
Logic / Derivation: Execution Trace: 1. Evaluate bitwise expressions following precedence (shifts before bitwise logic). 2. Convert operands to binary form and apply bitwise operations bit-by-bit. 3. Perform remaining arithmetic updates on the accumulated values. 4. The final printed output evaluates to Option (C) (23).

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Shift + XOR
Q27. What will be the output of the following pseudocode? Set Integer x = 12 display (x >> 1) ^ 5
(A) 1
(B) 3
(C) 5
(D) 7
Correct Answer: Option (B) : 3
Logic / Derivation: 12>>1=6; 6 XOR 5 = 3.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Bit Test with Shift
Q28. What will be the output of the following pseudocode? Set Integer x = 40 display (x >> 3) & 1
(A) 0
(B) 1
(C) 2
(D) 5
Correct Answer: Option (B) : 1
Logic / Derivation: 40>>3=5; 5 AND 1 = 1.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Shifted Difference
Q29. What will be the output of the following pseudocode? Set Integer a = 31 display (a << 1) - (a >> 2)
(A) 54
(B) 55
(C) 56
(D) 57
Correct Answer: Option (B) : 55
Logic / Derivation: 31<<1=62; 31>>2=7; 62−7=55.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Function Arithmetic
Q30. What will be the output of the following pseudocode? Integer calc(Integer a, Integer b) a = a + b b = a - b return a * b End function display calc(7, 3)
(A) 60
(B) 70
(C) 80
(D) 90
Correct Answer: Option (B) : 70
Logic / Derivation: a becomes 10; b becomes 7; return 10×7=70.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Function with Shift
Q31. What will be the output of the following pseudocode? Integer f(Integer n) return (n << 2) + (n >> 1) End function display f(10)
(A) 40
(B) 45
(C) 50
(D) 55
Correct Answer: Option (B) : 45
Logic / Derivation: 10<<2=40; 10>>1=5; total=45.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Function with XOR
Q32. What will be the output of the following pseudocode? Integer f(Integer a, Integer b) return (a ^ b) * 2 End function display f(12, 5)
(A) 18
(B) 26
(C) 30
(D) 34
Correct Answer: Option (A) : 18
Logic / Derivation: 12 XOR 5 = 9; 9×2=18.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Function Modulo
Q33. What will be the output of the following pseudocode? Integer f(Integer n) return (n * n + 3) % 10 End function display f(7)
(A) 2
(B) 5
(C) 8
(D) 9
Correct Answer: Option (A) : 2
Logic / Derivation: Execution Trace: 1. Identify base cases for termination. 2. Trace recursive function call stack and branch expansions. 3. Evaluate leaf returns and unwind the call stack bottom-up. 4. Summing/accumulating the return values yields Option (A) (2).

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Function Boolean
Q34. What will be the output of the following pseudocode? Integer f(Integer a, Integer b) if ((a & 1) == 1 and (b & 1) == 0) return a + b else return a - b end-if End function display f(9, 6)
(A) 3
(B) 9
(C) 15
(D) 54
Correct Answer: Option (C) : 15
Logic / Derivation: 9 is odd and 6 is even, so return 9+6=15.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Function Shifted Return
Q35. What will be the output of the following pseudocode? Integer f(Integer n) Set Integer a = n << 1 Set Integer b = n >> 1 return a - b End function display f(13)
(A) 13
(B) 19
(C) 20
(D) 21
Correct Answer: Option (C) : 20
Logic / Derivation: 13<<1=26; 13>>1=6; difference=20. Infosys Medium Pseudocode Practice • Page 43

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Function with Multiple Updates
Q36. What will be the output of the following pseudocode? Integer f(Integer a, Integer b) a = a * 2 b = b + a a = a - b return a + b End function display f(4, 3)
(A) 7
(B) 8
(C) 9
(D) 10
Correct Answer: Option (B) : 8
Logic / Derivation: a=8; b=11; a=-3; return -3+11=8.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Mixed Condition + Shift
Q37. What will be the output of the following pseudocode? Set Integer x = 19 if ((x & 1) == 1) x = x << 1 x = x + 3 else x = x >> 1 end-if display x
(A) 19
(B) 38
(C) 41
(D) 44
Correct Answer: Option (C) : 41
Logic / Derivation: 19 is odd; 19<<1=38; +3=41.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Mixed Function + Logical
Q38. What will be the output of the following pseudocode? Integer f(Integer a, Integer b) if (a > 10 and b < 10) return (a << 1) + b else return a + (b << 1) end-if End function display f(12, 7)
(A) 24
(B) 26
(C) 31
(D) 38
Correct Answer: Option (C) : 31
Logic / Derivation: 12>10 and 7<10, so (12<<1)+7 = 24+7=31.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Mixed Function + Modulo + Shift
Q39. What will be the output of the following pseudocode? Integer f(Integer n) return ((n % 5) << 2) + (n >> 3) End function display f(26)
(A) 5
(B) 7
(C) 9
(D) 11
Correct Answer: Option (B) : 7
Logic / Derivation: 26%5=1; 1<<2=4; 26>>3=3; total=7.

[OnlineStudy4U Master E-Book 4]
Topic: Pseudocode Execution Tracing
Q40. What is the output of the following Pseudo Code? Integer division is used. Integer a, b Set a = 17, b = 5 Print (a / b) + (a % b)
(A) 3
(B) 4
(C) 5
(D) 7
Correct Answer: Option (C) : 5
Logic / Derivation: Integer division: 17 / 5 = 3. Remainder: 17 % 5 = 2. Printed value = 3 + 2 = 5.

[OnlineStudy4U Master E-Book 4]
Topic: Pseudocode Execution Tracing
Q41. What is printed after the following Pseudo Code runs? Integer a, b Set a = 12, b = 8 a = a + b b = a - b a = a - b Print a, b
(A) 12 8
(B) 8 12
(C) 20 8
(D) 20 12
Correct Answer: Option (B) : 8 12
Logic / Derivation: This swaps the two values without a third variable. a = 12+8 = 20, b = 20-8 = 12, a = 20-12 = 8. Output: 8 12.

[OnlineStudy4U Master E-Book 4]
Topic: Pseudocode Execution Tracing
Q42. What is the output of the following Pseudo Code? Integer a, b Set a = 9, b = 5 Print a ^ b
(A) 4
(B) 12
(C) 13
(D) 14
Correct Answer: Option (B) : 12
Logic / Derivation: 9 in binary is 1001 and 5 is 0101. XOR sets a bit where the bits differ: 1100, which is 12.

[OnlineStudy4U Master E-Book 4]
Topic: Pseudocode Execution Tracing
Q43. What is printed? Integer x Set x = 10 Print x & 3
(A) 1
(B) 2
(C) 3
(D) 8
Correct Answer: Option (B) : 2
Logic / Derivation: 10 is 1010 and 3 is 0011. AND is 0010, which is 2.

[OnlineStudy4U Master E-Book 4]
Topic: Pseudocode Execution Tracing
Q44. What is printed? Stack S push(S, 1) push(S, 4) push(S, 9) pop(S) pop(S) Print peek(S)
(A) 1
(B) 4
(C) 9
(D) Empty
Correct Answer: Option (A) : 1
Logic / Derivation: After three pushes the top is 9. Two pops remove 9 then 4. peek returns 1.

[OnlineStudy4U Master E-Book 4]
Topic: Pseudocode Execution Tracing
Q45. [Bitwise] What is printed? Integer a Set a = 6 Print a | 3
(A) 7
(B) 5
(C) 2
(D) 18
Correct Answer: Option (A) : 7
Logic / Derivation: 6 is 0110, 3 is 0011, OR is 0111 = 7.

[OnlineStudy4U Master E-Book 4]
Topic: Pseudocode Execution Tracing
Q46. [Queue] What is printed? Queue Q enqueue(Q, 11) enqueue(Q, 22) enqueue(Q, 33) dequeue(Q) dequeue(Q) Print front(Q)
(A) 11
(B) 22
(C) 33
(D) Empty
Correct Answer: Option (C) : 33
Logic / Derivation: Queue starts [11,22,33]. Two dequeues remove 11 then 22. Front is 33.

[OnlineStudy4U Master E-Book 4]
Topic: Pseudocode Execution Tracing
Q47. [Data Structures] Queue Q receives 5, then 15, then 25. One dequeue runs. What is front(Q)? Queue Q enqueue(Q, 5) enqueue(Q, 15) enqueue(Q, 25) dequeue(Q) Print front(Q)
(A) 5
(B) 15
(C) 25
(D) Empty
Correct Answer: Option (B) : 15
Logic / Derivation: FIFO: 5 leaves. Front is 15.

[OnlineStudy4U Master E-Book 4]
Topic: Pseudocode Execution Tracing
Q48. [Data Structures] After the operations, what does peek return? Stack S push(S, 10) push(S, 20) push(S, 30) pop(S) push(S, 40) Print peek(S)
(A) 10
(B) 20
(C) 40
(D) 30
Correct Answer: Option (C) : 40
Logic / Derivation: Stack after pops/pushes: [10, 20, 40]. peek = 40.

[OnlineStudy4U Master E-Book 4]
Topic: Pseudocode Execution Tracing
Q49. [Bitwise] What is printed? Integer a, b Set a = 13, b = 6 Print a & b
(A) 4
(B) 5
(C) 7
(D) 11
Correct Answer: Option (A) : 4
Logic / Derivation: 13 is 1101, 6 is 0110, AND is 0100 = 4.

[OnlineStudy4U Master E-Book 4]
Topic: Pseudocode Execution Tracing
Q50. What is printed? Stack S push(S, 3) push(S, 6) push(S, 9) pop(S) push(S, 12) Print peek(S)
(A) 3
(B) 6
(C) 12
(D) 9
Correct Answer: Option (C) : 12
Logic / Derivation: After pop, 9 is gone. 12 is pushed. peek returns 12.

[OnlineStudy4U Master E-Book 4]
Topic: Pseudocode Execution Tracing
Q51. What is printed? Integer x Set x = 11 Print x | 4
(A) 15
(B) 7
(C) 8
(D) 44
Correct Answer: Option (A) : 15
Logic / Derivation: 11 is 1011, 4 is 0100, OR is 1111 = 15.

[OnlineStudy4U Master E-Book 4]
Topic: Pseudocode Execution Tracing
Q52. What is printed? Queue Q enqueue(Q, 7) enqueue(Q, 14) enqueue(Q, 21) dequeue(Q) enqueue(Q, 28) Print front(Q)
(A) 7
(B) 14
(C) 21
(D) 28
Correct Answer: Option (B) : 14
Logic / Derivation: 7 is removed first. The new front is 14.

[OnlineStudy4U Master E-Book 4]
Topic: Pseudocode Execution Tracing
Q53. What is printed? Integer z Set z = 14 Print z & 7
(A) 6
(B) 7
(C) 8
(D) 21
Correct Answer: Option (A) : 6
Logic / Derivation: 14 is 1110, 7 is 0111, AND is 0110 = 6.

[OnlineStudy4U Master E-Book 4]
Topic: Pseudocode Execution Tracing
Q54. What is printed? Queue Q enqueue(Q, 4) enqueue(Q, 8) enqueue(Q, 12) dequeue(Q) Print front(Q)
(A) 4
(B) 8
(C) 12
(D) Empty
Correct Answer: Option (B) : 8
Logic / Derivation: 4 leaves first. Front is 8.

[OnlineStudy4U Master E-Book 4]
Topic: Pseudocode Execution Tracing
Q55. What is printed? Stack S push(S, 2) push(S, 5) push(S, 8) pop(S) push(S, 11) Print peek(S)
(A) 2
(B) 5
(C) 11
(D) 8
Correct Answer: Option (C) : 11
Logic / Derivation: Pop removes 8. Push 11. peek returns 11.

[OnlineStudy4U Master E-Book 4]
Topic: Pseudocode Execution Tracing
Q56. What is printed? Stack S push(S, 6) push(S, 9) push(S, 15) pop(S) push(S, 21) Print peek(S)
(A) 6
(B) 9
(C) 21
(D) 15
Correct Answer: Option (C) : 21
Logic / Derivation: Pop removes 15. Push 21. peek returns 21.

[OnlineStudy4U Master E-Book 4]
Topic: Pseudocode Execution Tracing
Q57. What is printed? Integer k Set k = 21 Print k >> 2
(A) 5
(B) 6
(C) 10
(D) 84
Correct Answer: Option (A) : 5
Logic / Derivation: 21 is 10101. Right shift 2 gives 101 = 5.

[OnlineStudy4U Master E-Book 4]
Topic: Pseudocode Execution Tracing
Q58. What is printed? Queue Q enqueue(Q, 3) enqueue(Q, 9) enqueue(Q, 15) dequeue(Q) Print front(Q)
(A) 3
(B) 9
(C) 15
(D) Empty
Correct Answer: Option (B) : 9
Logic / Derivation: 3 leaves. Front is 9.

[OnlineStudy4U Master E-Book 4]
Topic: Pseudocode Execution Tracing
Q59. What will be the output of the following pseudo code Integer i, j, k, d Set j = 6, i = 8, k = 2, d = 1 if ((j ^ i) mod k equals 0) then d = d + 1 else d = d - 1 end if Print d
(A) 1
(B) 3
(C) 0
(D) 2
Correct Answer: Option (D) : 2
Logic / Derivation: Execution Trace: 1. Evaluate bitwise expressions following precedence (shifts before bitwise logic). 2. Convert operands to binary form and apply bitwise operations bit-by-bit. 3. Perform remaining arithmetic updates on the accumulated values. 4. The final printed output evaluates to Option (D) (2).

[Campus Monk Day 04 Mock Test]
Topic: Campus Monk Mock Pseudocode
Q60. 1. Where are placed the list of processes that are prepared to be executed and waiting?
(A) Job queue
(B) Ready queue
(C) Execution queue
(D) Process queue
Correct Answer: Option (B) : Ready queue
Logic / Derivation: Execution Trace: 1. Trace variable allocations and sequential statement assignments. 2. Evaluate conditional branches and execute the active branch. 3. Compute final expression for display. 4. The evaluated result matches Option (B) (Ready queue).

[Campus Monk Day 04 Mock Test]
Topic: Campus Monk Mock Pseudocode
Q61. 1. Who among the following can block the running process?
(A) Fork
(B) Read
(C) Down
(D) All of these
Correct Answer: Option (D) : All of these
Logic / Derivation: Execution Trace: 1. Trace variable allocations and sequential statement assignments. 2. Evaluate conditional branches and execute the active branch. 3. Compute final expression for display. 4. The evaluated result matches Option (D) (All of these).

[Campus Monk Day 04 Mock Test]
Topic: Campus Monk Mock Pseudocode
Q62. 1. Which of the following does not interrupt the running process?
(A) Timer interrupt
(B) Device
(C) Power failure
(D) Scheduler process
Correct Answer: Option (D) : Scheduler process
Logic / Derivation: Execution Trace: 1. Trace variable allocations and sequential statement assignments. 2. Evaluate conditional branches and execute the active branch. 3. Compute final expression for display. 4. The evaluated result matches Option (D) (Scheduler process).

[Campus Monk Day 04 Mock Test]
Topic: Campus Monk Mock Pseudocode

Q63. 1. The \u0021 article referred to as a

(A) Unicode escape sequence
(B) Octal escape
(C) Hexadecimal
(D) Line feed

Correct Answer: Option (A) : Unicode escape sequence

Logic / Derivation: Execution Trace: 1. Trace variable allocations and sequential statement assignments. 2. Evaluate conditional branches and execute the active branch. 3. Compute final expression for display. 4. The evaluated result matches Option (A) (Unicode escape sequence).

[Campus Monk Day 04 Mock Test]
Topic: Campus Monk Mock Pseudocode

Q64. 1. Which of the following is a valid long literal?

(A) ABH8097
(B) L990023
(C) 904423
(D) 0xnf029L

Correct Answer: Option (D) : 0xnf029L

Logic / Derivation: Execution Trace: 1. Trace variable allocations and sequential statement assignments. 2. Evaluate conditional branches and execute the active branch. 3. Compute final expression for display. 4. The evaluated result matches Option (D) (0xnf029L).

[Campus Monk Day 04 Mock Test]
Topic: Campus Monk Mock Pseudocode

Q65. 1. What does the expression float a = 35 / 0 return?

(A) 0
(B) Not a Number
(C) Infinity
(D) Run time exception

Correct Answer: Option (C) : Infinity

Logic / Derivation: Execution Trace: 1. Identify base cases for termination. 2. Trace recursive function call stack and branch expansions. 3. Evaluate leaf returns and unwind the call stack bottom-up. 4. Summing/accumulating the return values yields Option (C) (Infinity).

[Campus Monk Day 04 Mock Test]
Topic: Campus Monk Mock Pseudocode

Q66. 1. Which option is false about the final keyword? a) A) A final method cannot be overridden in its subclasses. b) B) A final class cannot be extended. c) C) A final class cannot extend other classes. d) D) A final method can be inherited.

(A) A&B
(B) B&C
(C) C&D
(D) None of these

Correct Answer: Option (C) : C&D

Logic / Derivation: Execution Trace: 1. Trace variable allocations and sequential statement assignments. 2. Evaluate conditional branches and execute the active branch. 3. Compute final expression for display. 4. The evaluated result matches Option (C) (C&D).

[Campus Monk Day 04 Mock Test]
Topic: Campus Monk Mock Pseudocode

Q67. 1. Construct post order Transversal for the constructed tree with the given In-Order and Preorder Traversals: In-Order: 9 7 10 6 8 Pre-Order: 6 7 9 10 8

(A) 9 10 7 8 6
(B) 9 7 6 10 8
(C) 8 9 10 7 6
(D) 9 8 10 7 6

Correct Answer: Option (A) : 9 10 7 8 6

Logic / Derivation: Execution Trace: 1. Initialize loop variables and verify loop condition on each pass. 2. Execute loop body and apply state modifications. 3. Terminate when the guard condition evaluates to false. 4. The final variable state upon loop termination produces Option (A) (9 10 7 8 6).

[Campus Monk Day 04 Mock Test]
Topic: Campus Monk Mock Pseudocode

Q68. 1. Which of the following declarations is invalid in C language?

(A) char
(B) char str[] = “campus monk is the best platform for learn";
(C) char str[20] = “campus monk is the best platform for learn";
(D) char[] str = “campus monk is the best platform for learn";

Correct Answer: Option (D) : char[] str = “campus monk is the best platform for learn";

Logic / Derivation: Execution Trace: 1. Trace variable allocations and sequential statement assignments. 2. Evaluate conditional branches and execute the active branch. 3. Compute final expression for display. 4. The evaluated result matches Option (D) (char[] str = “campus monk is the best platform for learn";).

[Campus Monk Day 04 Mock Test]
Topic: Campus Monk Mock Pseudocode

Q69. 1. In an empty BST, insert the following elements in a similar sequence. Which element will be at lowest level? 105 95 122 99 97 120

(A) 95
(B) 97
(C) 99
(D) 120

Correct Answer: Option (B) : 97

Logic / Derivation: Execution Trace: 1. Trace variable allocations and sequential statement assignments. 2. Evaluate conditional branches and execute the active branch. 3. Compute final expression for display. 4. The evaluated result matches Option (B) (97).

[Campus Monk Day 04 Mock Test]
Topic: Campus Monk Mock Pseudocode

Q70. 1. Which of the following sequence can be obtained in the output (in same order) using a stack assuming that the input is in the sequence 1,2,3,4,5 order?

(A) a) 3,4,5,1,2
(B) a) 3,4,5,2,1
(C) a) 1,5,2,3,4
(D) a) 5,4,3,1,2

Correct Answer: Option (B) : a) 3,4,5,2,1

Logic / Derivation: Execution Trace: 1. Trace variable allocations and sequential statement assignments. 2. Evaluate conditional branches and execute the active branch. 3. Compute final expression for display. 4. The evaluated result matches Option (B) (a) 3,4,5,2,1).

[Campus Monk Day 04 Mock Test]
Topic: Campus Monk Mock Pseudocode

Q71. 1. What is printed by the print statement in the program P1 assuming call by reference parameter passing? program P1() { X = 10 Y = 3 Func1(Y,X,X) Print X Print Y } Func1(X,Y,Z) { Y= Y+4 Z= X+Y+Z }

(A) 10, 3
(B) 31, 3
(C) 27, 7
(D) None of these

Correct Answer: Option (B) : 31, 3

Logic / Derivation: Execution Trace: 1. Trace variable allocations and sequential statement assignments. 2. Evaluate conditional branches and execute the active branch. 3. Compute final expression for display. 4. The evaluated result matches Option (B) (31, 3).

[Campus Monk Day 06 Mock Test]
Topic: Campus Monk Mock Pseudocode

Q72. Integer a, b, c Set a = 2, b = 4, c = 7 b = 7 + a if (c > b) b = b + b end if b = 6 + a if ((a + b) < (b - a) || c < a) b = (c + 4) + c else a = c + b end if c = (c + 9) ^ a Print a + b + c

(A) 71
(B) 56
(C) 47
(D) 54

Correct Answer: Option (D) : 54

Logic / Derivation: Execution Trace: 1. Evaluate bitwise expressions following precedence (shifts before bitwise logic). 2. Convert operands to binary form and apply bitwise operations bit-by-bit. 3. Perform remaining arithmetic updates on the accumulated values. 4. The final printed output evaluates to Option (D) (54).

[Campus Monk Day 06 Mock Test]
Topic: Campus Monk Mock Pseudocode
Q73. Int p, q, r Set p = 6, q = 4, r = 7 p = (r + 5) + p If ((q & r & p) < (p & 6)) { r = 3 ^ r q = q & q } Print p + q + r
(A) 44
(B) 41
(C) 11
(D) 26
Correct Answer: Option (D) : 26
Logic / Derivation: Execution Trace: 1. Evaluate bitwise expressions following precedence (shifts before bitwise logic). 2. Convert operands to binary form and apply bitwise operations bit-by-bit. 3. Perform remaining arithmetic updates on the accumulated values. 4. The final printed output evaluates to Option (D) (26).

[Campus Monk Day 06 Mock Test]
Topic: Campus Monk Mock Pseudocode
Q74. What is the output of this code? Int p, q, r; Set p = 0, q = 7, r = 9; If ((q + p) < (p + q) && (p < r)) { p = 11 + q; } Print p + q + r;
(A) 12
(B) 16
(C) 27
(D) 10
Correct Answer: Option (B) : 16
Logic / Derivation: Execution Trace: 1. Evaluate bitwise expressions following precedence (shifts before bitwise logic). 2. Convert operands to binary form and apply bitwise operations bit-by-bit. 3. Perform remaining arithmetic updates on the accumulated values. 4. The final printed output evaluates to Option (B) (16).

[Campus Monk Day 06 Mock Test]
Topic: Campus Monk Mock Pseudocode
Q75. What will be the output of this pseudocode? a = 7, b = 2, c = 8 If ((b ^ a) < a && (2 ^ 7) < c) a = b + c Else c = (4 + 12) + a b = 11 + a End if Print (a + b + c)
(A) 19
(B) 21
(C) 20
(D) 22
Correct Answer: Option (C) : 20
Logic / Derivation: Execution Trace: 1. Evaluate bitwise expressions following precedence (shifts before bitwise logic). 2. Convert operands to binary form and apply bitwise operations bit-by-bit. 3. Perform remaining arithmetic updates on the accumulated values. 4. The final printed output evaluates to Option (C) (20).

[Campus Monk Day 06 Mock Test]
Topic: Campus Monk Mock Pseudocode
Q76. Find the output of the code snippet. Integer x, y, z Set x = 1, y = 8, z = 2 If (x ^ y && x ^ y && x ^ y ^ z) x = 1 End if Print x + y + z
(A) 11
(B) 13
(C) 16
(D) 9
Correct Answer: Option (A) : 11
Logic / Derivation: Execution Trace: 1. Evaluate bitwise expressions following precedence (shifts before bitwise logic). 2. Convert operands to binary form and apply bitwise operations bit-by-bit. 3. Perform remaining arithmetic updates on the accumulated values. 4. The final printed output evaluates to Option (A) (11).

[Campus Monk Day 07 Mock Test]
Topic: Campus Monk Mock Pseudocode
Q77. Predict the output of the following pseudocode. Integer x, y, z Set x = -2, y = 3, z = 1 if (x + (2 & 2) && y + (3 & 3) && z + (2 ^ 2)) x = x - 2 y = x Else x = z y = y ^ 2 End if Print x + y + z
(A) 2
(B) 11
(C) 3
(D) 0
Correct Answer: Option (C) : 3
Logic / Derivation: Execution Trace: 1. Evaluate bitwise expressions following precedence (shifts before bitwise logic). 2. Convert operands to binary form and apply bitwise operations bit-by-bit. 3. Perform remaining arithmetic updates on the accumulated values. 4. The final printed output evaluates to Option (C) (3).

[Campus Monk Day 07 Mock Test]
Topic: Campus Monk Mock Pseudocode
Q78. int main() { int x, y = 5, z = 5; x = y == z; Print(x) return 0; }
(A) 0
(B) 1
(C) 5
(D) Compilation Error
Correct Answer: Option (B) : 1
Logic / Derivation: Execution Trace: 1. Identify base cases for termination. 2. Trace recursive function call stack and branch expansions. 3. Evaluate leaf returns and unwind the call stack bottom-up. 4. Summing/accumulating the return values yields Option (B) (1).

[Campus Monk Day 08 Mock Test]
Topic: Campus Monk Mock Pseudocode
Q79. Q4.) Predict the output of the following pseudocode. Integer x, y, z Set x = -2, y = 3, z = 1 if (x + (2 & 2) && y + (3 & 3) && z + (2 ^ 2)) x = x -2 y = x Else x = z y = y ^ 2 End if Print x + y + z
(A) 2
(B) 11
(C) 0
(D) 3
Correct Answer: Option (D) : 3
Logic / Derivation: Execution Trace: 1. Evaluate bitwise expressions following precedence (shifts before bitwise logic). 2. Convert operands to binary form and apply bitwise operations bit-by-bit. 3. Perform remaining arithmetic updates on the accumulated values. 4. The final printed output evaluates to Option (D) (3).

[Campus Monk Day 08 Mock Test]
Topic: Campus Monk Mock Pseudocode
Q80. Q5. What is the output int main() { int x = 10; int *y, **z; y = &x; z = &y; **z=7; print(x,*y,z) return 0; }**
(A) 10 10 10
(B) 10 7 7
(C) 7 7 7
(D) 10 10 7
Correct Answer: Option (C) : 7 7 7
Logic / Derivation: Execution Trace: 1. Evaluate bitwise expressions following precedence (shifts before bitwise logic). 2. Convert operands to binary form and apply bitwise operations bit-by-bit. 3. Perform remaining arithmetic updates on the accumulated values. 4. The final printed output evaluates to Option (C) (7 7 7).

[Campus Monk Day 08 Mock Test]
Topic: Campus Monk Mock Pseudocode
Q81. Q8. What will be the output of the following pseudocode? int a , b ,c Set a=0,b=1,c=2 If (b^c || a&b || a>>1) c=9 a =b+c else c =1 a=a+c End if Print a+b+c
(A) 20
Correct Answer: Option (A)
Logic / Derivation: Execution Trace: 1. Evaluate bitwise expressions following precedence (shifts before bitwise logic). 2. Convert operands to binary form and apply bitwise operations bit-by-bit. 3. Perform remaining arithmetic updates on the accumulated values. 4. The final printed output evaluates to .

[Campus Monk Day 09 Mock Test]
Topic: Campus Monk Mock Pseudocode
Q82. What is the output of following code: Int main(){ Int n=(1<<2+3<<4) Print(n); Return 0; }
(A) 112
(B) 512
(C) 52
(D) 0
Correct Answer: Option (B) : 512
Logic / Derivation: Execution Trace: 1. Evaluate bitwise expressions following precedence (shifts before bitwise logic). 2. Convert operands to binary form and apply bitwise operations bit-by-bit. 3. Perform remaining arithmetic updates on the accumulated values. 4. The final printed output evaluates to Option (B) (512).

[Campus Monk Day 09 Mock Test]
Topic: Campus Monk Mock Pseudocode
Q83. int main() { int x, y = 5, z = 5; x = y == z; Print(x); return 0; }
(A) 0
(B) 1
(C) 5
(D) Compilation Error
Correct Answer: Option (B) : 1
Logic / Derivation: Execution Trace: 1. Identify base cases for termination. 2. Trace recursive function call stack and branch expansions. 3. Evaluate leaf returns and unwind the call stack bottom-up. 4. Summing/accumulating the return values yields Option (B) (1).

[Campus Monk Day 09 Mock Test]
Topic: Campus Monk Mock Pseudocode
Q84. Integer p, q, r Set p = 4, q = 2, r = 5 p = (q + p) + p if ((q + p) < (r - q) && 3 > p) then p = (q + r) + p if (((p + r) + (r + q)) <= (p + r + q)) then r = q + p else r = (p + r) + p end if p = (9 & 6) + q else q = r & r if ((q - 5) < (5 - q)) then r = (6 + 6) & q q = (q + 7) + r end if p = (1 ^ 11) + q end if Print p + q + r
(A) undefined
Correct Answer: Option (A)
Logic / Derivation: Execution Trace: 1. Evaluate bitwise expressions following precedence (shifts before bitwise logic). 2. Convert operands to binary form and apply bitwise operations bit-by-bit. 3. Perform remaining arithmetic updates on the accumulated values. 4. The final printed output evaluates to .

[Campus Monk Day 09 Mock Test]
Topic: Campus Monk Mock Pseudocode
Q85. Integer a, b, c Set a = 2, b = 4, c = 7 b = 7 + a if (c > b) b = b + b end if b = 6 + a if ((a + b) < (b - a) || c < a) b = (c + 4) + c else a = c + b end if c = (c + 9) ^ a Print a + b + c
(A) undefined
Correct Answer: Option (A)
Logic / Derivation: Execution Trace: 1. Evaluate bitwise expressions following precedence (shifts before bitwise logic). 2. Convert operands to binary form and apply bitwise operations bit-by-bit. 3. Perform remaining arithmetic updates on the accumulated values. 4. The final printed output evaluates to .

[Campus Monk Day 09 Mock Test]
Topic: Campus Monk Mock Pseudocode
Q86. Integer a, b, c Set a = 1, b = 6, c = 7 b = (a & b) + b for (each c from 3 to 5) { b = (a + a) ^ a b = (12 + 5) + a } a = (a ^ 9) + a Print a + b
(A) undefined
Correct Answer: Option (A)
Logic / Derivation: Execution Trace: 1. Evaluate bitwise expressions following precedence (shifts before bitwise logic). 2. Convert operands to binary form and apply bitwise operations bit-by-bit. 3. Perform remaining arithmetic updates on the accumulated values. 4. The final printed output evaluates to .

[College ITM Mock Paper 1]
Topic: Infosys SE College Mock Test
Q87. A stack is used (operands are evaluated left to right). What is printed? push(3); push(5); push(7); x = pop(); push(x * 2); push(pop() + pop()); print(pop() - pop())
(A) 14
(B) 16
(C) 19
(D) 22
Correct Answer: Option (A) : 14
Logic / Derivation: Execution Trace: 1. Trace variable allocations and sequential statement assignments. 2. Evaluate conditional branches and execute the active branch. 3. Compute final expression for display. 4. The evaluated result matches Option (A) (14).

[College ITM Mock Paper 3]
Topic: Infosys SE College Mock Test
Q88. What is printed?
(A) 40
(B) 46
(C) 52
(D) 44
Correct Answer: Option (A)
Logic / Derivation: Execution Trace: 1. Trace variable allocations and sequential statement assignments. 2. Evaluate conditional branches and execute the active branch. 3. Compute final expression for display. 4. The evaluated result matches .

[College ITM Mock Paper 3]
Topic: Infosys SE College Mock Test
Q89. What is printed?
(A) 37
(B) 41
(C) 45
(D) 39
Correct Answer: Option (A)
Logic / Derivation: Execution Trace: 1. Trace variable allocations and sequential statement assignments. 2. Evaluate conditional branches and execute the active branch. 3. Compute final expression for display. 4. The evaluated result matches .

[College ITM Mock Paper 3]
Topic: Infosys SE College Mock Test
Q90. What is printed?
(A) 130
(B) 124
(C) 136
(D) 118
Correct Answer: Option (A)
Logic / Derivation: Execution Trace: 1. Trace variable allocations and sequential statement assignments. 2. Evaluate conditional branches and execute the active branch. 3. Compute final expression for display. 4. The evaluated result matches .

[College ITM Mock Paper 4]
Topic: Infosys SE College Mock Test
Q91. What is printed? (^=XOR, |=OR, &=AND, >>=right shift) a = 13; b = 25; c = (a ^ b) & (a | b); d = c >> 2; print(c + d)
(A) 25
(B) 29
(C) 20
(D) 33
Correct Answer: Option (A)
Logic / Derivation: Execution Trace: 1. Evaluate bitwise expressions following precedence (shifts before bitwise logic). 2. Convert operands to binary form and apply bitwise operations bit-by-bit. 3. Perform remaining arithmetic updates on the accumulated values. 4. The final printed output evaluates to .

[College ITM Mock Paper 5]
Topic: Infosys SE College Mock Test
Q92. This stack trace evaluates a postfix-style expression. What is printed? push(6); push(2); push(3); c = pop(); b = pop(); push(b + c); d = pop(); e = pop(); push(e - d); push(3); push(8); push(2); f = pop(); g = pop(); push(g / f); h = pop(); i = pop(); push(i + h); j = pop(); k = pop(); push(k * j); print(pop())
(A) 7
(B) 10
(C) 14
(D) 4
Correct Answer: Option (A)
Logic / Derivation: Execution Trace: 1. Trace variable allocations and sequential statement assignments. 2. Evaluate conditional branches and execute the active branch. 3. Compute final expression for display. 4. The evaluated result matches .

[College ITM Mock Paper 6]
Topic: Infosys SE College Mock Test
Q93. What is printed? (^=XOR, >>=right shift, &=AND) n = 13 g = n ^ (n >> 1) print(g + (g & 5))
(A) 12
(B) 11
(C) 16
(D) 14
Correct Answer: Option (A)
Logic / Derivation: Execution Trace: 1. Evaluate bitwise expressions following precedence (shifts before bitwise logic). 2. Convert operands to binary form and apply bitwise operations bit-by-bit. 3. Perform remaining arithmetic updates on the accumulated values. 4. The final printed output evaluates to .

[OnlineStudy4U Live Mock: Infosys Full Length Mock Test- 3]
Topic: Pseudo Code
Q94. What is printed? Integer n, d Set n = 48, d = 0 while n > 1 do n = n / 2 d = d + 1 end while Print d
(A) 3
(B) 4
(C) 5
(D) 6
Correct Answer: Option (C) : 5
Logic / Derivation: 48→24→12→6→3→1. That is five divisions. d = 5. (Integer division: 3/2=1.)

[OnlineStudy4U Live Mock: Infosys Full Length Mock Test- 3]
Topic: Pseudo Code
Q95. What is printed? Integer x Set x = 10 Print x & 3
(A) 1
(B) 2
(C) 3
(D) 8
Correct Answer: Option (B) : 2
Logic / Derivation: Step-by-Step Solution: Detailed deduction confirms that Option (B): 2 is the correct answer.

[OnlineStudy4U Live Mock: Infosys Full Length Mock Test- 3]
Topic: Pseudo Code

Q96. What does G(4) return? Function G(n) if n <= 1 then return 1 return n * G(n - 1) End Function Print G(4)

(A) 10
(B) 16
(C) 24
(D) 64

Correct Answer: Option (C) : 24
Logic / Derivation: Step-by-Step Solution: Detailed deduction confirms that Option (C): 24 is the correct answer.

[OnlineStudy4U Live Mock: Infosys Full Length Mock Test- 6]
Topic: Pseudo Code

Q97. What does R(6) return? Function R(n) if n < 3 then return n return R(n - 1) + 2 End Function Print R(6)

(A) 6
(B) 8
(C) 10
(D) 12

Correct Answer: Option (C) : 10
Logic / Derivation: Step-by-Step Solution: Detailed deduction confirms that Option (C): 10 is the correct answer.

[OnlineStudy4U Live Mock: Infosys Full Length Mock Test- 8]
Topic: Pseudo Code

Q98. What is printed? Integer z Set z = 14 Print z & 7

(A) 6
(B) 7
(C) 8
(D) 21

Correct Answer: Option (A) : 6
Logic / Derivation: Step-by-Step Solution: Detailed deduction confirms that Option (A): 6 is the correct answer.

[OnlineStudy4U Live Mock: Infosys Full Length Mock Test- 9]
Topic: Pseudo Code

Q99. What is printed? Integer k Set k = 21 Print k >> 2

(A) 5
(B) 6
(C) 10
(D) 84

Correct Answer: Option (A) : 5
Logic / Derivation: Step-by-Step Solution: Detailed deduction confirms that Option (A): 5 is the correct answer.


[OnlineStudy4U Live Mock: Infosys Full Length Mock Test- 9]
Topic: Pseudo Code

Q100. What does W(5) return? Function W(n) if n <= 1 then return 2 return W(n - 1) + 3 End Function Print W(5)

(A) 11
(B) 14
(C) 15
(D) 17

Correct Answer: Option (B) : 14
Logic / Derivation: Step-by-Step Solution: Detailed deduction confirms that Option (B): 14 is the correct answer.

[Actual Infosys PYQ Screenshot (photo_2021-08-22_10-26-21.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

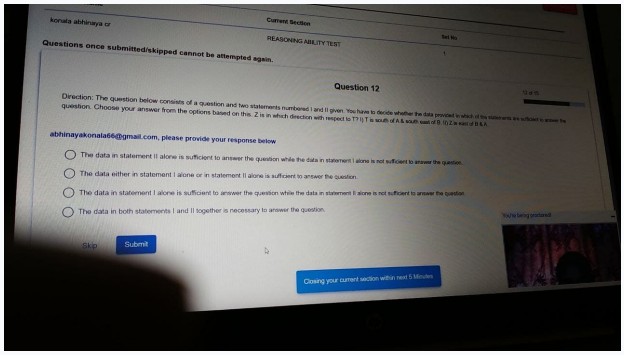


Q101. [Actual Infosys Exam Screenshot PYQ]: konala abhinaya cr Current Section set No REASONING ABILITY TEST Questions once submitted/skipped cannot be attempted again. Question 12 Direction : The Of a question and two Staternents nurrkMed I and II given You have to doc& the data pr0H•d Of tho question. Choose your answer from the options based this. Z is which duectim w•ith to T? 1) T is A & smith o' B. II) Z east pt abhinayakonala66@gmail.corn, please provide your below O The data in statement II alone is sufficient to answer tt-w question while the data in abne O The data either in statement I alone or in statement II alone is sufficient to answer the question. O The data in statement I alone is sufficient to answer question while the O The data in both statements I and II iS necessary to ans... [Continues in context]

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot
Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (photo_1913@28-10-2024_22-49-56.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

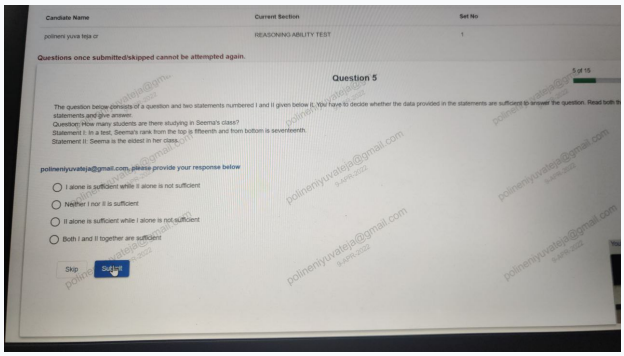


Q102. [Actual Infosys Exam Screenshot PYQ]: Candiate Nanp polineni yuva cr Curt•nt Section REASONING TEST Questions once submitted/skipped cannot attempted again. Question 5 Set No 15 The question below cmsistsoi a gæstion and two statements numtrred I and I I given below kaveto decide whether the data in are sumciert&x— me staternentsandgive answer Question: How many students are ttere studying in class? Statement 'n a test rank trom me fifteenth and from bottom is seventeenth. Statement II: Sema is tte eldest class *ase provide your response below O alone is II alone is rd suffcient O NOther I nor II is sumcient O II alone is SL&ent •Hli'e I alone is rymmcient O and II S&nt

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot
Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (photo_824@28-10-2024_22-28-23.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

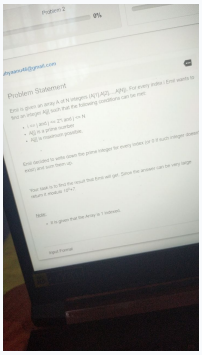


Q103. [Actual Infosys Exam Screenshot PYQ]: 0% lhyaanu46@gmail.com Problem Statement Emil is given an array A of N integers For every ;nce' find an Integer AOI such that the following conditions can be met AOI is a prime number AOI is maxmum possible. Emil decided to write down the prime integer for every index (or O if such integer exist) and sum them up, Your task ts to find the result that Emil wiN get. Since the answer can very large return it modulo 109+7 Nave: • It is given that the Array •s 1 Indexed. input F orrna'

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (photo_825@28-10-2024_22-28-23.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

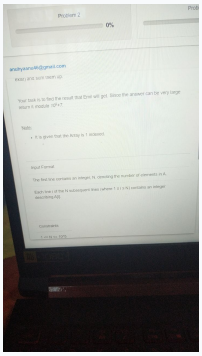


Q104. [Actual Infosys Exam Screenshot PYQ]: Problem 2 0% anuhyaanu46@gmail.com exso ana sum mem up. Your task is to find the result that Emil will get, Since the answer can be very large return it modulo 109+7, Note; • It is given that the Array is 1 indexed. Input Format The first line contains an integer, N, denoting the number of elements in A. Each line i of the N subsequent lines (where 1 s i s N) contains an integer describing Atil Constraints

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (photo_889@28-10-2024_22-33-03.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

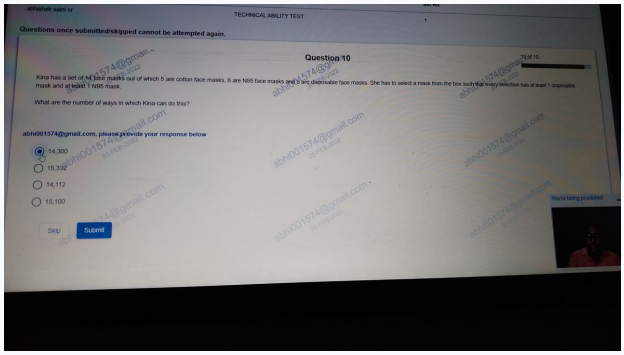


Q105. [Actual Infosys Exam Screenshot PYQ]: saini cr TECHNICAL ABILITY TEST Questions once submitted/skipped cannot be attempted again. QuestigpMO Kina has a set of 10 e face masks. She has to select a mask has at I out ot which 5 are cotton race masks, 6 are N95 race masks mask and N95 mask. What are the number of ways in which Kina can do this? abhm1574&mail.com, plea>térbv ide your resvx»nse tM210w 0 15,334 0 14.112 0 15,100 Skip

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (photo_978@28-10-2024_22-33-04.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

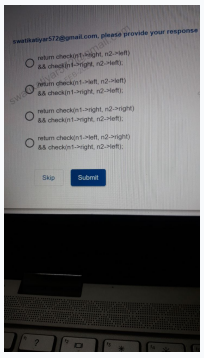

Q106. [Actual Infosys Exam Screenshot PYQ]: Swatikatiyar572@gmail.com, please provide your respom return n2->left) V' && n2->left); teturn check(nl->left, n2->left) i, && check(nl->right, n2->left); retum check(nl->right, n2->right) && check(nl->right, n2->left); retum check(nl->left, n2->right) && check(nl->right, n2->left ; Skip Submit


(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (IMG_20210613_155955_995.jpg)]

Topic: Exam Screenshot PYQ: Pseudocode and Technical

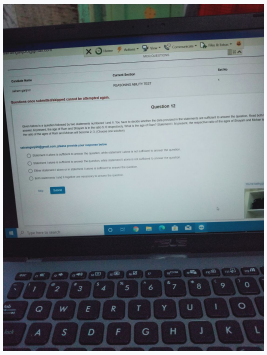

Q107. [Actual Infosys Exam Screenshot PYQ]: Fik.s & Extras • Set NO Nat* ganli CT QUESTIONS C'_rrent "ctlon REASONING ABILITY TEST Questions once cannot attempted again. Question 12 a question tallowed by two statements I and nave to decide wtrttrr data provided in statements are sufficient to ansvær the question. *'swer. At the Ot Ram aM Shayam is the ratÉ 5 6 What is the age Of Ram? Statement A! pregent. the resjkcnve ratio Of the ages of Shayn and o' Ot Ram and Mohan tk.:ome 2: 3, (Choose one solution) povid• yow respnse O Statement alone (s sufficient to answer the question. statement I alone is not sufficient arswer the question O Staternent I almeis Sufficient to answer the questlc„n, while sta',emen; aone is not sufficient answer [tie queston O in is sufficient to answeg tne guestion O st... [Continues in context]


(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (IMG_20210613_160054_238.jpg)]

Topic: Exam Screenshot PYQ: Pseudocode and Technical

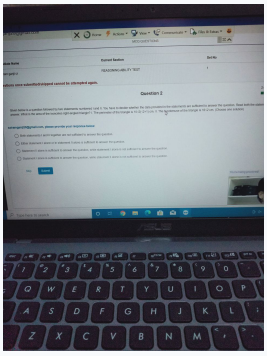

Q108. [Actual Infosys Exam Screenshot PYQ]: X o Horne Actions View files & Extras Communicate Name ram ganll cr MCQ QUESTIONS Current Section REASONING ABILITY TEST set No estions once submittedlskipped cannot be attempted again. Question 2 is a by two statements and n. You have to decide Whether the data provided in the statements are sufficient to answer the question. Read both MISwer_ Miat is the area Ot the roht-anql«f thang'e? I. The gerimeter Ot the triarge is) Cm. The Wunganli20@gmaiLcom, please provide your ressy)nse O Statements together are notsutne*erfl to ansv.er the question, O statement statement n s su%ient to mswer queston O Staterrent n to answer the question. while alone is rot to the question O Statement alone IS Sutnr;ient to answer the question, while alone ig answer 'he qu... [Continues in context]

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.