MixerConf

protocol (string)
inputsliders {dictionary} containing cnt keys, where each key:
       key : InputControl (object)
outputsliders {dictionary} containing cnt keys, where each key:
       key : OutputControl (object)
mutestyle: 'illuminated'
mute: 0 or 1
unmute: 1 or 0

__init__(self,
   mixerconf_file: filename string,
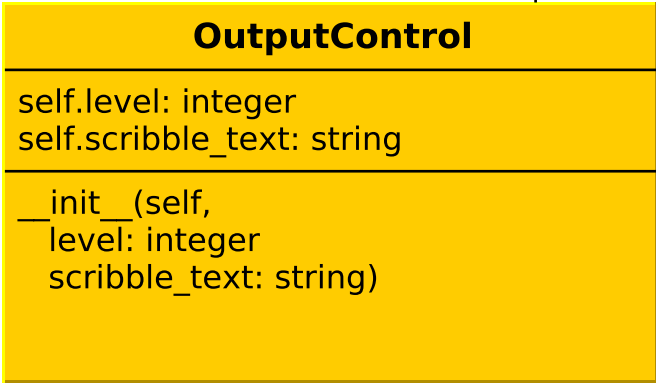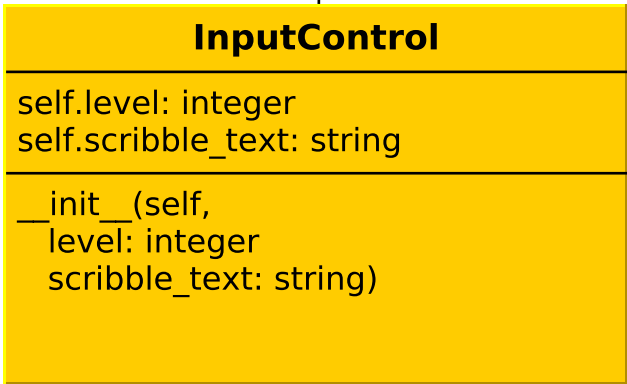   mixername: string,
   mixermodel: string)

---

cnt is parsed from the mixerconf_file xml for each item.
mutestyle is parsed from the mixerconf_file xml for each item.
mute 1/0, unmute 0/1 set based on mutestyle

InputControl

self.level: integer
self.scribble_text: string

__init__(self,
   level: integer
   scribble_text: string)

OutputControl

self.level: integer
self.scribble_text: string

__init__(self,
   level: integer
   scribble_text: string)

---

mixerconf_file XML structure:

```xml
<?xml version="1.0" encoding="UTF-8"?>
<mixers>
<mixer mfr="Behringer" model="X32">
  <protocol>osc</protocol>
  <mutestyle>illuminated</mutestyle>
  <port type="input" cnt="32" name="CH">
   <fader cmd="/ch/##/mix/fader" cmdtyp="level" range="0.0,1.0,1024" val="0"/>
   <mute cmd="/ch/##/mix/on" cmdtyp="enum" val="0"/>
   <scribble cmd="/ch/##/config/name" cmdtyp="string" text=""/>
  </port>
  <port type="auxin" cnt="6" name="AUX">
  </port>
  <port type="output" cnt="16" name="OUT">
   <mute cmd="/outputs/main/##/mix/on" cmdtyp="enum" val="0"/>
   <fader cmd="/ch/##/mix/fader" cmdtyp="level" range="0.0,1.0,1024" val="0"/>
  </port>
</mixer>
<mixer mfr="Yamaha" model="01V">
  <protocol>midi</protocol>
  <mutestyle>illuminated</mutestyle>
  <port type="input" cnt="16" name="CH">
   <fader cmd="B#,01,XX" cmdtyp="level" range="0,127" val="0"/>
   <mute cmd="B#.1C,XX" cmdtyp="enum" val="0"/>
   <scribble cmd="" cmdtyp="string" text=""/>
  </port>
  <port type="auxmaster" cnt="4" name="AUX">
   <mute cmd="B#,2D,XX" cmdtyp="enum" val="0"/>
   <fader cmd="B#,11,XX" cmdtyp="level" range="0,127" val="0"/>
  </port>
  <port type="output" cnt="2" name="OUT">
   <mute cmd="B#,37,XX" cmdtyp="enum" val="0"/>
   <fader cmd="B#,1B,XX" cmdtyp="level" range="0,127" val="0"/>
  </port>
</mixer>
<mixer mfr="Default" model="">
  <protocol>midi</protocol>
  <port type="input" cnt="16" name="CH">
   <fader cmd="B#,01,XX" cmdtyp="level" range="0,127" val="0"/>
   <mute cmd="B#.1C,XX" cmdtyp="enum" val="0"/>
   <scribble cmd="" cmdtyp="string" text=""/>
  </port>
  <port type="output" cnt="2" name="OUT">
   <mute cmd="B#,37,XX" cmdtyp="enum" val="0"/>
   <fader cmd="B#,1B,XX" cmdtyp="level" range="0,127" val="0"/>
  </port>
</mixer>
</mixers>
```