

FlashFru 工具使用手册

Fru 信息修改注意事项:

修改完成后必须重启机器，使之生效

1,依赖工具

win32\ipmitool.exe 与 flashfru.exe 放在同一目录下（如下图）



2,工具使用


1) 运行工具

双击执行 flashfru.exe,出现如下界面（图一），填入 IP 地址、账户及密码。



图一

2) 点击登录按键，获取当前 fru 信息（如图二）

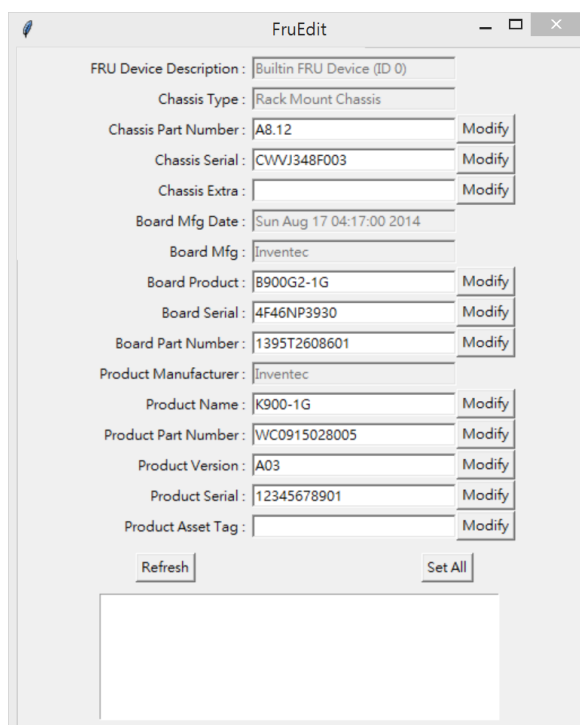

3) 修改 fru 信息

在工具界面中找到需要修改的项，填入目标值，然后点击该项后面的“Modify”按钮，下方文本框中会显示修改的过程。

The screenshot shows the FruEdit application window with the following fields and values:

Field	Value	Action
FRU Device Description	Builtin FRU Device (ID 0)	
Chassis Type	Rack Mount Chassis	
Chassis Part Number	A8.12	Modify
Chassis Serial	CWWJ348F003	Modify
Chassis Extra		Modify
Board Mfg Date	Sun Aug 17 04:17:00 2014	
Board Mfg	Inventec	
Board Product	B900G2-1G	Modify
Board Serial	4F46NP3931	Modify
Board Part Number	1395T2608601	Modify
Product Manufacturer	Inventec	
Product Name	K900-1G	Modify
Product Part Number	WC0915028005	Modify
Product Version	A03	Modify
Product Serial	12345678901	Modify
Product Asset Tag		Modify

Buttons: Refresh, Set All

Log output (highlighted in red):

```
Update Board Serial.....  
b"Updating Field '4F46NP3930' with '4F46NP3931' ...  
,  
b'  
Update Board Serial Passed
```

如果需要修改所有的项，则可以点击下方“Set All”按钮。


The screenshot shows the FruEdit application window with the same fields and values as the previous screenshot. The 'Set All' button is highlighted, indicating it has been clicked.

Buttons: Refresh, Set All

Log output (highlighted in red):

```
Chassis Serial:Pass  
Chassis Extra:Pass  
Board Product:Pass  
Board Serial:Pass  
Board Part Number:Pass  
Product Name:Pass  
Product Part Number:Pass  
Product Version:Pass  
Product Serial:Pass  
Product Asset Tag:Pass
```

4) 点击 Refresh 按键，获取修改后的 fru 信息

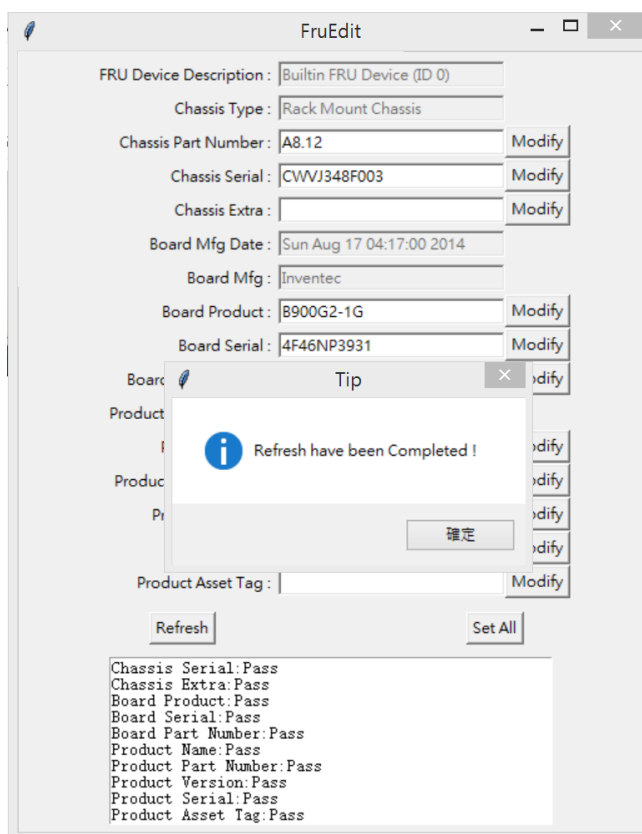

3, FRU 信息检查

修改完成后，重启机器，按F2/Del 进入BIOS Setup 界面然后进入

“Server Mgmt” → “View FRU information” 查看其中的FUR 信息和需要刷的是否一致，如果不一致则重启机器或重新设置 FRU 信息