A DMC_x^2 Multi-channel cross-correlation analyses of a motor/imaginary human activity experiment electroencephalogram (EEG) recordings

Fernando Ferraz Ribeiro^{1,4}, Andrea de Almeida Brito³, Florêncio Mendes Oliveira Filho⁵, Juan Alberto Leyva Cruz², Gilney Figueira Zebende²

- 1 Federal University of Bahia, Brazil
- 2 State University of Feira de Santana, Bahia, Brazil
- ${\bf 3}$ Department of Mathematic, Federal Institute of Education, Science and Techinology , Salvador, Bahia, Brazil
- 4 PPGM, State University of Feira de Santana, Bahia, Brazil
- **5** Computation Engeneering, SENAI CIMATEC University Center, Salvador, Bahia, Brazil
- These authors contributed equally to this work.
- ‡These authors also contributed equally to this work.
- ¤Current Address: Dept/Program/Center, Institution Name, City, State, Country †Deceased
- Membership list can be found in the Acknowledgments section.
- * correspondingauthor@institute.edu

Abstract

This paper presents an investigation on the electroencephalogram (EEG) 64-channels recordings of a motor/imaginary experiment, using the detrended multiple cross-correlation coefficient (DMC_x^2) . Analyzing data from 4 channels, F_332 , F_637 (frontal region of the head) and P_349 , P_654 (parietal region of the head), the DMC_x^2 was applied to evaluate the correlation among one of the channels with the three others alternately. Analyzing all the motor/imaginary experiments and 108 of the 109 subjects, this research points to a pattern, detected on most of the subjects: Using channel F_332 against the others, the correlation coefficient is higher compared to the other combinations. The reason why some persons don't match that pattern is still an open question.

Introduction

The electroencephalogram (EEG) is, in short, a technic that reads electrical signals from the brain activity with the use of sensors placed in the scalp of the patient and makes sense of this data. Impulses are amplified and recorded over time in parallel, generating one time serie for each sensor. The EEG equipment mesures the electric potential difference from each sensor position in relation with a reference sensor, usually placed in the ear lobe. Although the EEG is almost a centenary technic, in recent decades EEG has addressed new problems as brain-triggered neurorehabilitation treatments, experimental psychology or even computational neuroscience, due to it's versatility and accessibility combined with the advances in signal processing [1].

March 25, 2023 1/15

The recordings used are available at the Physionet on-line databank (https://physionet.org/pn4/eegmmidb/). The data is originated from a study that perform 14 experiments on a population of 109 subjects, Using 64 electrodes to record the brain signals. The first 2 experiments are baseline references, the subjects where resting with eyes opened end the second with eyes closed (one minute for each). The other four experiments are a combination of two categories with two possible options each $2 \times 2 = 4$. In general, the experiments consist of making the subjects react over visual stimulus: a target that appears on a screen. One category is about the target position, one option is a target that will aperar on the left or the right of the screen, in the other, the target will appear on the top or on the bottom of the screen. The second category determines if the subject will actually execute a body action related to the target position (Real) or if the corresponding action will be just imagined (Imaginary) by the subject. The tasks, with duration of two minutes, are described below:

11

13

15

17

31

33

41

- Task 1: a target appears on either the left or the right side of the screen. The subject opens and closes the corresponding fist until the target disappears. Then the subject relaxes. (Real (L/R));
- Task 2: a target appears on either the left or the right side of the screen. The subject imagines opening and closing the corresponding fist until the target disappears. Then the subject relaxes. (Imag (L/R));
- Task 3: a target appears on either the top or the bottom of the screen. The subject opens and closes either both fists (if the target is on top) or both feet (if the target is on the bottom) until the target disappears. Then the subject relaxes. (Real (T/D));
- Task 4: a target appears on either the top or the bottom of the screen. The subject imagines opening and closing either both fists (if the target is on top) or both feet (if the target is on the bottom) until the target disappears. Then the subject relaxes. (Imag (T/D)).

Table 1 presents witch Task is carried in each experiment number. Every subject executes the four tasks three times. Experiments 3, 7 and 11 applies Task 1 to the subjects, experiments 4, 8 and 12, Task 2, experiments 5, 9 and 13, Task 3 and experiments 6, 10 e 14 uses Task 4.

Table 1. Experiment x task relation

Experiment n ^o	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Baseline 1	X													
Baseline 2		X												
Task 1			X				X				X			
Task 2				X				X				X		
Task 3					X				X				X	
Task 4						X				X				X

The experiment and the executed tasks: Two one-minute baseline (eyes open/closed) and three two-minute of four Tasks.

The electrodes in all tasks and experiments where located as shown in Fig. 1. The colored circles in Figure 1 correspond to the positions of the electrodes channels whose recordings were used in our analyses: F_332 (blue) and F_637 (yellow), on the frontal region of the head, and P_349 (red) and P_654 (green), on the parietal region of the head.

March 25, 2023 2/15

Fig. 1. Electrodes position indistration.

(Fig. 22) Fig.23 (5,524)

(Fig. 30) Fig. 31 (633) Fig. 34 (7,525)

(Fig. 30) Fig. 33 (7,524)

(Fig. 30) Fig. 34 (7,525)

(Fig. 30) Fig. 34 (

Fig 1. Electrodes position illustration.

Position of the 64 electrodes according to the international 10-20 system (excluding electrodes Nz, F9, F10, FT9, FT10, A1, A2, TP9, TP10, P9, and P10). The colored dots: F_332 (blue), F_637 (yellow), P_349 (red), P_654 (green) identify the channels used in this research.

The four channels are alternately picked as dependent variable and the correlation against the other three are calculated by the application of the Detrended Multiple Cross-Correlation Coefficient (DMC_x^2) [2]

In the next sections we will present the dataset; the methodology used to analyze the data, including pre-processing strategies and criteria, and the DMC_x^2 method; the results, statistics and data visualization for the analyzed populations and individual results for randomly selected subjects. The discussion of the results and the conclusions are presented in sequence. In the supporting materials, a link to access all the calculations and data visualization for all the experiment subjects is available.

51

Materials and methods

The Physionet on-line databank is publicly available at https://physionet.org/pn4/eegmmidb/, presents recordings of the EEG experiments described in previous section. The data is provided in EDF (European data format) files. The files of all the experiments for every subject where downloaded using a web

March 25, 2023 3/15

scraping script created by the authors using Python and the package Beautiful Soap.

The EDF files where opened using Python package pyedflib and translated into text files. In EEG experiments, usually the end of the recordings is filled with a sequence of zeroes, corresponding to the time gap between the shooting down of the EEG machine and the recording system. In this pre-processing stage, all the tailing zeroes sequences are eliminated from the records. To properly apply the DMC_x^2 calculations and the intended comparisons between experiments end subjects, all the time series must have the same length. The research find out the the experiment number 5 (Top/Down, Real) conducted with subject S106 has only 5808 valid recorded points. The second smallest time series has 15742 valid records (subject: S100, experiment: 12 -Left/Right, Imaginary).

62

72

101

103

104

105

106

The interval between each recorded value in this equipment is 6.25 ms, and the recordings on experiment 5 of subject S106 is 36.3 s. The duration is way smaller then the expected 2 minutes and the series is relatively small to the application os the DMC_x^2 method. Cutting all the subjects data to this duration implies in a great loss of data. The second smaller series of 15742 represents a total duration of 98.3875 s. The value was considered adequate to the DMC_x^2 method and the duration is about 82% of the expected duration. The decision was to eliminate subject S106 from the experiment and to cut all time series at recording point 15742. resulting in a total number of 108 subjects with all 12 experiments per subject lasting 98.3875 s.

The DMC_x^2 is part of a group of new statistical methods applied to long-range time series. The DFA method [3,4] was proposed to identify self-affinity in of a signal. For long-memory series, the value of the $F_{DFA}(n)$ usually grow with the time scale n denoting a power-law, described by the auto-correlation exponent α . This method was already used to evaluate the self-affinity of the same channels of this same dataset analyzed in this study, concluding xthat the amplitude of fluctuation tends to be larger in the frontal channels " $(F_332 \text{ and } F_637)$, if we compare with the channels located in the parietal region of the brain $(P_349 \text{ and } P_654)$ " [5]. Other works also applied DFA to evaluate different aspects of EEG signals [6] [7] [8].

The Detrended Cross-Correlation Coefficient, DCCA [9], expand the idea of the DFA to analyze the long-range cross-correlation for two non-stationary time series, but the quantification of the level of this correlation is calculated by the ρ_{DCCA} , proposed tree year later [10] and statistically tested in the same year [11]. Equation 1 shows that the ρ_{DCCA} of two time series, x_a and x_b is calculated using the DFA and the DCCA methods.

$$\rho_{x_a,x_b}(n) = \frac{F_{DCCA_{(x_a,x_b)}}^2(n)}{F_{DFA_{x_a}}(n)F_{DFA_{x_b}}(n)} \tag{1}$$

To analise the dataset, this study uses the Detrended Multiple Cross-Correlation Coefficient (DMC_x^2) [2]. This coefficient, is a generalization of the ρ_{DCCA} , and calculates the correlation of one time serie Y, defined dependent variable in relation of a number k of time series $[x_1, x_2 \dots x_k]$, taken as independent variables. In equation 2, $\rho_{y,x_i}(n)$ is a vector containing the ρ_{DCCA} of Y against each one of the dependent variables, and matrix $\rho^{-1}(n)$ is the inverse matrix of the dependent variables in relation with each other, for a certain time scale.

$$DMC_x^2 \equiv \rho_{y,x_i}(n)^T \times \rho^{-1}(n) \times \rho_{y,x_i}(n)$$
(2)

Matrix $\rho(n)$ is presented in Equation 3. The main diagonal is filled with ones (1) because the ρ_{DCCA} correlation among a time serie and itself is always one. The ρ_{DCCA} correlation is independent of the order of the two time series in the equation (commutative property). Since ρ_{x_a,x_b} is equal to ρ_{x_b,x_a} , it's important to point that matrix $\rho(n)$ is symmetric with respect to the main diagonal.

March 25, 2023 4/15

$$\rho^{-1}(n) = \begin{pmatrix} 1 & \rho_{x_1, x_2}(n) & \rho_{x_1, x_3}(n) & \dots & \rho_{x_1, x_i}(n) \\ \rho_{x_2, x_1}(n) & 1 & \rho_{x_2, x_3}(n) & \dots & \rho_{x_2, x_i}(n) \\ \vdots & \vdots & \vdots & \dots & \vdots \\ \rho_{x_i, x_1}(n) & \rho_{x_i, x_2}(n) & \rho_{x_i, x_3}(n) & \dots & 1 \end{pmatrix}^{-1}$$
(3)

The calculation of the inverse matrix is the most time consuming step on the method. Replacing the equal values $(\rho_{x_a,x_b}=\rho_{x_b,x_a})$ the calculus of the DMC_x^2 with 3 independent variables $[x_1,x_2,x_3]$ against one dependent Y is presented in Equation 4.

$$DMC_{x}^{2} = (\rho_{X_{2},X_{3}}^{2} \times \rho_{Y,X_{1}}^{2} - \rho_{Y,X_{1}}^{2} + \rho_{X_{1},X_{3}}^{2} \times \rho_{Y,X_{2}}^{2} - \rho_{Y,X_{2}}^{2} + 2 \times \rho_{X_{1},X_{2}} \times \rho_{Y,X_{1}} \times \rho_{Y,X_{2}} - 2 \times \rho_{X_{1},X_{3}} \times \rho_{X_{2},X_{3}} \times \rho_{Y,X_{1}} + \rho_{X_{1},X_{2}}^{2} \times \rho_{Y,X_{3}}^{2} - \rho_{Y,X_{3}}^{2} + 2 \times \rho_{X_{1},X_{3}} \times \rho_{Y,X_{1}} \times \rho_{Y,X_{3}} - 2 \times \rho_{X_{1},X_{2}} \times \rho_{X_{2},X_{3}} \times \rho_{Y,X_{1}} \times \rho_{Y,X_{3}} - 2 \times \rho_{X_{1},X_{2}} \times \rho_{X_{1},X_{3}} \times \rho_{Y,X_{2}} \times \rho_{Y,X_{3}} + 2 \times \rho_{X_{2},X_{3}} \times \rho_{Y,X_{2}} \times \rho_{Y,X_{3}}) / (\rho_{X_{1},X_{2}}^{2} + \rho_{X_{1},X_{3}}^{2} + \rho_{X_{2},X_{3}}^{2} - 2 \times \rho_{X_{1},X_{2}} \times \rho_{X_{1},X_{3}} \times \rho_{X_{2},X_{3}}^{-1})$$

Data treatments and calculations

The study follow the steps presented below:

- 1. The data was automatically downloaded, using a script developed by the research team using Python and BBeautifulSoup package
- 2. Pre-processing: the data is extracted from the .EDF format to a Numpy array. The series were analyzed to eliminate the trailing zeroes, cut at the length of 15742 recorded point and saved as csv files.
- 3. ρ_{DCCA} and DMC_x^2 calculations: The csv files were used to calculate the coefficients. The calculations were implemented in C language by the research team and the executable was repeatedly called from a python file using the subprocess module. The C program saves the results in a spaces separated txt file.
- 4. The results are filtered by task. Statistics (mean, median and standard deviation) are calculated for every task for all the subjects. Results are stores in CSV files and in Python Pickle format.
- 5. Figures generation: To make sense of the results, visualizations are generated. Fist for every subject and task: a four figures plot with the three experiments for the same task and the mean values for each task. Then another four figures plot is generated for each subject, showing the mean value for each execution of each task. Third, for figures plot with the mean value for all the subject, one figure for each task.
- 6. Diferences: The diference between every subject (mean of the four tasks) and the global menis calculated and a four figures plot is created for every subject. The diferences between the imaginary and real actions are calculated for the top/down and the left/right actions, a two figure plot is generated for every subject. The mean square error is calculated resulting in four figures plots (one figure for each task, one plot for each channel as independent variable). All data is saved in CSV and Python Pickle format

March 25, 2023 5/15

Results

137

138

141

142

143

144

145


146

148

149

With the large amount of data generated by the experiment (764 images and 7 long data tables), five randomly selected subjects will be used to present some of the results: S014, S036, S039, S078 and S099. The plots displaying the results for every experiment of the same task for subject and the mean for that task as the fourth graphic were omitted with the exception of Fig. 2 (subject S014, Left Right imaginary) for illustration proposes, but all the information is available in the repository linked in the supporting information section of this article. The purple vertical line represents the time scale between the display of one image on the experiments screen and the display of the next image.


Fig 2. S014 - Left Right - Imaginary Subject code: S014 - Left Right, Imaginary

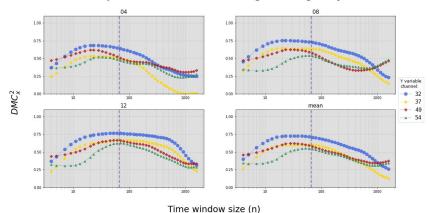


Time window size (n) Figure caption text here, please use this space for the figure panel descriptions instead of using subfigure commands. A: Lorem ipsum dolor sit amet. B: Consectetur adipiscing elit.

Fig. 3 presents the mean values for all the experiments that applies the same task for the randomly selected subject S014. For this individual, the top/down Imaginary and the top/down real are very close.

Fig 3. Bold the figure title.



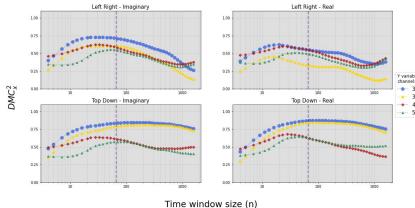

caption text here, please use this space for the figure panel descriptions instead of using subfigure commands. A: Lorem ipsum dolor sit amet. B: Consectetur adipiscing elit.

March 25, 2023 6/15

Fig 4. Bold the figure title.


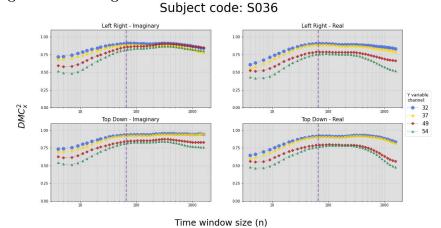


Fig 5. Bold the figure title.

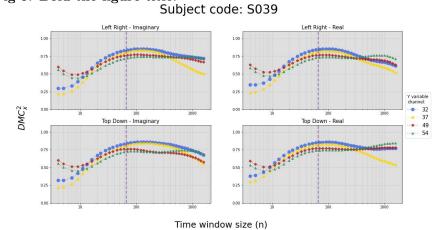

caption text here, please use this space for the figure panel descriptions instead of using subfigure commands. A: Lorem ipsum dolor sit amet. B: Consectetur adipiscing elit.

Discussion

150

152

153

154

156

Conclusion

Supporting information

S1 Fig. Bold the title sentence. Add descriptive text after the title of the item (optional).

S2 Fig. Lorem ipsum. Maecenas convallis mauris sit amet sem ultrices gravida. Etiam eget sapien nibh. Sed ac ipsum eget enim egestas ullamcorper nec euismod ligula. Curabitur fringilla pulvinar lectus consectetur pellentesque.

S1 File. Lorem ipsum. Maecenas convallis mauris sit amet sem ultrices gravida.

March 25, 2023 7/15

Fig 6. Bold the figure title.


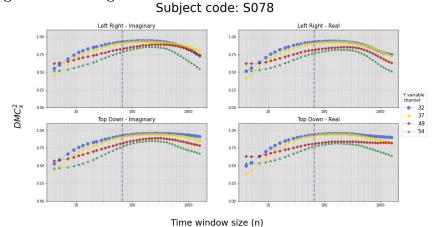


Fig 7. Bold the figure title.

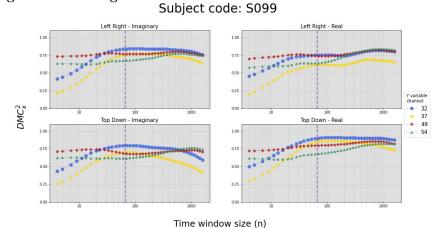

caption text here, please use this space for the figure panel descriptions instead of using subfigure commands. A: Lorem ipsum dolor sit amet. B: Consectetur adipiscing elit.

Etiam eget sapien nibh. Sed ac ipsum eget enim egestas ullamcorper nec euismod ligula. Curabitur fringilla pulvinar lectus consectetur pellentesque.

159

160

161

162

163

164

165

166

167

169

S1 Video. Lorem ipsum. Maecenas convallis mauris sit amet sem ultrices gravida. Etiam eget sapien nibh. Sed ac ipsum eget enim egestas ullamcorper nec euismod ligula. Curabitur fringilla pulvinar lectus consectetur pellentesque.

S1 Appendix. Lorem ipsum. Maecenas convallis mauris sit amet sem ultrices gravida. Etiam eget sapien nibh. Sed ac ipsum eget enim egestas ullamcorper nec euismod ligula. Curabitur fringilla pulvinar lectus consectetur pellentesque.

S1 Table. Lorem ipsum. Maecenas convallis mauris sit amet sem ultrices gravida. Etiam eget sapien nibh. Sed ac ipsum eget enim egestas ullamcorper nec euismod ligula. Curabitur fringilla pulvinar lectus consectetur pellentesque.

March 25, 2023 8/15

Fig 8. Bold the figure title.




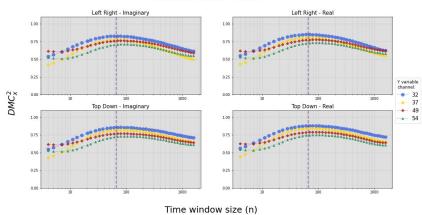


Fig 9. Bold the figure title.

Global stats: median

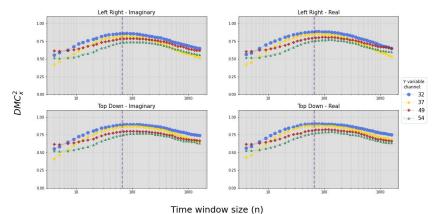

Figure

170

173

175

176

177

178

179

180

caption text here, please use this space for the figure panel descriptions instead of using subfigure commands. A: Lorem ipsum dolor sit amet. B: Consectetur adipiscing elit.

Acknowledgments


References

1. Biasiucci A, Franceschiello B, Murray MM. Electroencephalography. Current Biology. 2019;29(3):R80–R85. doi:10.1016/j.cub.2018.11.052.

- 2. Zebende GF, Silva AM. Detrended Multiple Cross-Correlation Coefficient. Physica A. 2018;510:91–97. doi:10.1016/j.physa.2018.06.119.
- 3. Peng CK, Buldyrev SV, Havlin S, Simons M, Stanley HE, Goldberger AL. Mosaic Organization of DNA Nucleotides. Physical Review E. 1994;49(2):1685–1689. doi:10.1103/PhysRevE.49.1685.
- 4. Buldyrev SV, Goldberger AL, Havlin S, Mantegna RN, Matsa ME, Peng CK, et al. Long-Range Correlation Properties of Coding and Noncoding DNA

March 25, 2023 9/15

Fig 10. Bold the figure title.

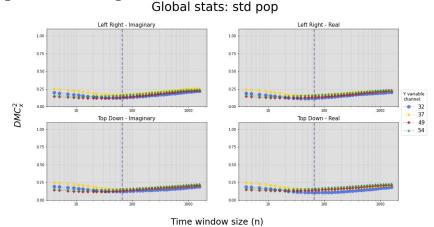

181

182

183

185

187

188

189


190

191

192

Fig 11. Bold the figure title.

Subject code: S014 (difference from mean value)

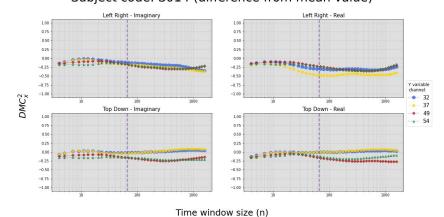

caption text here, please use this space for the figure panel descriptions instead of using subfigure commands. A: Lorem ipsum dolor sit amet. B: Consectetur adipiscing elit.

Sequences: GenBank Analysis. Physical Review E. 1995;51(5):5084–5091. doi:10.1103/PhysRevE.51.5084.

- 5. Zebende GF, Filho FMO, Cruz JAL. Auto-Correlation in the Motor/Imaginary Human EEG Signals: A Vision about the FDFA Fluctuations. PLoS ONE. 2017;12(9):1–13. doi:10.1371/journal.pone.0183121.
- Mesquita VB, Oliveira Filho FM, Rodrigues PC. Detection of Crossover Points in Detrended Fluctuation Analysis: An Application to EEG Signals of Patients with Epilepsy. Bioinformatics. 2021;37(9):1278–1284. doi:10.1093/bioinformatics/btaa955.
- 7. Oliveira Filho FM, Leyva Cruz JA, Zebende GF. Analysis of the EEG Bio-Signals during the Reading Task by D F A Method. Physica A: Statistical Mechanics and its Applications. 2019;525:664–671. doi:10.1016/j.physa.2019.04.035.

March 25, 2023 10/15

Fig 12. Bold the figure title.

Subject code: S036 (difference from mean value)


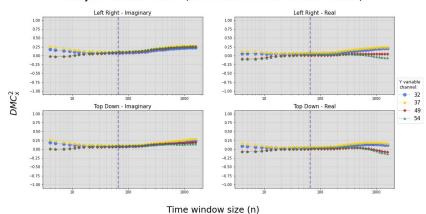


Fig 13. Bold the figure title.

Subject code: S039 (difference from mean value)

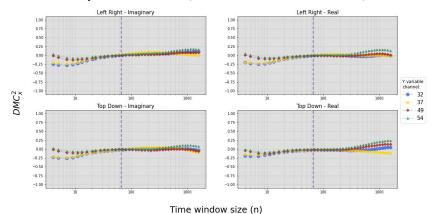

caption text here, please use this space for the figure panel descriptions instead of using subfigure commands. A: Lorem ipsum dolor sit amet. B: Consectetur adipiscing elit.

8. Filho FMO, Zebende GF, Guedes EF, Filho AMdS, de Castro APN, Cruz JAL. Self-Regulation in Electroencephalographic Signals during an Arithmetic Performance Test: An Approach with an Rms Fluctuation Function. International Journal of Health Science. 2021;1(9):2–12. doi:10.22533/at.ed.15921091210.

193

195

197

198

199

200

201

202

203

204

205

- 9. Podobnik B, Stanley HE. Detrended Cross-Correlation Analysis: A New Method for Analyzing Two Nonstationary Time Series. Physical Review Letters. 2008;100(8). doi:10.1103/PhysRevLett.100.084102.
- 10. Zebende GF. DCCA Cross-Correlation Coefficient: Quantifying Level of Cross-Correlation. Physica A: Statistical Mechanics and its Applications. 2011;390(4):614–618. doi:10.1016/j.physa.2010.10.022.
- 11. Podobnik B, Jiang ZQ, Zhou WX, Stanley HE. Statistical Tests for Power-Law Cross-Correlated Processes. Phys Rev E. 2011;84(6):66118.

March 25, 2023 11/15

Fig 14. Bold the figure title.
Subject code: S078 (difference from mean value)


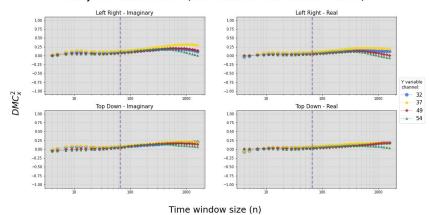



Fig 15. Bold the figure title.
Subject code: S099 (difference from mean value)

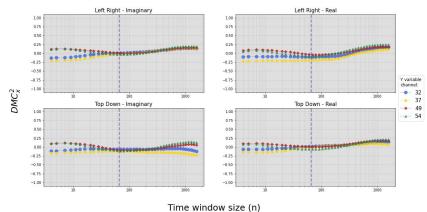

Time window size (n)

Figure caption text here, please use this space for the figure panel descriptions instead of using subfigure commands. A: Lorem ipsum dolor sit amet. B: Consectetur adipiscing elit.

Fig 16. Bold the figure title.
Subject code: S014 difference (Imaginary - real)



Figure

caption text here, please use this space for the figure panel descriptions instead of using subfigure commands. A: Lorem ipsum dolor sit amet. B: Consectetur adipiscing elit.


doi:10.1103/PhysRevE.84.066118.

March 25, 2023 12/15

206

Fig 17. Bold the figure title.

Subject code: S036 difference (Imaginary - real)




Figure

caption text here, please use this space for the figure panel descriptions instead of using subfigure commands. A: Lorem ipsum dolor sit amet. B: Consectetur adipiscing elit.

Fig 18. Bold the figure title.

Subject code: S039 difference (Imaginary - real)




Figure

caption text here, please use this space for the figure panel descriptions instead of using subfigure commands. A: Lorem ipsum dolor sit amet. B: Consectetur adipiscing elit.

Fig 19. Bold the figure title.


Subject code: S078 difference (Imaginary - real)



Figure

caption text here, please use this space for the figure panel descriptions instead of using subfigure commands. A: Lorem ipsum dolor sit amet. B: Consectetur adipiscing elit.

Fig 20. Bold the figure title.
Subject code: S099 difference (Imaginary - real)




Figure

caption text here, please use this space for the figure panel descriptions instead of using subfigure commands. A: Lorem ipsum dolor sit amet. B: Consectetur adipiscing elit.

March 25, 2023 13/15

Fig 21. Bold the figure title.

MSE: Channel 32

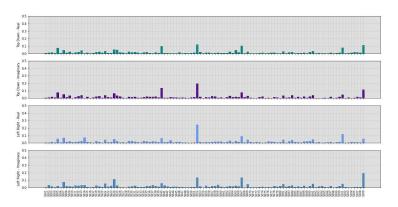


Figure

caption text here, please use this space for the figure panel descriptions instead of using subfigure commands. A: Lorem ipsum dolor sit amet. B: Consectetur adipiscing elit.

Fig 22. Bold the figure title.

MSE: Channel 37

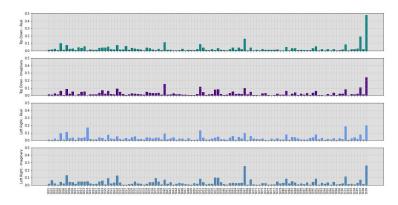

Figure

caption text here, please use this space for the figure panel descriptions instead of using subfigure commands. A: Lorem ipsum dolor sit amet. B: Consectetur adipiscing elit.

March 25, 2023 14/15

Fig 23. Bold the figure title.

MSE: Channel 49


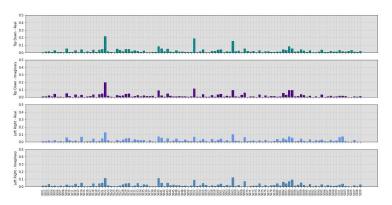


Fig 24. Bold the figure title.

MSE: Channel 54

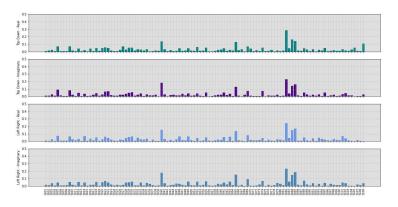

Figure

caption text here, please use this space for the figure panel descriptions instead of using subfigure commands. A: Lorem ipsum dolor sit amet. B: Consectetur adipiscing elit.

March 25, 2023 15/15