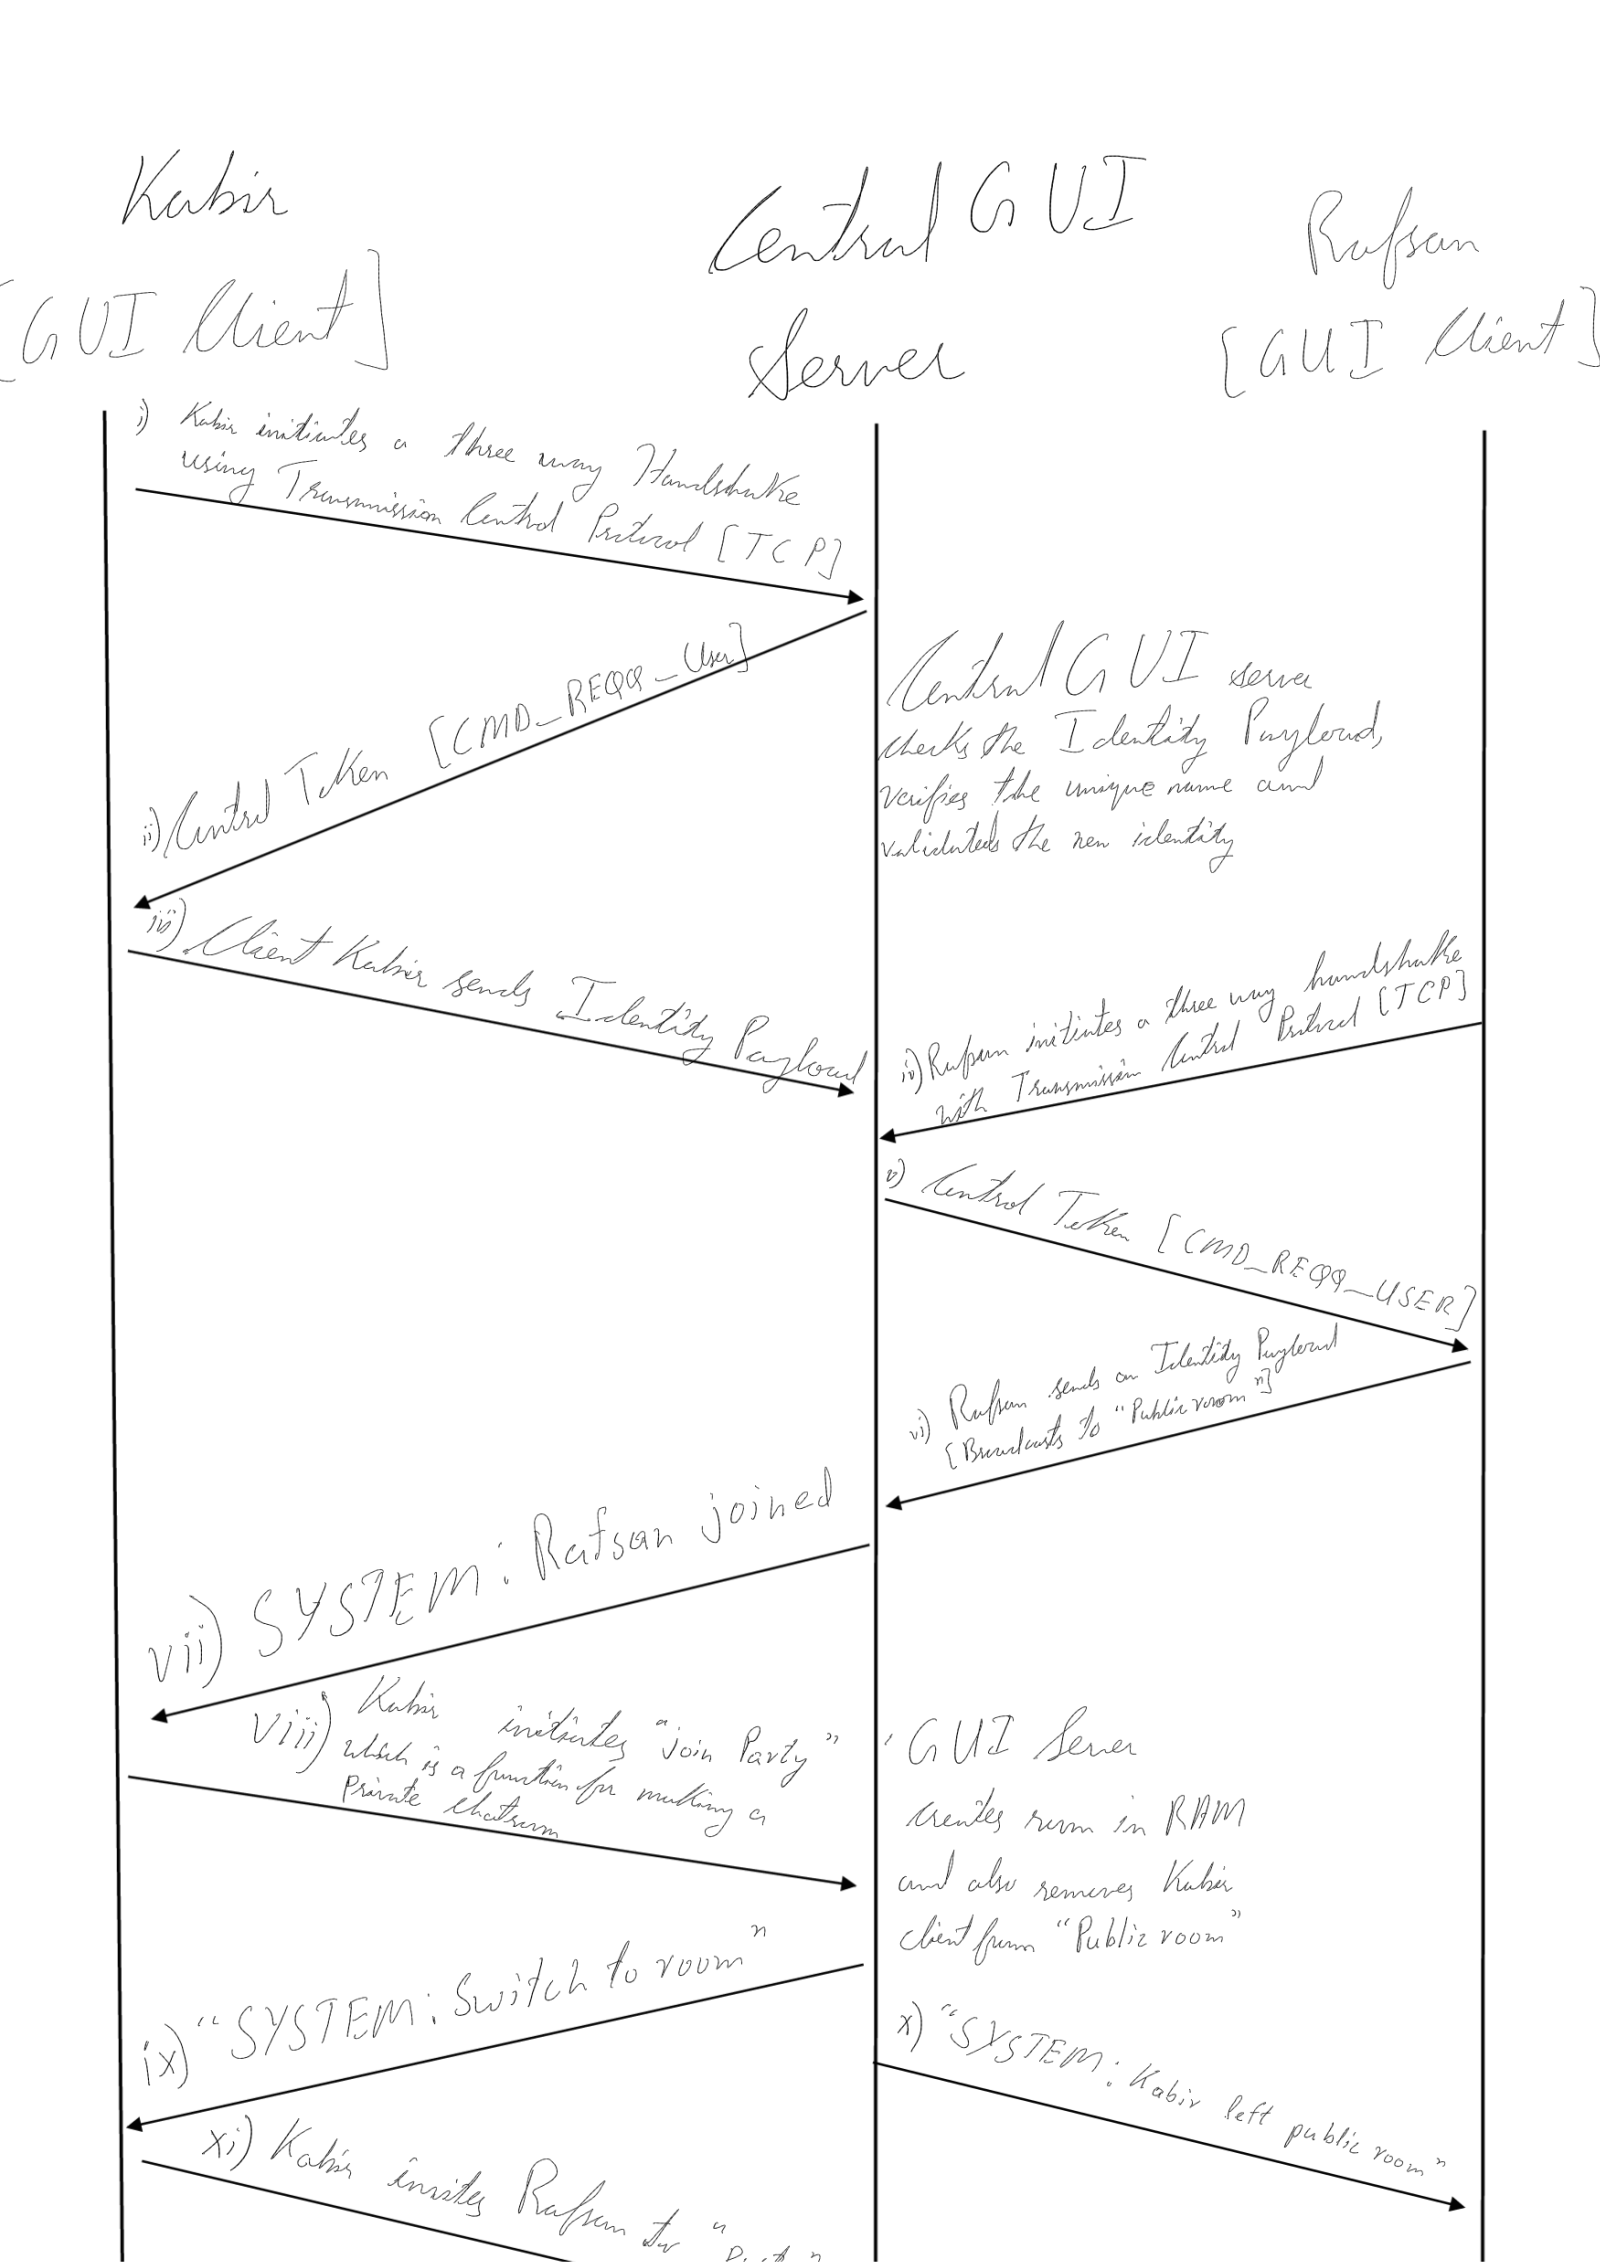
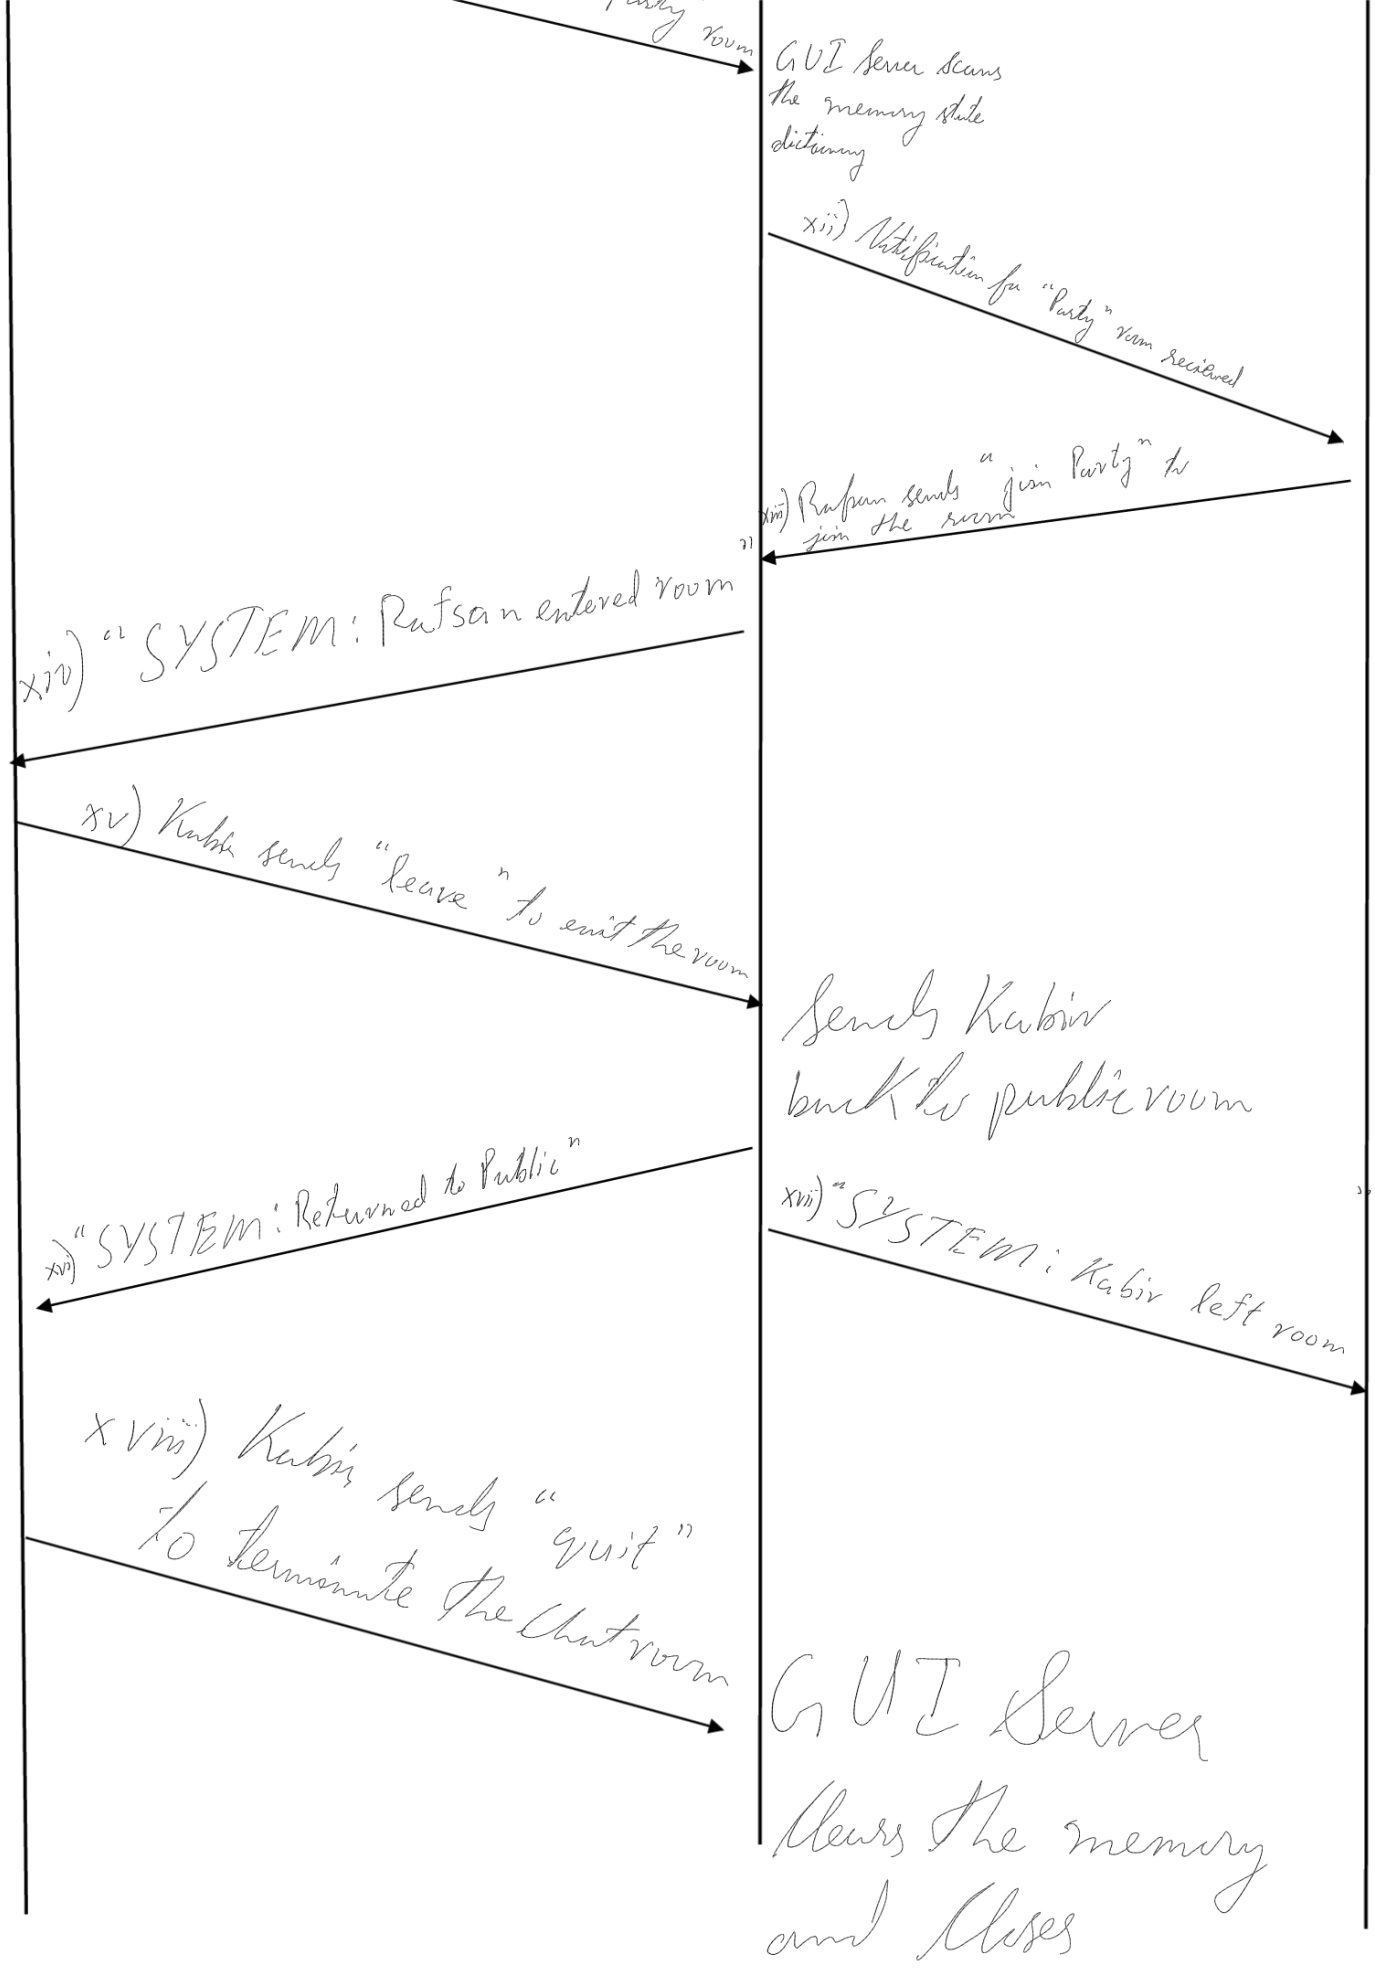

Kabir
[GUI Client]
Central GUI
Server
Rafsan
[GUI Client]
i) Kabir initiates a three way Handshake using Transmission Control Protocol [TCP]
ii) Control Token [CMD_REQQ_User]
Central GUI server checks the Identity Payload, verifies the unique name and validates the new identity
iii) Client Kabir sends Identity Payload
iv) Rafsan initiates a three way handshake with Transmission Control Protocol [TCP]
v) Control Token [CMD_REQQ_USER]
vi) Rafsan sends an Identity Payload [Broadcasts to "Public room"]
vii) SYSTEM: Rafsan joined
viii) Kabir initiates "Join Party" which is a function for making a Private chatroom
GUI Server creates room in RAM and also removes Kabir client from "Public room"
ix) "SYSTEM: Switch to room"
x) "SYSTEM: Kabir left public room"
xi) Kabir invites Rafsan to "


party room
GUI Server scans the memory state dictionary
xiii) Notification for "Party" room received
xiii) Rufsan sends "join Party" to join the room
xiv) "SYSTEM: Rufsan entered room
xv) Kabir sends "leave" to exit the room
Sends Kabir back to public room
xvi) "SYSTEM: Returned to Public"
xvii) "SYSTEM: Kabir left room
xviii) Kabir sends "quit" to terminate the chat room
GUI Server clears the memory and closes