


# Github Repository

<https://github.com/ebubekirtr/ebubekir-final.git>

## Repository Oluşturma



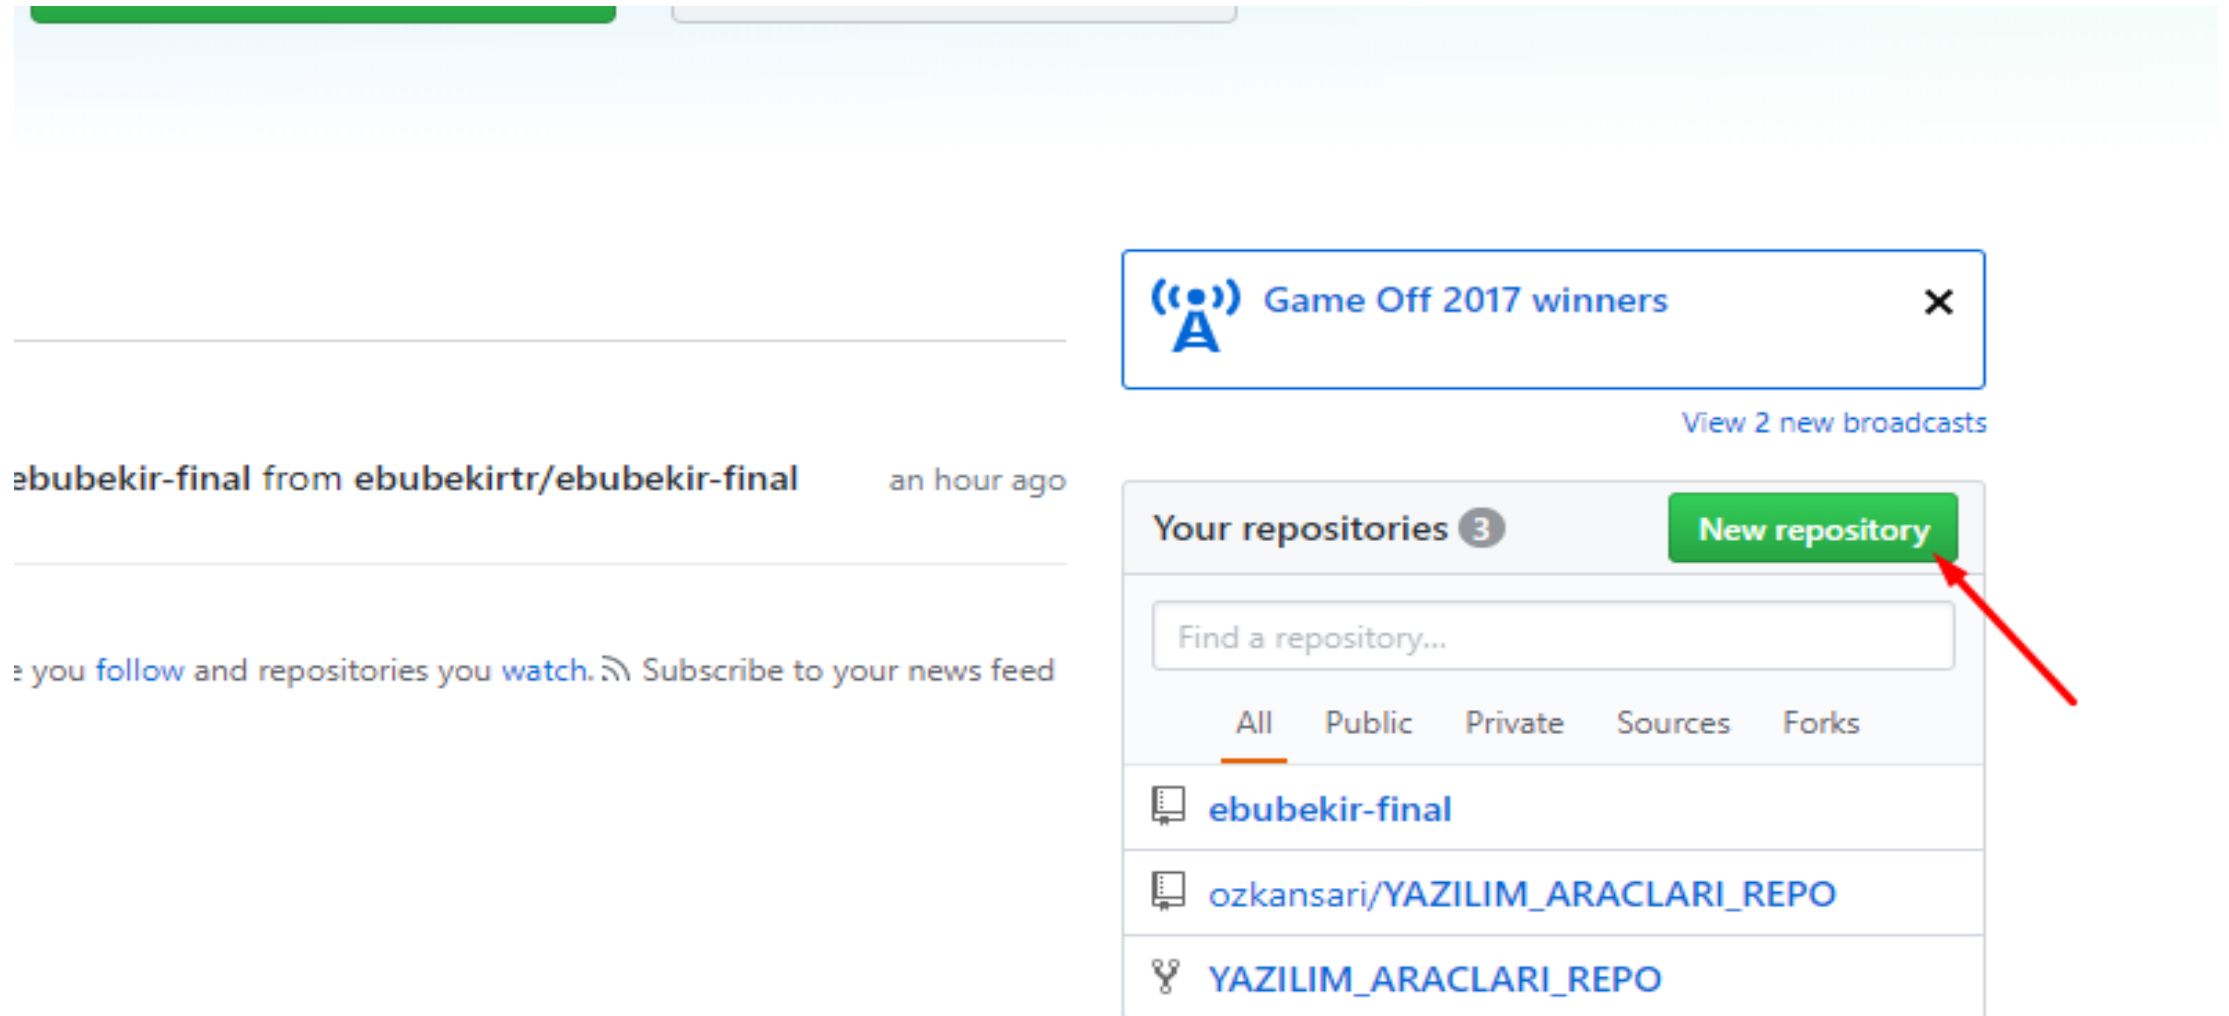

ebubekirtr ▾



finalIII



Great repository names are short and memorable. Need inspiration? How about **cur**

**Description** (optional)



**Public**

Anyone can see this repository. You choose who can commit.



**Private**

You choose who can see and commit to this repository.



**Initialize this repository with a README**

This will let you immediately clone the repository to your computer. Skip this step if you're im

Add .gitignore: **None** ▾


Add a license: **None** ▾





Create repository



# Proje Commit

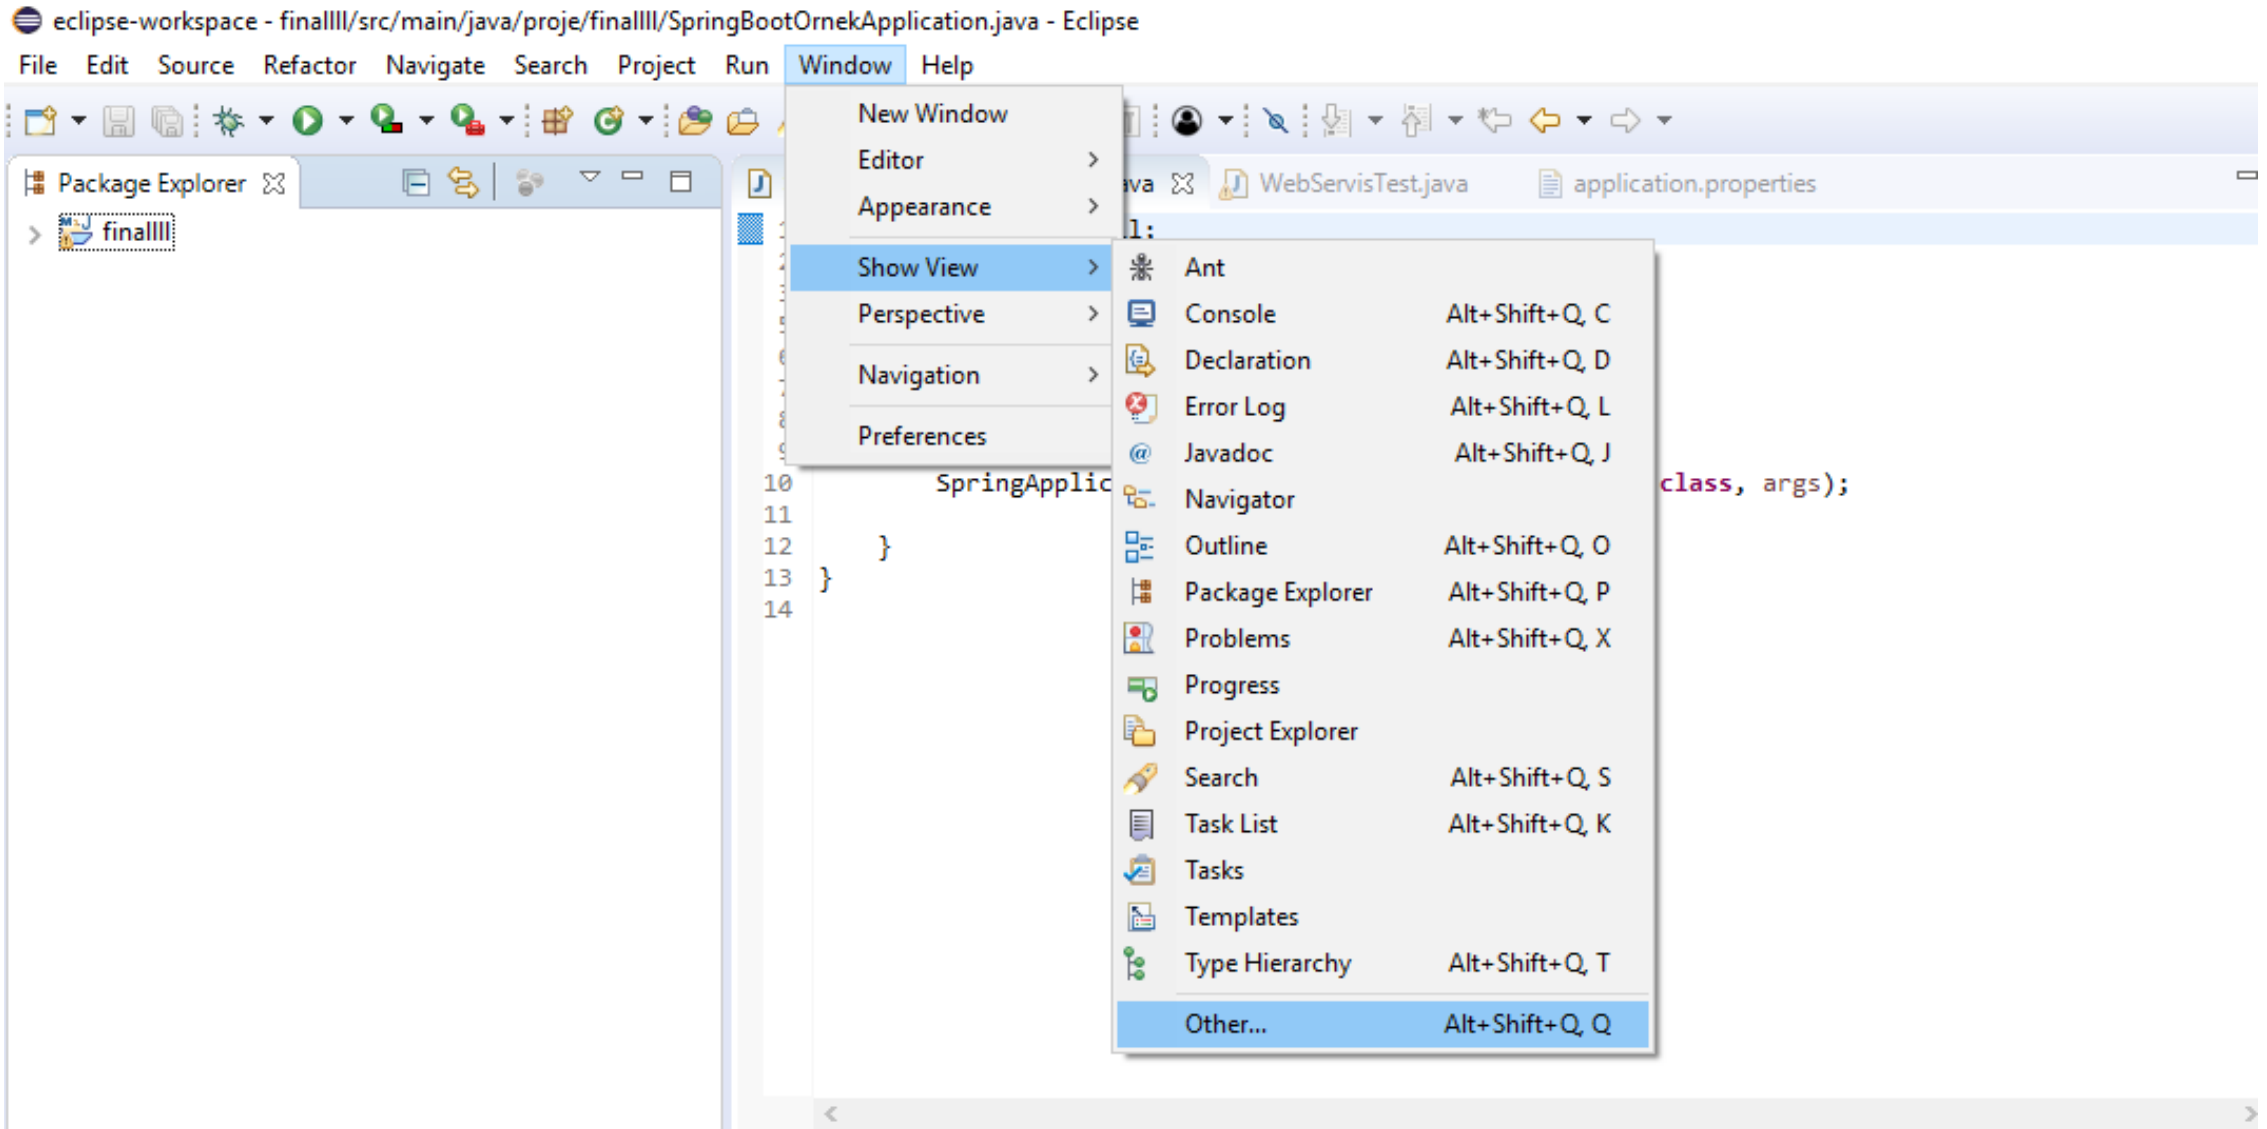

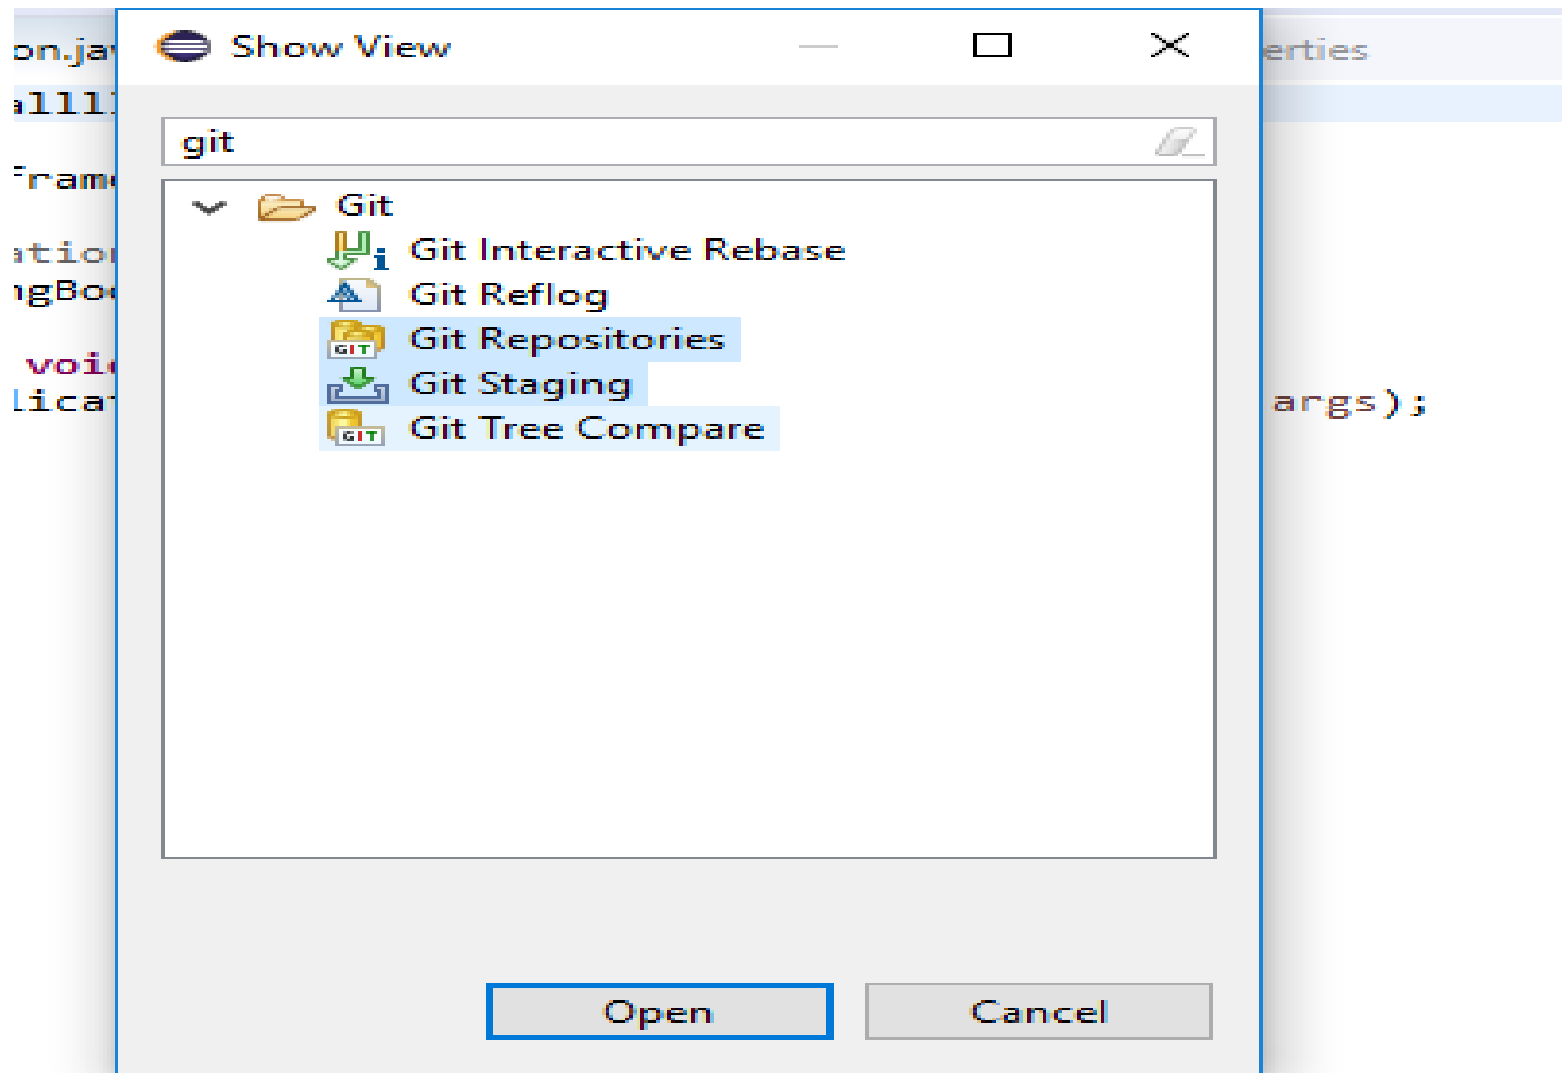

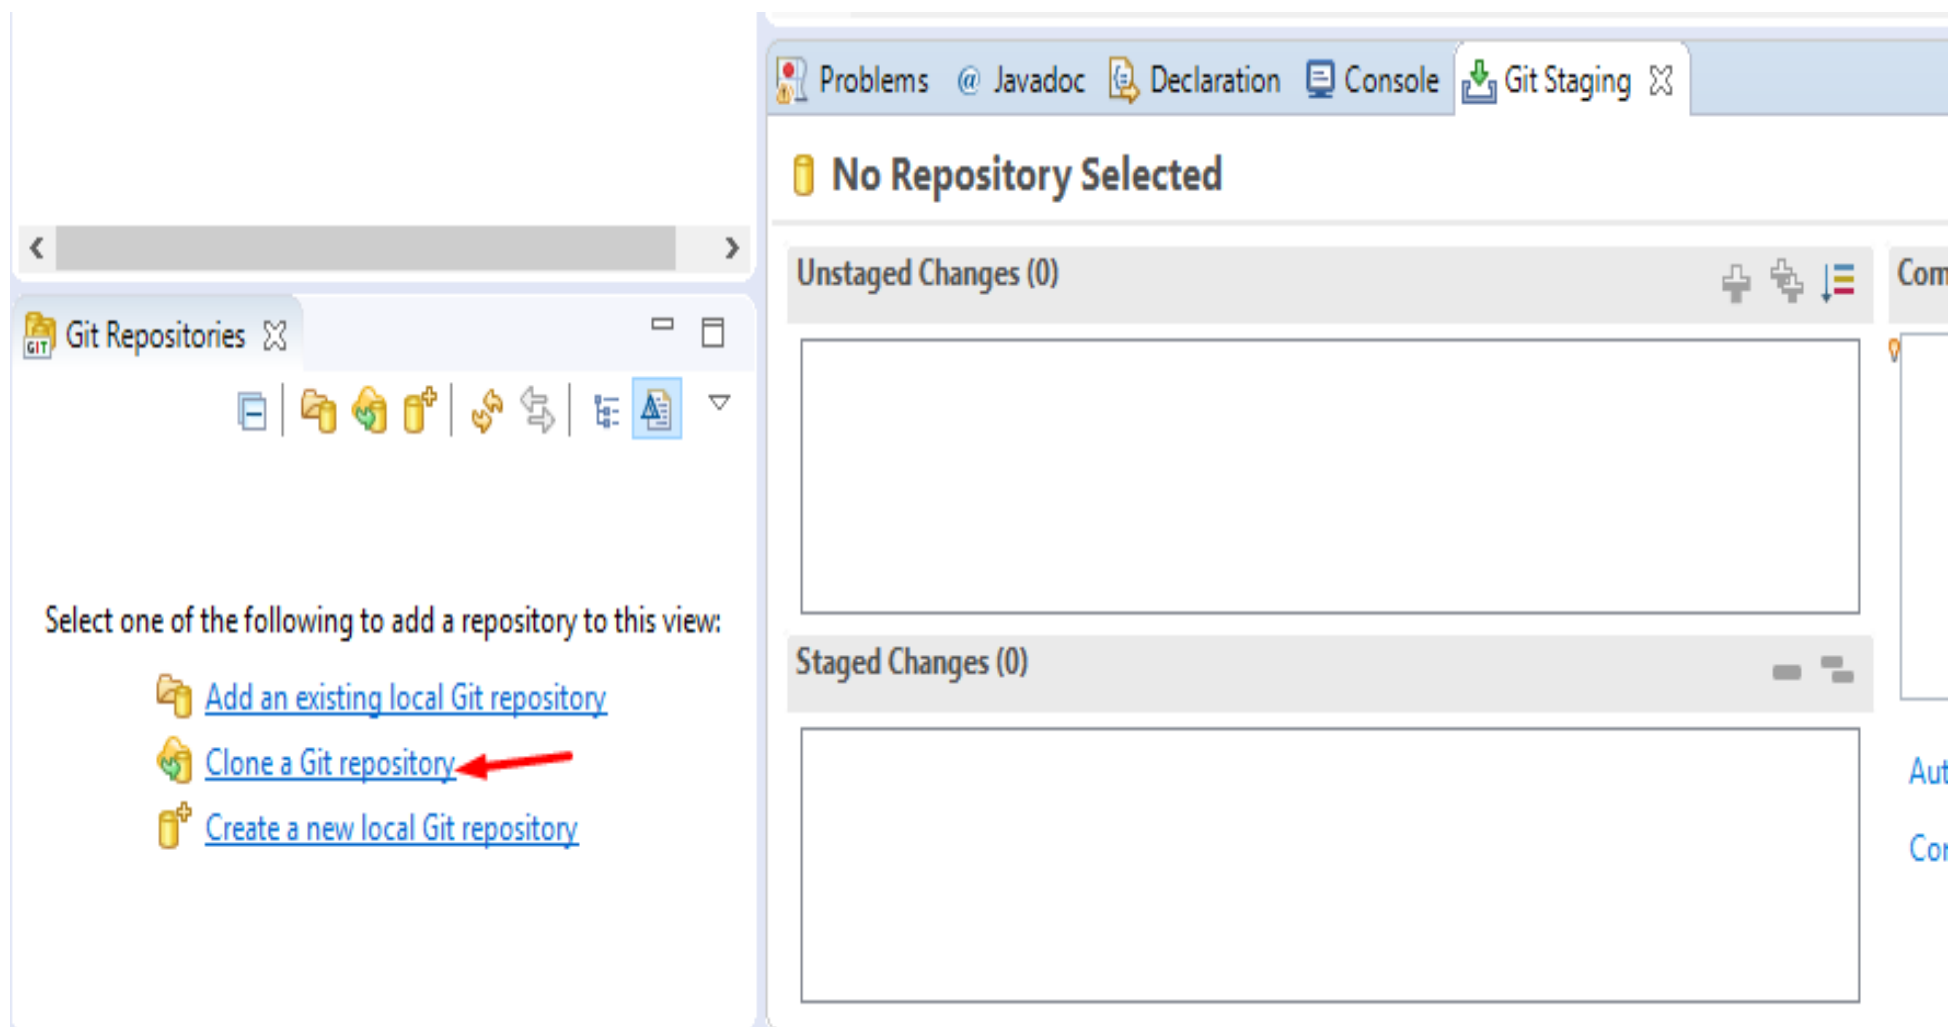

## Clone Git Repository

### Select Repository Source

Select a location of Git Repositories



type filter text



Clone URI

Gerrit



< Back

Next >

Finish

Cancel

Author:

Committer:

## Clone Git Repository

### Source Git Repository

Enter the location of the source repository.

GIT

#### Location

URI:

<https://github.com/ebubekirtr/ebubekir-final.git>

Local File...

Host:

github.com

Repository path:

/ebubekirtr/ebubekir-final.git

#### Connection

Protocol:

https

Port:

#### Authentication

User:

Password:

☐ Store in Secure Store




< Back

Next >

Finish

Cancel



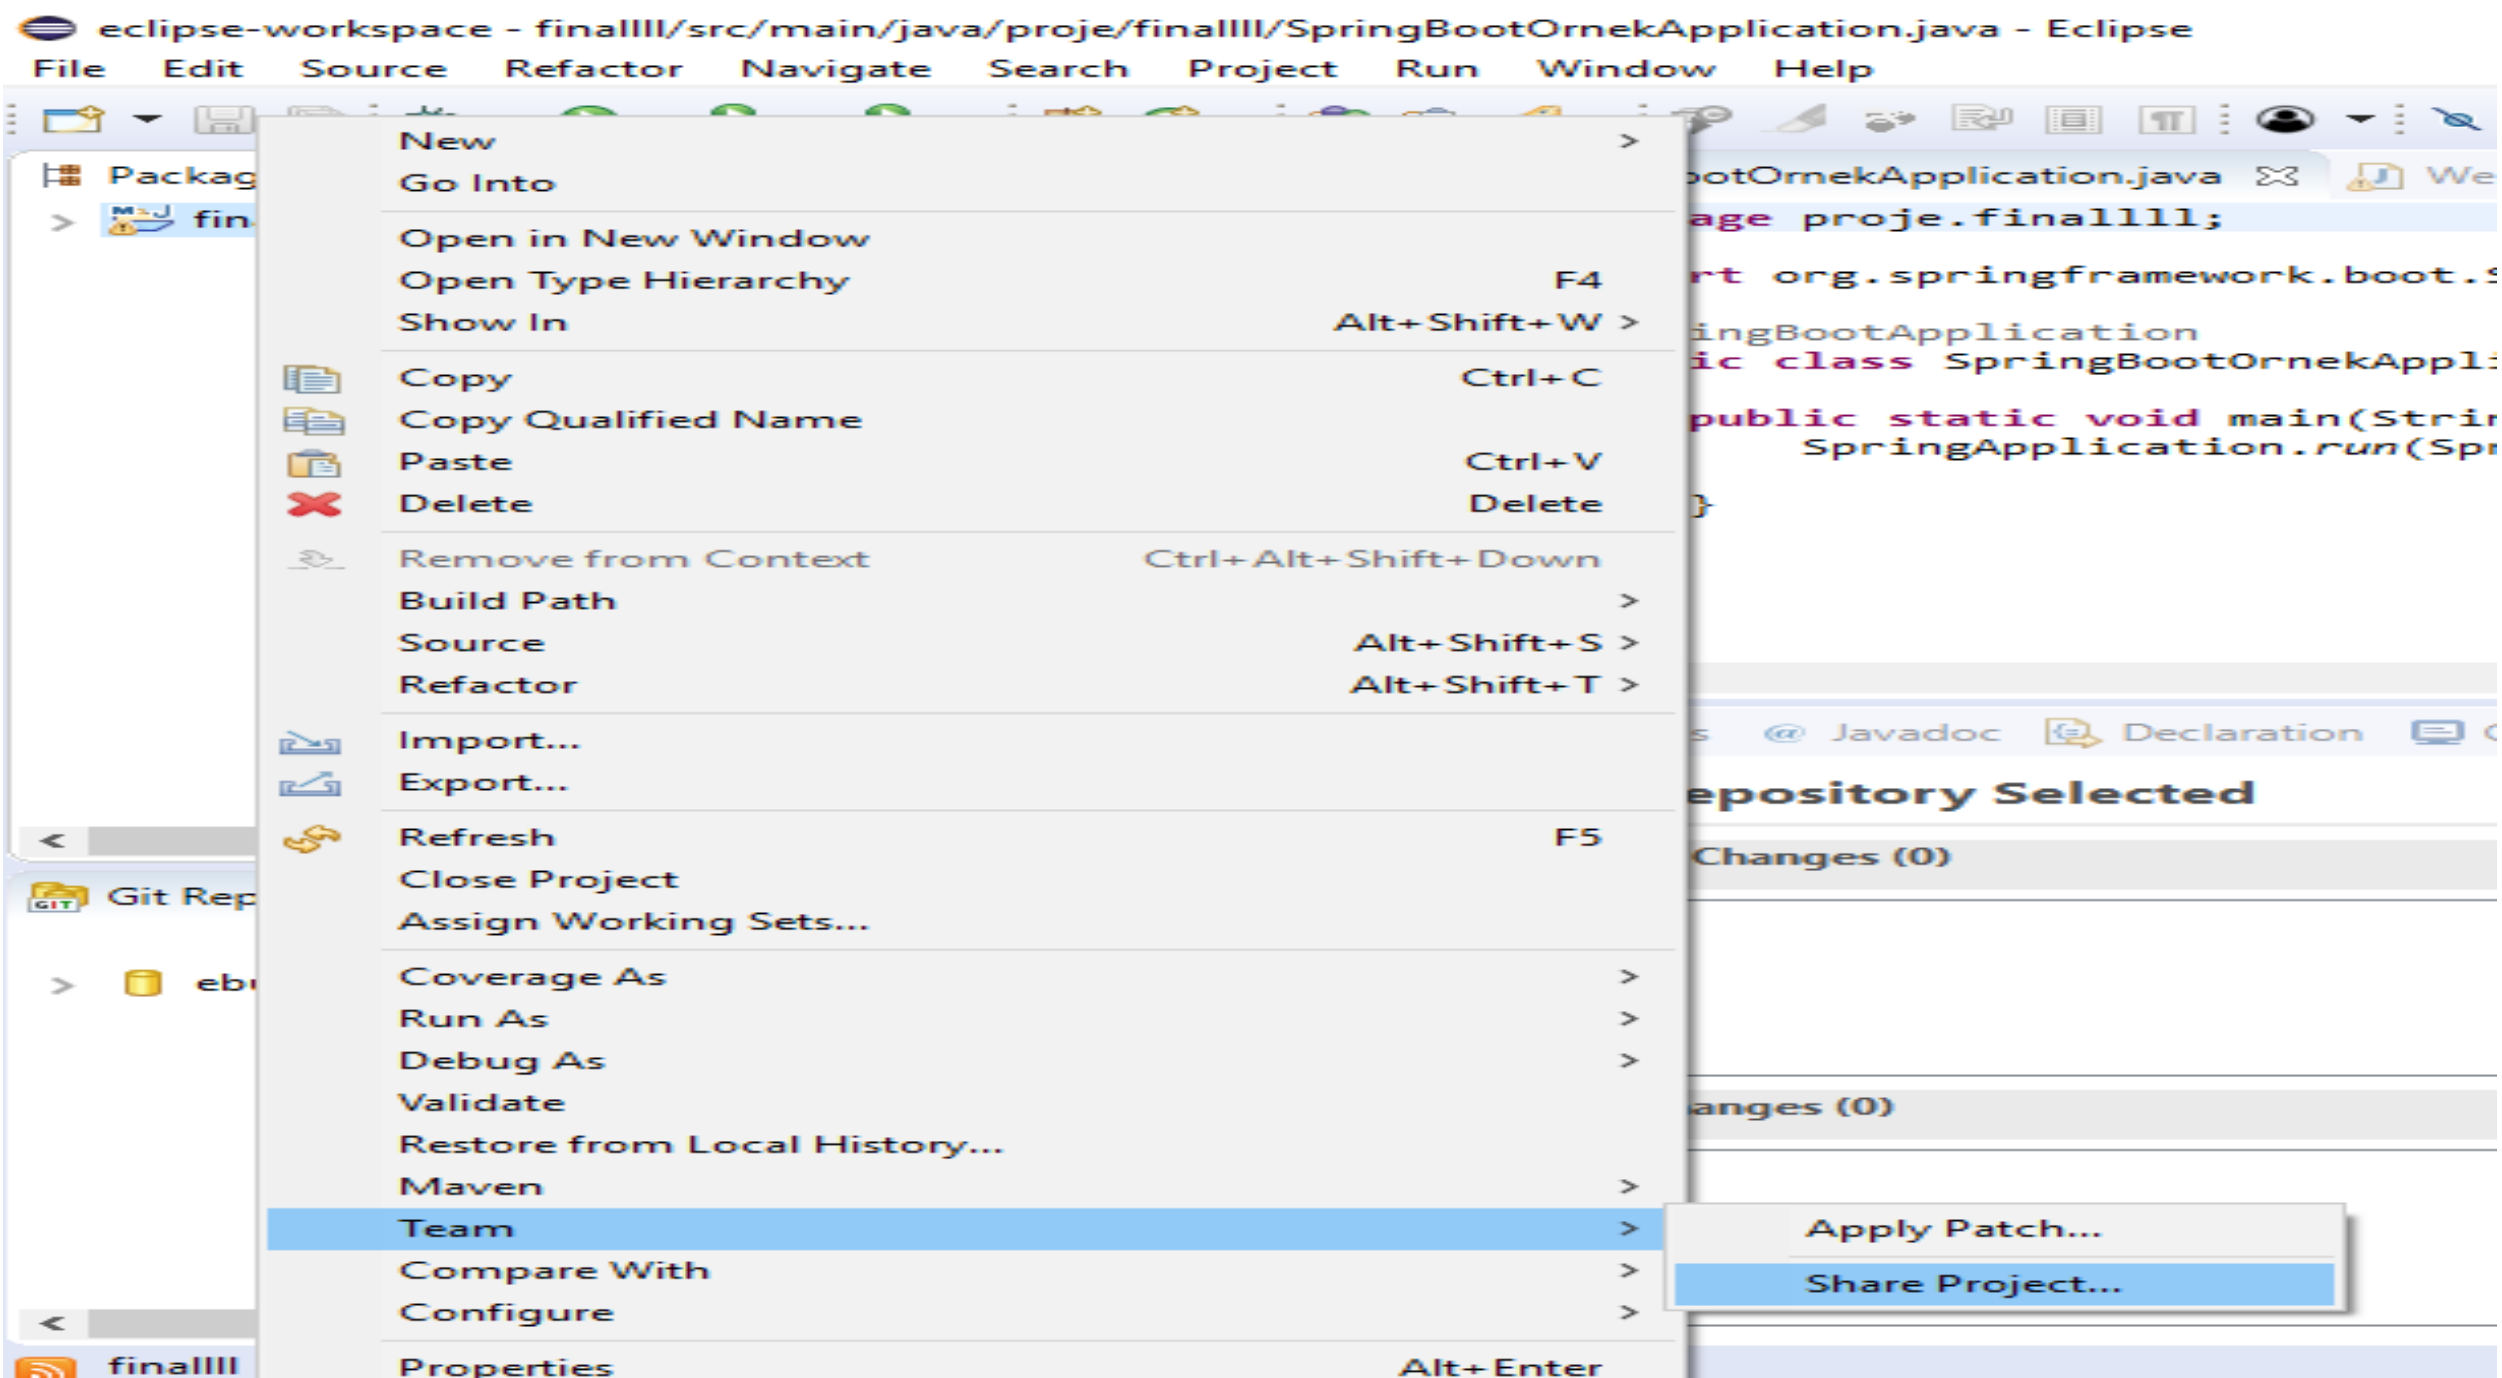

## Configure Git Repository

### Configure Git Repository

Select an existing repository or create a new one



☐ Use or create repository in parent folder of project

Repository: ebubekir-final - C:\Users\ebubekir\git\ebubekir-final\.git

Create...

Working tree: C:\Users\ebubekir\git\ebubekir-final

Path within repository:

Browse...

Project	Current Location	Target Location
<input checked="" type="checkbox"/> finallll	C:/Users/ebubekir/Desktop/finallll-master/f...	C:/Users/ebubekir/git/ebubekir-final/finallll



< Back

Next >

Finish

Cancel

The screenshot shows the Eclipse IDE interface with the 'Team' menu open. The 'Commit...' option is highlighted in blue. The menu structure is as follows:

- New
- Go Into
- Open in New Window
- Open Type Hierarchy (F4)
- Show In (Alt+Shift+W)
- Copy (Ctrl+C)
- Copy Qualified Name
- Paste (Ctrl+V)
- Delete (Delete)
- Remove from Context (Ctrl+Alt+Shift+Down)
- Build Path
- Source (Alt+Shift+S)
- Refactor (Alt+Shift+T)
- Import...
- Export...
- Refresh (F5)
- Close Project
- Assign Working Sets...
- Coverage As
- Run As
- Debug As
- Validate
- Restore from Local History...
- Maven
- Team**
- Compare With
- Replace With
- Configure
- Properties (Alt+Enter)

The 'Team' menu is open, showing the following options:

- Commit...** (Ctrl+#)
- Stashes
- Push to Upstream
- Fetch from Upstream
- Push Branch 'master'...
- Pull
- Pull...
- Remote
- Switch To
- Advanced
- Synchronize Workspace
- Merge Tool
- Merge...
- Rebase...
- Reset...
- Create Patch...
- Apply Patch...
- Add to Index
- Ignore
- Show in History
- Show in Repositories View
- Init Git Flow...
- Disconnect

> ebubekir-final [master]

unstaged Changes (21)



- .classpath - finallll
- .gitignore - finallll/target/classes
- .gitignore - finallll/target/test-classes
- .project - finallll

Add all files including not selected ones to the index


Commit Message



staged Changes (0)

Author: ebubekirtr <ebubekirtr@hotmail.com>

Committer: ebubekirtr <ebubekirtr@hotmail.com>

 Commit and Push...

 Commit

Unstaged Changes (0)



Staged Changes (21)



- .classpath - finalIII

.gitignore - finalIII/target/classes

.gitignore - finalIII/target/test-classes

.project - finalIII
- <

>

Commit Message



Author:

ebubekitr <ebubekitr@hotmail.com>


Committer:

ebubekitr <ebubekitr@hotmail.com>















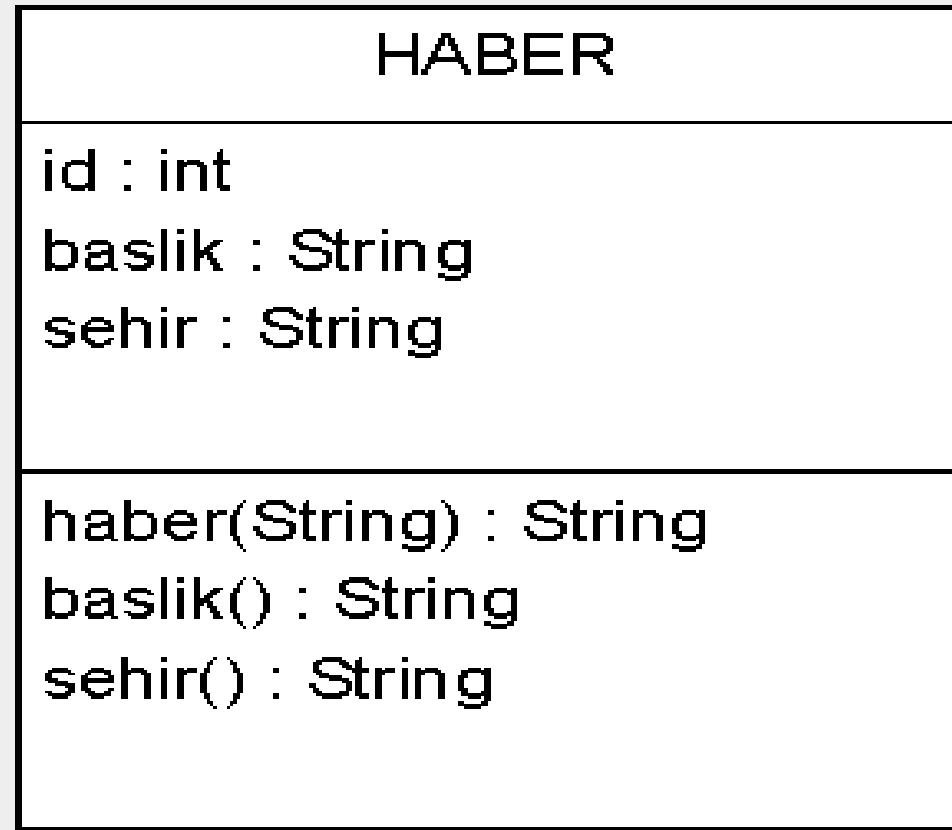


 Commit and Push...

 Commit

## Uml Diyagram



## Jmeter

	BeanShellSampler.bshrc	17.09.2017 19:34	BSHRC Dosyası
	Haber.jmx	1.02.2018 16:45	JMX Dosyası
	hc.parameters	17.09.2017 19:34	PARAMETERS Dos
	heapdump.cmd	17.09.2017 19:10	Windows Komut .
	heapdump.sh	17.09.2017 19:10	Shell Script
	j.bshrc	17.09.2017 19:34	BSHRC Dosyası
	jaas.conf	17.09.2017 19:34	CONF Dosyası
	jmeter	17.09.2017 19:23	Dosya
	jmeter.bat	17.09.2017 19:23	Windows Toplu İş
	jmeter.log	1.02.2018 16:45	Metin Belgesi
	jmeter.properties	17.09.2017 19:34	PROPERTIES Dosy.
	jmeter.sh	17.09.2017 19:10	Shell Script
	jmeter-n.cmd	17.09.2017 19:23	Windows Komut .
	jmeter-n-r.cmd	17.09.2017 19:10	Windows Komut .
	jmeter-server	17.09.2017 19:23	Dosya
	jmeter-server.bat	17.09.2017 19:23	Windows Toplu İş
	jmeter-t.cmd	17.09.2017 19:23	Windows Komut .



Test Plan  
Tezga

**Add**

- Paste Ctrl-V
- Open...
- Merge
- Save Selection As...
- Save Node As Image Ctrl-G
- Save Screen As Image Ctrl+Shift-G
- Enable
- Disable
- Toggle Ctrl-T
- Help

**Threads (Users)**

- setUp Thread Group
- tearDown Thread Group
- Thread Group**
- Timer
- Pre Processors
- Post Processors
- Assertions
- Listener

User Defined Variable

Name:

Detail Add Add from Clipboard

☐ Run Thread Groups consecutively (i.e. run groups one at a time)

☐ Run tearDown Thread Groups after shutdown of main threads

☐ Functional Test Mode (i.e. save Response Data and Sampler Data)

Selecting Functional Test Mode may adversely affect performance.

Add directory or jar to classpath

Library





Test Plan  
Thread Group  
Tezgah

## Thread Group

<b>Add</b>	<b>Logic Controller</b>	Interleave Controller
Add Think Times to children	Config Element	Simple Controller
Start	Timer	Once Only Controller
Start no pauses	Pre Processors	Module Controller
Validate	Sampler	Critical Section Controller
Cut Ctrl-X	Post Processors	Switch Controller
Copy Ctrl-C	Assertions	<b>Loop Controller</b>
Paste Ctrl-V	Listener	ForEach Controller
Duplicate Ctrl+Shift-C		If Controller
Remove Delete		Include Controller
Open...		Transaction Controller
Merge		Recording Controller
Save Selection As...		Random Controller
Save Node As Image Ctrl-G		Random Order Controller
Save Screen As Image Ctrl+Shift-G		Throughput Controller
Enable		While Controller
Disable		Runtime Controller
Toggle Ctrl-T		
Help		

Logic Controller  
Config Element  
Timer  
Pre Processors  
Sampler  
Post Processors  
Assertions  
Listener

Interleave Controller  
Simple Controller  
Once Only Controller  
Module Controller  
Critical Section Controller  
Switch Controller  
**Loop Controller**  
ForEach Controller  
If Controller  
Include Controller  
Transaction Controller  
Recording Controller  
Random Controller  
Random Order Controller  
Throughput Controller  
While Controller  
Runtime Controller

Loop Count: ☐ Forever

Delay Thread creation

Scheduler


Scheduler Configuration

Duration (seconds)

Startup delay (seconds)

Start Time 2018/02/01

Time 2018/02/01 15:24:46

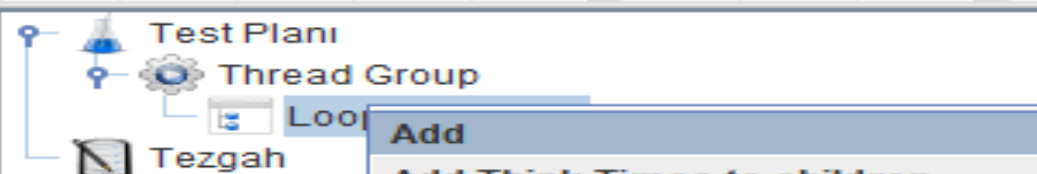

## Loop Controller

### Add

Add Think Times to children  
 Apply Naming Policy  
 Change Controller  
 Insert Parent

Cut Ctrl-X  
 Copy Ctrl-C  
 Paste Ctrl-V  
 Duplicate Ctrl+Shift-C  
 Remove Delete

Open...  
 Merge  
 Save Selection As...  
 Save as Test Fragment

Save Node As Image Ctrl-G  
 Save Screen As Image Ctrl+Shift-G


Enable  
 Disable  
 Toggle Ctrl-T

Help

### Logic Controller

Config Element  
 Timer  
 Pre Processors  
 Sampler  
 Post Processors  
 Assertions  
 Listener

Simple Config Element  
 CSV Data Set Config  
 DNS Cache Manager  
 FTP Request Defaults  
 HTTP Header Manager  
 HTTP Cache Manager  
 HTTP Request Defaults  
 HTTP Authorization Manager  
 HTTP Cookie Manager  
 Java Request Defaults  
 JDBC Connection Configuration  
 Keystore Configuration  
 Login Config Element  
 User Defined Variables  
 LDAP Extended Request Defaults  
 LDAP Request Defaults  
 Random Variable  
**Counter**  
 TCP Sampler Config

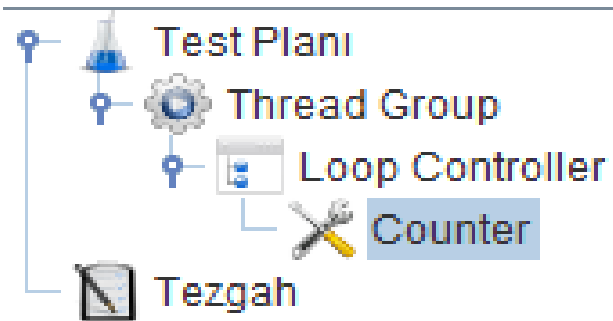

## Counter

Name: Counter

Comments:

Starting value 2

Increment 2


Maximum value

Number format

Reference Name c1

☐ Track counter independently for each user

☐ Reset counter on each Thread Group iteration

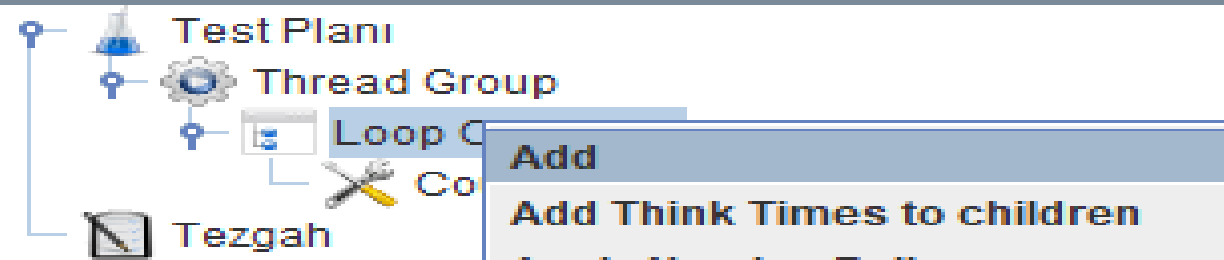

## Loop Controller

<b>Add</b>	▶	<b>Logic Controller</b>	▶
Add Think Times to children		Config Element	▶
Apply Naming Policy		Timer	▶
Change Controller	▶	Pre Processors	▶
Insert Parent	▶	<b>Sampler</b>	▶
Cut	Ctrl-X	Post Processors	▶
Copy	Ctrl-C	Assertions	▶
Paste	Ctrl-V	Listener	▶
Duplicate	Ctrl+Shift-C		
Remove	Delete		
Open...			
Merge			
Save Selection As...			
Save as Test Fragment			
Save Node As Image	Ctrl-G		
Save Screen As Image	Ctrl+Shift-G		
Enable			
Disable			

AJP/1.3 Sampler
Debug Sampler
BeanShell Sampler
Mail Reader Sampler
FTP Request
<b>HTTP Request</b>
Java Request
JDBC Request
JMS Subscriber
JMS Point-to-Point
JMS Publisher
JSR223 Sampler
JUnit Request
LDAP Extended Request

# HTTP Request

Name: HaberOlustur

Comments:http://localhost:7777/haber/olustur?sehir=Istanbul&baslik=Gasp

BasicAdvanced

Web Server  
Protocol [http]: http Server Name or IP: localhost Port Number: 7777



HTTP Request  
Method: GET Path: /haber/olustur Content encoding:  
☐ Redirect Automatically ☒ Follow Redirects ☒ Use KeepAlive ☐ Use multipart/form-data for POST ☒ Browser-compatible headers

ParametersBody DataFiles Upload

## Send Parameters With the Request:

Name:	Value	Encode?	Include Equals?
sehir	sehir_ \${c1}	<input type="checkbox"/>	<input checked="" type="checkbox"/>
baslik	baslik_ \${c1}	<input type="checkbox"/>	<input checked="" type="checkbox"/>

File Edit Search Run Options Help

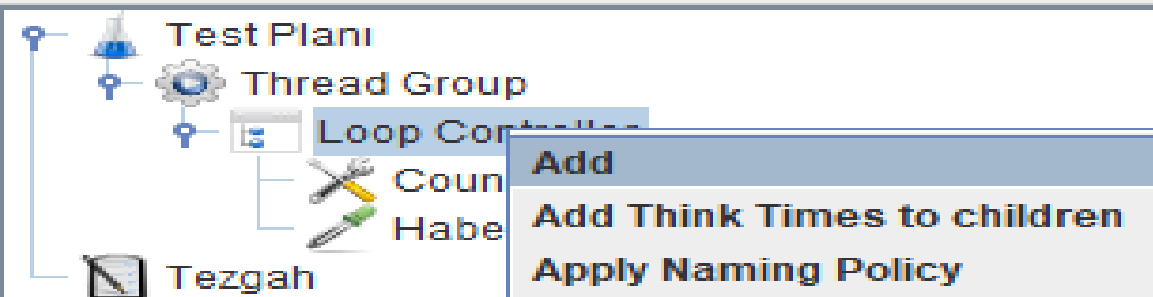

## Loop Controller

- Add
  - Logic Controller
    - Config Element
    - Timer
    - Pre Processors
    - Sampler**
      - AJP/1.3 Sampler
      - Debug Sampler
      - BeanShell Sampler
      - Mail Reader Sampler
      - FTP Request
      - HTTP Request**
      - Java Request
      - JDBC Request
      - JMS Subscriber
      - JMS Point-to-Point
      - JMS Publisher
      - JSR223 Sampler
      - JUnit Request
      - LDAP Extended Request
      - LDAP Request
      - Access Log Sampler
    - Post Processors
    - Assertions
    - Listener
  - Add Think Times to children
  - Apply Naming Policy
  - Change Controller
  - Insert Parent
- Cut Ctrl-X
- Copy Ctrl-C
- Paste Ctrl-V
- Duplicate Ctrl+Shift-C
- Remove Delete
- Open...
- Merge
- Save Selection As...
- Save as Test Fragment
- Save Node As Image Ctrl-I
- Save Screen As Image Ctrl+Shift-G
- Enable
- Disable
- Toggle Ctrl-T

## HTTP Request

[illegible]

--	--	--	--

http

localhost

7777

GET

/haber/listele
----------------

5

☐ Redirect Automatically ☒ Follow Redirects ☒ Use KeepAlive ☐ Use multipart/form-data for POST ☒ Browser-compatible headers

### Send Parameters With the Request:

Name:
-------

Value
-------

Encode?

Include Equal

- Loop Controller
- Counter
- HaberOlus
- HaberList
- HaberTen

zgah


## Loop Controller



<b>Add</b>	
Add Think Times to children	
Apply Naming Policy	
Change Controller	
Insert Parent	
Cut	Ctrl-X
Copy	Ctrl-C
Paste	Ctrl-V
Duplicate	Ctrl+Shift-C
Remove	Delete
Open...	
Merge	
Save Selection As...	
Save as Test Fragment	
Save Node As Image	Ctrl-G
Save Screen As Image	Ctrl+Shift-G
Enable	
Disable	
Toggle	Ctrl-T
Help	

- Logic Controller
- Config Element
- Timer
- Pre Processors
- Sampler
- Post Processors
- Assertions
- Listener**

- Backend Listener
- Simple Data Writer
- Bean Shell Listener
- Save Responses to a file
- Comparison Assertion Visualizer
- Assertion Results
- Mailer Visualizer
- Graph Results
- JSR223 Listener
- Response Time Graph
- View Results in Table
- View Results Tree**
- Aggregate Graph
- Aggregate Report
- Summary Report
- Generate Summary Results



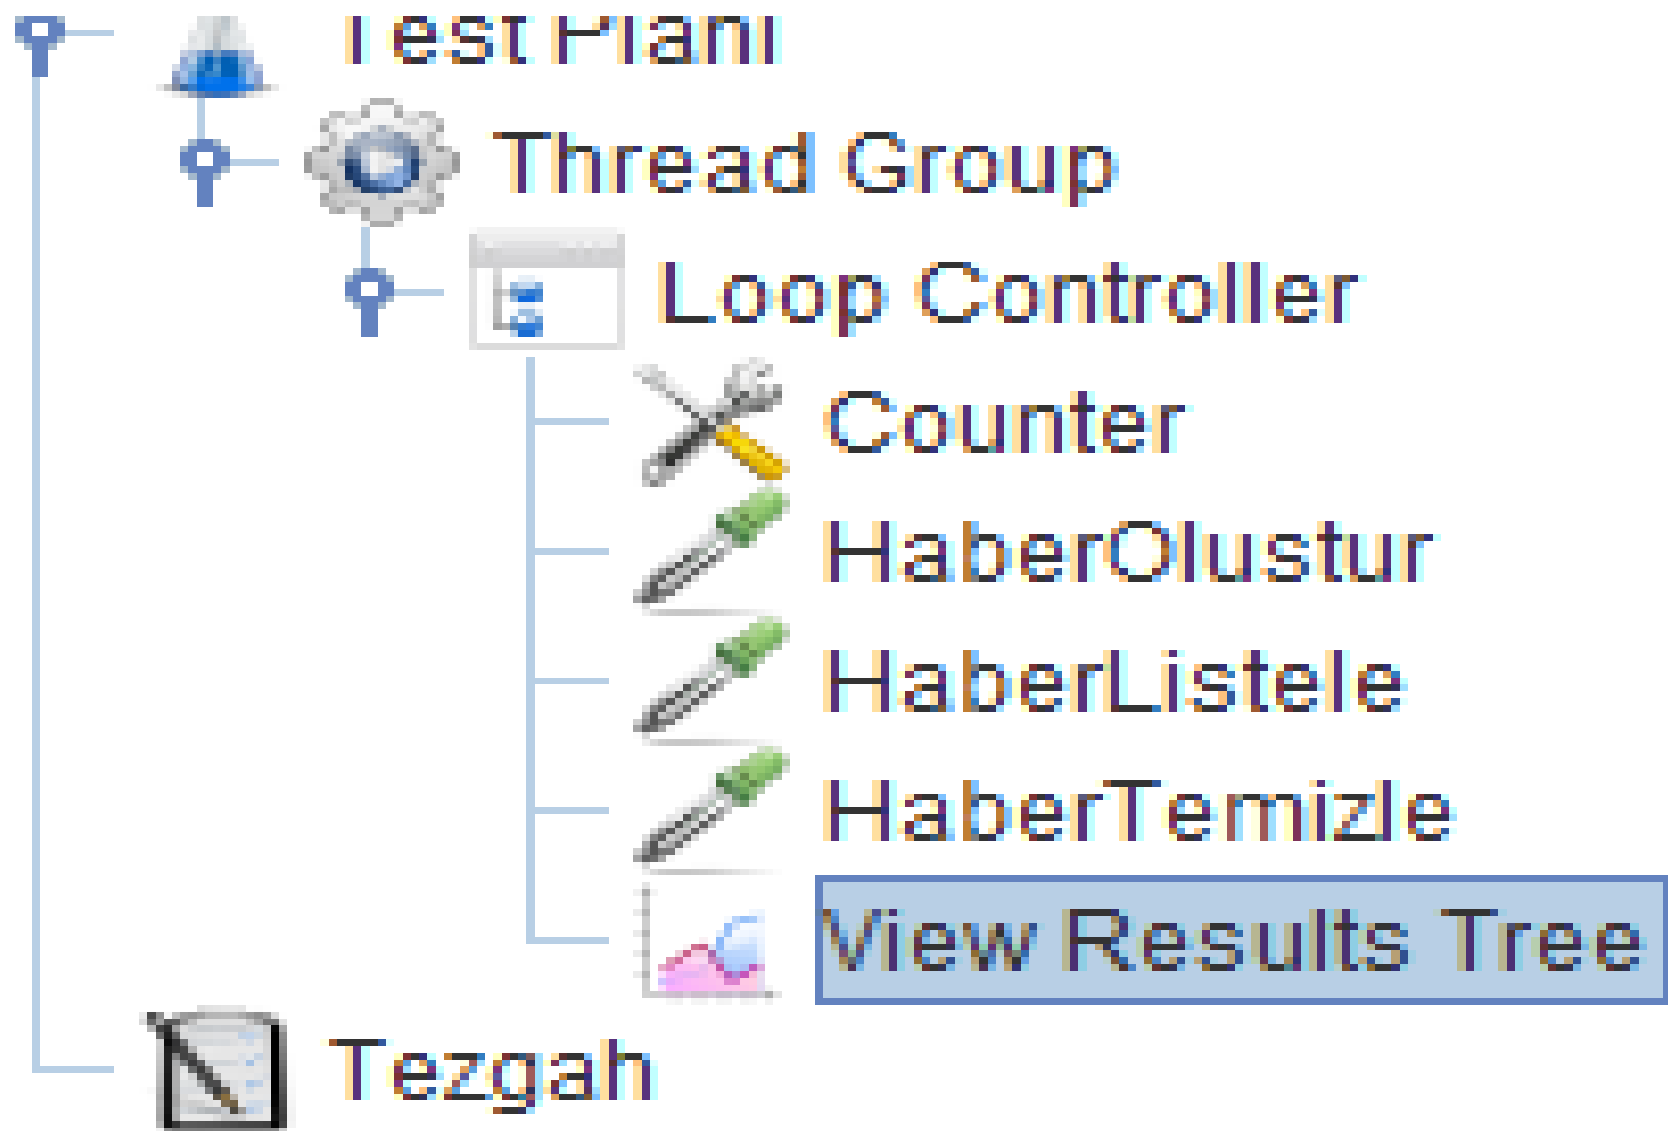

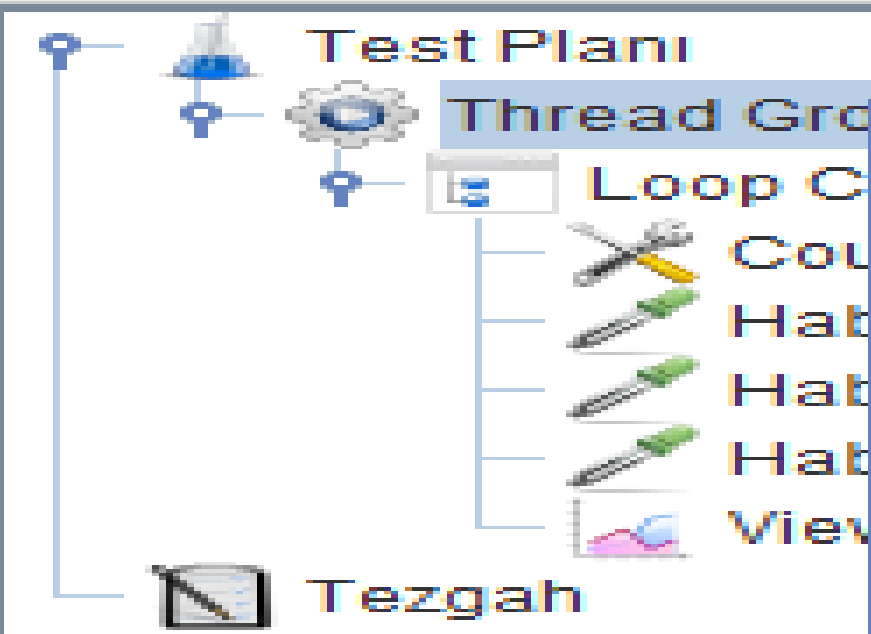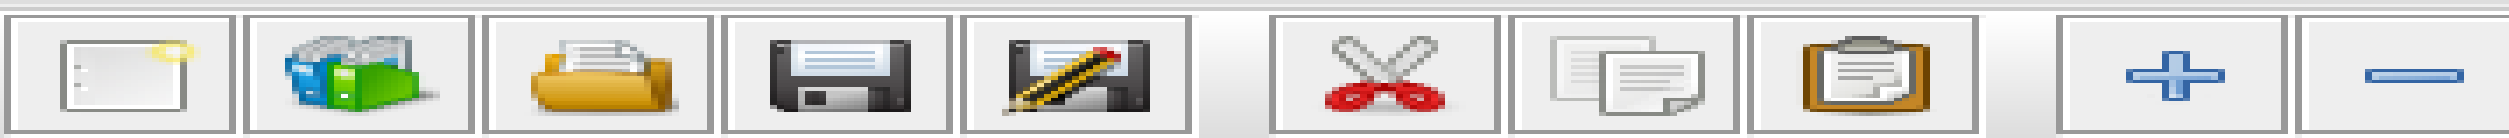

- Add
- Add Think Times to children
- Start
- Start no pauses
- Validate
- Cut Ctrl-X
- Copy Ctrl-C
- Paste Ctrl-V
- Duplicate Ctrl+Shift-C
- Remove Delete
- Open...
- Merge
- Save Selection As...
- Save Node As Image Ctrl-G

- Thread Group
- Loop Controller
    - Counter
    - HaberOlustur
    - HaberListele
    - HaberTemizle
    - View Results Tree

izgah

## View Results Tree

Name: View Results Tree

Comments:

Write results to file / Read from file

Filename

Browse...

Log/Display Only: ☐ Errors ☐ Success

Search:

☐ Case sensitive

☐ Regular exp.

Search

Reset

Text

Sampler result

Request

Response data

- ✓ HaberOlustur
- ✓ HaberListele
- ✓ HaberTemizle
- ✓ HaberOlustur
- ✓ HaberListele
- ✓ HaberTemizle
- ✓ HaberOlustur
- ✓ HaberListele
- ✓ HaberTemizle
- ✓ HaberOlustur
- ✓ HaberListele
- ✓ HaberTemizle
- ✓ HaberOlustur
- ✓ HaberListele
- ✓ HaberTemizle
- ✓ HaberOlustur
- ✓ HaberListele

```
{  
  "baslik": "baslik_2",  
  "sehir": "sehir_2"  
}
```

## VIEW RESULTS TREE

Name: View Results Tree

Comments:

Write results to file / Read from file

Filename

Search:

☐ Case sensitive

☐ Re

Text

Sampler result

Request

Re

- ✓ HaberOlustur
- ✓ HaberListele
- ✓ HaberTemizle
- ✓ HaberOlustur
- ✓ HaberListele
- ✓ HaberTemizle
- ✓ HaberOlustur
- ✓ HaberListele
- ✓ HaberTemizle

```
[ {  
  "baslik" : "baslik_2",  
  "sehir" : "sehir_2"  
}]
```

Search:

☐

Case sensitive

Text



Sampler result

Request

✓ HaberOlustur

✓ HaberListele

✓ HaberTemizle

✓ HaberOlustur

✓ HaberListele

✓ HaberTemizle

✓ HaberOlustur

✓ HaberListele

✓ HaberTemizle

✓ HaberOlustur

✓ HaberListele

OK

## Postman

New Tab



No Environment

GET ▾

Enter request URL

Params

Send

Authorization

Headers

Body

Pre-request Script

Tests

TYPE

Inherit auth from parent ▾



The authorization header will be

This request is not inheriting any authorization helper at the moment. Save it in a collection to use the authorization helper.

http://localhost:7777/



No Environment



GET



http://localhost:7777/haber/olustur?sehir=Istanbul&baslik=Gasp

Params

Send



Authorization

Headers

Body

Pre-request Script

Tests

TYPE

Inherit auth from parent



The authorization header will be

automatically generated when you send the

This request is not inheriting any authorization helper at the moment. Save it in a collection to use the parent authorization helper.

Filter

History

Collections

Clear all

Today

GET http://localhost:7777/haber/olustur?sehir=Istanbul&baslik=Gasp

http://localhost:7777/



GET

http://localhost:7777/haber/olustur?sehir=Istanbul&baslik=Gasp

Params

Authorization

Headers

Body

Pre-request Script

Tests

TYPE

Inherit auth from parent

The authorization header will be automatically generated when you send the request. [Learn more about authorization](#)

This request is not inheriting any authorization helper at the moment. Save it in a collection to use an authorization helper.

Body

Cookies

Headers (3)

Test Results

Status: 200

Pretty

Raw

Preview

JSON



```
1 {  
2   "baslik": "Gasp",  
3   "sehir": "Istanbul"  
4 }
```





ter

story

Collections

Clear all

http://localhost:7777/haber/temizle

http://localhost:7777/haber/olustur?s  
ehir=Istanbul&baslik=Gasp

http://localhost:7777/ + ...

GET ▾

http://localhost:7777/haber/temizle

Authorization

Headers

Body

Pre-request Script

Tests

TYPE

Inherit auth from parent ▾

The authorization header will be automatically generated when you send the request. [Learn more about authorization](#)

This request is not inheriting any authorization helper at the moment. [Learn more about authorization helpers](#)

Body

Cookies

Headers (3)

Test Results

Pretty

Raw

Preview

Text ▾



1 OK

# Travis



This repository

Search

Pull requests

Issues

Marketplace

Explore

+



File successfully deleted.



ebubekirtr / ebubekir-final

Watch 0

Star 0

Fork 0

Code

Issues 0

Pull requests 0

Projects 0

Wiki

Insights

Settings

No description, website, or topics provided.

Edit

Add topics

4 commits

1 branch

0 releases

1 contributor

Branch: master

New pull request

Create new file

Upload files

Find file

Clone or download

ebubekirtr Delete .travis.yml

Latest commit 5f5472b just now

finallll

final

an hour ago

README.md

Initial commit

an hour ago

README.md

ebubekir-final

ebubekir-final / .travis.yml or cancel

Edit new file

Preview

Spaces

2

No wrap

```
1 language: java
2 sudo: false # false for faster builds
3
4 script:
5 - "mvn -f final111/pom.xml -Dmaven.javadoc.skip=false clean install cobertura:cobertura checkstyle:checkstyle pmd:pmd javadoc:javadoc javadoc:javadoc"
6 jdk:
7 - oraclejdk8
8 after_success:
9 - bash <(curl -s https://codecov.io/bash)
```

No description, website, or topics provided.

Edit

Add topics

5 commits

1 branch

0 releases

1 contributor

Branch: master

New pull request

Create new file

Upload files

Find file

Clone or download



ebubekitr Create .travis.yml

Latest commit a2d195e just now



finallll

final

an hour ago



.travis.yml

Create .travis.yml

just now



README.md

Initial commit

an hour ago



README.md

ebubekir-final

 Filter repositories

Filter repositories



 ebubekirtr/ebubekir-final



 ebubekirtr/YAZILIM\_ARACLARI\_REPO

[My Repositories](#) +

ebubekirtr/ebubekir-final # 3

Duration: 33 sec

ebubekirtr/YAZILIM\_ARACLARI\_# 7

Duration: -

Finished: 2 days ago

ozkansari/YAZILIM\_ARACLARI\_RE # 29

Duration: 2 min 24 sec

Finished: 4 days ago

## ebubekirtr / ebubekir-final

build unknown

[Current](#)[Branches](#)[Build History](#)[Pull Requests](#)[More options](#)

master Create .travis.yml

Commit a2d195e

Compare 5f5472b...a2d195e

Branch master

ebubekirtr authored

GitHub committed

#3 started

Running for 33 sec

[Cancel build](#)[Job log](#)[View config](#)[Remove log](#)[Raw log](#)

1 Worker information

worker\_info

6 mode of '/usr/local/clang-5.0.0/bin' changed from 0777 (rwxrwxrwx) to 0775 (rwxrwxr-x)

7 Build system information

system\_info

404

405 removed '/etc/apt/sources.list.d/basho\_riak.list'

406 W: http://ppa.launchpad.net/couchdb/stable/ubuntu/dists/trusty/Release.gpg: Signature by key  
15866BAFD9BCC4F3C1E0DFC7D69548E1C17EAB57 uses weak digest algorithm (SHA1)

[My Repositories](#) +

✓ ebubekirtr/ebubekir-final # 3

⌚ Duration: 2 min 25 sec

📅 Finished: less than a minute ago

⊘ ebubekirtr/YAZILIM\_ARACLARI\_F # 7

⌚ Duration: -

📅 Finished: 2 days ago

✓ ozkansari/YAZILIM\_ARACLARI\_RI # 29

⌚ Duration: 2 min 24 sec

📅 Finished: 4 days ago

## ebubekirtr / ebubekir-final

build unknown

[Current](#) [Branches](#) [Build History](#) [Pull Requests](#)[More options](#)

✓ master Create .travis.yml

-o- #3 passed

[Restart build](#)-o- Commit a2d195e [↗](#)

⌚ Ran for 2 min 25 sec

🔗 Compare 5f5472b..a2d195e [↗](#)

📅 less than a minute ago

🔗 Branch master [↗](#)

⏻ ebubekirtr authored

⏻ GitHub committed

[Job log](#)[View config](#)[✕ Remove log](#)[⬇ Raw log](#)

▶ 1 Worker information

worker\_info



6 mode of '/usr/local/clang-5.0.0/bin' changed from 0777 (rwxrwxrwx) to 0775 (rwxrwxr-x)

▶ 7 Build system information

system\_info

404

405 removed '/etc/apt/sources.list.d/basho\_riak.list'

406 W: http://ppa.launchpad.net/couchdb/stable/ubuntu/dists/trusty/Release.gpg: Signature by key


15866BAFD9BCC4F3C1E0DFC7D69548E1C17EAB57 uses weak digest algorithm (SHA1)

Jenkins

 jenkins.war

1.02.2018 02:24

WAR Dosyası





```
Microsoft Windows [Version 10.0.16299.192]  
(c) 2017 Microsoft Corporation. Tüm hakları saklıdır.
```

```
C:\Users\ebubekir>cd desktop
```

```
C:\Users\ebubekir\Desktop>cd jenkins
```

```
C:\Users\ebubekir\Desktop\jenkins>ls
```

```
'ls' is not recognized as an internal or external command,  
operable program or batch file.
```

```
C:\Users\ebubekir\Desktop\jenkins> -ls
```

```
'-ls' is not recognized as an internal or external command,  
operable program or batch file.
```

```
C:\Users\ebubekir\Desktop\jenkins>java -jar jenkins.war --httpPort=8080
```

```
INFO: Pre-instantiating singletons in org.springframework.beans.factory.support.De
ining beans [authenticationManager]; root of factory hierarchy
`ub 01, 2018 5:07:26 PM org.springframework.context.support.AbstractApplicationCon
INFO: Refreshing org.springframework.web.context.support.StaticWebApplicationConte
licationContext]; startup date [Thu Feb 01 17:07:26 EET 2018]; root of context hie
`ub 01, 2018 5:07:26 PM org.springframework.context.support.AbstractApplicationCon
INFO: Bean factory for application context [org.springframework.web.context.support
]: org.springframework.beans.factory.support.DefaultListableBeanFactory@2790e218
`ub 01, 2018 5:07:26 PM org.springframework.beans.factory.support.DefaultListableB
INFO: Pre-instantiating singletons in org.springframework.beans.factory.support.De
ining beans [filter,legacy]; root of factory hierarchy
`ub 01, 2018 5:07:27 PM jenkins.install.SetupWizard init
INFO:
```

```
*****
*****
*****
```

Jenkins initial setup is required. An admin user has been created and a password g  
Please use the following password to proceed to installation:

3b841ab0d1cf430099fae426eff6b1ae

This may also be found at: C:\Users\ebubekir\.jenkins\secrets\initialAdminPassword

```
*****
*****
*****
```

# Unlock Jenkins

To ensure Jenkins is securely set up by the administrator, a password has been written to the log (not sure where to find it?) and this file on the server:

```
C:\Users\ebubekir\.jenkins\secrets\initialAdminPassword
```

Please copy the password from either location and paste it below.

**Administrator password**




# Customize Jenkins

Plugins extend Jenkins with additional features to support many different needs.

## Install suggested plugins

Install plugins the Jenkins community finds most useful.



## Select plugins to install

Select and install plugins most suitable for your needs.

# Getting Started

✓ Folders Plugin	🔄 OWASP Markup Formatter Plugin	🔄 Build Timeout	🔄 Credentials Binding Plugin	<pre>** Script Security Plugin ** Command Agent Launcher Plugin <b>Folders Plugin</b> ** bouncycastle API Plugin ** Structs Plugin ** Pipeline: Step API ** SCM API Plugin ** Pipeline: API</pre>
🔄 Timestamper	🔄 Workspace Cleanup Plugin	🔄 Ant Plugin	🔄 Gradle Plugin	
🔄 Pipeline	🔄 GitHub Branch Source Plugin	🔄 Pipeline: GitHub Groovy Libraries	🔄 Pipeline: Stage View Plugin	
🔄 Git plugin	🔄 Subversion Plug-in	🔄 SSH Slaves plugin	🔄 Matrix Authorization Strategy Plugin	
🔄 PAM Authentication plugin	🔄 LDAP Plugin	🔄 Email Extension Plugin	🔄 Mailer Plugin	
				<pre>** - required dependency</pre>

# Create First Admin User

Kullanıcı Adı:

Şifre:

Şifreyi Doğrula:

Tam İsim:

E-posta adresi:

# Jenkins is ready!

Your Jenkins setup is complete.

Start using Jenkins





Yeni Item



Kişiler



Yapılandırma Geçmişi



Jenkins'i Yönet



My Views



Credentials



New View

### Yapılandırma Listesi



Sırada bekleyen yapılandırma yok.

### Yapılandırıcı Durumu



1 Beklemede

2 Beklemede

# Jenkinsa Hoşgeldiniz!

Lütfen başlamak için **yeni işler oluşturun**



# Jenkins'i Yönet



## Sistem Konfigürasyonunu Değiştir

Evrensel ayarları ve pathleri konfigüre et



## Configure Global Security

Secure Jenkins; define who is allowed to access/use the system.



## Configure Credentials

Configure the credential providers and types



## Global Tool Configuration

Configure tools, their locations and automatic installers.



## Konfigürasyonu Disk'ten Yükle

Hafızada tutulan yapılmış tüm değişiklikleri iptal et ve herşeyi dosya sisteminde kullanışlıdır



## Eklentileri Yönet

Jenkins fonksiyonalitesini artırmak için kullanılan eklentileri ekle, çıkar, devreye



## Sistem Bilgisi

Sorun çözebilmek için çeşitli ortam değişkenlerini gösterir.



## System Log



# Global Tool Configuration

## Maven Configuration

---

Default settings provider

Use default maven settings

Default global settings provider

Use default maven global settings

## JDK

---

JDK installations

Add JDK



List of JDK installations on this system

## Git

---

Git installations

....

# K installations




































JDK

isim

Java 8

JAVA\_HOME

C:\Program Files\Java\jdk1.8.0\_161

☐
Install automatically

Add JDK

List of JDK installations on this system

Add Git



## Gradle

---

Gradle installations

Add Gradle

List of Gradle installations on this system

## Ant

---

Ant installations

Add Ant

List of Ant installations on this system

## Maven

---

Maven installations

Add Maven

List of Maven installations on this system

## Docker

---

Docker installations

Add Docker

List of Docker installations on this system

\*\*\*\* JGit  
\*\*\*\*  
\*\*\*\*  
\*\*\*\*  
\*\*\*\*

Delete Git

\*\*\*\* JGit with Apache HTTP client  
\*\*\*\*  
\*\*\*\*  
\*\*\*\*  
\*\*\*\*

Delete Git

Add Git ▼

Gradle

Add Git



## Gradle

Gradle installations

Add Gradle

List of Gradle installations on this system

## Ant

Ant installations

Add Ant

List of Ant installations on this system

## Maven

Maven installations

Add Maven



List of Maven installations on this system

## Docker

Docker installations

Add Docker

List of Docker installations on this system

## Maven

### Maven installations

....  
.... Maven

isim 3.5.2

☒ Install automatically

....  
.... Install from Apache

Version 3.5.2 ▼

Delete Installer

Add Installer ▼

Save

Apply



Yeni Item



Kişiler



Yapılandırma Geçmişi



Jenkins'i Yönet



My Views



Credentials



New View

### Yapılandırma Listesi



Sırada bekleyen yapılandırma yok.

### Yapılandırıcı Durumu



1 Beklemede

2 Beklemede



## Enter an item name

» *Required field*



### Serbest-stil yazılım projesi yapılandır

Jenkins'in merkezi özelliği, projelerinizi yapılandırmanıza yardım etmesidir. Bu proje türünü kullanarak, herhangi bir yapılandırma sistemini herhangi bir Kaynak Kodu Yönetimi aracı ile birleştirebilirsiniz, ve hatta yazılım yapılandırmanın dışında başka tür projeler için dahi kullanabilirsiniz.



### Pipeline

Orchestrates long-running activities that can span multiple build slaves. Suitable for building pipelines (formerly known as workflows) and/or organizing complex activities that do not easily fit in free-style job type.



### Çoklu-konfigürasyona sahip proje yapılandır

Platforma Özgü yapılandırmalara sahip veya çeşitli ortamlarda test işlemi yapan projeler gibi çok fazla sayıda konfigürasyona ihtiyaç duyan projeler için uygundur.



### Folder

Creates a container that stores nested items in it. Useful for grouping things together. Unlike view, which is just a filter, a folder creates a separate namespace, so you can have multiple things of the same name as long as they are in different folders.

## Enter an item name

» Required field



### Serbest-stil yazılım projesi yapılandır

Jenkins'in merkezi özelliği, projelerinizi yapılandırmanıza yardım etmesidir. Bu proje türünü kullanarak, herhangi bir yapılandırma sistemini herhangi bir Kaynak Kodu Yönetimi aracı ile birleştirebilirsiniz,ve hatta yazılım yapılandırmanın dışında başka tür projeler için dahi kullanabilirsiniz.



### Pipeline

Orchestrates long-running activities that can span multiple build slaves. Suitable for building pipelines (formerly known as workflows) and/or organizing complex activities that do not easily fit in free-style job type.




### Çoklu-konfigürasyona sahip proje yapılandır

Platforma Özgü yapılandırmalara sahip veya çeşitli ortamlarda test işlemi yapan projeler gibi çok fazla sayıda konfigürasyona ihtiyaç duyan projeler için uygundur.



### Folder

Creates a container that stores nested items in it. Useful for grouping things together. Unlike view, which is just a filter, a folder creates a separate namespace, so you can have multiple things of the same name as long as they are in different folders.



### GitHub Organization

Creates a GitHub organization (or user account) for all repositories matching some defined markers.

OK

Branch: master ▼

New pull request

Create new file

Upload files

Find file

Clone or download ▼



ebubekirtr Update pom.xml



finalIII

Update pom.xml



.travis.yml

Update .travis.yml



README.md

Initial commit



README.md

Clone with HTTPS ?

[Use SSH](#)

Use Git or checkout with SVN using the web URL.

`https://github.com/ebubekirtr/ebubekir-fin`



Copy to clipboard

[Open in Desktop](#)

[Download ZIP](#)

General

Kaynak Kodu Yönetimi

Yapılandırma Tetikleyiciler

Yapılandırma Ortamı

Yapılandırma

Yapılandırma-sonrası Aksiyonlar

Proje isim Maven Buid

Açıklama

[Plain text] [Önizleme](#)

- ☐ Bu yapılandırma parametreleştirilmiştir.
- ☐ Eski Yapılandırmalardan Kurtul
- ☐ GitHub project
- ☐ Throttle builds
- ☐ Yapılandırmayı devre dışı bırak
- ☐ Eğer gerekliyse eş zamanlı yapılandırmaları çalıştır



Gelişmiş...

Kaynak Kodu Yönetimi

☒ Hiõbirisi

☐ Git ←

☐ Subversion

## Repositories

Repository URL

Credentials

- none - ▼

 Add

Gelişmiş...

Add Repository

## Branches to build

Branch Specifier (blank for 'any')

Add Branch

Git executable

igitaapache

Repository tarayıcısı

(Otomatik)

Additional Behaviours

Add ▼

☐ Subversion

Yanılantırma Tefikleyiciler

Kaydet

Apply

Tabloların uzaktan tetikle (örn.. scriptlerden)

Branch: master ▼

ebubekir-final / finallll / pom.xml



ebubekirtr Update pom.xml

1 contributor

70 lines (45 sloc) | 1.63 KB

1

```
1 <project xmlns="http://maven.apache.org/POM/4.0.0" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
2   xsi:schemaLocation="http://maven.apache.org/POM/4.0.0 http://maven.apache.org/xsd/maven-4.0.0.xsd">
3   <modelVersion>4.0.0</modelVersion>
4
5   <groupId>proje</groupId>
6   <artifactId>finallll</artifactId>
7   <version>0.0.1-SNAPSHOT</version>
8   <packaging>jar</packaging>
9
10  <name>finallll</name>
11  <url>http://maven.apache.org</url>
12
13  <parent>
```



## En üst seviye Maven hedeflerini çalıştır



Maven Versiyonu

3.5.2



Hedefler

finallll/pom.xml



POM



Properties



JVM Options



Inject build variables

☐

Use private Maven repository

☐

Settings file

Use default maven settings



Use default maven global settings



Kaydet

Apply



 Kontrol Merkezi'ne Dön

 **Durum**

 Değişiklikler

 Çalışma Alanı

 Şimdi Yapılandır



 Proje sil

 Konfigürasyonu Düzenle



Yapılandırma Geçmişi

Eğilim —

Progress (1): 239 kB

Downloaded from central: <https://repo.maven.apache.org/maven2/org/codehaus/plexus/plexus-utils/3.0.15/plexus-utils-3.0.15.jar>  
at 245 kB/s)

[INFO] Installing C:\Users\ebubekir\.jenkins\workspace\Maven Buid\final111\target\final111-0.0.1-SNAPSHOT.jar to  
C:\Users\ebubekir\.m2\repository\proj\final111\0.0.1-SNAPSHOT\final111-0.0.1-SNAPSHOT.jar

[INFO] Installing C:\Users\ebubekir\.jenkins\workspace\Maven Buid\final111\pom.xml to  
C:\Users\ebubekir\.m2\repository\proj\final111\0.0.1-SNAPSHOT\final111-0.0.1-SNAPSHOT.pom

[INFO] -----

[INFO] BUILD SUCCESS

[INFO] -----

[INFO] Total time: 59.758 s

[INFO] Finished at: 2018-02-01T17:40:22+03:00

[INFO] Final Memory: 34M/285M

[INFO] -----

Finished: SUCCESS

Sonar



Durum



Değişiklikler



Çalışma Alanı



Şimdi Yapılandır



Proje sil



Konfigürasyonu Düzenle



Yapılandırma Gecmisi

Eğilim

## Proje Maven Buid



Çalışma Alanı



Son Değişiklikler

## Permalinkler

General

Kaynak Kodu Yönetimi

Yapılandırma Tetikleyiciler

Yapılandırma Ortamı

Yapılandırma

Yapılandırma-sonrası Ak

Git executable

igita

Repository tarayıcısı

(Otomatik)

Additional Behaviours

Add ▼



En üst seviye Maven hedeflerini çalıştır




Maven Versiyonu

3.5.2



Hedefler


install sonar:sonar



Gelişmiş...

Yapılandırma adımı ekle ▼

```
[INFO] Calculating CPD for 2 files
[INFO] CPD calculation finished
[INFO] Analysis report generated in 337ms, dir size=48 KB
[INFO] Analysis reports compressed in 38ms, zip size=19 KB
[INFO] Analysis report uploaded in 1640ms
[INFO] ANALYSIS SUCCESSFUL, you can browse http://localhost:9000/dashboard/index/proje:final111
[INFO] Note that you will be able to access the updated dashboard once the server has processed the submitted analysis report
[INFO] More about the report processing at http://localhost:9000/api/ce/task?id=AWFR4AFek1yee6DZNLY6
[INFO] Task total time: 12.041 s
[INFO] -----
[INFO] BUILD SUCCESS
[INFO] -----
[INFO] Total time: 51.099 s
[INFO] Finished at: 2018-02-01T17:58:10+03:00
[INFO] Final Memory: 52M/461M
[INFO] -----
Finished: SUCCESS
```





# Continuous Code Quality

[Log in](#)[Read documentation](#)

## Multi-Language

20+ programming languages are supported by SonarQube thanks to our in-house code analyzers,

[Java](#)[C/C++](#)[C#](#)[COBOL](#)[ABAP](#)[H](#)

finalIII

Passed

Last i

0 **A**

 Bugs

2 **B**

 Vulnerabilities

4 **A**

 Code Smells

 0.0%

Coverage



 0.0%

Duplications

1 of 1 shown




Quality Gate **Passed**

Bugs  Vulnerabilities 

0 **A**  
Bugs


2 **B**  
Vulnerabilities

Code Smells 

13min **A**  
Debt

started 4 minutes ago

4  
Code Smells

Coverage 

 0.0%  
Coverage

1  
Unit Tests

# codecovarage

eclipse-final - finalIII/src/main/java/proje/finalIII/RESTServisi.java - Eclipse

File Edit Source Refactor Navigate Search Project Run Window Help

Navigator

- java
  - proje
    - finalIII
      - Haber.java
      - RESTServisi.java
      - SpringBootOrnekApplication.java
    - resources
  - test
    - java
      - proje
        - finalIII
          - HaberTest.java
          - SpringBootOrnekApplicationTests.java
          - WebServisTest.java
    - target
      - .classpath
      - .project
      - mvnw
      - mvnw.cmd
      - pom.xml
  - MatematikUygulaması
    - .settings
    - src
      - main
        - java
          - Hesaplama.java
      - test
        - java
          - HesaplamaTest.java
      - target
        - .classpath
        - .gitignore
        - .project
        - pom.xml

Help

  - Welcome
  - Help Contents
  - Search
  - Show Contextual Help
  - Show Active Keybindings... Ctrl+Shift+L
  - Tips and Tricks...
  - Cheat Sheets...
  - Eclipse User Storage Open the Eclipse Marketplace wizard
  - Perform Setup Tasks...
  - Check for Updates
  - Install New Software...
  - Eclipse Marketplace...
  - About Eclipse

SpringBootOrnekApplicationTests.java Hesaplama.java WebServisTest.java

```
1 package ...
2
3 import ...
4 import ...
5
6 import ...
7 import ...
8
9 @Re
10 pub
11
12
13
14
15
16
17
18
19
20 synchronized (kilit) {
21     Haber haber = new Haber(sehir,baslik);
22     HABERLER.add(haber);
23     return haber;
24 }
25
26
27 @RequestMapping("haber/lis tele")
28 public synchronized List<Haber> haberListele(){
29     synchronized (kilit) {
```

Problems Javadoc Declaration Console Error Log

<terminated> SpringBootOrnekApplicationTests [JUnit] C:\Program Files\Java\jre1.8.0\_161\bin\javaw.exe (30 Oca 2018 01:35:04)

```
2018-01-30 01:35:08.371 INFO 4996 --- [main] o.s.w.s.handler.SimpleUrlHandlerMapping : Mapped URL path [/webjars/**] onto handler of type [org.springframework.web.servlet.resource.ResourceHandlerMapping]
2018-01-30 01:35:08.372 INFO 4996 --- [main] o.s.w.s.handler.SimpleUrlHandlerMapping : Mapped URL path [/**] onto handler of type [org.springframework.web.servlet.resource.ResourceHandlerMapping]
2018-01-30 01:35:08.445 INFO 4996 --- [main] o.s.w.s.handler.SimpleUrlHandlerMapping : Mapped URL path [/**/favicon.ico] onto handler of type [org.springframework.web.servlet.resource.ResourceHandlerMapping]
2018-01-30 01:35:08.669 INFO 4996 --- [main] p.f.SpringBootOrnekApplicationTests : Started SpringBootOrnekApplicationTests
2018-01-30 01:35:08.747 INFO 4996 --- [Thread-2] o.s.w.c.s.GenericWebApplicationContext : Closing org.springframework.web.context.support.AnnotationConfigWebApplicationContext@7b671e7: startupDate = 2018-01-30 01:35:08.372; rootCause = java.lang.ClassNotFoundException: org.springframework.web.servlet.mvc.annotation.AnnotationMethodHandlerAdapter; parent = null
```

MyCourses/SoftwareDev

EclEmma - Installation

EclEmma - Launching in

www.eclEmma.org/installation.html

EclEmma 1.x

User Guide

Support

Resources

Developer Information

Research

JaCoCo

Change Log

License

Contact

GitHub Home

eclipse

COMMUNITY AWARDS 2008 WINNER

Powered by JACOCo

Java Code Coverage

Inspected with sonarqube

Gesucht In Frankfurt

Java Experte für die Eisenbahn

different installation options. Using the marketplace or update site is the recomm

Option 1: Install from Eclipse Marketplace Client

Option 2: Installation from update site

Option 3: Manual download and installation

Prerequisites

EclEmma requires Eclipse 3.8 or higher and Java 1.5 or higher. It has no deper

development tools (JDT) which is included in the default SDK installation.

Option 1: Install from Eclipse Marketplace Client

Install

Since Eclipse 3.6 the [Eclipse Marketplace Client](#) allows direct installation of E

workspace.

1. From your Eclipse menu select *Help* → *Eclipse Marketplace*.

2. Search for "EclEmma".

3. Hit *Install* for the entry "EclEmma Java Code Coverage".

4. Follow the steps in the installation wizard.

Option 2: Installation from Update Site

The update site for EclEmma is <http://update.eclEmma.org/>. Perform the follow

1. From your Eclipse menu select *Help* → *Install New Software...*

2. In the *Install* dialog enter <http://update.eclEmma.org/> at the *Work with fie*

Install

Available Software

Check the items that you wish to install.

jacoco-0.5.4.20111....zip

Eclipse Marketplace

Eclipse Marketplace

Select solutions to install. Press Install Now to proceed with installation. Press the "more info" link to learn more about a solution.

Search

Recent

Popular

Favorites

Installed

Eclipse Newsletter: 2018 (Java EE)

Find: eclEmma

All Markets

All Categories

Go

EclEmma Java Code Coverage 3.0.1

EclEmma is a free Java code coverage tool for Eclipse, available under the Eclipse Public License. It brings code coverage analysis directly into the Eclipse... [more info](#)

by Mountainminds GmbH & Co. KG, EPL

[quality metrics](#) [code coverage](#) [fileExtension](#) [exec](#)

★ 585

Installs: 577K (5.242 last month)

Installed

Marketplaces

Tümünü göster

eclipse-workspace - finalIII/src/main/java/proje/finalIII/Haber.java - Eclipse

File Edit Source Refactor Navigate Search Project Run Window Help



Package Explorer

ebubekir-final-master  
finalIII  
src/main/java  
src/main/resources  
src/test/java  
JRE System Library [JavaSE-1.8]  
Maven Dependencies  
src  
target  
mvnw  
mvnw.cmd  
pom.xml


Haber.java RESTServisi.java SpringBootOmekApplication.java

```
1 package proje.finalIII;  
2  
3 public class Haber {  
4     public static int COUNT = 0;  
5     private int id;  
6     private String baslik;  
7     private String sehir;  
8  
9     public Haber(String sehir, String baslik) {  
10         this.id = COUNT;  
11         this.sehir = sehir;  
12         this.baslik = baslik;  
13     }  
14  
15     public String getbaslik() {  
16         return baslik;  
17     }  
18  
19     public String getsehir() {  
20         return sehir;  
21     }  
22 }
```

Problems Javadoc Declaration Console Progress Coverage

Element	Coverage	Covered Instruction...
> finalIII	10,8 %	16

# Javadoc

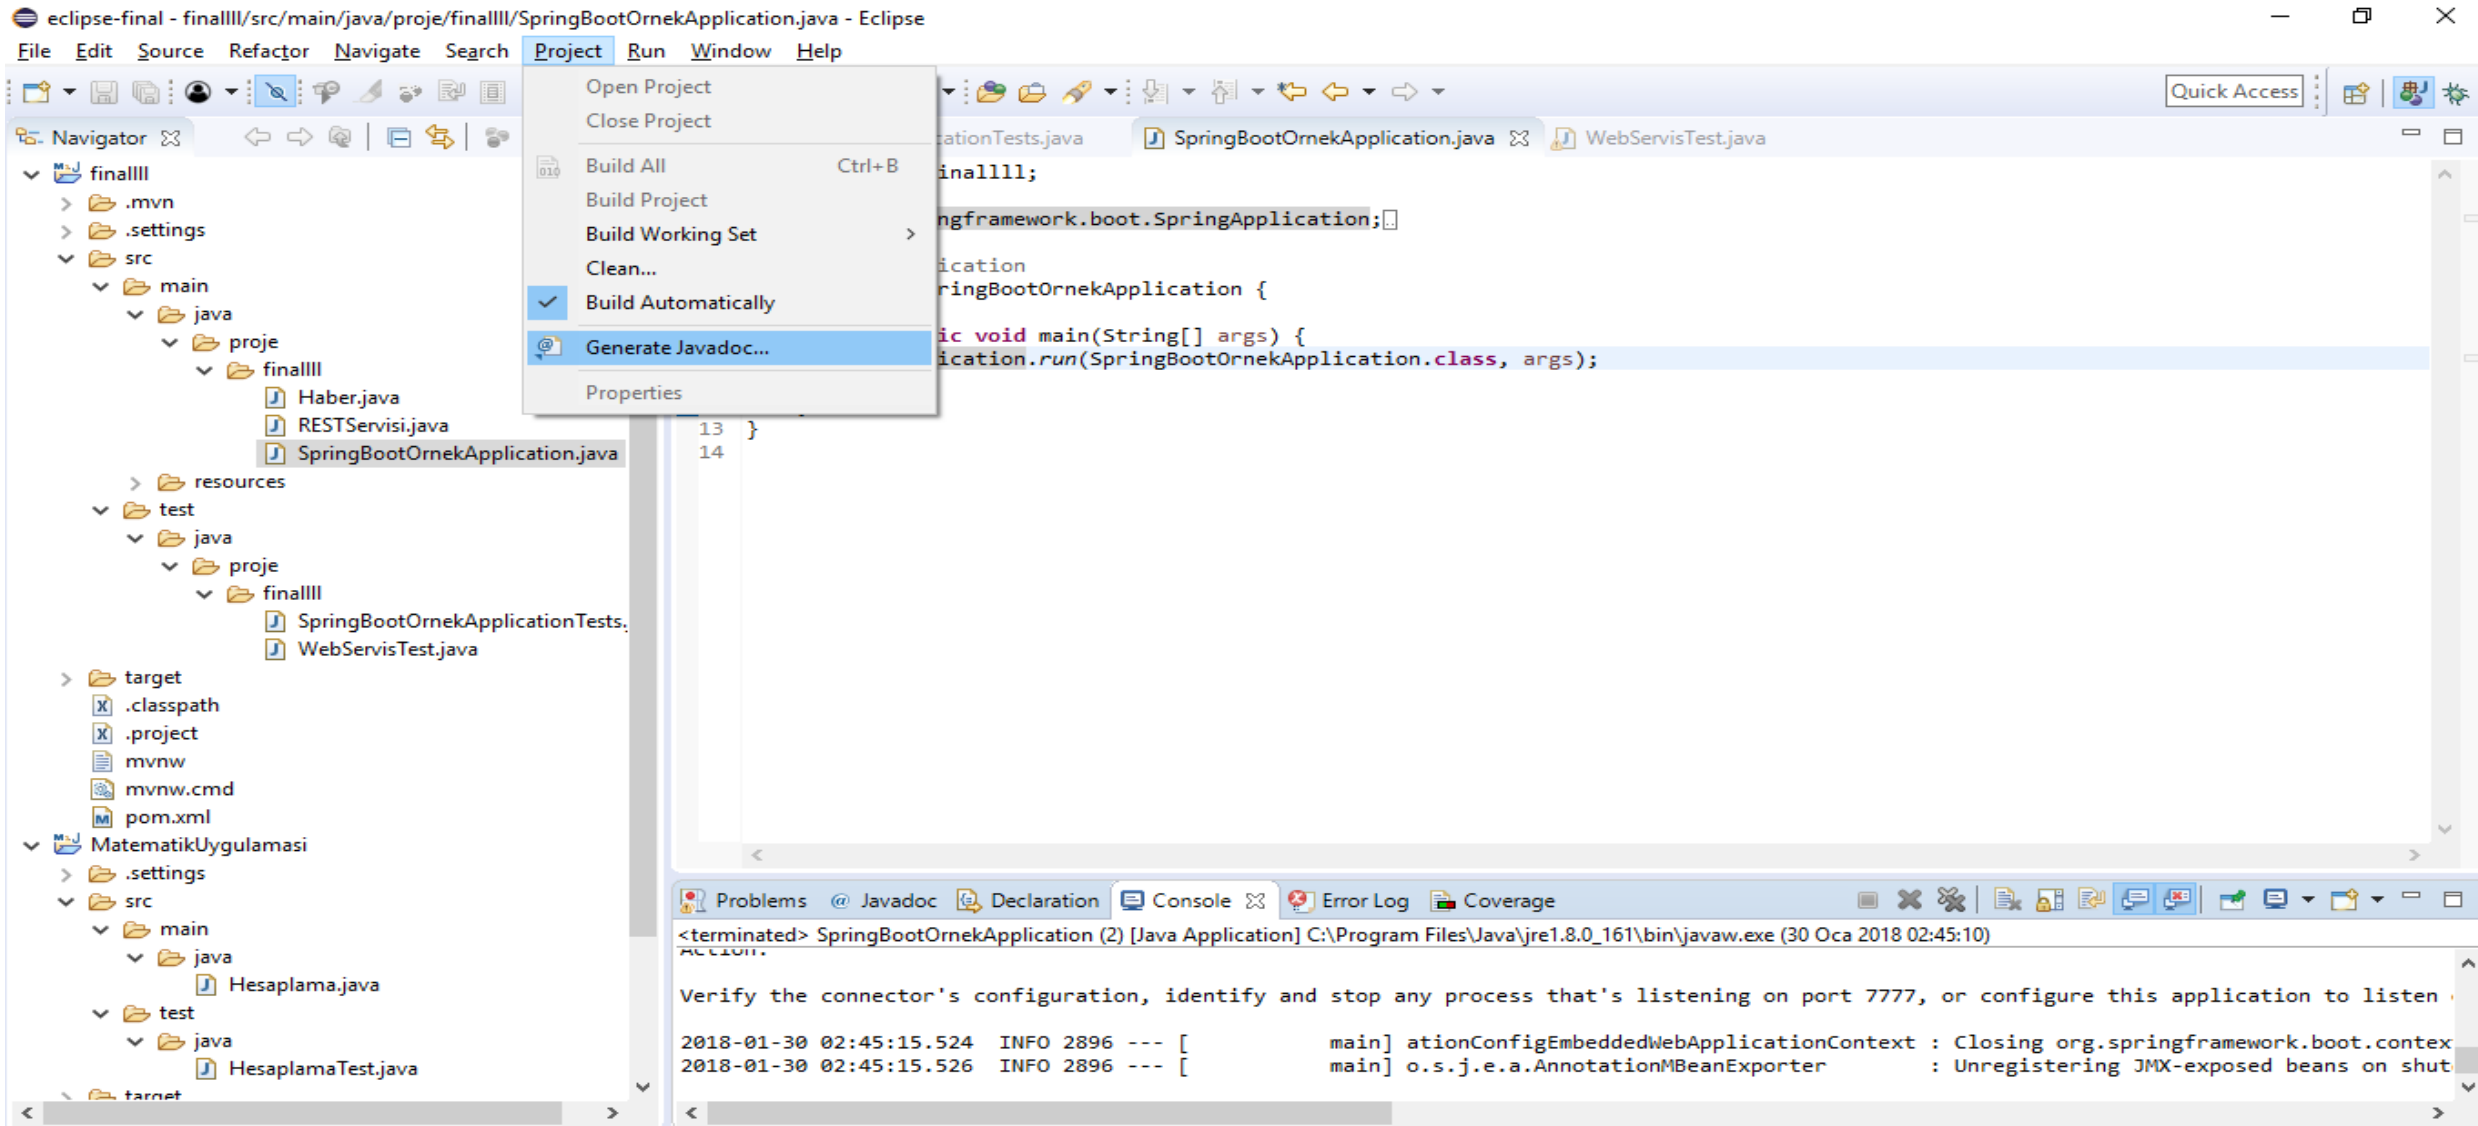

## Generate Javadoc

### Javadoc Generation

Select types for Javadoc generation.

Javadoc command:

C:\Program Files\Java\jdk1.8.0\_161\bin\javadoc.exe

Configure...

Select types for which Javadoc will be generated:

- > ☒ finalIII
- > ☐ MatematikUygulamasi

Create Javadoc for members with visibility:

☐ Private

☐ Package

☐ Protected

☒ Public

Public: Generate Javadoc for public classes and members.

☒ Use standard doclet

Destination: C:\Users\ebubekir\eclipse-final\finalIII\doc

Browse...

☐ Use custom doclet

Doclet name:

Doclet class path:














< Back

Next >

Finish

Cancel

- >  src/main/java
- >  src/main/resources
- >  src/test/java
- >  JRE System Library [JavaSE-1.8]
- >  Maven Dependencies
- >  doc
- >  src
- >  target
-  mvnw
-  mvnw.cmd
-  pom.xml

PACKAGE CLASS USE TREE DEPRECATED INDEX HELP

PREV PACKAGE NEXT PACKAGE FRAMES NO FRAMES ALL CLASSES

## Package proje.finallll

### Class Summary

Class	Description
-------	-------------

Haber	
-------	--

RETServisi	
------------	--

SpringBootOrnekApplication	
----------------------------	--

SpringBootOrnekApplicationTests	
---------------------------------	--

WebServisTest	
---------------	--

PACKAGE CLASS USE TREE DEPRECATED INDEX HELP

PREV PACKAGE NEXT PACKAGE FRAMES NO FRAMES ALL CLASSES

Problems @ Javadoc Declaration Console Git Staging

No consoles to display at this time.



[PREV](#) [NEXT](#) [FRAMES](#) [NO FRAMES](#)

## Hierarchy For Package `proje.finaIIII`

### Class Hierarchy

- `java.lang.Object`
  - `proje.finaIIII.Haber`
  - `proje.finaIIII.RESTServisi`
  - `proje.finaIIII.SpringBootOrnekApplication`
  - `proje.finaIIII.SpringBootOrnekApplicationTests`
  - `proje.finaIIII.WebServisTest`

[PACKAGE](#) [CLASS](#) [USE](#) [TREE](#) [DEPRECATED](#) [INDEX](#) [HELP](#)

[PREV](#) [NEXT](#) [FRAMES](#) [NO FRAMES](#)

# RestServis

eclipse-final - finalIII/src/test/java/proje/finalIII/WebServisTest.java - Eclipse

File Edit Source Refactor Navigate Search Project Run Window Help

Navigator

- finalIII
  - .mvn
  - .settings
  - src
    - main
      - java
        - proje
          - finalIII
            - Haber.java
            - RESTServisi.java
            - SpringBootOrnekApplication.java
    - resources
    - test
      - java
        - proje
          - finalIII
            - SpringBootOrnekApplicationTests.java
            - WebServisTest.java
    - target
      - .classpath
      - .project
      - mvnw
      - mvnw.cmd
      - pom.xml

WebServisTest.java

```
1 package proje.finalIII;
2
3 import static org.junit.Assert.assertFalse;
4
5 public class WebServisTest {
6
7     public static void main(String[] args) {
8         OkHttpClient client = new OkHttpClient();
9
10        Request request = new Request.Builder()
11            .url("http://localhost:7777/haber/olustur?sehir=Istanbul&baslik=Gasp")
12            .get()
13            .addHeader("cache-control", "no-cache")
14            .addHeader("postman-token", "cf587d5f-e520-fcc7-027c-ea6f1187d851")
15            .build();
16
17        try {
18            Response response = client.newCall(request).execute();
19            System.out.println(response.body().string());
20        } catch (IOException e) {
21            System.out.println("hata: " + e);
22        }
23    }
24 }
25
26
27
28
29
30
31
32
33 }
```


Problems @ Javadoc Declaration Console Error Log Coverage

<terminated> WebServisTest [Java Application] C:\Program Files\Java\jre1.8.0\_161\bin\javaw.exe (29 Oca 2018 22:58:07)

```
{
  "baslik" : "Gasp",
  "sehir" : "Istanbul"
}
```

← → ↻ 🏠 ⓘ localhost:7777/haber/olustur?sehir=Istanbul&baslik=Gasp

```
{  
  "baslik" : "Gasp",  
  "sehir" : "Istanbul"  
}
```

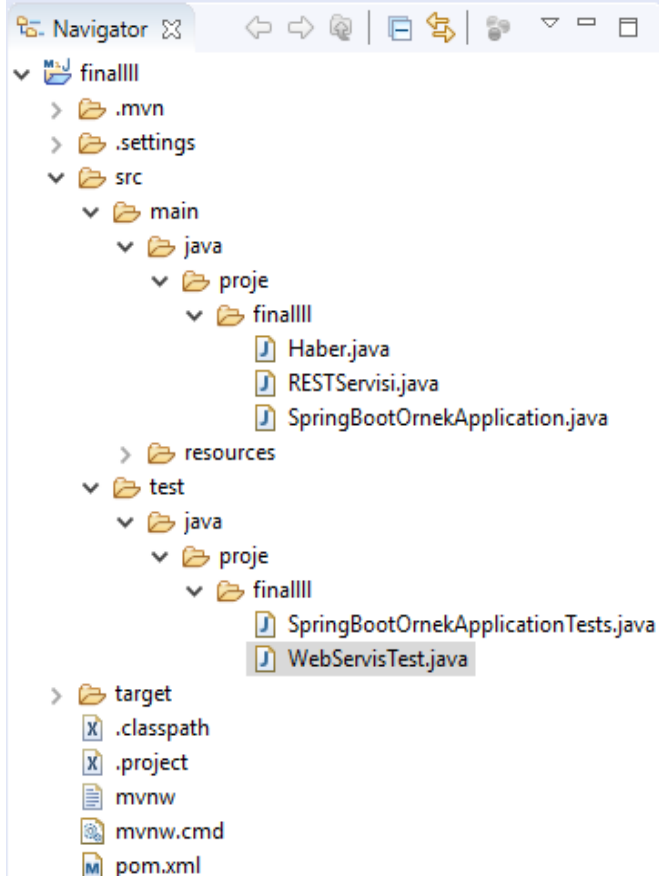

```
1 package proje.finaIIII;
2
3 import static org.junit.Assert.assertFalse;
4
5 public class WebServisTest {
6
7     public static void main(String[] args) {
8         OkHttpClient client = new OkHttpClient();
9
10        Request request = new Request.Builder()
11            .url("http://localhost:7777/haber/listele")
12            .get()
13            .addHeader("cache-control", "no-cache")
14            .addHeader("postman-token", "cf587d5f-e520-fcc7-027c-ea6f1187d851")
15            .build();
16
17        try {
18            Response response = client.newCall(request).execute();
19            System.out.println(response.body().string());
20        } catch (IOException e) {
21            System.out.println("hata: " + e);
22        }
23    }
24 }
```

Problems @ Javadoc Declaration Console Error Log Coverage

<terminated> WebServisTest [Java Application] C:\Program Files\Java\jre1.8.0\_161\bin\javaw.exe (29 Oca 2018 23:25:57)

```
[ {
  "baslik" : "sdgf",
  "sehir" : "se"
} ]
```



localhost:7777/haber/listele?

```
[ {  
  "baslik" : "sdgf",  
  "sehir" : "se"  
} ]
```

The screenshot shows the Eclipse IDE interface. On the left is the Project Explorer showing the project structure: `finalIII` (a folder) containing `.mvn`, `.settings`, `src`, `resources`, and `test`. The `src` folder contains `main` and `test` subfolders. The `test` folder contains `java` and `proje` subfolders. The `proje` folder contains `finalIII` subfolder, which contains `SpringBootOrnekApplicationTests.java` and `WebServisTest.java`. The `test` folder also contains `resources` and `target` subfolders. The `target` folder contains `.classpath`, `.project`, `mvnw`, `mvnw.cmd`, and `pom.xml`.

The main editor shows the code for `WebServisTest.java`:

```
1 package proje.finalIII;
2
3 import static org.junit.Assert.assertFalse;
4
5 public class WebServisTest {
6
7     public static void main(String[] args) {
8         OkHttpClient client = new OkHttpClient();
9
10        Request request = new Request.Builder()
11            .url("http://localhost:7777/haber/temizle?")
12            .get()
13            .addHeader("cache-control", "no-cache")
14            .addHeader("postman-token", "cf587d5f-e520-fcc7-027c-ea6f1187d851")
15            .build();
16
17        try {
18            Response response = client.newCall(request).execute();
19            System.out.println(response.body().string());
20        } catch (IOException e) {
21            System.out.println("hata: " + e);
22        }
23    }
24 }
```

The bottom of the IDE shows the Console view with the following output:

```
<terminated> WebServisTest [Java Application] C:\Program Files\Java\jre1.8.0_161\bin\javaw.exe (29 Oca 2018 23:26:14)
OK
```



localhost:7777/haber/temizle?

OK