

Carrier SIP Trunk Setup — Route 2 Shine (pilot 8064258400)

Oct 8, 2026 · @Someone


The carrier trunk runs over its own private link on server port **eno2**. The network side is configured and waits only for the carrier’s cable; the trunk itself is added in the web UI.

Carrier details

Item	Value
Customer	ROUTE 2 SHINE PRIVATE LIMITED
Product	SIP
Pilot number	8064258400
DID range	8064258401 – 8064258999 (599 numbers)
SIP username	00918064258400
SIP password	as on the carrier sheet (not repeated here)
Our IP on the carrier link	10.55.118.18, mask 255.255.255.252 (/30)
Carrier gateway	10.55.118.17
SBC (SIP server)	10.60.72.141, port 5060 UDP
Media IPs (RTP)	10.60.73.48, 10.60.73.49
SIP channels	200

Network layout

Only carrier traffic uses eno2; SSH and internet stay on en01

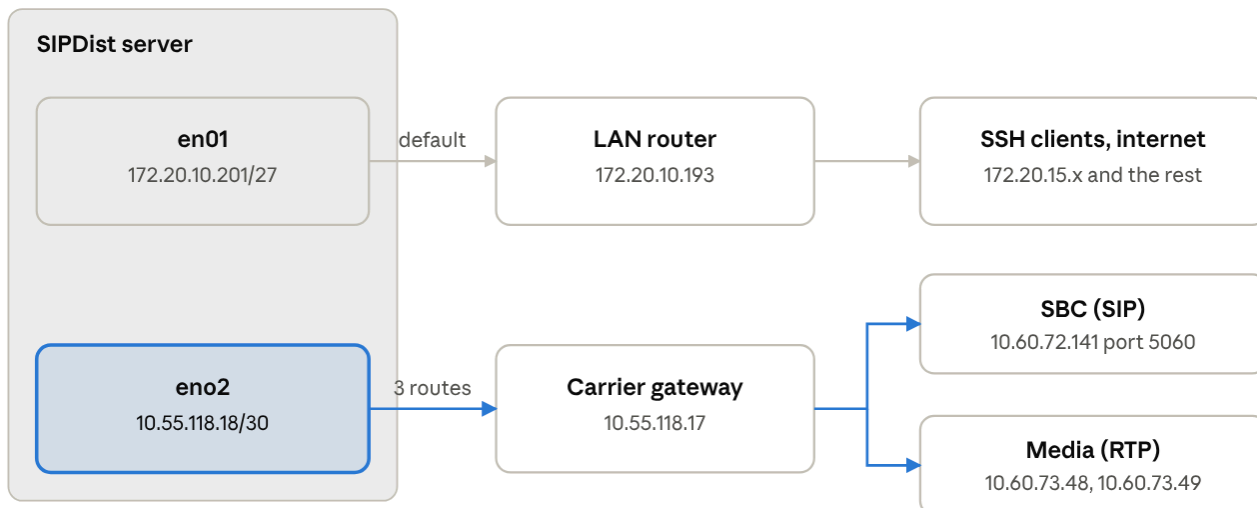

Only 3 host routes (/32: SBC + 2 media IPs) use eno2; every other address stays on en01.

network layout · 2 server ports, carrier link on eno2

The carrier link is point-to-point (/30) on eno2. SSH and internet keep using en01 and the default gateway 172.20.10.193.

Network setup on the server

Port eno2 gets the carrier IP and three host routes, nothing else. This was done on 8 October 2026 and comes up by itself when the cable is plugged in.

Config file: `/etc/netplan/60-carrier-route2shine.yaml` (mode 600)

```

network:
  version: 2
  ethernets:
    eno2:
      match:
        macaddress: b8:2a:72:d6:3b:2c
      addresses:
        - 10.55.118.18/30
      routes:
        - to: 10.60.72.141/32      # SBC (SIP signalling)
          via: 10.55.118.17
        - to: 10.60.73.48/32      # media
          via: 10.55.118.17
        - to: 10.60.73.49/32      # media
          via: 10.55.118.17
      optional: true              # boot does not wait for this link

```

Why SSH and internet are not affected

- No default route on eno2. The default route stays `via 172.20.10.193 dev en01`.
- Only three /32 host routes point at the carrier, so no other address changes path. SSH clients (172.20.15.x) still go out through en01.
- Applied with `networkctl reload` and `networkctl reconfigure eno2`, which touch eno2 only. `netplan apply` was not used, so en01 was never reloaded.
- Checked after the change: en01 and default routes identical to before, both SSH sessions still connected.

Asterisk: no change needed. The SIP transport lists `10.0.0.0/8` as `local_net`, so calls to the carrier carry our private IP 10.55.118.18 instead of the public NAT IP 182.95.69.226.

Firewall: none active (ufw inactive, iptables policy ACCEPT), so SIP 5060 and RTP 10000–30000 from the carrier are allowed.

Rollback (only if needed)

```

rm /etc/netplan/60-carrier-route2shine.yaml
netplan generate && networkctl reload && networkctl reconfigure eno2

```

The network state before the change is saved in `/root/net-backup-20261008/`.

Configure in the UI

Everything below is done in the web UI; no code or file changes are needed. It can be done before the cable is in; the trunk simply shows unreachable until then.

1. Add the trunk: SIP trunks → + Add trunk

Field	Value
Name	route2shine
Host	10.60.72.141
Port	5060
Transport	udp
SIP username	00918064258400
SIP password	from the carrier sheet
Register to carrier	ticked
From user / From domain	blank
Total channels	200
CPS	0 (unlimited), or the CPS the carrier states
Allow inbound calls	ticked

2. Add the DID range: on the route2shine card → + Add DID range

- First 8064258401 , last 8064258999 .
- Tick **Caller ID** so processes can send these numbers as caller ID.
- **Inbound to:** optionally pick the process that should receive calls to these DIDs. Callbacks go to the process that last used the DID anyway.

3. Point processes at the trunk: Processes → Edit (or + Add)

- Set **Trunk** to route2shine and the process channel limits as sold to the customer.
- The customer dialer sends **X-DID** (caller ID) and **X-Number** (number to call). **X-DID** must be inside 8064258401-8064258999, otherwise the call is rejected as INVALID_DID.

Go-live checklist

Work down the list once the carrier's cable is plugged into eno2.

- ☐ Link is up with our IP: `ip -br addr show eno2` shows **UP** and **10.55.118.18/30**
- ☐ Routes are in place: `ip route get 10.60.72.141` shows **via 10.55.118.17 dev eno2**

- ☐ SSH and internet unchanged: `ip route get 8.8.8.8` still shows `dev en01`
- ☐ Carrier gateway answers: `ping -c3 10.55.118.17`
- ☐ SBC reachable: `asterisk -rx 'pjsip show contacts'` shows `t_route2shine` as Avail
- ☐ Trunk registered: the route2shine card shows **Registered** (or `pjsip show registrations`)
- ☐ Outbound test call from a process, with `X-DID` in the DID range: answered, audio both ways
- ☐ Inbound test call to a DID (e.g. 8064258401): reaches the right process, audio both ways
- ☐ CDR report shows both test calls on trunk route2shine

Troubleshooting

Symptom	Likely cause	What to do
eno2 stays DOWN	No cable, or carrier port not active	Check the cable and the carrier's CPE; <code>networkctl status eno2</code>
Ping to 10.55.118.17 fails	Wrong port or carrier link not provisioned	Confirm the cable is in eno2; ask the carrier to check the /30
Trunk not Registered, calls still work	Carrier uses IP authentication only	Untick Register to carrier ; keep username and password
Registration rejected (403)	Wrong username / password	Re-enter them in Edit trunk; leave password blank to keep it
Carrier rejects calls (403 / 404)	Carrier expects the pilot in the From header	Set From user to <code>00918064258400</code>
One-way or no audio	RTP not reaching the media IPs	<code>ip route get 10.60.73.48</code> must show <code>dev eno2</code> ; check Diagnostics → RTP / audio
Calls rejected as INVALID_DID	<code>X-DID</code> outside 8064258401-8064258999	Fix the caller ID on the customer dialer
Calls rejected as TRUNK_LIMIT	200 channels in use, or CPS limit full	Check live channels; raise CPS only if the carrier allows

For any failed call, Diagnostics → SIP trace and Diagnostics → Asterisk log (search the number) show what the carrier answered.