



DALHOUSIE UNIVERSITY

CSCI 5408: Data Management, Warehousing and Analytics

Assignment: Lab - 06

Banner ID: B01026328

Name: Parva Mineshbhai Patel

Date: 2025 – 03 – 16

GitLab Assignment Link: <https://git.cs.dal.ca/parva/>

CSCI5408_W25_B01026328_ParvaMineshbhai_Patel

Contents

1) MongoDB Database.....	1
2) Java Code Execution.....	5
3) MongoDB Post execution.....	6
4) References.....	7

1) MongoDB Database

Step 1: I have created a cluster its name is Cluster1 in Atlas.

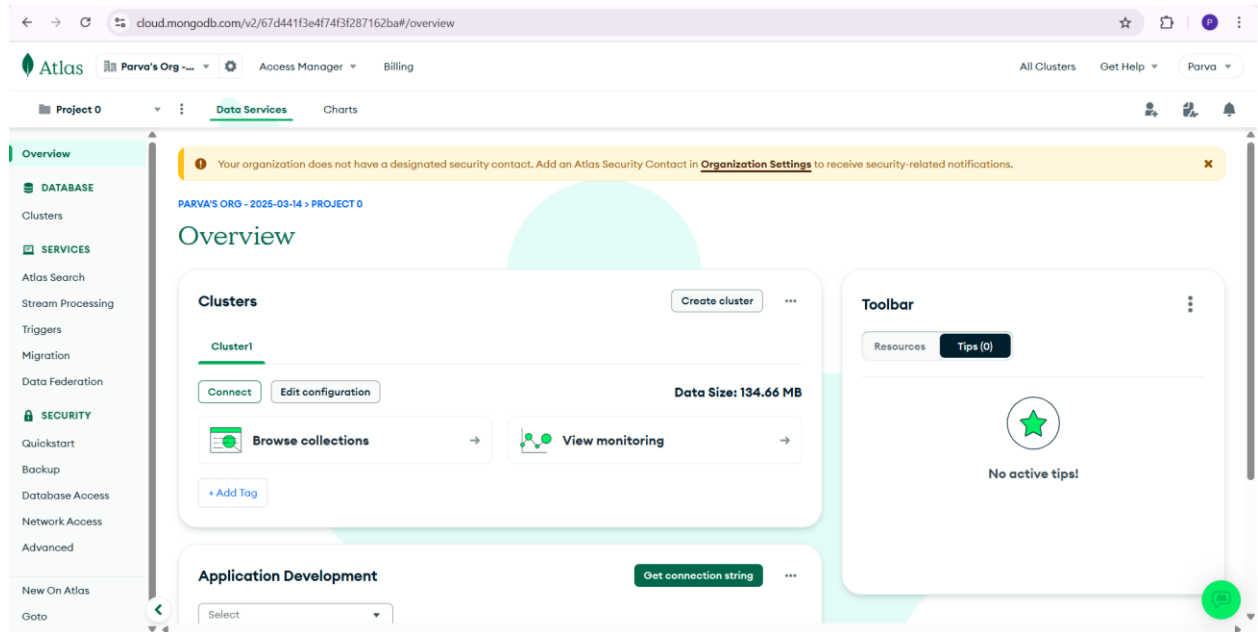


Figure 1: Cluster Created

Step 2: I have added the IP address 0.0.0.0/0 and the status is active.

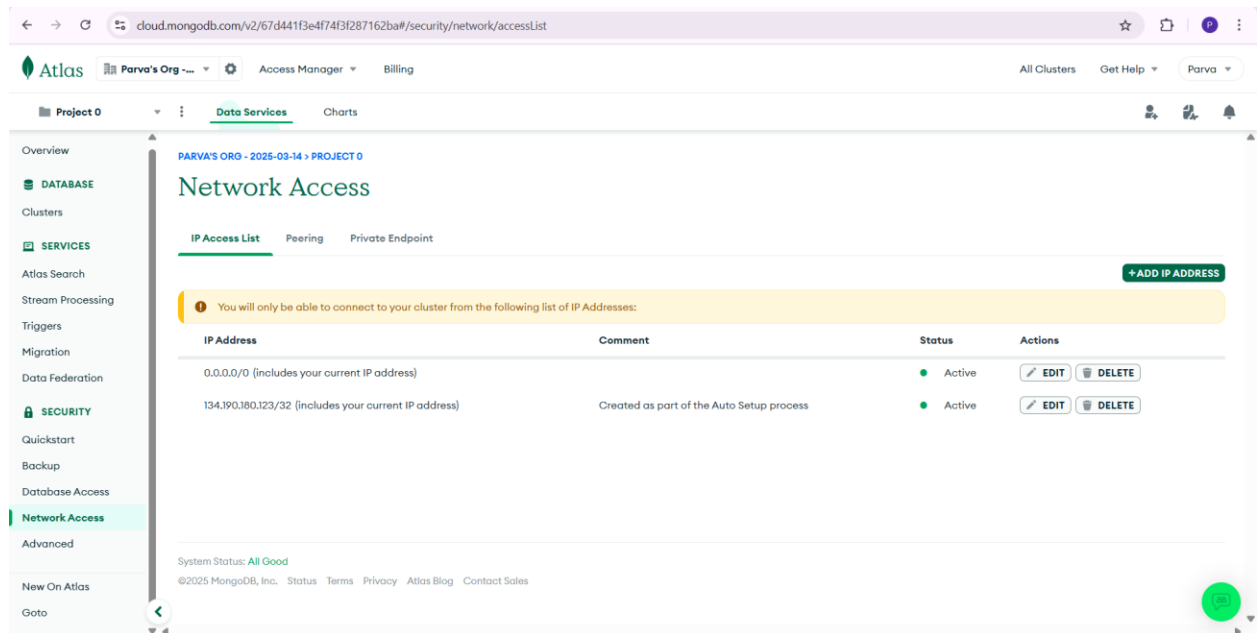


Figure 2: Add IP Address

Step 3: I have added Database User, and the name of the user is parvapatel2612.

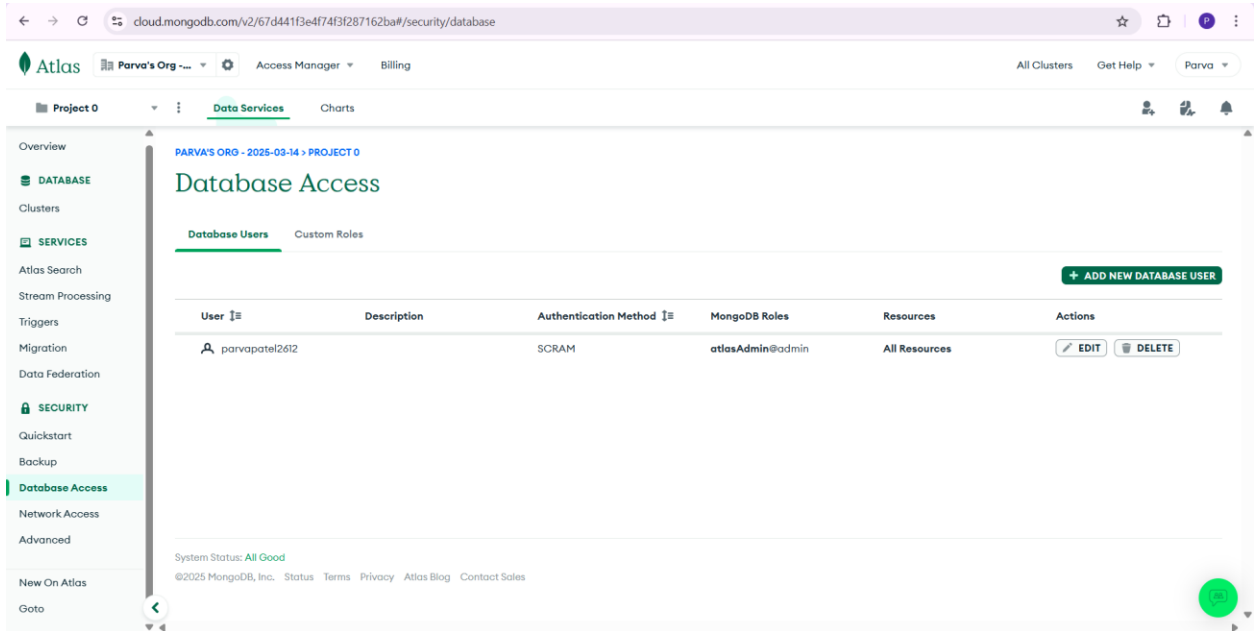


Figure 3: Add Database User

Step 4: Set Up connection security is done.

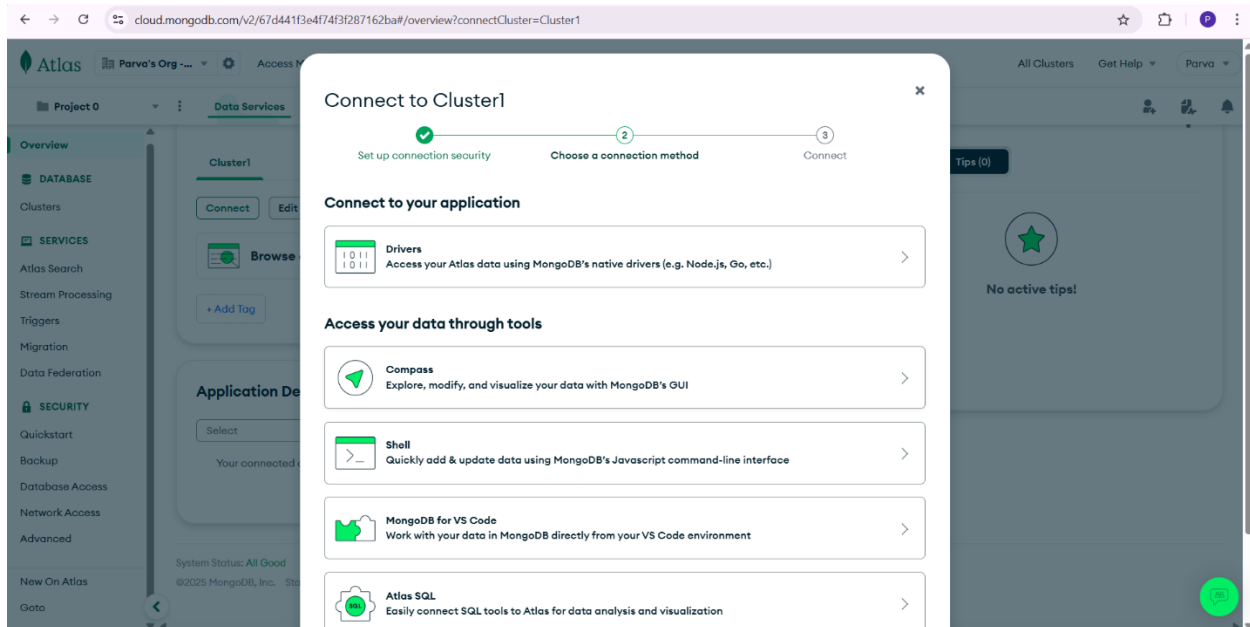


Figure 4: Set up Connection Security

Step 5: I have downloaded compass, and I have selected the URL.

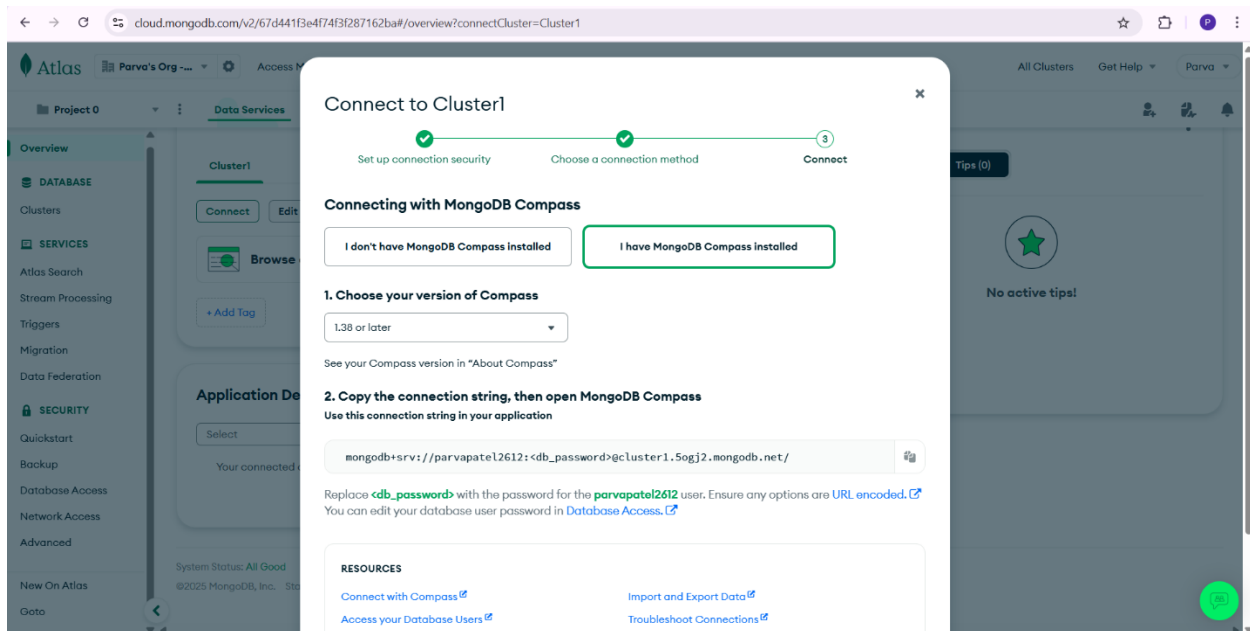


Figure 5: Choose a connection method

Step 6: I have pasted URL in MongoDB compass and change the password for the database. After that click the save and connect.

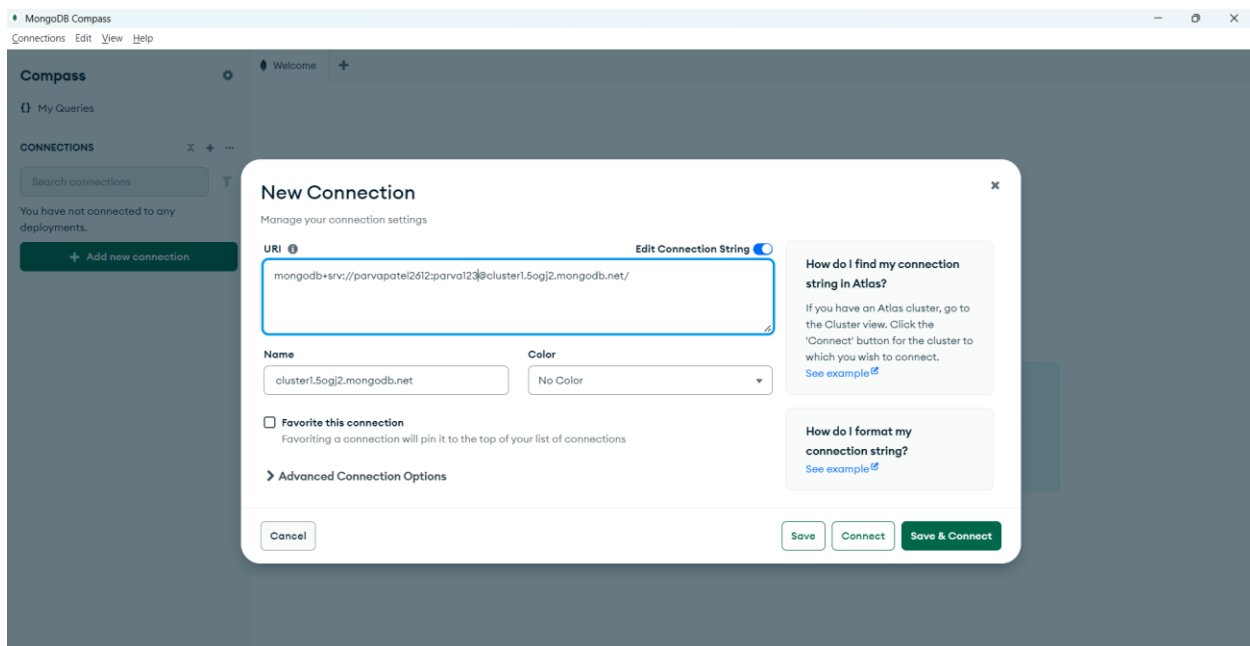


Figure 6: Change Password in MongoDB Compass

Step 7: I have created a database name E-Commerce and collection name is Orders and click the create Database.

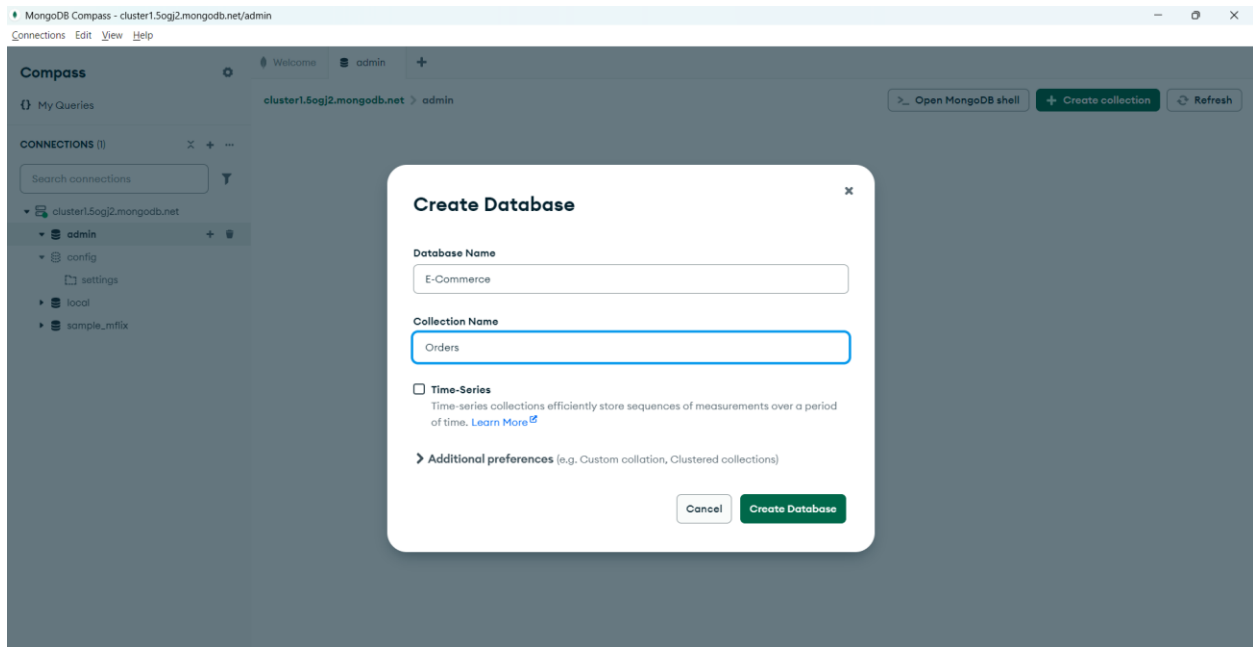


Figure 7: Create Database

Step 8: Now the E-Commerce Database is created and Orders collection name as you can see.


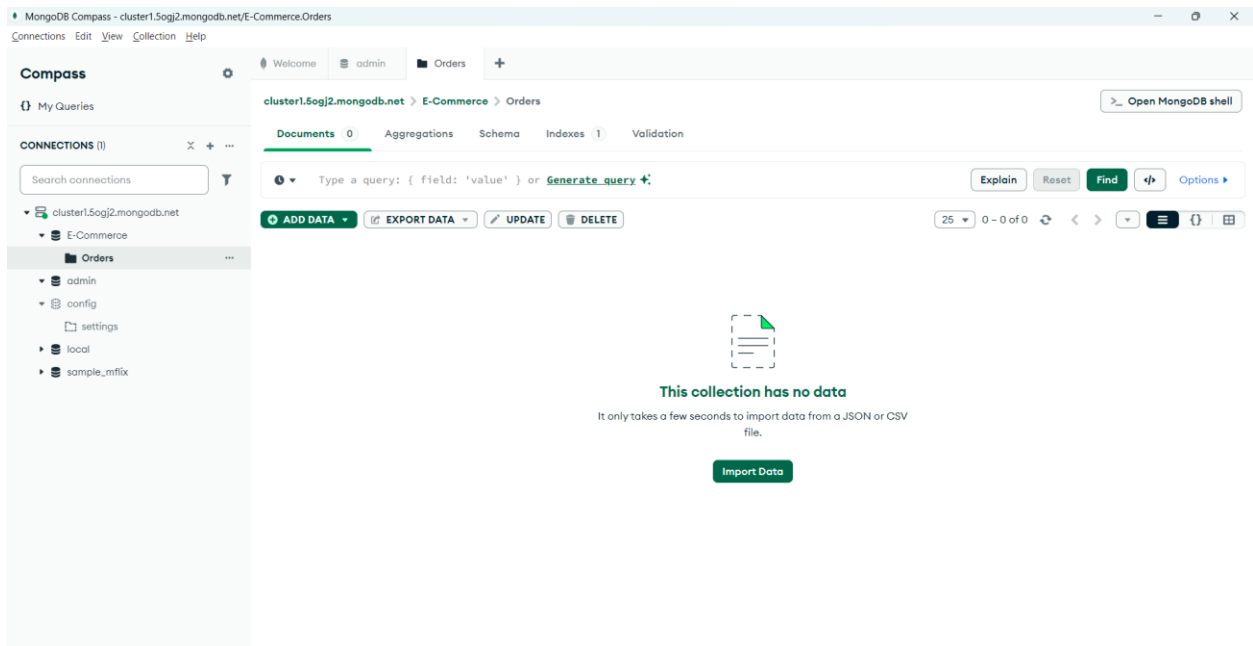


Figure 8: Created E-Commerce Database

2) Java Code Execution

Step 9: This is the execution of the java code. I have done CRUD operation in the Java.

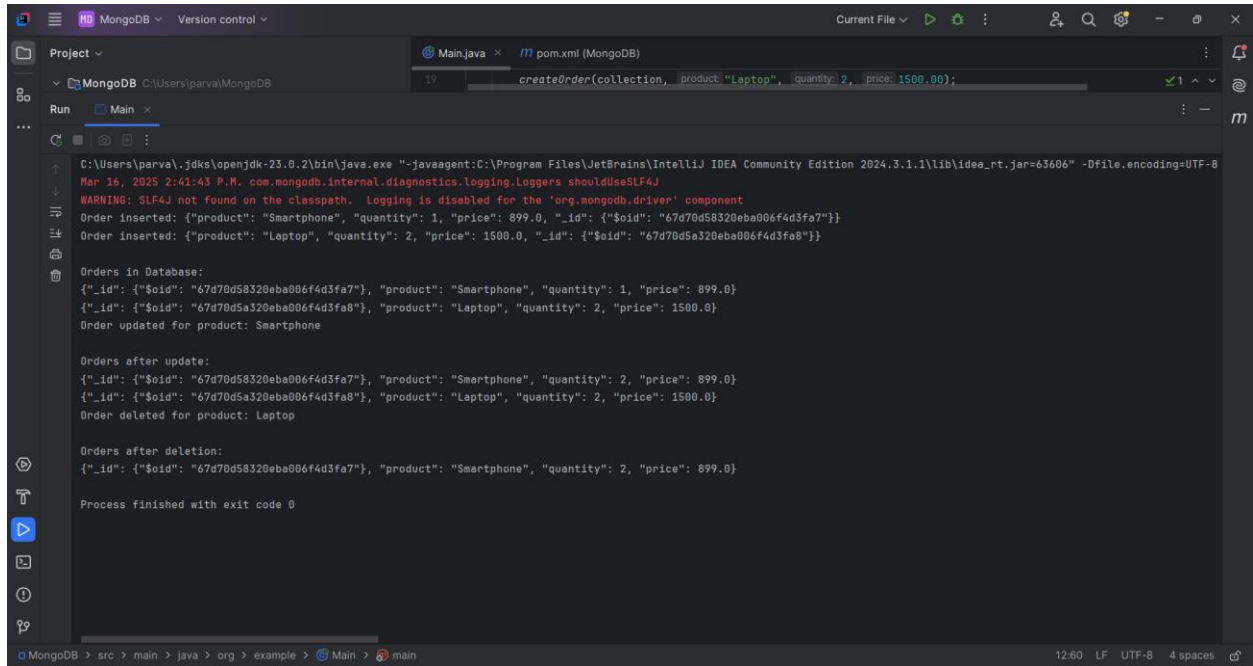

```
C:\Users\parval\jdk8\openjdk-23.0.2\bin\java.exe "-javaagent:C:\Program Files\JetBrains\IntelliJ IDEA Community Edition 2024.3.1.1\lib\idea_rt.jar=63606" -Dfile.encoding=UTF-8
Mar 16, 2025 2:41:43 P.M. com.mongodb.internal.diagnostics.logging.Loggers shouldUseSLF4J
WARNING: SLF4J not found on the classpath. Logging is disabled for the 'org.mongodb.driver' component
Order inserted: {"product": "Smartphone", "quantity": 1, "price": 899.0, "_id": {"$oid": "67d70d58320eba006f4d3fa7"}}
Order inserted: {"product": "Laptop", "quantity": 2, "price": 1500.0, "_id": {"$oid": "67d70d5a320eba006f4d3fa8"}}

Orders in Database:
{"_id": {"$oid": "67d70d58320eba006f4d3fa7"}, "product": "Smartphone", "quantity": 1, "price": 899.0}
{"_id": {"$oid": "67d70d5a320eba006f4d3fa8"}, "product": "Laptop", "quantity": 2, "price": 1500.0}
Order updated for product: Smartphone

Orders after update:
{"_id": {"$oid": "67d70d58320eba006f4d3fa7"}, "product": "Smartphone", "quantity": 2, "price": 899.0}
{"_id": {"$oid": "67d70d5a320eba006f4d3fa8"}, "product": "Laptop", "quantity": 2, "price": 1500.0}
Order deleted for product: Laptop

Orders after deletion:
{"_id": {"$oid": "67d70d58320eba006f4d3fa7"}, "product": "Smartphone", "quantity": 2, "price": 899.0}

Process finished with exit code 0
```

Figure 9: Java Code Execution

3) MongoDB Post execution

Step 10: In the browse collection it will show the MongoDB post code execution.

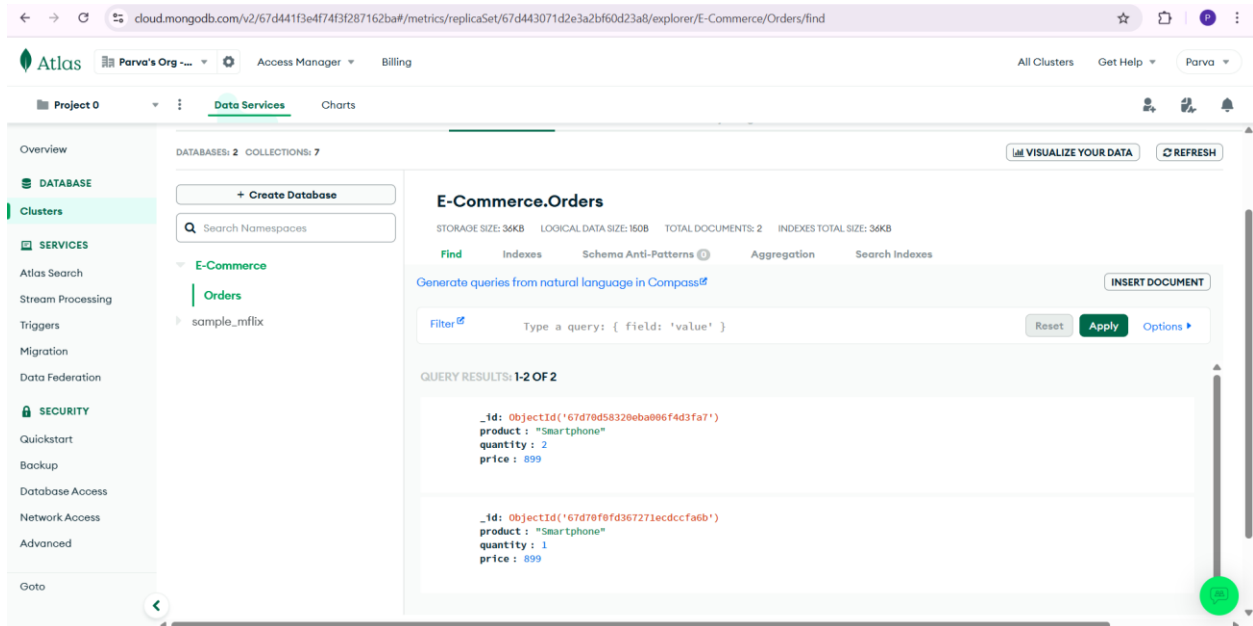


Figure 10: MongoDB Post Code Execution

4) References

[1] MongoDB, “MongoDB Atlas,” MongoDB [Online]. Available: <https://www.mongodb.com/atlas>. [Accessed: March 16, 2025].

[2] MongoDB, “MongoDB Compass,” MongoDB [Online]. Available: <https://www.mongodb.com/products/compass>. [Accessed: March 16, 2025].

[3] JetBrains, “IntelliJ IDEA – The Leading Java and Kotlin IDE,” JetBrains [Online]. Available: <https://www.jetbrains.com/idea/>. [Accessed: March 16, 2025].

[4] GeeksforGeeks, “CRUD Operations in MongoDB using Java,” GeeksforGeeks [Online]. Available: <https://www.geeksforgeeks.org/crud-operations-in-mongodb-using-java/>. [Accessed: March 16, 2025].

[5] The Apache Software Foundation, “Maven Repository: MongoDB Java Driver,” Maven Repository [Online]. Available: <https://mvnrepository.com/artifact/org.mongodb/mongodb-driver-sync>. [Accessed: March 16, 2025].