Assignment -4

SMS SPAM Classification

Assignment Date	26 October 2022
Team ID	PNT2022TMID02916
Project Name	AI BASED DISCOURSE FOR BANKING INDUSTRY
Student Name	AJITHKUMAR
Student Roll Number	727720EUIT501
Maximum Marks	2 Marks

Question-1. Import required library

Solution:

import pandas as pd

import numpy as np

import matplotlib.pyplot as plt

from sklearn.model_selection import train_test_split

from sklearn.preprocessing import LabelEncoder

from keras.models import Model

from keras.layersimport LSTM, Activation, Dense, Dropout, Input, Embedding

from keras.optimizers import Adam

fromkeras.preprocessing.textimportTokenizer

from keras.preprocessing import sequence

from keras.utils import pad_sequences

from keras.utils import to_categorical

from keras.callbacks import EarlyStopping

Question-2. Read the Dataset

Solution:

```
df = pd.read_csv('spam.csv',delimiter=',',encoding='latin-1')
df.head()
```

	V1	V2	Unnamed: 2	Unnamed: 3	Unnamed: 4
0	ham	Go until jurong point, crazy Available only	NaN	NaN	NaN
1	ham	Ok lar Joking wif u oni	NaN	NaN	NaN
2	spam	Free entry in 2 a wkly comp to win FA Cup fina	NaN	NaN	NaN
3	ham	U dun say so early hor U c already then say	NaN	NaN	NaN
4	ham	Nah I don't think he goes to usf, he lives aro	NaN	NaN	NaN

Question-3. Preprocessing the Dataset

Solution:

```
df.drop(['Unnamed: 2', 'Unnamed: 3', 'Unnamed: 4'],axis=1,inplace=True)
from wordcloud import WordCloud, STOPWORDS, ImageColorGenerator
X = df.v2
Y = df.v1
le =LabelEncoder()
Y =le.fit_transform(Y)
Y = Y.reshape(-1,1)
X_train,X_test,Y_train,Y_test = train_test_split(X,Y,test_size=0.25)
max_words = 1000
max_len = 150
tok =
                    tok.fit_on_texts(X_tr
Tokenizer(num_wordain)
s=max
                    words)
sequences = tok.texts_to_sequences(X_train)
sequences_matrix = pad_sequenc
                                es(sequences,maxlen=max_len)
```

Question-4. Create Model

Solution:

```
inputs = Input(shape=[max_len])
```

layer = Embedding(max_words,50,input_length=max_len)(inputs)

layer = LSTM(128)(layer)

layer = Dense(128)(layer)

layer = Activation('relu')(layer)

layer = Dropout(0.5)(layer)

layer = Dense(1)(layer)

layer = Activation('sigmoid')(layer)

model = Model(inputs=inputs,outputs=layer)

Question-5. Add Layers (LSTM, Dense-(Hidden Layers), Output)

Solution:

model.summary()

Model: "model_1"

Layer (type)	Output Shape	Param #
input_2 (InputLayer)	[(None, 150)]	0
embedding_1 (Embedding)	(None, 150, 50)	50000
lstm_1 (LSTM)	(None, 128)	91648
dense_2 (Dense)	(None, 128)	16512
activation_2 (Activation)	(None, 128)	0
dropout_1 (Dropout)	(None, 128)	0
dense_3 (Dense)	(None, 1)	129
activation_3 (Activation)	(None, 1)	0

Total params: 158,289 Trainable params: 158,289 Non-trainable params: 0

Solution:

model.compile(loss='binary_crossentropy',optimizer=Adam(),metrics=['accuracy'])

Question-7. Fit the Model


Solution:

history = model.fit(sequences_matrix,Y_train,batch_size=20,epochs=15, validation split=0.2)

```
Epoch 1/15
Epoch 2/15
168/168 [ ---
    Epoch 3/15
   168/168 [ ===
Epoch 4/15
     168/168 [==
Epoch 5/15
Epoch 6/15
Epoch 7/15
168/168 [ ---
       Epoch 8/15
Epoch 9/15
    168/168 [ ----
Epoch 10/15
Epoch 11/15
168/168 [========] - 33s 194ms/step - loss: 0.0036 - accuracy: 0.9991 - val loss: 0.1149 - val accuracy: 0.9844
Epoch 12/15
     168/168 [ ......
Epoch 13/15
     168/168 [-----
Epoch 14/15
168/168 [ ---
      Epoch 15/15
metrics = pd.DataFrame(history.history)
metrics.rename(columns ={'loss':'Training_Loss', 'accuracy':'Training_Accuracy', 'val_loss': 'Valida
tion_Loss', 'val_accuracy': 'Validation_Accuracy'}, inplace = True)
def plot_graphs1(var1, var2, string):
metrics[[var1, var2]].plot()
plt.title('Training and Validation ' + string)
plt.xlabel ('Number of epochs')
plt.ylabel(string)
```

plt.legend([var1, var2])

plot_graphs1('Training_Accuracy', 'Validation_Accuracy', 'Accuracy')

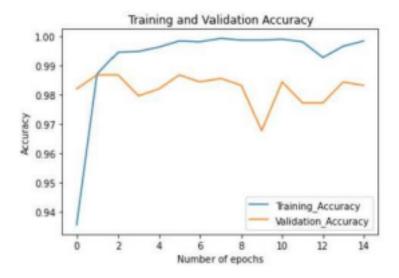

Question-8. Save The Model

Solution:

model.save('Spam_sms_classifier.h5')



Question-9. Test The Model

Solution:

test_sequences = tok.texts_to_sequences(X_test)
test_sequences_matrix = pad_sequences(test_sequences,maxlen=max_len)

accuracy1 = model.evaluate(test_sequences_matrix,Y_test)

```
44/44 [------] - 4s 82ms/step - loss: 0.1061 - accuracy: 0.9828
```

print(' loss: {:0.4f}'.format(accuracy1[0]))
print(' Accuracy: {:0.4f}'.format(accuracy1[1]))

loss: 0.1061 Accuracy: 0.9828