TRUE: Re-evaluating Factual Consistency Evaluation

^TTel Aviv University ^GGoogle Research ^MMeta AI Tel Aviv, Israel Paris, France

or.honovich@gmail.com
{roeeaharoni,szpektor}@google.com

Abstract

Grounded text generation systems often generate text that contains factual inconsistencies, hindering their real-world applicability. Automatic factual consistency evaluation may help alleviate this limitation by accelerating evaluation cycles, filtering inconsistent outputs and augmenting training data. While attracting increasing attention, such evaluation metrics are usually developed and evaluated in silo for a single task or dataset, slowing their adoption. Moreover, previous meta-evaluation protocols focused on system-level correlations with human annotations, which leave the examplelevel accuracy of such metrics unclear. In this work, we introduce TRUE: a comprehensive survey and assessment of factual consistency metrics on a standardized collection of existing texts from diverse tasks, manually annotated for factual consistency. Our standardization enables an example-level metaevaluation protocol that is more actionable and interpretable than previously reported correlations, yielding clearer quality measures. Across diverse state-of-the-art metrics and 11 datasets we find that large-scale NLI and question generation-and-answering-based approaches achieve strong and complementary results. We recommend those methods as a starting point for model and metric developers, and hope TRUE will foster progress towards even better evaluation methods.¹

1 Introduction

A core issue in deploying text generation models for real-world applications is that they often generate factually inconsistent text with respect to the input they are conditioned on, or even completely "hallucinate" (Lee et al., 2018; Rohrbach et al., 2018; Maynez et al., 2020; Zhao et al., 2020) as exemplified in Table 1.

Summarization (Wang et al., 2020)

Input	Phyllis schlafly, a leading figure in the us conservative movement, has died at her home in missouri, aged 92
Summary	Us conservative activist phyllis schlafly has died at the age of 87.

Fact Verification (Thorne et al., 2018)

Evidence	Ronald Bilius "Ron" Weasley is a character in J. K. Rowling's Harry
	Potter fictional series.
Claim	Ron Weasley is a President.

Paraphrasing (Zhang et al., 2019)

	The tracks were produced by Tommy
Input	Lee, and feature Michael Beinhorn
	on drums.
	The tracks were produced by Michael
Paraphrase	Beinhorn and have Tommy Lee on
_	drums.

Knowledge-Grounded Dialogue (Honovich et al., 2021)

The first flip trick called a kickflip,
originally called a "magic flip," was
invented by professional skateboarder
Rodney Mullen.
I remember the first one was called
magic flip. It was called a magic flip
and was invented in the 60's.

Table 1: Factual inconsistencies (in red) from various tasks which are part of the TRUE study. The corresponding parts in the input/grounding are in blue.

To tackle such inconsistencies, one would like to detect them automatically by predicting whether a generated text is factually consistent with respect to a grounding text (frequently referred to as the "input", or the "knowledge"). Such automatic methods attract increasing attention (Zhou et al., 2021; Deng et al., 2021) as they enable both better evaluation and better generation models by automatically filtering training data (Gehrmann et al., 2021) or by augmenting training data for controlled generation (Rashkin et al., 2021b).

While automatically evaluating factual consistency is an active line of work, there is no single agreed-upon meta-evaluation protocol for measuring the quality of such methods, and labeling schemes vary in their granularity. Works are usu-

^{*}Work done during an internship at Google Research.

Our code is publicly available at http://www.github.com/google-research/true

ally done in silo, introducing new datasets and methods that target a specific task or domain, such as summarization (Falke et al., 2019; Kryscinski et al., 2020; Wang et al., 2020; Scialom et al., 2021; Deutsch et al., 2021; Xie et al., 2021) or dialogue (Dziri et al., 2021; Honovich et al., 2021; Nie et al., 2021; Qin et al., 2021). Comparing the robustness of such methods *across* tasks and datasets is therefore difficult, impeding progress on this subject.

In this work, we present TRUE: a comprehensive survey and assessment of factual consistency evaluation methods, covering various metrics, tasks and datasets. We consolidate 11 existing datasets annotated for factual consistency into a unified format, including pairs of a target text and a grounding source text, with a binary annotation of whether the target text is factually consistent w.r.t its source. TRUE² covers summarization, knowledge-grounded dialogue, paraphrasing and fact verification.³ The proposed standardization enables us to properly compare consistency evaluation methods in a robust manner across these various tasks and domains.

Previous works on automatic factual consistency evaluation have mainly focused on measuring system-level correlations of the proposed metrics with human judgements (Pagnoni et al., 2021). Yet, these correlations are not useful for estimating the performance of a measured metric when making example-level, binary decisions, decoupled from specific system implementations (see recent discussion by Deutsch et al. (2022) on the limitations of reporting correlations). Instead, we aim to measure how well a method detects inconsistent texts (recall) and how often it falsely disregards consistent texts (precision), which can be easily computed using the aforementioned binary labeling scheme. Therefore, as a meta-evaluation protocol we report the Area Under the ROC Curve (ROC AUC) with respect to inconsistent example detection for each evaluation metric and dataset.

Our thorough survey and assessment of 12 metrics draws a clearer picture on the state of evaluating factual consistency. We show that Natural Language Inference (NLI) approaches, as well as Question Generation and Answering (QG-QA) ap-

proaches achieve significantly better⁴ results on a wide variety of tasks and datasets. We also show that NLI and QG-QA are complementary: combining the two yields even better results and hints at room for further improvement. Finally, we perform both quantitative and qualitative analysis of our results, finding that all approaches struggle with long inputs, labeling issues and personal statements – paving interesting avenues for future work.

To summarize, our contributions are as follows: (1) We argue that work on factual consistency evaluation should be unified and generalized across tasks, and standardize 11 published datasets into a single labeling scheme to corroborate this. (2) We propose a meta-evaluation protocol that allows more actionable and interpretable quality measures than previously reported correlations. (3) We survey and evaluate 12 diverse metrics in this unified perspective, showing that large-scale NLI and QG-QA-based approaches achieve strong and complementary results *across* tasks. (4) We analyze our results both qualitatively and quantitatively, pointing at challenges like long inputs and personal statements to be addressed in future work.

2 Standardizing Factual Consistency

In this section we elaborate on our re-evaluation setup. We first formally define what factual consistency refers to in this work. We then detail the datasets we consider and how we standardize them. Finally, we discuss the meta-evaluation protocol we propose for measuring the performance of evaluation methods on the standardized datasets.

2.1 Definitions and Terminology

We define a text to be factually consistent w.r.t its grounding text if all the factual information it conveys is consistent with the factual information conveyed by the grounding text.⁵ While some previous works distinguished between inconsistent erroneous text to inconsistent correct text (Maynez et al., 2020), we take a strict approach, requiring the text to be faithful to its grounding text, regardless of the "correctness" w.r.t the "real world". In other words, we consider only the information present in the input text, not external knowledge, to assess faithfulness. This enables a more well-defined task, since determining the truthfulness of a fact w.r.t a

²The name is a homage to GLUE (Wang et al., 2018) and not an acronym.

³We focus on English text-to-text tasks, and leave data-to-text (Parikh et al., 2020; Reiter and Thomson, 2020), multilingual and multimodal tasks to future work.

⁴We conduct significance testing, see section 4.

⁵We exclude personal and social statements such as opinions and chit-chat from the scope of factual information.

Task	# Examples	Open Test	Cons.
Summarization			
- FRANK (Pagnoni et al., 2021)	671	+	33.2%
- SummEval (Fabbri et al., 2021a)	1,600	-	81.6%
- MNBM (Maynez et al., 2020)	2,500	-	10.2%
- QAGS-CNNDM (Wang et al., 2020)	235	-	48.1%
- QAGS-XSum (Wang et al., 2020)	239	-	48.5%
Dialogue			
- BEGIN (Dziri et al., 2021)	836	+	33.7%
- Q ² (Honovich et al., 2021)	1,088	-	57.7%
- DialFact (Gupta et al., 2021)	8,689	+	38.5%
Fact Verification			
- FEVER (Thorne et al., 2018)	18,209	-	35.1%
- VitaminC (Schuster et al., 2021)	63,054	+	49.9%
Paraphrasing			
- PAWS (Zhang et al., 2019)	8,000	+	44.2%

Table 2: Statistics for the datasets incorporated in TRUE. Cons. is the ratio of consistent examples.

general "real world" is subjective and depends on the knowledge, values and beliefs of the subject (Heidegger, 2001). This definition follows similar strictness in Textual Entailment, Question Answering, Summarization and other tasks where comprehension is based on a given grounding text, irrespective of contradiction with other world knowledge. This is also in line with recent work on evaluating attribution in text generation (Rashkin et al., 2021a), where humans are required to judge whether a generated text is attributable to a grounding text. We use the terms *consistent*, *grounded*, *faithful* and *factual* interchangeably.

2.2 Standardization Process

We include 11 datasets that contain human annotations w.r.t factual consistency in diverse tasks (Table 2). Other than the importance of covering a wide variety of error types, this also alleviates issues of rating quality which may vary across datasets (Denton et al., 2021).

To allow a unified evaluation framework we convert all annotations to binary labels that correspond to whether the entire target text is factually consistent w.r.t the given grounding text or not. We note that a fine-grained annotation scheme, i.e., a typology of errors, was proposed for factual consistency (Pagnoni et al., 2021). While useful, most existing datasets do not include such labels. Moreover, while Machine Translation (MT) evaluation also showed value in fine-grained annotations (Freitag et al., 2021), it was proposed after years of improving MT to the level where coarse-grained annotation is insufficient. We argue that current grounded generation models are still at early stages w.r.t factual consistency, making binary labeling more beneficial now as it enables easier standardization across tasks and domains, with the goal of bringing researchers to collaborate on a shared methodology. Binary annotation also corresponds

to practical applications where filtering out unfaithful predictions is desired, and is in-line with the recommendations for human evaluation of attribution in text generation by Rashkin et al. (2021a).

We next detail the 11 datasets included in TRUE.

2.2.1 Abstractive Summarization

FRANK Pagnoni et al. (2021) proposed a typology of factual errors, grounded in frame semantics (Fillmore, 1976; Palmer et al., 2005) and linguistic discourse theory (Brown and Yule, 1983). Based on this typology, they collected annotations for model-generated summaries on the CNN/DailyMail (CNN/DM; Hermann et al., 2015) and XSum (Narayan et al., 2018) datasets, resulting in 2250 annotated system outputs. Each summary sentence was annotated by three annotators. We take the majority vote for each sentence to get a sentence-level label and consider a summary as consistent if all sentences are consistent.

SummEval SummEval (Fabbri et al., 2020) is a comprehensive study of evaluation metrics for text summarization. The authors collected human judgments for 16 model outputs on 100 articles taken from the CNN/DM dataset, using both extractive and abstractive models. Annotators were asked to rate summaries on a Likert scale from 1 to 5, over 4 dimensions: *consistency*, *coherence*, *fluency* and *relevance*. Each summary was scored by 5 crowd-workers and 3 expert annotators. We label summaries as consistent only if all the expert annotators gave a *consistency* score of 5.

MNBM Maynez et al. (2020) annotated system outputs for the XSum dataset (Narayan et al., 2018). They sampled 500 articles and annotated summaries generated by four different systems, as well as the gold summaries. Annotators were asked to assess whether the summary includes hallucinations. Judgments from three different annotators were collected for each document-summary pair. To convert to a binary-label format, we use the binary consistency decision of whether a summary contains no hallucinations, and assign a label by taking the majority vote of the three annotators.

QAGS Wang et al. (2020) collected judgments of factual consistency on generated summaries for CNN/DM and XSum. Annotators were presented with the summaries one sentence at a time, along with the article, and determined whether each sentence is factually consistent w.r.t the article. Each

sentence was annotated by 3 annotators, using the majority vote as the final score. To convert to binary-label format, we consider a summary consistent only if all its sentences are consistent.

2.2.2 Dialogue Generation

BEGIN (Dziri et al., 2021) is a dataset for evaluating groundedness in knowledge-grounded dialogue systems, in which system outputs should be consistent with a grounding knowledge provided to the dialogue agent. BEGIN frames the task as textual entailment (Dagan et al., 2006; Bowman et al., 2015), adopting the entailment and contradiction labels, and splitting the neutral label into three subcategories: hallucination, off-topic responses and generic responses. Dialogue responses were generated by fine-tuning two systems on the Wizard of Wikipedia (WoW) dataset (Dinan et al., 2019), in which responses should be grounded in a span of text from Wikipedia. The generated responses were split into sentences, and each sentence was annotated separately. To convert to a binary-label format, we treat entailed sentences as consistent and all others as inconsistent.

 Q^2 Honovich et al. (2021) annotated 1,088 generated dialogue responses for binary factual consistency w.r.t the knowledge paragraph provided to the dialogue model, for two dialogue models trained on WoW. Responses were annotated using binary labels by 3 of the paper authors, one annotator per response. We use Q^2 's labels without changes.

DialFact Gupta et al. (2021) introduced the task of fact-verification in dialogue and constructed a dataset of conversational claims paired with pieces of evidence from Wikipedia. They define three tasks: (1) detecting whether a response contains verifiable content (2) retrieving relevant evidence and (3) predicting whether a response is *supported* by the evidence, *refuted* by the evidence or if there is *not enough information* to determine. We use the verifiable (i.e., factual, rather than personal) responses annotated for the third task, treating *supported* annotations as consistent and the rest as inconsistent. In cases where several evidence were marked as required for verification, we concatenate all evidence sentences to be the grounding text.

2.2.3 Fact Verification

FEVER Thorne et al. (2018) introduced FEVER (Fact Extraction and VERification), a dataset for fact verification against textual sources. FEVER

was constructed by extracting information from Wikipedia, generating claims using annotators, then labeling whether each claim is supported or refuted by Wikipedia. Claims can also be labeled with NotEnoughInfo, meaning that there is not enough information in Wikipedia to either verify or refute the claim. Given a claim, the task defined by FEVER is to first extract evidence, then to determine whether it supports or refutes the claim. In a slightly different framing, the latter stage in FEVER is to determine whether the claim is factually consistent or not w.r.t the evidence, which is aligned with what we aim to measure in TRUE. We use the development set of the NLI version of FEVER (Nie et al., 2019, 2020), treating supported claims as consistent and the rest as inconsistent.

VitaminC Schuster et al. (2021) derived a largescale fact verification dataset from factual revisions to Wikipedia pages. Each example includes an evidence text from Wikipedia and a fact, with an annotation of whether the fact is supported, refuted or neutral w.r.t the evidence. The authors collected factual revisions to Wikipedia articles (pairs of "before" and "after" sentences), and asked annotators to write two facts for each pair: one that is supported by the first sentence and refuted by the second, and vice versa. When no explicit contradiction was present, the annotators wrote facts that are neutral w.r.t the evidence. Additional examples were created by revising examples from FEVER. We treat examples that include supported facts as consistent, and refuted or neutral facts as inconsistent.

2.2.4 Paraphrase Detection

PAWS Zhang et al. (2019) constructed a dataset for paraphrase identification with 108,463 paraphrase and non-paraphrase pairs with high lexical overlap, generated by controlled word swapping and back-translation, followed by judgments from human raters. Source sentences were drawn from Wikipedia and the Quora Question Pairs (QQP) corpus. We only use the examples with Wikipedia source sentences and view the binary paraphrase labels as consistency labels. We note that the definition of paraphrase is not equivalent to the definition of factual consistency, as a subset of a source text is not a paraphrase but may still be factually consistent with the source. However, PAWS was constructed such that non-paraphrases usually have contradicting meanings and is therefore relevant.

2.3 Meta-Evaluation

Previous work on evaluating factual consistency focused on measuring correlation with human judgements (Pagnoni et al., 2021) to compare different metrics. However, such system-level numbers are not very informative when one is interested in evaluating the absolute performance of inconsistency detection methods that perform a *binary* decision w.r.t each input. Deutsch et al. (2022) also recently discuss various issues in measuring system-level correlations to assess the validity of automatic evaluation metrics for summarization.

To conduct a more fine-grained evaluation at the single example level, we report the Receiver Operating Characteristic Area Under the Curve (ROC AUC) w.r.t binary detection of inconsistent examples. The ROC curve is created by plotting the *true positive rate* (TPR, a.k.a. the recall) against the *false positive rate* (FPR, a.k.a. the fallout) at different possible thresholds for each tested metric. Measuring ROC AUC evaluates the different metrics without setting a specific decision threshold.

For datasets with existing development/test split, we also tune a threshold for the binary consistency/inconsistency decision on the development set and report the test set accuracy using this threshold. We tune the thresholds by optimizing the geometric mean of the TPR and 1-FPR: $\sqrt{\text{TPR}*(1-\text{FPR})}$.

3 Evaluation Metrics

We compare various standard as well as state-of-the-art approaches to measure factual consistency. This comparison should draw a clear picture of current research on this subject and raise directions for future work. For example, we expect that robust metrics should perform well across various tasks and datasets. We next describe the different metrics we assess as part of this study. We note that for all reference-based metrics, we use the grounding text as the reference. For metrics where the scores are not in the [0,1] range, we normalize the scores to be in that range.

3.1 N-Gram Based Metrics

Standard N-Gram matching metrics such as BLEU (Papineni et al., 2002), ROUGE (Lin, 2004) and token-level F1 were shown to have weak correlation with factual consistency (Maynez et al.,

2020; Honovich et al., 2021). We add them as baselines to this study mainly to corroborate this claim on a wide set of datasets and tasks.

3.2 Model-Based Metrics

BERTScore (Zhang et al., 2020) aggregates similarity scores between the BERT contextual embedding of tokens in candidate and reference sentences. We report results for the BERTScore-precision variant as it showed better results in preliminary experiments. We use BERTScore version 0.3.11 with the DeBERTa-xl-MNLI model (He et al., 2021; Nangia et al., 2017), which is the recommended model as of the time of writing this paper.⁷

BLEURT (Sellam et al., 2020a,b) is a learned metric based on BERT (Devlin et al., 2019) for evaluating text generation. BLEURT includes additional pretraining on synthetic data followed by fine-tuning on human judgements to train a model that scores system outputs. We use the recommended BLEURT-20 checkpoint (Pu et al., 2021).8

FactCC (Kryscinski et al., 2020) is a BERT-based metric for verifying the factual consistency of summaries. It is trained on synthetically generated data obtained by applying rule-based transformations to generate consistent and inconsistent summaries.

BARTScore (Yuan et al., 2021) evaluates text using probabilities from force-decoding with a BART model (Lewis et al., 2020). We use the version finetuned on the ParaBank2 dataset (Hu et al., 2019).

CTC (Deng et al., 2021) measures the average token-level alignment of the generated text w.r.t the grounding text using a BERT sequence tagging model. The model is trained to detect hallucinated tokens generated by a BART model in a self-supervised manner. ⁹

3.3 Natural Language Inference Metrics

ANLI The task of Textual Entailment (Dagan et al., 2006) or Natural Language Inference (NLI; Bowman et al., 2015) is to determine, given two

⁶This is equivalent to the AUC w.r.t detecting consistent examples.

⁷https://github.com/Tiiiger/bert_score
8
https://github.com/google-research/
bleurt/blob/master/checkpoints.md

⁹This metric has come to our attention after the paper was accepted, so we add the results to the appendix to avoid adding unreviewed results in the camera ready version. See https://github.com/tanyuqian/ctc-gen-eval/blob/master/factual-consistency.md for implementation details and Table 9 for results.

sentences, a *hypothesis* and a *premise*, whether the *hypothesis* in entailed by the *premise*, contradicts it, or is neutral w.r.t to it. The resemblance¹⁰ of NLI to factual consistency evaluation has led to utilizing NLI models for measuring factual consistency (Thorne et al., 2018; Welleck et al., 2019; Maynez et al., 2020; Dziri et al., 2021). We trained an NLI model by fine-tuning T5-11B (Raffel et al., 2020) on the Adversarial NLI (ANLI; Nie et al., 2020) dataset. As suggested by Maynez et al. (2020), we compute the entailment probability with the grounding text as the premise and the generated text as the hypothesis and use it as the example-level factual consistency score.¹¹

SUMMAC (Summary Consistency; Laban et al., 2021) is focused on evaluating factual consistency in summarization. They use NLI for detecting inconsistencies by splitting the document and summary into sentences and computing the entailment probabilities on all document/summary sentence pairs, where the premise is a document sentence and the hypothesis is a summary sentence. They aggregate the NLI scores for all pairs by either taking the maximum score per summary sentence and averaging (SC_{ZS}) or by training a convolutional neural network to aggregate the scores (SC_{Conv}). We use the publicly available implementation. ¹²

3.4 QG-QA Based Metrics

Durmus et al. (2020) and Wang et al. (2020) proposed to use Question Generation (QG) and Question Answering (QA) models to automatically evaluate factual consistency in abstractive summarization, showing promising results. Honovich et al. (2021) employed a similar approach for evaluating knowledge-grounded dialogue generation.

The steps of the QG-QA approach are as follows: (1) Questions are automatically generated for spans in the generated text, such that the answer to a question is its respective input span. (2) The generated questions are answered using a QA model on the grounding text, resulting in an answer span or a "no-answer" output. (3) For each question, the two answer spans from the grounding and the generated text are compared to get a score. (4) The scores for

all questions are aggregated into a final score.

 Q^2 (Honovich et al., 2021) is a QG-QA method that employs an NLI model to compare the two answers for each question, where the grounding text answer is the premise and the generated text answer is the hypothesis. We report results for a re-implementation of Q^2 using T5-11B as the backbone for the QG, QA and NLI models. While Honovich et al. (2021) validate each generated question by answering it using a QA model and comparing to the original extracted answer candidate using exact match, we relax this and instead use F1 token-overlap with a predefined threshold.¹³

QuestEval (Scialom et al., 2021) is a QG-QA method that measures both factual consistency and relevance (by reversing the roles of the generated and grounding texts). The authors trained a model that weights each generated question according to the relevance of its answer to appear in the generated text. Their results showed high correlation with human judgments in comparison to prior work on the SummEval benchmark (Fabbri et al., 2021a). We use the publicly available version.¹⁴

4 Results

We report the ROC AUC¹⁵ of various metrics on the standardized datasets in Table 3. The ROC curves can be found in Figure 2 in the appendix. SC_{ZS} was trained on VitaminC which includes examples from FEVER, so we exclude those datasets from the average AUC calculation for a more fair comparison. As all metrics operate in a "zero-shot" manner on all datasets (except for SC_{ZS} on VitaminC and FEVER) and no threshold tuning is required, we report results on the development sets. ¹⁶

The results show that the NLI-based models (ANLI, SC_{ZS}^{17}) outperformed the other approaches on 6 datasets, with average AUC of 81.5 and 81.4 for ANLI and SC_{ZS} , respectively. Q^2 outperformed the other approaches on 4 datasets, with an average AUC of 80.7. The next best method, BARTScore,

¹⁰One example where the definition of NLI and factual consistency differs is in dialog, where subjective or opinionated statements of the dialog agent are not evaluated as factual statements, while NLI models consider all the text in the premise.

¹¹More implementation details on the NLI model are available in Section B in the appendix.

¹²https://github.com/tingofurro/summac

¹³More implementation details are available in Section B in the appendix.

¹⁴https://github.com/ThomasScialom/
QuestEval

¹⁵Multiplied by 100 for better readability.

¹⁶AUC for the test sets and accuracy for the dev and test sets are provided in Tables 10, 11 and 12 in the appendix.

 $^{^{17}\}mbox{We}$ report results for SC_{ZS} as it performed better in our experiments. Results for SC_{Conv} are available in Table 10 in the appendix.

	Ensemble	Q ² _{metric}	ANLI	SCzs	F1	BLEURT	QuestEval	FactCC	BART _{score}	BERT _{score}
FRANK	91.2	87.8	89.4	89.1	76.1	82.8	84.0	76.4	86.1	84.3
SummEval	82.9	78.8	80.5	81.7	61.4	66.7	70.1	75.9	73.5	77.2
MNBM	76.6	68.7	77.9**	71.3	46.2	64.5	65.3	59.4	60.9	62.8
QAGS-C	87.7	83.5	82.1	80.9	63.8	71.6	64.2	76.4	80.9	69.1
QAGS-X	84.8	70.9	83.8	78.1	51.1	57.2	56.3	64.9	53.8	49.5
BEGIN	86.2	79.7	82.6	82.0	86.4	86.4	84.1	64.4	86.3	87.9
Q ² _{dataset}	82.8	80.9*	72.7	77.4	65.9	72.4	72.2	63.7	64.9	70.0
DialFact	90.4	86.1**	77.7	84.1	72.3	73.1	77.3	55.3	65.6	64.2
PAWS	91.2	89.7**	86.4	88.2	51.1	68.3	69.2	64.0	77.5	77.5
FEVER	94.7	88.4	93.2**	93.2	51.8	59.5	72.6	61.9	64.1	63.3
VitaminC	96.1	81.4	88.3**	97.9	61.4	61.8	66.5	56.3	63.2	62.5
Avg. w/o VitC, FEVER	86.0	80.7	81.5	81.4	63.8	71.4	71.4	66.7	72.2	71.4

Table 3: ROC AUC results for the different metrics on the TRUE development set. We exclude VitaminC and FEVER from the average calculation as SC_{ZS} was trained on VitaminC that includes examples from FEVER. The highest score in each row (excluding the Ensemble) is in bold and the aforementioned SC results are in strikethrough. Statistically significant results are indicated using * and ** for p < 0.05 and p < 0.01 respectively.

had lower average AUC of 72.2. All other approaches scored 72 or lower on average across all datasets (excluding FEVER and VitaminC). As expected, the simple token-matching based metrics did not perform well, and for completeness, we report their performance in Table 9 in the appendix. We keep the F1 score in Table 3 for convenient comparison to the other metrics.

One outlier is BEGIN, which is the only dataset where simple metrics like F1 token overlap achieved scores higher than 80. We measured the average overlap between the grounding and target texts per dataset, and found that BEGIN exhibits a high difference between grounded and ungrounded texts in comparison to other datasets (Table 8 in appendix A), which explains this.

We follow Laban et al. (2021) and perform significance testing through bootstrap resampling (Efron, 1982), comparing the best method to the second-best method on each dataset. We perform interval comparison at p=0.05 and p=0.01 and find significantly best results on 6 datasets, 3 achieved by Q^2 and 3 by the ANLI-based model.

Given that no single method outperformed the rest on all datasets, we hypothesize that the NLI and QG-QA based metrics are complementary. We test this by averaging the Q^2 , ANLI and SC_{ZS} scores per example ¹⁸ (*Ensemble* in Table 3). Indeed, averaging the three methods yields better results on most datasets and on average, with an increase of 4.5 in ROC AUC from the best single-metric result.

Our results show that a single metric can do well across all tasks and datasets, with all 3 best metrics scoring higher than 80 on average on the 11 datasets. This corroborates our hypothesis that

evaluating factual consistency can be unified, and we hope such unified perspective will be adopted in future work to accelerate progress on the subject.

5 Analysis

Input Length. As QA and NLI models may struggle with long inputs (Kočiský et al., 2018; Pang et al., 2021; Yin et al., 2021; Shaham et al., 2022), metrics based on them may fail when handling long text. To study the effect of input length on the metrics performance, we unify all datasets ¹⁹ and split examples into 6 bins according to the grounding length. ²⁰ We focus on the grounding as the target texts are usually short (see Table 7 in Appendix A). We measure AUC of the best 3 metrics according to their overall score for each length bin, sampling 1,000 examples per bin.

The results are shown in Figure 1. We find that there is a consistent degradation for texts longer than 200 tokens for all metrics, including SC_{ZS} which is designed to better handle long text. We find it surprising that the ANLI-based model and Q^2 still do relatively well on the longest bin (with AUC > 0.825) as they perform end-to-end QA and NLI on text with more than 500 tokens.

Model Size. Model-based metrics are expected to benefit from increasing the model size. To quantify this we study the effect of using smaller models for the ANLI, BLEURT and BERTScore metrics. We compare the average ROC AUC of larger and

¹⁸Pairwise ensembles are reported in the appendix, Table 9.

¹⁹Excluding VitaminC as it is much larger than other datasets and might therefore distort results. Statistics regarding the grounding and target text lengths per dataset is in Appendix A.

²⁰We measure length in tokens (before subword splitting) as different metrics use different subword tokenizations.

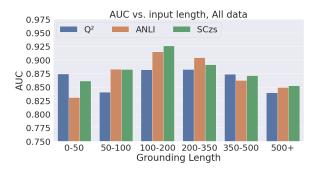


Figure 1: ROC AUC when splitting TRUE's data according to the grounding length.

smaller model variants for each metric. The ablation results are in Table 4. We find an advantage of 4.7, 3.7 and 1.3 average ROC AUC for the larger ANLI, BLEURT and BERTScore variants respectively, showing that larger models indeed allow for better factual consistency evaluation metrics, and hinting at potential improvements from using even larger models.

Model	Avg. ROC AUC
ANLI-T5-11B	81.5 (+4.7)
ANLI-T5-Large	76.8
BLEURT-20	71.4 (+3.7)
BLEURT-20-D6	67.7
BERTScore P - deberta-xl-mnli	71.4 (+1.3)
BERTScore P - roberta-large	70.1

Table 4: Ablation study comparing the average ROC AUC results for models with different sizes. "BERTScore P" stands for BERTScore Precision.

Qualitative Analysis. We conduct manual error analysis to point at weaknesses of the different metrics and present challenges posed by the task. We analyze 80 examples that were misclassified by all three best metrics, as well as 100 examples that were correctly classified by one or two of the three.

Out of the analyzed examples, many seem to have a wrong label. This is especially true for cases in which all best metrics failed, with annotation errors in 35/80 cases. For the cases where one or two metrics failed, we found annotation errors in 27/100 cases. To verify that the high annotation error rate is indeed a result of inspecting the "hardest" examples and not a general issue in the datasets we used, we uniformly sample 100 additional examples, finding that only 10 had annotation errors. We therefore stress that the high misannotation rate indeed characterizes "hard" examples only, and is not a general property of the datasets we used. This is inline with the findings of Freitag et al. (2021), who showed that in some cases, metrics may be

"better" than non-expert annotators. These findings demonstrate the potential of automatic methods in "cleaning" training data by filtering factually inconsistent examples.

Despite showing impressive results, the bestperforming metrics fail to detect subtle inconsistencies, as presented in Table 5. This was the case for 21/180 analyzed examples. Metrics that aggregate scores across parts of a target text, such as Q^2 or SC_{ZS}, might assign a high score for texts in which all but a small part is consistent. End-to-end NLI should predict "contradiction" even when only a small part of the text contradicts the grounding, but it may fail to do so. Applying a strict approach in the aggregation step, like taking the minimum instead of the average, could potentially remedy this – with the price of having more false-negatives. Other errors are caused by domain-specific challenges, such as handling personal statements in dialogues. As shown in Table 5, such statements may be falsely classified as ungrounded. This was the case for 10/62 analyzed dialogue responses. A possible way to alleviate this would be to automatically exclude non-factual parts from the evaluation.

Ensemble Analysis. As shown in §4, a simple averaging ensemble using the three best metrics achieves strong results, outperforming individual metrics on most datasets. To understand this further, we analyze cases in which at least one of the best three metrics failed, while the ensemble succeeded. Overall, there were 25,761 such cases, where in 85.2% of these cases, two out of the three metrics succeeded, and only one failed. In 14.6% of these cases, one metric succeeded while the other two failed, and only in 0.2% of the cases, the ensemble succeeded while all metrics failed. These cases are a result of the different threshold used for the ensemble model vs. the thresholds for the individual metrics. We sample 100 of these examples and manually analyze them. Out of the sampled examples, 47% were misclassified by one metric only, where this metric assigned a borderline score - i.e., close to the decision threshold. 36% of these examples were misclassified by one metric only, and also with a non-borderline score - i.e., the metric was far from a correct prediction. Other cases include two, or even three, erroneous metrics.

6 Related Work

Adding to the related work mentioned throughout the paper, works on unified evaluation of text

Grounding	Generated Text	Explanation
The word "philately" is the English version of	The word philately is actually a french	The word philately is an English word based on
the French word "philatélie", coined by Georges	word coined by george herpin.	a French word, but not French. All best metrics
Herpin in 1864.		misclassified this.
French police have interviewed presidential can-	French presidential candidate françois fil-	Most details are correct and the hallucination is
didate francois fillon and his wife penelope	lon has said he and his wife penelope have	subtle. In the case of Q^2 , most of the generated
over claims she was paid for fake work. They	been questioned by police over claims she	questions have the same answer based on the
provided information that would help find the	worked illegally.	grounding and the generated text, therefore the
"truth", mr fillon said		overall score was high.
Stamp collecting is generally accepted as one	I've never heard of stamps, but I do know	The personal statement "I've never heard of
of the areas that make up the wider subject of	that the word "philately" refers to the study	stamps" is not factual and should not be evalu-
philately, which is the study of stamps.	of stamps.	ated.
Evidence suggests that cognitive behavioral	It has been suggested that cognitive be-	Similar to the previous examples - SummaC and
therapy and a gradual increase in activity suited	havioral therapy and gradual increase in	ANLI falsely marked the text as inconsistent,
to individual capacity can be beneficial in some	exercise could help in some cases so I'm	probably due to the personal statement.
cases.	going to try that for now.	

Table 5: Examples for the error analysis. The first two rows show cases of challenging inconsistencies, while the last two show dialogue responses containing non-factual personal statements.

generation across tasks include GEM (Gehrmann et al., 2021), where the focus is on evaluating system outputs and not the factual consistency evaluation methods as in TRUE. BEAMetrics (Scialom and Hill, 2021) proposes meta-evaluation protocols across tasks, but does not focus on factual consistency. When discussing consistency ("correctness") they measure correlations, which are not sufficient as mentioned in Section 2.3. Chen et al. (2021) present an adversarial meta-evaluation for factual consistency evaluators, focused on summarization. Other works on meta-evaluation of factual consistency across datasets include GO-FIGURE (Gabriel et al., 2021) FRANK (Pagnoni et al., 2021) SummaC (Laban et al., 2021) and QAFactEval (Fabbri et al., 2021b), however they all focus solely on summarization. Yeh et al. (2021) conduct a thorough assessment of dialog metrics, however not specifically around factual consistency. To the best of our knowledge, our work is the first to generalize the discussion on evaluating factual consistency across tasks and datasets, and the first to show that large-scale QG-QA and NLI are strong and highly complementary - setting better baselines and metaevaluation methodology for future work.

7 Discussion and Future Work

We discuss the main takeaways of the TRUE study, pointing at actionable insights for future work. First, as QG-QA and NLI-based methods show better performance than other approaches, especially when combined together, we recommend model developers to use those methods for evaluation when factual consistency is a priority. As for metric developers, we recommend using those methods and the datasets in TRUE when evaluating new metrics.

We also suggest reporting ROC AUC rather than correlations, as it is more interpretable and actionable. Our proposed binary annotation scheme allows to easily test new metrics across tasks and datasets, which would be useful for future work.

Finally, we encourage data curators to use the binary annotation scheme, which is inline with the recommendations of Rashkin et al. (2021a). Having said that, we do not rule out more detailed labeling schemes – but rather ask to provide a protocol for converting such labels into the more general binary format. Future work may also address the challenges of long inputs and personal statements in dialogue, which we point out in our analysis.

8 Conclusions

We presented TRUE, a survey and assessment of automatic factual consistency evaluation methods. We standardized various datasets from diverse tasks into a unified labeling scheme to perform a thorough comparison of automatic evaluation methods, showing that large scale NLI and QG-QA based approaches perform well *across* multiple tasks and datasets. We further show that these methods are highly complementary – hinting at additional headroom for improvement while pointing on current limitations. We hope our results and methodology will encourage a more unified perspective in future work to foster progress towards more factually-consistent NLP applications.

Acknowledgements

We thank Dipanjan Das, Sebastian Gehrmann and Joshua Maynez for their valuable comments and suggestions for this work.

References

- Samuel R. Bowman, Gabor Angeli, Christopher Potts, and Christopher D. Manning. 2015. A large annotated corpus for learning natural language inference. In *Proceedings of the 2015 Conference on Empirical Methods in Natural Language Processing*, pages 632–642, Lisbon, Portugal. Association for Computational Linguistics.
- Gillian Brown and George Yule. 1983. *Discourse Analysis*. Cambridge University Press.
- Yiran Chen, Pengfei Liu, and Xipeng Qiu. 2021. Are factuality checkers reliable? adversarial metaevaluation of factuality in summarization. In *Findings of the Association for Computational Linguistics: EMNLP 2021*, pages 2082–2095, Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Ido Dagan, Oren Glickman, and Bernardo Magnini. 2006. The pascal recognising textual entailment challenge. In Machine Learning Challenges. Evaluating Predictive Uncertainty, Visual Object Classification, and Recognising Tectual Entailment, pages 177–190, Berlin, Heidelberg. Springer Berlin Heidelberg.
- Mingkai Deng, Bowen Tan, Zhengzhong Liu, Eric Xing, and Zhiting Hu. 2021. Compression, transduction, and creation: A unified framework for evaluating natural language generation. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 7580–7605, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Emily Denton, Mark Díaz, Ian Kivlichan, Vinodkumar Prabhakaran, and Rachel Rosen. 2021. Whose ground truth? accounting for individual and collective identities underlying dataset annotation. *arXiv* preprint arXiv:2112.04554.
- Daniel Deutsch, Tania Bedrax-Weiss, and Dan Roth. 2021. Towards question-answering as an automatic metric for evaluating the content quality of a summary. *Transactions of the Association for Computational Linguistics*, 9:774–789.
- Daniel Deutsch, Rotem Dror, and Dan Roth. 2022. Reexamining system-level correlations of automatic summarization evaluation metrics. *arXiv preprint arXiv*:2204.10216.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. BERT: Pre-training of deep bidirectional transformers for language understanding. In Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers), pages 4171–4186, Minneapolis, Minnesota. Association for Computational Linguistics.

- Emily Dinan, Stephen Roller, Kurt Shuster, Angela Fan, Michael Auli, and Jason Weston. 2019. Wizard of Wikipedia: Knowledge-powered conversational agents. In *Proceedings of the International Conference on Learning Representations (ICLR)*.
- Esin Durmus, He He, and Mona Diab. 2020. FEQA: A question answering evaluation framework for faithfulness assessment in abstractive summarization. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 5055–5070, Online. Association for Computational Linguistics.
- Nouha Dziri, Hannah Rashkin, Tal Linzen, and David Reitter. 2021. Evaluating groundedness in dialogue systems: The begin benchmark.
- Bradley Efron. 1982. *The jackknife, the bootstrap and other resampling plans*. SIAM.
- Alexander R Fabbri, Wojciech Kryściński, Bryan McCann, Caiming Xiong, Richard Socher, and Dragomir Radev. 2020. Summeval: Reevaluating summarization evaluation. arXiv preprint arXiv:2007.12626.
- Alexander R Fabbri, Wojciech Kryściński, Bryan McCann, Caiming Xiong, Richard Socher, and Dragomir Radev. 2021a. Summeval: Re-evaluating summarization evaluation. *Transactions of the Association for Computational Linguistics*, 9:391–409.
- Alexander R. Fabbri, Chien-Sheng Wu, Wenhao Liu, and Caiming Xiong. 2021b. Qafacteval: Improved qa-based factual consistency evaluation for summarization.
- Tobias Falke, Leonardo F. R. Ribeiro, Prasetya Ajie Utama, Ido Dagan, and Iryna Gurevych. 2019. Ranking generated summaries by correctness: An interesting but challenging application for natural language inference. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 2214–2220, Florence, Italy. Association for Computational Linguistics.
- C. Fillmore. 1976. Frame semantics and the nature of language *. Annals of the New York Academy of Sciences, 280.
- Markus Freitag, George Foster, David Grangier, Viresh Ratnakar, Qijun Tan, and Wolfgang Macherey. 2021. Experts, errors, and context: A large-scale study of human evaluation for machine translation. *arXiv* preprint arXiv:2104.14478.
- Saadia Gabriel, Asli Celikyilmaz, Rahul Jha, Yejin Choi, and Jianfeng Gao. 2021. GO FIGURE: A meta evaluation of factuality in summarization. In *Findings of the Association for Computational Linguistics: ACL-IJCNLP 2021*, pages 478–487, Online. Association for Computational Linguistics.

- Sebastian Gehrmann, Tosin Adewumi, Karmanya Pawan Sasanka Ammanamanchi, Anuoluwapo Aremu, Antoine Bosselut, Khyathi Raghavi Chandu, Miruna-Adriana Clinciu, Dipanjan Das, Kaustubh Dhole, Wanyu Du, Esin Durmus, Ondřej Dušek, Chris Chinenye Emezue, Varun Gangal, Cristina Garbacea, Tatsunori Hashimoto, Yufang Hou, Yacine Jernite, Harsh Jhamtani, Yangfeng Ji, Shailza Jolly, Mihir Kale, Dhruv Kumar, Faisal Ladhak, Aman Madaan, Mounica Maddela, Khyati Mahajan, Saad Mahamood, Bodhisattwa Prasad Majumder, Pedro Henrique Martins, Angelina McMillan-Major, Simon Mille, Emiel van Miltenburg, Moin Nadeem, Shashi Narayan, Vitaly Nikolaev, Andre Niyongabo Rubungo, Salomey Osei, Ankur Parikh, Laura Perez-Beltrachini, Niranjan Ramesh Rao, Vikas Raunak, Juan Diego Rodriguez, Sashank Santhanam, João Sedoc, Thibault Sellam, Samira Shaikh, Anastasia Shimorina, Marco Antonio Sobrevilla Cabezudo, Hendrik Strobelt, Nishant Subramani, Wei Xu, Diyi Yang, Akhila Yerukola, and Jiawei Zhou. 2021. The GEM benchmark: Natural language generation, its evaluation and metrics. In Proceedings of the 1st Workshop on Natural Language Generation, Evaluation, and Metrics (GEM 2021), pages 96-120, Online. Association for Computational Linguistics.
- Prakhar Gupta, Chien-Sheng Wu, Wenhao Liu, and Caiming Xiong. 2021. Dialfact: A benchmark for fact-checking in dialogue. arXiv preprint arXiv:2110.08222.
- Pengcheng He, Xiaodong Liu, Jianfeng Gao, and Weizhu Chen. 2021. Deberta: Decoding-enhanced bert with disentangled attention. In *International Conference on Learning Representations*.
- Martin Heidegger. 2001. On the essence of truth. *The Nature of Truth: Classic and Contemporary Perspectives*, 1:295–316.
- Karl Moritz Hermann, Tomas Kocisky, Edward Grefenstette, Lasse Espeholt, Will Kay, Mustafa Suleyman, and Phil Blunsom. 2015. Teaching machines to read and comprehend. In *Advances in Neural Information Processing Systems*, volume 28. Curran Associates, Inc.
- Or Honovich, Leshem Choshen, Roee Aharoni, Ella Neeman, Idan Szpektor, and Omri Abend. 2021. q^2 : Evaluating factual consistency in knowledge-grounded dialogues via question generation and question answering. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 7856–7870, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.
- J. Edward Hu, Abhinav Singh, Nils Holzenberger, Matt Post, and Benjamin Van Durme. 2019. Largescale, diverse, paraphrastic bitexts via sampling and clustering. In Proceedings of the 23rd Conference on Computational Natural Language Learning

- (*CoNLL*), pages 44–54, Hong Kong, China. Association for Computational Linguistics.
- Tomáš Kočiský, Jonathan Schwarz, Phil Blunsom, Chris Dyer, Karl Moritz Hermann, Gábor Melis, and Edward Grefenstette. 2018. The NarrativeQA reading comprehension challenge. *Transactions of the Association for Computational Linguistics*, 6:317– 328.
- Wojciech Kryscinski, Bryan McCann, Caiming Xiong, and Richard Socher. 2020. Evaluating the factual consistency of abstractive text summarization. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 9332–9346, Online. Association for Computational Linguistics.
- Philippe Laban, Tobias Schnabel, Paul N Bennett, and Marti A Hearst. 2021. Summac: Re-visiting nlibased models for inconsistency detection in summarization. *arXiv preprint arXiv:2111.09525*.
- Zhenzhong Lan, Mingda Chen, Sebastian Goodman, Kevin Gimpel, Piyush Sharma, and Radu Soricut. 2019. Albert: A lite bert for self-supervised learning of language representations. *arXiv preprint arXiv:1909.11942*.
- Katherine Lee, Orhan Firat, Ashish Agarwal, Clara Fannjiang, and David Sussillo. 2018. Hallucinations in neural machine translation. *NeurIPS 2018 Workshop on Interpretability and Robustness for Audio, Speech, and Language.*
- Mike Lewis, Yinhan Liu, Naman Goyal, Marjan Ghazvininejad, Abdelrahman Mohamed, Omer Levy, Veselin Stoyanov, and Luke Zettlemoyer. 2020. BART: Denoising sequence-to-sequence pretraining for natural language generation, translation, and comprehension. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 7871–7880, Online. Association for Computational Linguistics.
- Chin-Yew Lin. 2004. ROUGE: A package for automatic evaluation of summaries. In *Text Summarization Branches Out*, pages 74–81, Barcelona, Spain. Association for Computational Linguistics.
- Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. 2019. Roberta: A robustly optimized bert pretraining approach. *arXiv preprint arXiv:1907.11692*.
- Joshua Maynez, Shashi Narayan, Bernd Bohnet, and Ryan McDonald. 2020. On faithfulness and factuality in abstractive summarization. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 1906–1919, Online. Association for Computational Linguistics.
- Nikita Nangia, Adina Williams, Angeliki Lazaridou, and Samuel Bowman. 2017. The RepEval 2017 shared task: Multi-genre natural language inference

- with sentence representations. In *Proceedings of the* 2nd Workshop on Evaluating Vector Space Representations for NLP, pages 1–10, Copenhagen, Denmark. Association for Computational Linguistics.
- Shashi Narayan, Shay B. Cohen, and Mirella Lapata. 2018. Don't give me the details, just the summary! topic-aware convolutional neural networks for extreme summarization. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 1797–1807, Brussels, Belgium. Association for Computational Linguistics.
- Yixin Nie, Haonan Chen, and Mohit Bansal. 2019. Combining fact extraction and verification with neural semantic matching networks. In *Association for the Advancement of Artificial Intelligence (AAAI)*.
- Yixin Nie, Adina Williams, Emily Dinan, Mohit Bansal, Jason Weston, and Douwe Kiela. 2020. Adversarial NLI: A new benchmark for natural language understanding. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 4885–4901, Online. Association for Computational Linguistics.
- Yixin Nie, Mary Williamson, Mohit Bansal, Douwe Kiela, and Jason Weston. 2021. I like fish, especially dolphins: Addressing contradictions in dialogue modeling. In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 1699–1713, Online. Association for Computational Linguistics.
- Artidoro Pagnoni, Vidhisha Balachandran, and Yulia Tsvetkov. 2021. Understanding factuality in abstractive summarization with FRANK: A benchmark for factuality metrics. In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 4812–4829, Online. Association for Computational Linguistics.
- Martha Palmer, Daniel Gildea, and Paul Kingsbury. 2005. The Proposition Bank: An Annotated Corpus of Semantic Roles. *Computational Linguistics*, 31(1):71–106.
- Richard Yuanzhe Pang, Alicia Parrish, Nitish Joshi, Nikita Nangia, Jason Phang, Angelica Chen, Vishakh Padmakumar, Johnny Ma, Jana Thompson, He He, et al. 2021. Quality: Question answering with long input texts, yes! *arXiv preprint arXiv:2112.08608*.
- Kishore Papineni, Salim Roukos, Todd Ward, and Wei-Jing Zhu. 2002. Bleu: a method for automatic evaluation of machine translation. In *Proceedings of* the 40th Annual Meeting of the Association for Computational Linguistics, pages 311–318, Philadelphia, Pennsylvania, USA. Association for Computational Linguistics.

- Ankur Parikh, Xuezhi Wang, Sebastian Gehrmann, Manaal Faruqui, Bhuwan Dhingra, Diyi Yang, and Dipanjan Das. 2020. ToTTo: A controlled table-to-text generation dataset. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 1173–1186, Online. Association for Computational Linguistics.
- Amy Pu, Hyung Won Chung, Ankur Parikh, Sebastian Gehrmann, and Thibault Sellam. 2021. Learning compact metrics for MT. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 751–762, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Libo Qin, Tianbao Xie, Shijue Huang, Qiguang Chen, Xiao Xu, and Wanxiang Che. 2021. Don't be contradicted with anything! CI-ToD: Towards benchmarking consistency for task-oriented dialogue system. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 2357–2367, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. 2020. Exploring the limits of transfer learning with a unified text-to-text transformer. *Journal of Machine Learning Research*, 21(140):1–67.
- Hannah Rashkin, Vitaly Nikolaev, Matthew Lamm, Michael Collins, Dipanjan Das, Slav Petrov, Gaurav Singh Tomar, Iulia Turc, and David Reitter. 2021a. Measuring attribution in natural language generation models. *arXiv preprint arXiv:2112.12870*.
- Hannah Rashkin, David Reitter, Gaurav Singh Tomar, and Dipanjan Das. 2021b. Increasing faithfulness in knowledge-grounded dialogue with controllable features. In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 704–718, Online. Association for Computational Linguistics.
- Ehud Reiter and Craig Thomson. 2020. Shared task on evaluating accuracy. In *Proceedings of the 13th International Conference on Natural Language Generation*, pages 227–231, Dublin, Ireland. Association for Computational Linguistics.
- Anna Rohrbach, Lisa Anne Hendricks, Kaylee Burns, Trevor Darrell, and Kate Saenko. 2018. Object hallucination in image captioning. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 4035–4045.
- Tal Schuster, Adam Fisch, and Regina Barzilay. 2021. Get your vitamin C! robust fact verification with contrastive evidence. In *Proceedings of the 2021 Conference of the North American Chapter of the Asso-*

- ciation for Computational Linguistics: Human Language Technologies, pages 624–643, Online. Association for Computational Linguistics.
- Thomas Scialom, Paul-Alexis Dray, Sylvain Lamprier, Benjamin Piwowarski, Jacopo Staiano, Alex Wang, and Patrick Gallinari. 2021. QuestEval: Summarization asks for fact-based evaluation. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 6594–6604, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Thomas Scialom and Felix Hill. 2021. Beametrics: A benchmark for language generation evaluation evaluation. *arXiv preprint arXiv:2110.09147*.
- Thibault Sellam, Dipanjan Das, and Ankur Parikh. 2020a. BLEURT: Learning robust metrics for text generation. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 7881–7892, Online. Association for Computational Linguistics.
- Thibault Sellam, Amy Pu, Hyung Won Chung, Sebastian Gehrmann, Qijun Tan, Markus Freitag, Dipanjan Das, and Ankur Parikh. 2020b. Learning to evaluate translation beyond English: BLEURT submissions to the WMT metrics 2020 shared task. In *Proceedings of the Fifth Conference on Machine Translation*, pages 921–927, Online. Association for Computational Linguistics.
- Uri Shaham, Elad Segal, Maor Ivgi, Avia Efrat, Ori Yoran, Adi Haviv, Ankit Gupta, Wenhan Xiong, Mor Geva, Jonathan Berant, and Omer Levy. 2022. Scrolls: Standardized comparison over long language sequences.
- James Thorne, Andreas Vlachos, Oana Cocarascu,
 Christos Christodoulopoulos, and Arpit Mittal. 2018.
 The fact extraction and VERification (FEVER)
 shared task. In Proceedings of the First Workshop on Fact Extraction and VERification (FEVER), pages 1–9, Brussels, Belgium. Association for Computational Linguistics.
- Alex Wang, Kyunghyun Cho, and Mike Lewis. 2020. Asking and answering questions to evaluate the factual consistency of summaries. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 5008–5020, Online. Association for Computational Linguistics.
- Alex Wang, Amanpreet Singh, Julian Michael, Felix Hill, Omer Levy, and Samuel Bowman. 2018. GLUE: A multi-task benchmark and analysis platform for natural language understanding. In *Proceedings of the 2018 EMNLP Workshop BlackboxNLP: Analyzing and Interpreting Neural Networks for NLP*, pages 353–355, Brussels, Belgium. Association for Computational Linguistics.
- Sean Welleck, Jason Weston, Arthur Szlam, and Kyunghyun Cho. 2019. Dialogue natural language

- inference. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 3731–3741, Florence, Italy. Association for Computational Linguistics.
- Yuexiang Xie, Fei Sun, Yang Deng, Yaliang Li, and Bolin Ding. 2021. Factual consistency evaluation for text summarization via counterfactual estimation. In *Findings of the Association for Computational Linguistics: EMNLP 2021*, pages 100–110, Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Yi-Ting Yeh, Maxine Eskenazi, and Shikib Mehri. 2021. A comprehensive assessment of dialog evaluation metrics. In *The First Workshop on Evaluations and Assessments of Neural Conversation Systems*, pages 15–33, Online. Association for Computational Linguistics.
- Wenpeng Yin, Dragomir Radev, and Caiming Xiong. 2021. DocNLI: A large-scale dataset for document-level natural language inference. In *Findings of the Association for Computational Linguistics: ACL-IJCNLP 2021*, pages 4913–4922, Online. Association for Computational Linguistics.
- Weizhe Yuan, Graham Neubig, and Pengfei Liu. 2021. BARTScore: Evaluating generated text as text generation. In *Advances in Neural Information Processing Systems*.
- Tianyi Zhang, Varsha Kishore, Felix Wu, Kilian Q. Weinberger, and Yoav Artzi. 2020. Bertscore: Evaluating text generation with bert. In *International Conference on Learning Representations*.
- Yuan Zhang, Jason Baldridge, and Luheng He. 2019. PAWS: Paraphrase adversaries from word scrambling. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 1298–1308, Minneapolis, Minnesota. Association for Computational Linguistics.
- Zheng Zhao, Shay B Cohen, and Bonnie Webber. 2020. Reducing quantity hallucinations in abstractive summarization. *arXiv* preprint arXiv:2009.13312.
- Chunting Zhou, Graham Neubig, Jiatao Gu, Mona Diab, Francisco Guzmán, Luke Zettlemoyer, and Marjan Ghazvininejad. 2021. Detecting hallucinated content in conditional neural sequence generation. In *Findings of the Association for Computational Linguistics: ACL-IJCNLP 2021*, pages 1393–1404, Online. Association for Computational Linguistics.

A Additional Data Statistics

Tables 6 and 7 presents statistics regarding the length of the grounding text and the generated text for TRUE's datasets, respectively.

Dataset	Min len.	Max len.	Median len.	Avg len.
FRANK	102	1005	550	548
SummEval	100	540	367	359
MNBM	8	10315	287	383
QAGS-CNNDM	73	360	325	318
QAGS-XSUM	218	520	339	351
BEGIN	7	64	23	23
Q^2	6	71	21	23
DialFact	4	174	22	26
PAWS	5	37	21.0	21
FEVER	8	286	44	59
VitaminC	1	265	26	28

Table 6: Grounding length statistics for TRUE.

Dataset	Min len.	Max len.	Median len.	Avg len.
FRANK	2	126	40	41
SummEval	5	133	61	63
MNBM	2	52	19	19
QAGS-CNNDM	23	85	47	49
QAGS-XSUM	9	31	18	18
BEGIN	5	40	13	14
Q^2	7	44	15	16
DialFact	4	69	16	17
PAWS	5	37	21	21
FEVER	2	36	8	8
VitaminC	1	103	12	13

Table 7: Generated text length statistics for TRUE.

B Implementation Details

We train all models using the t5x library.²¹

QG-QA For our reimplementation of Q^2 (Honovich et al., 2021) we use T5-11B as the pretrained model for QG, QA and NLI, while Honovich et al. (2021) used T5-Base, ALBERT (Lan et al., 2019), and RoBERTa (Liu et al., 2019) for the QG, QA and NLI models, respectively. We use a maximum length of 2048 tokens for the input. We set the F1 token overlap threshold to 0.54 by tuning it on a held-out dataset. We use beam search with a beam size of 4 to generate multiple questions, and use the first question that passes the validation threshold.

NLI We fine-tune a T5-11B model on ANLI (Nie et al., 2020) for 25K steps with a learning rate of 10^{-4} and a batch size of 32. During inference we use a maximum input length of 2048 tokens.

C ROC Curves

Figure 2 presents the ROC curves for the different datasets studied in TRUE, using the best-performing metrics.

²¹https://github.com/google-research/t5x

Dataset	Pos ROUGE_L	Neg ROUGE_L	ROUGE_L diff	Pos F1	Neg F1	F1 diff
FRANK	0.105	0.060	0.045	0.165	0.103	0.062
SummEval	0.181	0.141	0.041	0.282	0.244	0.038
MNBM	0.044	0.047	0.003	0.079	0.084	0.006
QAGS-CNNDM	0.215	0.170	0.045	0.281	0.249	0.031
QAGS-XSUM	0.051	0.050	0.002	0.082	0.080	0.002
BEGIN	0.465	0.159	0.306	0.553	0.207	0.346
Q^2	0.228	0.169	0.059	0.368	0.264	0.104
DialFact	0.302	0.200	0.102	0.394	0.249	0.144
PAWS	0.832	0.734	0.098	0.938	0.934	0.003
FEVER	0.174	0.179	0.005	0.276	0.258	0.018
VitaminC	0.314	0.270	0.044	0.362	0.290	0.072

Table 8: Average overlap between the generated text and the grounding, measured using ROUGE-L and simple F1 token-overlap, taking the grounding to be the reference text. The "Pos" columns contain the statistics for the grounded text, while the "Neg" columns contain the statistics for the ungrounded text.

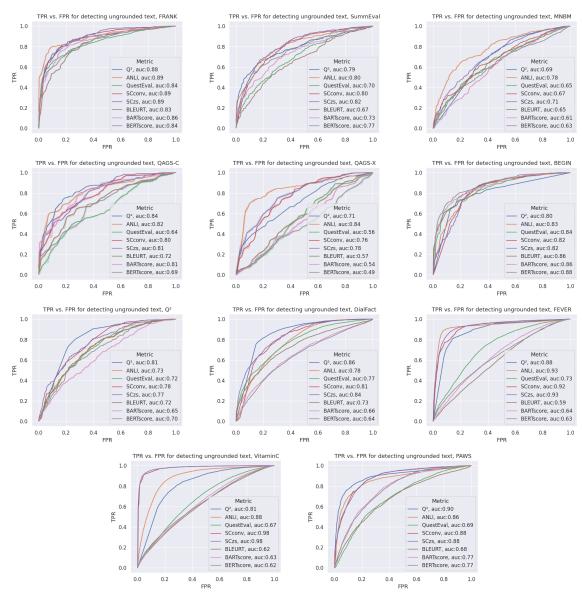


Figure 2: ROC curves for the best performing methods.

	ANLI+Q ²	ANLI+SC _{ZS}	Q ² +SC _{ZS}	CTC	SC _{Conv}	ROUGE-L	BLEU4
FRANK	89.6	91.1	90.4	87.5	88.9	80.1	78.0
SummEval	80.7	83.0	82.0	76.0	79.8	68.8	60.2
MNBM	75.6	77.1	74.6	72.3	67.2	47.5	49.3
QAGS-C	86.0	84.7	86.4	73.4	79.6	67.1	63.9
QAGS-X	81.8	85.1	79.3	73.1	76.1	52.9	48.6
BEGIN	85.7	82.1	85.7	77.9	81.6	86.4	84.6
Q^2	83.0	76.9	83.9	85.3	77.5	66.8	64.3
DialFact	89.4	84.5	90.2	83.5	81.2	71.2	72.5
PAWS	90.5	89.7	91.4	86.0	88.2	82.2	77.3
FEVER	94.0	94.6	93.9	84.8	86.7	49.9	51.1
VitaminC	90.3	96.4	96.5	84.9	97.5	59.9	59.6
Avg. w/o VitC, FEVER	84.7	83.8	84.9	79.4	80.0	69.2	66.5

Table 9: ROC AUC results for metrics that were not reported in Table 3.

	Ensemble	Q^2	ANLI	SCzs	BLEURT	QuestEval	FactCC	BART _{score}	BERTscore
FRANK	90.8	87.8	89.2	88.6	83.2	86.4	73.9	88.3	86.0
BEGIN	85.9	78.0	82.8	84.2	82.2	81.4	65.0	83.7	86.0
DialFact	88.6	85.0	75.9	82.1	72.2	76.3	55.1	65.5	64.3
PAWS	92.4	90.1	87.3	89.7	67.1	70.1	65.1	77.3	76.4
VitaminC	96.7	83.4	89.6	98.4	63.0	67.8	56.8	64.1	63.5
Avg. w/o VitC	89.4	85.2	83.8	86.2	76.2	78.5	64.8	78.7	78.2

Table 10: ROC AUC results for the different metrics on the TRUE test set. We exclude VitaminC from the average calculation as SC_{ZS} was trained on VitaminC. The highest score in each row (excluding the Ensemble) is in bold and the aforementioned SC results are in strikethrough.

	Ensemble	Q ² _{metric}	ANLI	SCzs	F1	BLEURT	QuestEval	FactCC	BART _{score}	BERT _{score}
FRANK	83.2	82.9	83.5	80.9	67.5	76.0	74.2	73.9	80.2	77.0
SummEval	79.4	77.3	72.9	75.0	64.2	66.4	67.0	65.3	68.9	73.7
MNBM	69.6	66.5	66.7	64.5	40.4	53.7	66.1	62.9	61.0	60.1
QAGS-C	81.3	78.3	75.3	72.8	62.6	68.9	62.6	70.6	74.5	66.8
QAGS-X	77.4	63.6	80.3	72.8	51.0	56.5	56.9	65.3	54.4	52.3
BEGIN	77.9	73.0	76.0	79.7	80.0	78.1	75.5	66.6	77.4	80.5
Q ² _{dataset}	76.8	76.1	66.6	71.3	61.4	67.0	65.8	60.5	59.7	66.1
DialFact	83.4	80.5	70.9	75.8	66.4	67.0	69.9	53.4	60.8	61.2
PAWS	83.4	83.5	80.5	81.5	50.2	64.2	64.3	60.2	72.2	71.1
FEVER	90.4	82.7	90.2	87.6	52.3	57.7	69.4	57.2	60.5	58.7
VitaminC	90.8	76.0	82.3	93.5	58.0	58.0	62.2	55.0	59.1	58.6
Avg. w/o VitC, FEVER	79.2	75.7	74.7	74.9	60.4	66.4	66.9	64.3	67.6	67.6

Table 11: Accuracy results for the different metrics on the TRUE development set. Note that thresholds were tuned on the development set itself. We exclude VitaminC and FEVER from the average calculation as SC_{ZS} was trained on VitaminC that includes examples from FEVER. The highest score in each row (excluding the Ensemble) is in bold and the aforementioned SC results are in strikethrough.

	Ensemble	Q^2	ANLI	SCzs	BLEURT	QuestEval	FactCC	BART _{score}	BERT _{score}
FRANK	83.0	81.5	82.0	79.0	76.6	73.0	72.1	80.7	75.6
BEGIN	76.8	74.1	76.8	78.9	74.3	73.4	62.09	74.8	78.1
DialFact	80.9	78.1	68.4	74.2	67.1	69.0	52.5	58.6	60.2
PAWS	84.8	84.1	82.1	82.3	62.9	64.8	60.7	70.9	69.8
VitaminC	92.1	77.5	83.9	94.2	59.0	63.3	55.5	59.8	58.0
Avg. w/o VitC	81.4	79.4	77.3	78.6	70.2	70.0	62.1	71.3	70.9

Table 12: Accuracy results for the different metrics on the TRUE test set. Thresholds were tuned on the corresponding development sets. We exclude VitaminC from the average calculation as SC_{ZS} was trained on VitaminC. The highest score in each row (excluding the Ensemble) is in bold and the aforementioned SC results are in strikethrough.