

Creating reproducible examples

reprex

- [reprex usage](#)
- [Reprex do's and don'ts](#)
- [This seems like a lot of work!](#)
- [Using datapasta with reprex](#)

Beyond reprex (.Rmd)

Why .Rmd?

- reprex can't read data from your system


```
reprex::reprex(  
  readr::read_csv(here::here("your-file.csv"))  
)  
#> Error: 'your-file.csv' does not exist in current working directory  
( 'C:/Users/Mauro/AppData/Local/Temp/RtmpCqzepI/reprex4e7022114c1f' ).
```

- .Rmd can.

```
data <- readr::read_csv(here::here("your-file.csv"))  
head(data, 2)  
#> # A tibble: 2 x 2  
#>   Time demand  
#>   <dbl>   <dbl>  
#> 1     1     8.3  
#> 2     2    10.3
```


Create a GitHub document

File > New File > R Markdown...

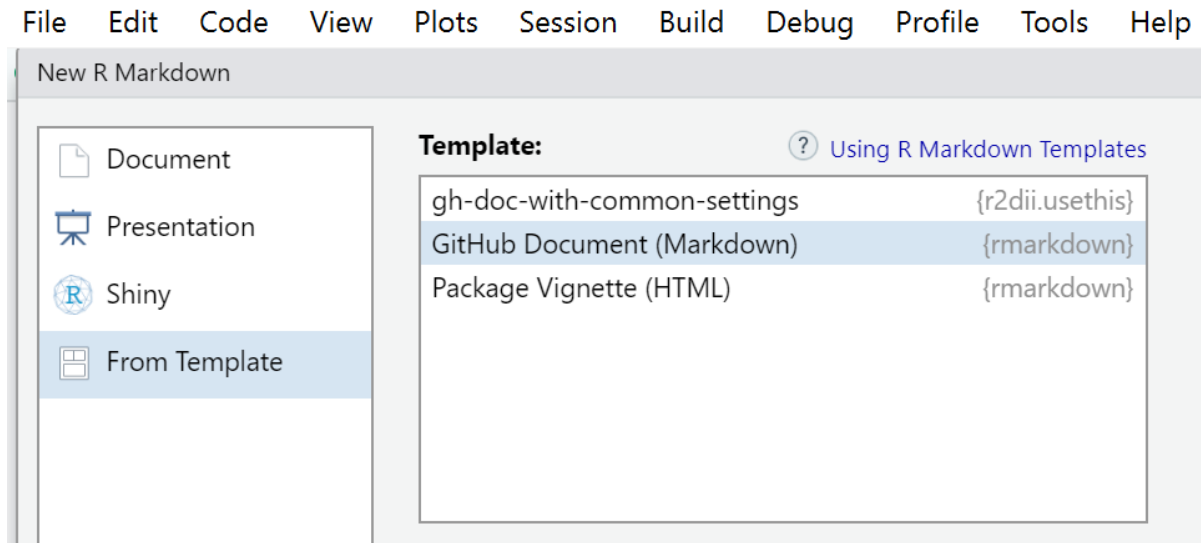

Why here::here?

.Rmd files have a weird notion of working directory

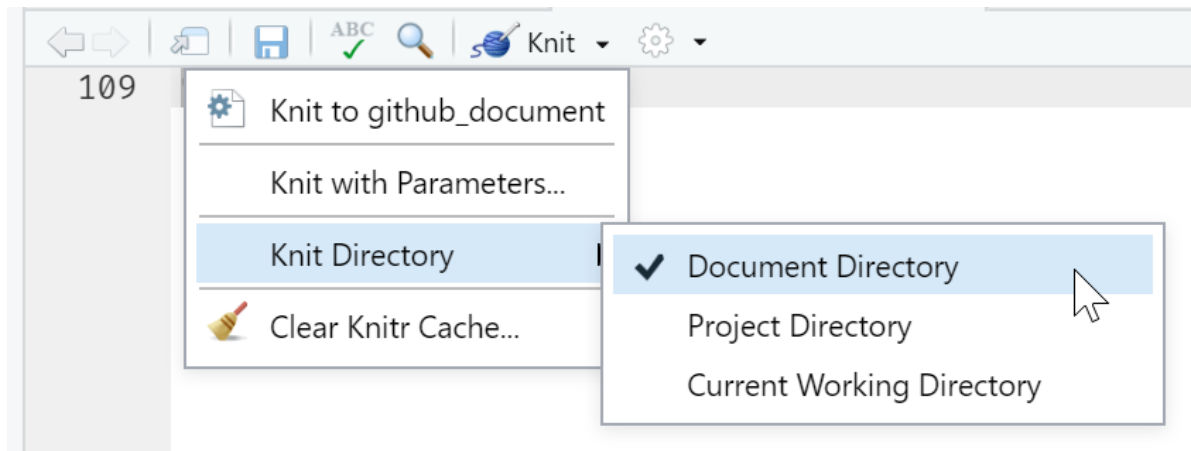

`here::here()` is what you normally expect.

```
here::here()
```

```
#> [1] "C:/Users/Mauro/git/ds-incubator"
```

Workflow

- Write your-file.Rmd, e.g.:

```
library(readr)

data <- read_csv(here::here("your-file.csv"))
head(data, 2)
#> # A tibble: 2 x 2
#>   Time demand
#>   <dbl>   <dbl>
#> 1     1     8.3
#> 2     2    10.3

# More code ...
```

- Knit your-file.Rmd (press the *Knit* button).
- Commit and push; GitHub will render your-file.md beautifully.
- Share your-file.csv and the [link to your-file.md](#).