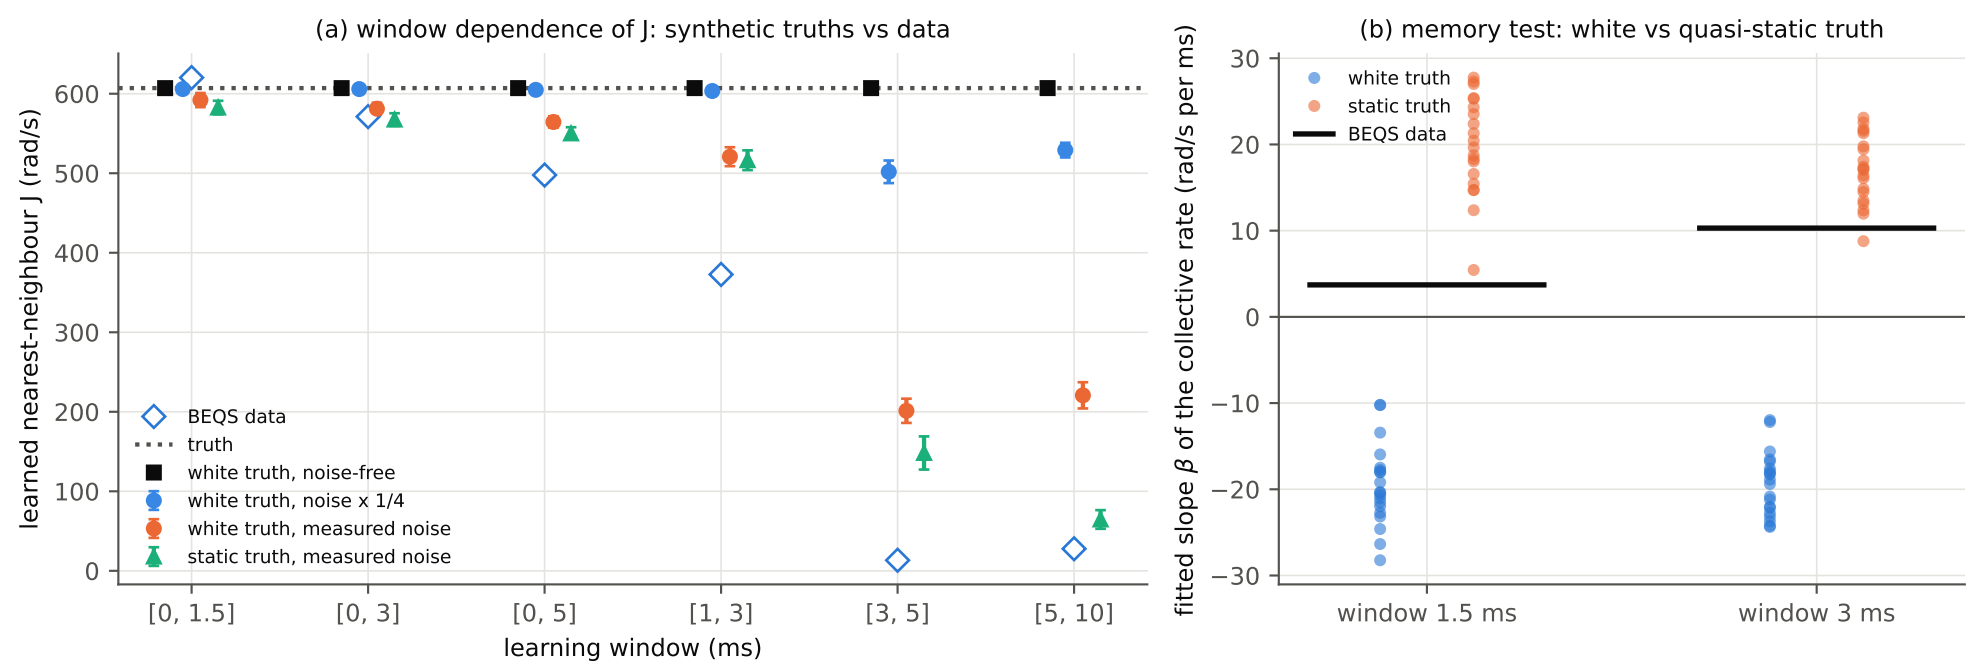
(a) window dependence of J: synthetic truths vs data
learned nearest-neighbour J (rad/s)
600
500
400
300
200
100
0
BEQS data
truth
white truth, noise-free
white truth, noise x 1/4
white truth, measured noise
static truth, measured noise
[0, 1.5]
[0, 3]
[0, 5]
[1, 3]
[3, 5]
[5, 10]
learning window (ms)
(b) memory test: white vs quasi-static truth
fitted slope β of the collective rate (rad/s per ms)
30
20
10
0
−10
−20
−30
white truth
static truth
BEQS data
window 1.5 ms
window 3 ms