



Top repositories



Find a repository...

JAGallo/Nome-do-Projeto

Home

Try the new experience

Ask anything

+ Add repositories, files, and spaces



New



Create issue



Spark

Feed

Trending repositories · [See more](#)[tinkle-community/nofx](#)

Multi-exchange AI trading platform (Binance/Hyperliquid/Aster) with multi-AI competition(deepseek/qwen/claudie), self-evolution, and real-time dashboard

Go

2.7k



Star

[johannschopplich/toon](#)

TokenName-Oriented Object Notation (TOON) – JSON for LLM prompts at half the tokens. Official spec & reference implementation.

TypeScript

6.4k



Star

[See what's new](#)

Latest from our changelog

- 2 days ago GitHub MCP Server now comes with server instructions, better...
- 3 days ago GitHub Copilot in Visual Studio Code gets upgraded
- 3 days ago A mission control to assign, steer, and track Copilot codin...
- 3 days ago GitHub Code Quality in public



OCT 28-29 SAN FRANCISCO

Explore GitHub's latest tools shaping agentic software and developer choice.

[See what's new](#)



Top repositories



Find a repository...

JAGallo/Nome-do-Projeto

Home

Try the new experience

Ask anything

+ Add repositories, files, and spaces



Task

New




Create issue



Spark

Feed



Trending repositories · See more

tinkle-community/nofx

Multi-exchange AI trading platform (Binance/Hyperliquid/Aster) with multi-AI competition(deepseek/qwen/clause), self-evolution, and real-time dashboard

Go

2.7k



Star



johannschopplich/toon

TokenName-Oriented Object Notation (TOON) – JSON for LLM prompts at half the tokens. Official spec & reference implementation.

TypeScript

6.4k



Star



See what's new


Latest from our changelog

2 days ago GitHub MCP Server now comes with server instructions, better...


3 days ago GitHub Copilot in Visual Studio Code gets upgraded

3 days ago A mission control to assign, steer, and track Copilot codin...

3 days ago GitHub Code Quality in public



OCT 28-



New project

Explore GitHub's latest tools shaping agentic software and developer choice.



New repository



Type / to search



Create a new repository

Repositories contain a project's files and version history. Have a project elsewhere? [Import a repository](#).
Required fields are marked with an asterisk (*).

1 General

Owner *



JAGallo

Repository name *



Great repository names are short and memorable. How about [redesigned-journey](#)?

Description

0 / 350 characters

2 Configuration

Choose visibility *

Choose who can see and commit to this repository



Public



Add README

READMEs can be used as longer descriptions. [About READMEs](#)

Off



Add .gitignore

.gitignore tells git which files not to track. [About ignoring files](#)

No .gitignore



Add license

Licenses explain how others can use your code. [About licenses](#)

No license

**Create repository**



New repository



Type / to search



Create a new repository

Repositories contain a project's files and version history. Have a project elsewhere? [Import a repository](#).
Required fields are marked with an asterisk (*).

1

General

Owner *

JAGallo

Repository name *

GMovies

 GMovies is available.

Great repository names are short and memorable. How about [automatic-goggles](#)?

Description

Projeto de Aplicação React Native Expo, para leitura de dados de filmes da API themoviedb.org

93 / 350 characters

2


Configuration

Choose visibility *



Choose who can see and commit to this repository



Public

**Add README**READMEs can be used as longer descriptions. [About READMEs](#)

On

**Add .gitignore**.gitignore tells git which files not to track. [About ignoring files](#)**Add license**Licenses explain how others can use your code. [About licenses](#)



JAGallo / GMovies



Type / to search



Code

Issues

Pull requests

Actions

Projects

Wiki

Security

Insights

Settings



GMovies

Public

Pin

Watch

0



Fork

0



Star

0



main



1 Branch



0 Tags

Go to file



Add file



Code



JAGallo Initial commit

d3e2941 · now

1 Commit

README.md

Initial commit

now

README



GMovies

Projeto de Aplicação React Native Expo, para leitura de dados de filmes da API themoviedb.org



Projeto de Aplicação React Native Expo,
para leitura de dados de filmes da API
themoviedb.org

Readme

Activity

0 stars

0 watching

0 forks

Releases

No releases published

[Create a new release](#)

Packages

No packages published

[Publish your first package](#)



© 2025 GitHub, Inc.

[Terms](#)[Privacy](#)[Security](#)[Status](#)[Community](#)[Docs](#)[Contact](#)[Manage cookies](#)[Do not share my personal information](#)



JAGallo / GMovies

 Type / to search[Code](#) [Issues](#) [Pull requests](#) [Actions](#) [Projects](#) [Wiki](#) [Security](#) [Insights](#) [Settings](#)

GMovies

Public

[Pin](#)[Watch 0](#)[Fork 0](#)[Star 0](#)[main](#) [Branches](#)[1 Branch](#) [Tags](#)[Go to file](#)[Add file](#) [Code](#)[JAGallo Initial commit](#)[README.md](#)

Initial commit

[README](#)

GMovies

Projeto de Aplicação React Native Expo, para leitura de dados de

Local Codespaces

Clone

HTTPS SSH GitHub CLI

<https://github.com/JAGallo/GMovies.git>

Clone using the web URL.

[Open with GitHub Desktop](#) [Download ZIP](#)



About

Projeto de Aplicação React Native Expo,
para leitura de dados de filmes da API
[themoviedb.org](#)

[Readme](#)[0 watching](#)[0 forks](#)

Releases

No releases published
[Create a new release](#)

Packages

No packages published
[Publish your first package](#)



© 2025 GitHub, Inc. [Terms](#) [Privacy](#) [Security](#) [Status](#) [Community](#) [Docs](#) [Contact](#) [Manage cookies](#) [Do not share my personal information](#)

EXPLORER 

NO FOLDER OPENED

You have not yet opened a folder.

 Open Folder

You can clone a repository locally.

 Clone Repository

To learn more about how to use Git and source control in VS Code [read our docs](#).


You can open a folder containing a .NET project or solution, or create a new .NET project.

 Create .NET Project




OUTLINE
 TIMELINE



Show All Commands 

Open File 

Open Folder  

Open Recent 

Open Chat 

 EXPLORER 

 NO FOLDER OPENED

You have not yet opened a folder.

 Open Folder

You can clone a repository locally.

 Clone Repository

To learn more about how to use Git and source control in VS Code [read our docs](#).

You can open a folder containing a .NET project or solution, or create a new .NET project.


 Create .NET Project


 > OUTLINE
 > TIMELINE

 Clone from GitHub 





Show All Commands 



Open File 

Open Folder  

Open Recent 

Open Chat 

The left sidebar of the VS Code interface, titled "EXPLORER". It displays a message "NO FOLDER OPENED" with a small downward arrow icon. Below this, it says "You have not yet opened a folder." with a "Open Folder" button. A note follows: "You can clone a repository locally." with a "Clone Repository" button. Further down, it provides instructions for using Git and source control, mentioning ".NET projects", and includes a "Create .NET Project" button. At the bottom, there are sections for "OUTLINE" and "TIMELINE".

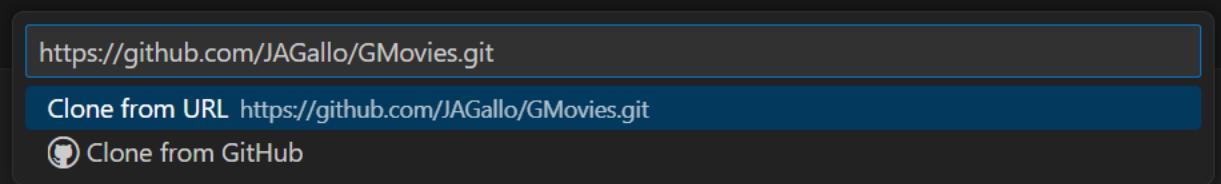

Show All Commands `Ctrl + Shift + P`

Open File `Ctrl + O`

Open Folder `Ctrl + K` `Ctrl + O`

Open Recent `Ctrl + R`

Open Chat `Ctrl + Alt + I`

EXPLORER

NO FOLDER OPENED

You have not yet opened a folder

Open Folder

You can clone a repository locally

Clone Repository

To learn more about how to use source control in VS Code [read the documentation](#).

You can open a folder containing project or solution, or create a new project.

Create .NET Project

Choose a folder to clone https://github.com/JAGallo/GMovies.git into

← → ↻ ↑

Este Computador > Disco Local (C:) > Projetos

Pesquisar em Projetos

Organizar Nova pasta

Nome Data de modificação Tipo Tamanho

Projeto Interdisciplinar

Nenhum item corresponde à pesquisa.

Este Computador

Disco Local (C:)

Disco Local (F:)

Rede

Pasta: Projetos

Select as Repository Destination Cancelar



OUTLINE

TIMELINE

0 0

Go Live

A vertical sidebar on the left side of the interface, featuring large, semi-transparent icons for various features: Explorer (document), Search (magnifying glass), Repository (git branch), Git History (branch graph), Terminal (code editor), and Settings (gear).

EXPLORER

NO FOLDER OPENED

You have not yet opened a folder.

[Open Folder](#)


You can clone a repository locally.

[Clone Repository](#)

To learn more about how to use Git and source control in VS Code [read our docs](#).

You can open a folder containing a .NET project or solution, or create a new .NET project.

[Create .NET Project](#)

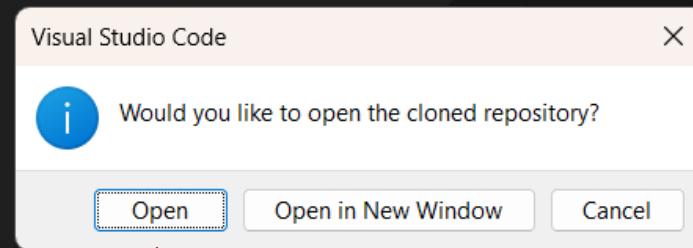

Show All Commands [Ctrl + Shift + P](#)

Open File [Ctrl + O](#)

Open Folder [Ctrl + K](#) [Ctrl + O](#)

Open Recent [Ctrl + R](#)

Open Chat [Ctrl + Alt + I](#)

> OUTLINE

> TIMELINE

EXPLORER

GMOVIES

README.md

SEARCH

PROBLEMS

OUTLINE

TIMELINE

RESTRICTED MODE

0 0 0 0

Welcome

Do you trust the authors of the files in this folder?

Code provides features that may automatically execute files in this folder.

If you don't trust the authors of these files, we recommend to continue in restricted mode as the files may be malicious. See [our docs](#) to learn more.

C:\Projetos\GMovies

Trust the authors of all files in the parent folder 'Projetos'

Yes, I trust the authors

Trust folder and enable all features

No, I don't trust the authors

Browse folder in restricted mode

GMovies F:\Projetos\Etc...

More...

Show welcome page on startup

Build with agent mode

Let's get started

Add context (#), extensions (@), commands ➔

Build Workspace Show Config

AI responses may be inaccurate.

File Edit Selection View Go Run ... ⏪ ⏩ 🔍 GMovies ⏹ 🔍 Chat

EXPLORER ...

GMovies README.md

Welcome

Visual Studio Code

Editing evolved

Start

- New File...
- Open File...
- Open Folder...
- Clone Git Repository...
- Connect to...
- Generate New Workspace...

Walkthroughs

- Get started with VS Co... Customize your editor, learn the basics, and start coding
- Learn the Fundamentals
- Get Started ... Updated

Recent

- GMovies C:\Users\Gallo\Desktop
- GCook C:\Users\Gallo\Desktop
- python F:\GranTiete\2025\2 Semestr...
- GStore F:\Projetos\Etec\API
- GMovies F:\Projetos\Etec\React

More...

Build Workspace Show Config

Add context (#), extensions (@), commands

AI responses may be inaccurate.

Show welcome page on startup

main ⏪ 0 △ 0 🔍 🔍 Go Live 🔍



Show All Commands `Ctrl + Shift + P`

Go to File `Ctrl + P`

Open Chat `Ctrl + Alt + I`


Toggle Terminal `Ctrl + ``

Open Settings `Ctrl + ,`



> OUTLINE


> TIMELINE

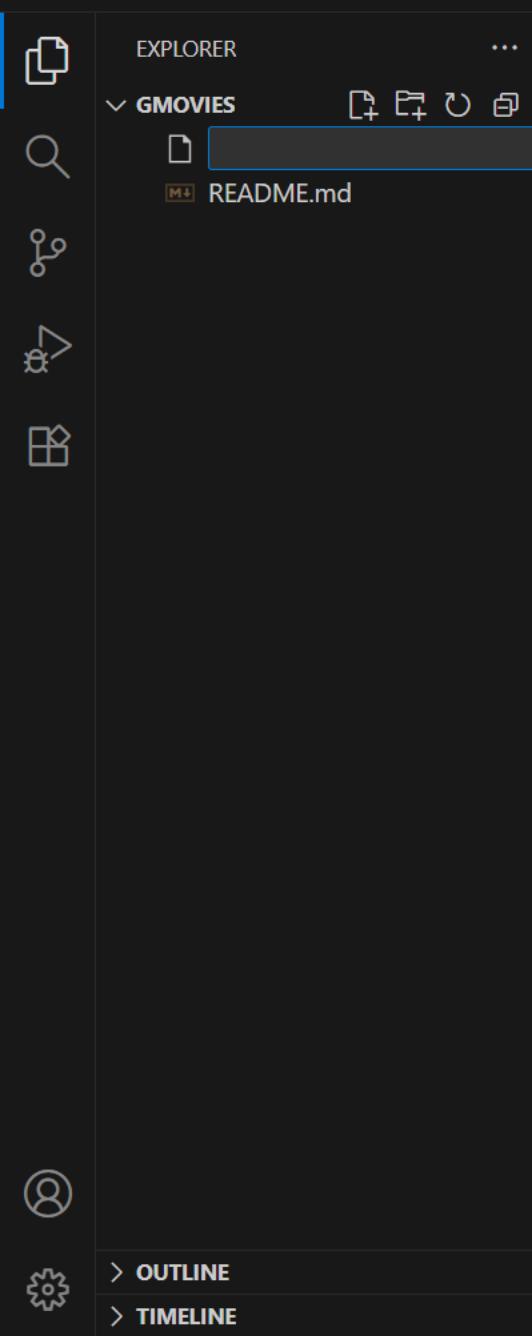

EXPLORER

...

GMOVIES



config e inicio.txt

README.md

Show All Commands Ctrl + Shift + PGo to File Ctrl + POpen Chat Ctrl + Alt + IToggle Terminal Ctrl + TOpen Settings Ctrl + ,

> OUTLINE

> TIMELINE

main ↻ ⟳ ✖ 0 △ 0

← →

GMovies



0% 🔍 ⌂ ⌂ ⌂

EXPLORER

...

config e inicio.txt U X

▷ 🔍 ⌂ ⌂ ⌂ ⌂

GMovies

config e inicio.txt

U

README.md



config e inicio.txt

1 Generate code (Ctrl+I), or select a Language (Ctrl+K M). Start typing to dismiss or don't show this again.



Ln 1, Col 1

Spaces: 4

UTF-8

CRLF

{ } Plain Text



Go Live





EXPLORER

...

config e inicio.txt X



GMOVIES

config e inicio.txt U

README.md



1



```
1 // ABRA O TERMINAL PARA EXECUÇÃO DOS COMANDOS
2 | View -> Terminal ou Ctrl + '
3
4
5 // CONFIGURAÇÃO LOCAL DO GIT -> GITHUB
6 git config --global user.name <NOME DE USUÁRIO DO GITHUB>
7 git config --global user.email <EMAIL DA CONTA DO GITHUB>
8
9
10 // CRIANDO O PROJETO REACT NATIVE EXPO COM TEMPLATE VAZIO
11 npx create-expo-app@latest GMovies --template blank
12
13
14 // ACESSA A PASTA DO PROJETO
15 cd GMovies
16
17
18
```



> OUTLINE

> TIMELINE



main* ⌂ ⌂ 0 ⌂ 0



Ln 18, Col 1

Spaces: 4

UTF-8

CRLF

{ } Plain Text



@ Go Live





EXPLORER

...

config e inicio.txt X

- GMovies
 - GMovies
 - assets
 - node_modules
 - .gitignore
 - App.js
 - app.json
 - index.js
 - package-lock.json
 - package.json
- config e inicio.txt
- README.md

```
1 // ABRA O TERMINAL PARA EXECUÇÃO DOS COMANDOS
2 | View -> Terminal ou Ctrl + '
3
4
5 // CONFIGURAÇÃO LOCAL DO GIT -> GITHUB
6 git config --global user.name <NOME DE USUÁRIO DO GITHUB>
7 git config --global user.email <EMAIL DA CONTA DO GITHUB>
8
9
10 // CRIANDO O PROJETO REACT NATIVE EXPO COM TEMPLATE VAZIO
11 npx create-expo-app@latest GMovies --template blank
12
13
14 // ACESSA A PASTA DO PROJETO
15 cd GMovies
16
17
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

powershell - GMovies

run `npm fund` for details

found 0 vulnerabilities

Your project is ready!

To run your project, navigate to the directory and run one of the following npm commands.

- cd GMovies
 - npm run android
 - npm run ios # you need to use macOS to build the iOS project - use the Expo app if you need to do iOS development without a Mac
 - npm run web
- PS C:\Projetos\GMovies> cd GMovies
- PS C:\Projetos\GMovies\GMovies> []



> OUTLINE

> TIMELINE



main* ↻ 0 △ 0



Ln 16, Col 1 Spaces: 4 UTF-8 CRLF {} Plain Text



Go Live





EXPLORER

...

GMovies

GMovies

assets

node_modules

.gitignore

App.js

app.json

index.js

package-lock.json

package.json

config e inicio.txt

README.md



> OUTLINE

> TIMELINE

config e inicio.txt U X

config e inicio.txt

```
18 // INSTALAÇÃO DO REACT NAVIGATION
19 npm install @react-navigation/native
20 npm install @react-navigation/native-stack
21 npx expo install react-native-screens
22 npx expo install react-native-gesture-handler
23
24 // INSTALAÇÃO DO TAILWIND E NATIVEWIND
25 npm install nativewind
26 npm install --dev tailwindcss@3.4.17 prettier-plugin-tailwindcss@^0.5.11
27 npx tailwindcss init
28
29 // INSTALAÇÃO DO CAROUSEL
30 npm i react-native-reanimated-carousel
31 npx expo install react-native-reanimated
32 npm install react-native-worklets@0.5.1
33
34 // INSTALAÇÃO DA FONTE DE ICONES HEROICONS
35 npm i react-native-heroicons
36
37 // INSTALAÇÃO DO EXPO LIENAR GRADIENTE
38 npm i expo-linear-gradient
39
40 // INSTALAÇÃO DO COMPONENTE PROGRESS
41 npm i react-native-progress
42
43 // INSTALAÇÃO DA BIBLIOTECA AXIOS PARA FETCH EM APIs
44 npm i axios
45
46 // BABEL CONFIGURAÇÃO
47 npx expo customize babel.config.js
```

← →

GMovies



0% 🔍 ⌂ ⌂ ⌂



EXPLORER

...

tailwind.config.js U X

- GMovies
- assets
- node_modules
- .gitignore
- App.js
- app.json
- babel.config.js
- index.js
- package-lock.json
- package.json
- tailwind.config.js
- config e inicio.txt
- README.md

GMovies > tailwind.config.js > ...

```
1  /** @type {import('tailwindcss').Config} */
2  module.exports = {
3    content: [
4      "./App.js",
5      "./components/**/*.{js,jsx,ts,tsx}",
6      "./screens/**/*.{js,jsx,ts,tsx}"
7    ],
8    presets: [require("nativewind/preset")],
9    theme: {
10      extend: {},
11    },
12    plugins: []
13 }
14 
```



> OUTLINE

> TIMELINE



main* ⌂ 0 △ 0



Ln 14, Col 1

Spaces: 2

UTF-8 LF

{ } JavaScript



Go Live



← →

GMovies



0% 🔍 ⌂ ⌂ ⌂



EXPLORER

...

babel.config.js X



GMovies

assets

node_modules

.gitignore

App.js

app.json

babel.config.js

index.js

package-lock.json

package.json

tailwind.config.js

config e inicio.txt

README.md

●

●

U

U

U

U

U

U

U

U

U

U

```
1 module.exports = function (api) {
2   api.cache(true);
3   return {
4     presets: [
5       ["babel-preset-expo", {
6         jsxImportSource: "nativewind"
7       }],
8       "nativewind/babel"
9     ],
10    plugins: [
11      "react-native-reanimated/plugin",
12    ],
13  };
14};
15};
```



> OUTLINE

> TIMELINE



main* ⌂ ⌂ 0 ⌂ 0



Ln 15, Col 1 Spaces: 2 UTF-8 LF {} JavaScript ⌂ Go Live ⌂

← →

GMovies



EXPLORER

...

GMOVIES

GMovies

assets

node_modules

metro.config.js

.gitignore

App.js

app.json

babel.config.js

index.js

package-lock.json

package.json

tailwind.config.js

config e inicio.txt

README.md

13

...

OUTLINE

TIMELINE



Show All Commands Ctrl + Shift + P


Go to File Ctrl + P

Open Chat Ctrl + Alt + I

Start Debugging F5

Toggle Terminal Ctrl + `



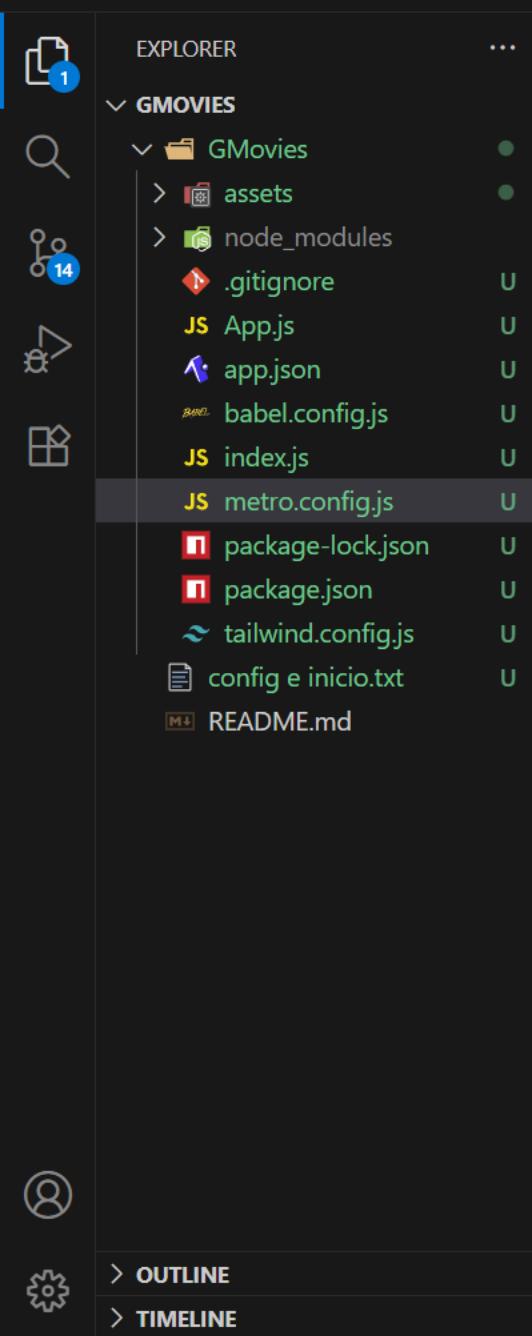

JS metro.config.js U ●

GMovies > JS metro.config.js > ...

```
1  const { getDefaultConfig } = require("expo/metro-config");
2  const { withNativeWind } = require('nativewind/metro');
3
4  const config = getDefaultConfig(__dirname);
5
6  module.exports = withNativeWind(config, { input: './global.css' });
7 |
```

← →

GMovies



EXPLORER

...

GMOVIES

GMovies

assets

node_modules

global.css

.gitignore

App.js

app.json

babel.config.js

index.js

metro.config.js

package-lock.json

package.json

tailwind.config.js

config e inicio.txt

README.md

14

...

OUTLINE

TIMELINE



Show All Commands Ctrl + Shift + P

Go to File Ctrl + P

Open Chat Ctrl + Alt + I


Start Debugging F5

Toggle Terminal Ctrl + `





GMovies



EXPLORER

...

global.css 3, U X

GMovies > global.css

```
1 @tailwind base;  
2 @tailwind components;  
3 @tailwind utilities;
```

GMovies

assets

node_modules

.gitignore

App.js

app.json

babel.config.js

global.css 3, U

index.js

metro.config.js

package-lock.json

package.json

tailwind.config.js

config e inicio.txt

README.md

> OUTLINE

> TIMELINE

X ↻ main* ⌂ ⌂ 0 ⌂ 3

Ln 3, Col 21 Spaces: 4 UTF-8 CRLF {} CSS ⌂ Go Live ⌂

← →

GMovies



EXPLORER

...

GMOVIES

...

GMovies

screens

assets

node_modules

.gitignore

App.js

app.json

babel.config.js

global.css

index.js

metro.config.js

package-lock.json

package.json

tailwind.config.js

config e inicio.txt

README.md

15

...

OUTLINE

TIMELINE



Show All Commands Ctrl + Shift + P

Go to File Ctrl + P

Open Chat Ctrl + Alt + I

Start Debugging F5

Toggle Terminal Ctrl + `



← →

GMovies



EXPLORER

...

GMOVIES

GMovies

assets

node_modules

screens

HomeScreen.js

.gitignore

App.js

app.json

babel.config.js

global.css

index.js

metro.config.js

package-lock.json

package.json

tailwind.config.js

config e inicio.txt

README.md

15

...

OUTLINE

TIMELINE



Show All Commands Ctrl + Shift + P

Go to File Ctrl + P

Open Chat Ctrl + Alt + I

Start Debugging F5

Toggle Terminal Ctrl + `



← →

GMovies



0% 🔍 ⌂ ⌂ ⌂



EXPLORER

...

JS HomeScreen.js X

GMovies

assets

node_modules

screens

JS HomeScreen.js U

.gitignore U

JS App.js U

app.json U

babel.config.js U

css global.css U

JS index.js U

JS metro.config.js U

package-lock.json U

package.json U

tailwind.config.js U

config e inicio.txt U

README.md

GMovies > screens > JS HomeScreen.js > HomeScreen

```
1 import React from 'react'
2 import { View, Text } from 'react-native'
3
4 export default function HomeScreen() {
5   return (
6     <View>
7       <Text>HomeScreen</Text>
8     </View>
9   )
10 }
```



> OUTLINE

> TIMELINE



main* ↻ 0 △ 0



Ln 10, Col 2 Spaces: 4 UTF-8 CRLF {} JavaScript



Go Live



← →

GMovies



EXPLORER

...

GMOVIES

navigation

assets

node_modules

screens

HomeScreen.js

.gitignore

App.js

app.json

babel.config.js

global.css

index.js

metro.config.js

package-lock.json

package.json

tailwind.config.js

config e inicio.txt

README.md

OUTLINE

TIMELINE



Show All Commands Ctrl + Shift + P

Go to File Ctrl + P

Open Chat Ctrl + Alt + I

Start Debugging F5

Toggle Terminal Ctrl + `



← →

GMovies



EXPLORER

...

GMOVIES

GMovies

assets

navigation

appNavigation.js

node_modules

screens

HomeScreen.js

.gitignore

App.js

app.json

babel.config.js

global.css

index.js

metro.config.js

package-lock.json

package.json

tailwind.config.js

config e inicio.txt

README.md

...

OUTLINE

TIMELINE



Show All Commands Ctrl + Shift + P


Go to File Ctrl + P

Open Chat Ctrl + Alt + I

Start Debugging F5

Toggle Terminal Ctrl + `



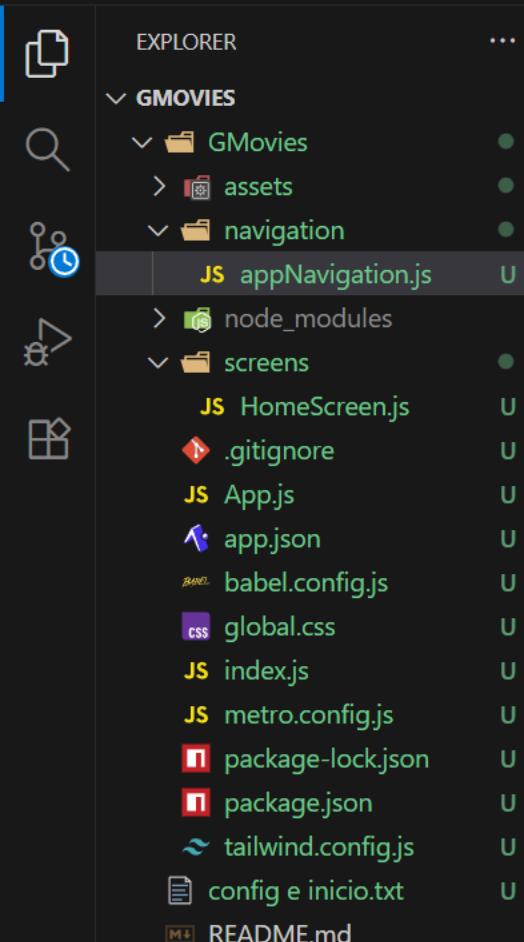

JS appNavigation.js X

GMovies > navigation > JS appNavigation.js > ...

```
1 import { NavigationContainer } from '@react-navigation/native';
2 import { createNativeStackNavigator } from '@react-navigation/native-stack';
3 import HomeScreen from '../screens/HomeScreen';
4
5 const Stack = createNativeStackNavigator();
6
7 export default function AppNavigation() {
8     return (
9         <NavigationContainer>
10            <Stack.Navigator>
11                <Stack.Screen name='Home' options={{headerShown: false}} component={HomeScreen} />
12            </Stack.Navigator>
13        </NavigationContainer>
14    )
15 }
16 }
```






EXPLORER

...

JS App.js U X


GMOVIES



GMovies




assets




navigation



JS appNavigation.js




node_modules



screens




JS HomeScreen.js




.gitignore




JS App.js



app.json



babel.config.js




global.css



JS index.js




JS metro.config.js



package-lock.json



package.json



tailwind.config.js



config e inicio.txt



README.md



GMovies > JS App.js > ...

```
1 import 'react-native-gesture-handler';
2 import "./global.css";
3 import AppNavigation from "./navigation/appNavigation";
4
5 export default function App() {
6   return (
7     <AppNavigation />
8   );
9 }
```

10



EXPLORER

...

JS App.js U X

GMovies

GMovies

assets

navigation

appNavigation.js

node_modules

screens

HomeScreen.js

.gitignore

JS App.js

app.json

babel.config.js

global.css

index.js

metro.config.js

package-lock.json

package.json

tailwind.config.js

config e inicio.txt

README.md

GMovies > JS App.js > ...

```
1 import 'react-native-gesture-handler';
2 import "./global.css";
3 import AppNavigation from "./navigation/appNavigation";
4
5 export default function App() {
6   return (
7     <AppNavigation />
8   );
9 }
```

10

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

powershell - GMovies

PS C:\Projetos\GMovies\GMovies> npx expo start --android



> OUTLINE

> TIMELINE



main* ↻ 0 △ 0



Ln 10, Col 1 Spaces: 2 UTF-8 LF {} JavaScript Go Live

GMovies

EXPLORER

GMOVIES

- GMovies
- .expo
- assets
- navigation
 - appNavigation.js
- node_modules
- screens
 - HomeScreen.js
- gitignore
- App.js
- app.json
- babel.config.js
- global.css
- index.js
- metro.config.js
- package-lock.json
- package.json
- tailwind.config.js
- config e inicio.txt
- README.md

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

Press j | open debugger
Press r | reload app
Press m | toggle menu
shift+m | more tools
Press o | open project code in your editor

Press ? | show all commands

Logs for your project will appear below. Press Ctrl+C to exit.

Android Bundled 1747ms index.js (1297 modules)

WARN SafeAreaView has been deprecated and will be removed in a future release. Please use . See <https://github.com/th3rdwave/react-native-safe-area-context>

main* 0 0 0 0

Ln 10, Col 1 Spaces: 2

Android Emulator - Medium_Phone_API_36:0:5554

Home Screen

← →

GMovies



EXPLORER

...

GMOVIES

GMovies

.expo

assets

navigation

node_modules

screens

theme

index.js

gitignore

App.js

app.json

babel.config.js

global.css

index.js

metro.config.js

package-lock.json

package.json

tailwind.config.js

config e inicio.txt

README.md

...

OUTLINE

TIMELINE



Show All Commands Ctrl + Shift + P

Go to File Ctrl + P

Open Chat Ctrl + Alt + I

Start Debugging F5

Toggle Terminal Ctrl + `



EXPLORER

...

JS index.js U X

GMovies

GMovies

.expo

assets

navigation

node_modules

screens

theme

JS index.js

gitignore

JS App.js

app.json

babel.config.js

css global.css

JS index.js

JS metro.config.js

package-lock.json

package.json

tailwind.config.js

config e inicio.txt

README.md



GMovies > theme > JS index.js > ...

```
1  export const theme = {  
2    background: '#eab308',  
3    text: '#eab308',  
4  }  
5  
6  export const styles = {  
7    text: { color: theme.text },  
8    background: { backgroundColor: theme.background }  
9  }  
10
```



EXPLORER

...

JS HomeScreen.js U X

GMovies

GMovies

.expo

assets

navigation

node_modules

screens

●

●

●

●

●

JS HomeScreen.js U

theme

gitignore

JS App.js U

app.json U

babel.config.js U

global.css U

JS index.js U

JS metro.config.js U

package-lock.json U

package.json U

tailwind.config.js U

config e inicio.txt U

README.md



GMovies > screens > JS HomeScreen.js > ...

```
1 import React from 'react'
2 import { View, Text, Platform, TouchableOpacity, ScrollView } from 'react-native'
3 import { StatusBar } from 'expo-status-bar'
4 import { SafeAreaView } from 'react-native-safe-area-context'
5 import { Bars3BottomLeftIcon, MagnifyingGlassIcon } from 'react-native-heroicons/outline';
6 import { styles } from '../theme';
7
8 const ios = Platform.OS == "ios";
9
10 export default function HomeScreen() {
11   return (
12     <View className="flex-1 bg-neutral-800">
13       <SafeAreaView className={ios ? "-mb-2" : "mb-3"}>
14         <StatusBar style="light" />
15         <View className="flex-row justify-between items-center mx-4 mt-2">
16           <TouchableOpacity>
17             <Bars3BottomLeftIcon size={30} strokeWidth={2} color="white"/>
18           </TouchableOpacity>
19           <Text className="text-white text-3xl font-bold">
20             <Text style={styles.text}>GM</Text>ovies
21           </Text>
22           <TouchableOpacity>
23             <MagnifyingGlassIcon size={30} strokeWidth={2} color="white" />
24           </TouchableOpacity>
25         </View>
26       </SafeAreaView>
27
28       <ScrollView
29         showVerticalScrollIndicator={false}
30         contentContainerStyles={{paddingBottom: 10}}
31       >
```



Ln 7, Col 1

Spaces: 2


UTF-8 CRLF

{ } JavaScript



Go Live



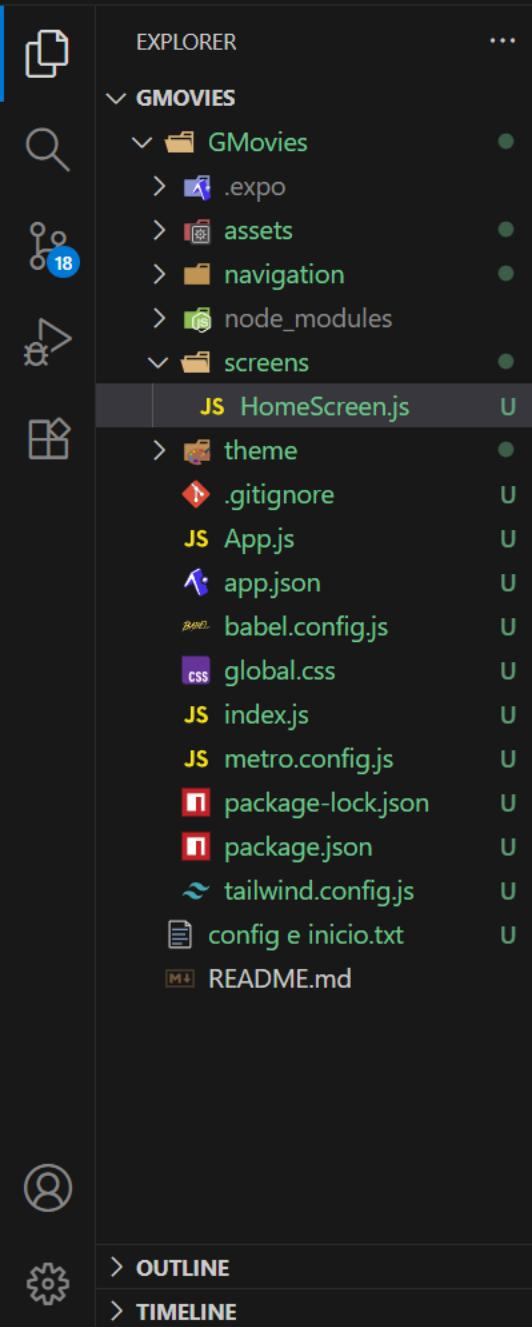

JS HomeScreen.js X

GMovies > screens > JS HomeScreen.js > ...

```
8  const ios = Platform.OS == "ios";
9
10 export default function HomeScreen() {
11   return (
12     <View className="flex-1 bg-neutral-800">
13       <SafeAreaView className={ios ? "-mb-2" : "mb-3"}>
14         <StatusBar style="light" />
15         <View className="flex-row justify-between items-center mx-4 mt-2">
16           <TouchableOpacity>
17             <Bars3BottomLeftIcon size={30} strokeWidth={2} color="white"/>
18           </TouchableOpacity>
19           <Text className="text-white text-3xl font-bold">
20             <Text style={styles.text}>GM</Text>ovies
21           </Text>
22           <TouchableOpacity>
23             <MagnifyingGlassIcon size={30} strokeWidth={2} color="white" />
24           </TouchableOpacity>
25         </View>
26       </SafeAreaView>
27
28       <ScrollView
29         showVerticalScrollIndicator={false}
30         contentContainerStyles={{paddingBottom: 10}}
31       >
32
33       </ScrollView>
34
35     </View>
36   )
37 }
```

The screenshot shows a development environment with a code editor and a mobile application preview.

VS Code Explorer:

- GMOVIES** folder:
 - GMovies** folder
 - .expo
 - assets
 - navigation
 - node_modules
 - screens** folder
 - HomeScreen.js** (selected)
 - theme
 - .gitignore
 - App.js
 - app.json
 - babel.config.js
 - global.css
 - index.js
 - metro.config.js
 - package-lock.json
 - package.json
 - tailwind.config.js
 - config e inicio.txt
 - README.md

Code Editor: The file **HomeScreen.js** is open, showing the following code:

```
8  const ios = Platfo
9
10 export default fun
11   return (
12     <View className="SafeAreaView"
13       <StatusBar
14         <View class
15           <Touchab
16             <Bars3
17           </Toucha
18             <Text cl
19               <Text
20                 <Text>
21               <Touchab
22                 <Magni
23                   </Toucha
24                     </View>
25           </SafeAreaVi
26             <ScrollView
27               showVertic
28                 contentCon
29               >
30
31             </ScrollView>
32
33             </ScrollView>
34
35         </View>
36     )
37 }
```

Android Emulator: The application is running on an **Android Emulator - Medium_Phone_API_36.0:5554**. The screen displays the app's interface with the title **GMovies**.

Bottom Status Bar:

- Ln 7, Col 1
- Spaces: 2
- UTF-8
- CRLF
- {}
- JavaScript
- Go Live

← →

GMovies



EXPLORER

...

GMOVIES

GMovies

components

.expo

assets

navigation

node_modules

screens

theme

.gitignore

App.js

app.json

babel.config.js

global.css

index.js

metro.config.js

package-lock.json

package.json

tailwind.config.js

config e inicio.txt

README.md

18

...

OUTLINE

TIMELINE



Show All Commands Ctrl + Shift + P

Go to File Ctrl + P

Open Chat Ctrl + Alt + I

Start Debugging F5

Toggle Terminal Ctrl + `



← →

GMovies



EXPLORER

...

GMovies

GMovies

.expo

assets

components

trendingMovies.js

navigation

node_modules

screens

theme

.gitignore

App.js

app.json

babel.config.js

global.css

index.js

metro.config.js

package-lock.json

package.json

tailwind.config.js

config e inicio.txt

README.md

...

OUTLINE

TIMELINE



Show All Commands **Ctrl + Shift + P**

Go to File **Ctrl + P**

Open Chat **Ctrl + Alt + I**

Start Debugging **F5**

Toggle Terminal **Ctrl + `**





EXPLORER

...

JS trendingMovies.js U ●



GMovies

> .expo

> assets

> components



JS trendingMovies.js U



> navigation



> node_modules



> screens



> theme

↳ .gitignore

JS App.js

A app.json

Babel babel.config.js

CSS global.css

JS index.js

JS metro.config.js

P package-lock.json

P package.json

S tailwind.config.js

C config e inicio.txt

README.md



> OUTLINE

> TIMELINE



main* ↻ 0 △ 0



Ln 14, Col 1

Spaces: 4

UTF-8 CRLF

{ } JavaScript



Go Live



GMovies > components > JS trendingMovies.js > ...

```
1 import React from 'react'
2 import { View, Text, Dimensions } from 'react-native'
3
4 var { width, height } = Dimensions.get('window');
5
6 export default function TrendingMovies({data}) {
7     return (
8         <View className="mb-8">
9             <Text className="text-white text-xl mx-4">Em alta</Text>
10            </View>
11        )
12    }
13 }
14 |
```



EXPLORER

...

JS HomeScreen.js U X

JS trendingMovies.js U

▷ 🔍 ⌂ ⌂ ⌂ ⌂

GMovies

GMovies

.expo

assets

components

JS trendingMovies.js U

navigation

node_modules

screens

JS HomeScreen.js U

theme

.gitignore

JS App.js

app.json

babel.config.js

global.css

JS index.js

JS metro.config.js

package-lock.json

package.json

tailwind.config.js

config e inicio.txt

README.md



> OUTLINE

> TIMELINE



main* ⌂ 0 △ 0



Ln 40, Col 1 Spaces: 2 UTF-8 CRLF {} JavaScript



Go Live



GMovies > screens > JS HomeScreen.js > ...

```
1 import React, { useState } from 'react'
2 import { View, Text, Platform, TouchableOpacity, ScrollView } from 'react-native'
3 import { StatusBar } from 'expo-status-bar'
4 import { SafeAreaView } from 'react-native-safe-area-context'
5 import { Bars3BottomLeftIcon, MagnifyingGlassIcon } from 'react-native-heroicons/outline';
6 import { styles } from '../theme';
7 import TrendingMovies from '../components/trendingMovies';
8
9 const ios = Platform.OS == "ios";
10
11 export default function HomeScreen() {
12   const [trending, setTrending] = useState([1,2,3]);
13   return (
14     <View className="flex-1 bg-neutral-800">
15       <SafeAreaView className={ios ? "-mb-2" : "mb-3"}> ...
16       </SafeAreaView>
17
18       <ScrollView
19         showVerticalScrollIndicator={false}
20         contentContainerStyles={{paddingBottom: 10}}
21       >
22         <TrendingMovies data={trending} />
23       </ScrollView>
24
25     </View>
26   )
27 }
28
29
30
31
32
33
34
35
36
37
38
39
40 }
```

Android Emulator - Medium_Phone_API_36.0:5554

8:58

GMovies


GMovies > screens > HomeScreen.js

```
1 import React, { use } from 'react';
2 import { View, Text, SafeAreaView, ScrollView } from 'react-native';
3 import { Bars3BottomIcon } from 'react-native-heroicons/outline';
4 import { styles } from './styles';
5 import TrendingMovies from './TrendingMovies';
6 import TrendingMovie from './TrendingMovie';
7 import TrendingMovieList from './TrendingMovieList';
8
9 const ios = Platform.OS === 'ios' ? true : false;
10
11 export default function HomeScreen() {
12   const [trending, setTrending] = useState([]);
13   return (
14     <View className={ios ? 'ios-style' : ''}>
15       <SafeAreaView style={ios ? styles.safeArea : null}>
16         <ScrollView showsVerticalScrollIndicator={ios ? false : true}>
17           <ContentContainer>
18             <TrendingMovies data={trending} />
19           </ContentContainer>
20         </ScrollView>
21       </SafeAreaView>
22     </View>
23   );
24 }
```

Em alta

19

GO LIVE

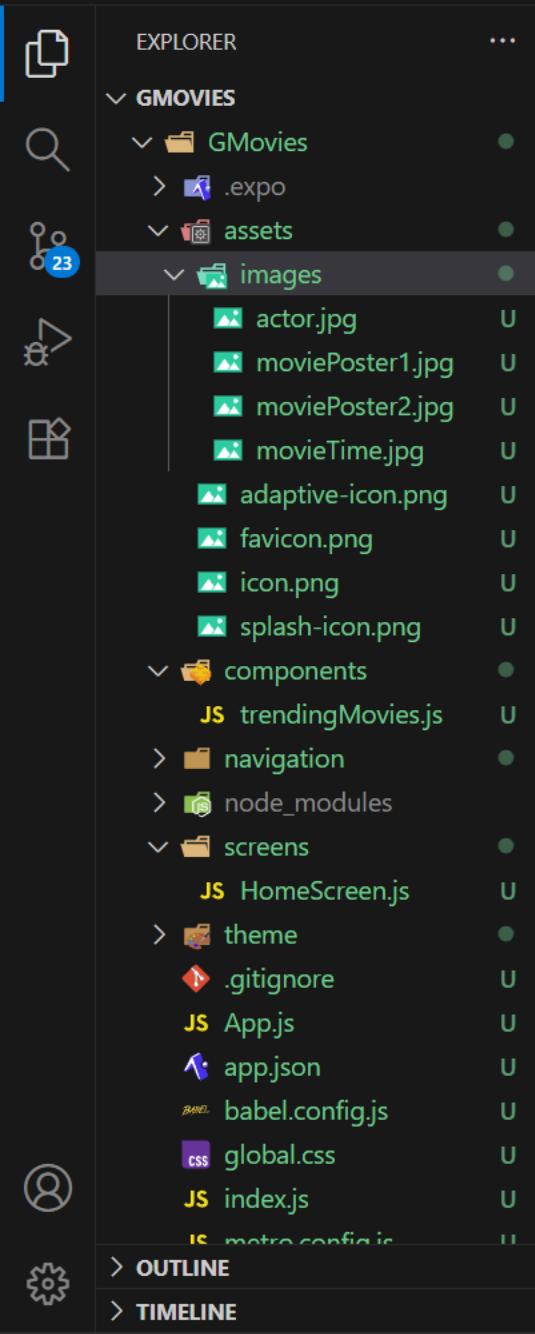

JS HomeScreen.js U X JS trendingMovies.js U

GMovies > screens > JS HomeScreen.js > ...

```
1 import React, { useState } from 'react'
2 import { View, Text, Platform, TouchableOpacity, ScrollView } from 'react-native'
3 import { StatusBar } from 'expo-status-bar'
4 import { SafeAreaView } from 'react-native-safe-area-context'
5 import { Bars3BottomLeftIcon, MagnifyingGlassIcon } from 'react-native-heroicons/outline'
6 import { styles } from '../theme';
7 import TrendingMovies from '../components/trendingMovies';
8
9 const ios = Platform.OS == "ios";
10
11 export default function HomeScreen() {
12   const [trending, setTrending] = useState([1,2,3]);
13   return (
14     <View className="flex-1 bg-neutral-800">
15       <SafeAreaView className={ios ? "-mb-2" : "mb-3"}> ...
16       </SafeAreaView>
17
18       <ScrollView
19         showVerticalScrollIndicator={false}
20         contentContainerStyles={{paddingBottom: 10}}
21       >
22         <TrendingMovies data={trending} />
23       </ScrollView>
24
25     </View>
26   )
27 }
28
29
30
31
32
33
34
35
36
37
38
39
40 }
```



EXPLORER

...

JS HomeScreen.js U

JS trendingMovies.js U X

GMOVIES

GMovies

> .expo

> assets

components

JS trendingMovies.js U

> navigation

> node_modules

screens

JS HomeScreen.js U

> theme

.gitignore

JS App.js

app.json

babel.config.js

global.css

JS index.js

JS metro.config.js

package-lock.json

package.json

tailwind.config.js

config e inicio.txt

README.md



GMovies > components > JS trendingMovies.js > [o] MovieCard

```
1 import React from 'react';
2 import { useNavigation } from '@react-navigation/native';
3 import { View, Text, Dimensions, TouchableWithoutFeedback, Image } from 'react-native'
4 import Carousel from 'react-native-reanimated-carousel';
5
6 var { width, height } = Dimensions.get('window');
7
8 export default function TrendingMovies({ data }) {
9   const navigation = useNavigation();
10  const handleClick = (item) => {
11    navigation.navigate('Movie', item);
12  }
13
14  return (
15    <View className="mb-8">
16      <Text className="text-white text-xl mx-4 my-3">Em alta</Text>
17      <Carousel
18        loop
19        width={width * 0.6}
20        height={height * 0.4}
21        autoPlay={false}
22        data={data}
23        // scrollAnimationDuration={5000}
24        renderItem={({ item }) => <MovieCard item={item} handleClick={handleClick} />}
25        mode="parallax"
26        modeConfig={{
27          parallaxScrollingScale: 1,
28          parallaxScrollingOffset: 1,
29          parallaxAdjacentItemScale: 0.9,
30        }}
31        style={{ width: width, justifyContent: 'center' }}
32      />
33    
```



Ln 47, Col 2

Tab Size: 4

UTF-8

CRLF

{ } JavaScript



Go Live





EXPLORER

...

JS HomeScreen.js U

JS trendingMovies.js U X

GMovies > components > JS trendingMovies.js > ...

```
19     width={width * 0.6}
20     height={height * 0.4}
21     autoPlay={false}
22     data={data}
23 // scrollAnimationDuration={5000}
24 renderItem={({ item }) => <MovieCard item={item} handleClick={handleClick} />}
25 mode="parallax"
26 modeConfig={{
27   parallaxScrollingScale: 1,
28   parallaxScrollingOffset: 1,
29   parallaxAdjacentItemScale: 0.9,
30 }}
```

}

```
31   style={{ width: width, justifyContent: 'center' }}
32   />
33 </View>
34 )
35 }
```

```
36
37 const MovieCard = ({item, handleClick}) => {
38   return (
39     <TouchableWithoutFeedback onPress={() => handleClick(item)}>
40       <Image
41         source={require('../assets/images/moviePoster1.jpg')}
42         style={{ width: '100%', height: '100%' }}
43         className="rounded-2xl"
44       />
45     </TouchableWithoutFeedback>
46   )
47 }
```



GMovies

> .expo

> assets

23

> components

JS trendingMovies.js U

> navigation

> node_modules

> screens

JS HomeScreen.js U

> theme

.gitignore

JS App.js U

app.json U

babel.config.js U

global.css U

JS index.js U

JS metro.config.js U

package-lock.json U

package.json U

tailwind.config.js U

config e inicio.txt U

README.md



> OUTLINE

> TIMELINE



main* ↻ ⑧ 0 ⚠ 0



Ln 48, Col 1

Tab Size: 4

UTF-8

CRLF

{ } JavaScript



Go Live



The screenshot shows a developer's environment with several open windows:

- EXPLORER**: Shows the project structure for "GMOVIES". The "components" folder contains "trendingMovies.js", which is currently selected.
- CODE**: The "trendingMovies.js" file is open in the editor. The code defines a "MovieCard" component using React Native syntax. It includes imports for "Image" and "TouchableOpacity", and uses "width", "height", "autoPlay", and "data" props. A "parallaxImage" style is applied to the image component.
- PREVIEW**: An Android emulator window titled "Android Emulator - Medium_Phone_API_36.0:5554" displays the "HomeScreen.js" UI. The screen shows a grid of movie cards. One card in the center features a composite image of Deadpool and Wolverine, with their names overlaid. The top navigation bar of the app shows the title "GMovies".
- STATUS BAR**: The bottom of the screen shows standard OS status icons for signal strength, battery, and connectivity.

← →

GMovies



EXPLORER

...

GMOVIES

GMovies

.expo

assets

components

movieList.js

trendingMovies.js

navigation

node_modules

screens

theme

.gitignore

App.js

app.json

babel.config.js

global.css

index.js

metro.config.js

package-lock.json

package.json

tailwind.config.js

config e inicio.txt

README.md

...

23

OUTLINE

TIMELINE




Show All Commands Ctrl + Shift + P

Go to File Ctrl + P

Open Chat Ctrl + Alt + I

Start Debugging F5

Toggle Terminal Ctrl + `

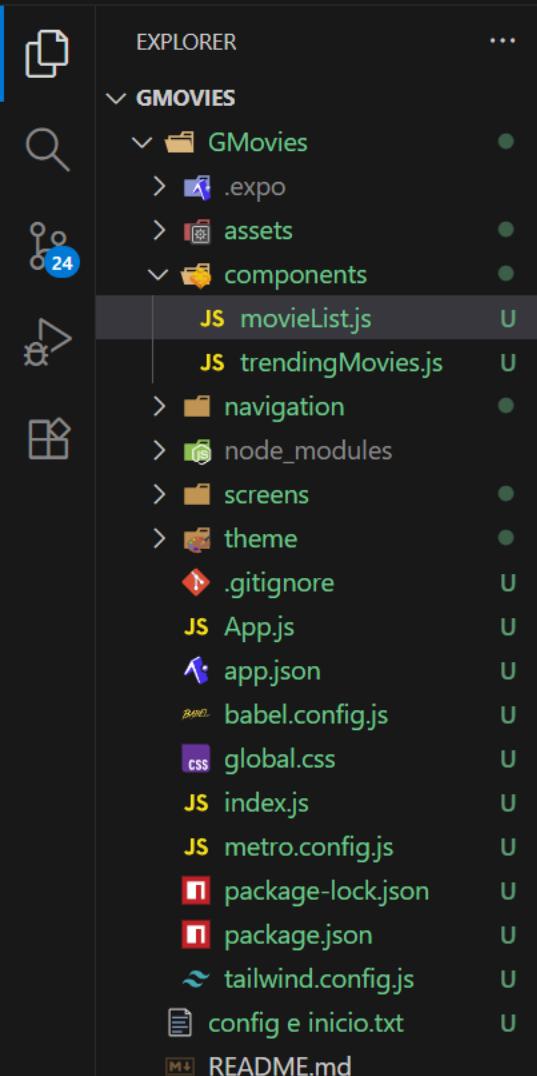

JS movieList.js U X

GMovies > components > JS movieList.js > ...

```
1 import React from 'react'
2 import { View, Text } from 'react-native'
3
4 export default function MovieList() {
5   return (
6     <View>
7       |   <Text>movieList</Text>
8     </View>
9   )
10 }
11
```





EXPLORER

...

JS movieList.js U

JS HomeScreen.js U X

GMovies

GMovies

.expo

assets

components

movieList.js

trendingMovies.js

navigation

node_modules

screens

HomeScreen.js

theme

.gitignore

App.js

app.json

babel.config.js

global.css

index.js

metro.config.js

package-lock.json

package.json

tailwind.config.js

config e inicio.txt

README.md



> OUTLINE

> TIMELINE



main* ↻ 0 △ 0



Ln 45, Col 1

Spaces: 2

UTF-8 CRLF

{ } JavaScript



Go Live



```
GMovies > screens > JS HomeScreen.js > ...
  5   import { BarssBottomLeftIcon, MagnifyingGlassIcon } from 'react-native-heroicons/outline';
  6   import { styles } from '../theme';
  7   import TrendingMovies from '../components/trendingMovies';
  8   import MovieList from '../components/movieList';
  9
 10  const ios = Platform.OS === "ios";
 11
 12  export default function HomeScreen() {
 13    const [trending, setTrending] = useState([1,2,3]);
 14    const [upcoming, setUpcoming] = useState([1,2,3]);
 15    const [topRated, setTopRated] = useState([1,2,3]);
 16
 17    return (
 18      <View className="flex-1 bg-neutral-800">
 19        <SafeAreaView className={ios ? "-mb-2" : "mb-3"}> ...
 20
 21        <ScrollView
 22          showVerticalScrollIndicator={false}
 23          contentContainerStyles={{paddingBottom: 10}}
 24        >
 25          <TrendingMovies data={trending} />
 26
 27          <MovieList title="Próximos lançamentos" data={upcoming} />
 28        </ScrollView>
 29
 30        </View>
 31      )
 32    }
 33
 34  )
 35
 36  )
 37
 38  )
 39
 40  )
 41
 42  )
 43  )
 44  }
 45 }
```



EXPLORER

...

JS movieList.js U X

JS HomeScreen.js U

▷ 🔍 ⌂ ⌂ ⌂ ⌂

GMovies

GMovies

.expo

assets

components

JS movieList.js

JS trendingMovies.js

navigation

node_modules

screens

JS HomeScreen.js

theme

.gitignore

App.js

app.json

babel.config.js

global.css

index.js

metro.config.js

package-lock.json

package.json

tailwind.config.js

config e inicio.txt

README.md



> OUTLINE

> TIMELINE

GMovies > components > JS movieList.js > ...

```
1 import React from 'react'
2 import { View, Text, TouchableOpacity, ScrollView, TouchableWithoutFeedback, Image, Dimensions } from 'react-native'
3 import { styles } from '../theme'
4 import { useNavigation } from '@react-navigation/native';
5
6 var { width, height } = Dimensions.get('window');
7
8 export default function MovieList({ title, data }) {
9   let movieName = "Joker: Folie à Deux";
10  const navigation = useNavigation();
11  return (
12    <View className="mb-9 space-y-4">
13      <View className="mx-4 flex-row justify-between items-center">
14        <Text className="text-white text-xl">{title}</Text>
15        <TouchableOpacity>
16          <Text style={styles.text} className="text-lg">Ver todos</Text>
17        </TouchableOpacity>
18      </View>
19      <ScrollView
20        horizontal
21        showsHorizontalScrollIndicator={false}
22        contentContainerStyle={{ paddingHorizontal: 15 }}>
23        >
24        {
25          data.map((item, index) => {
26            return (
27              <TouchableWithoutFeedback
28                key={index}
29                onPress={() => navigation.navigate('Movie', item)}
30              >
31                <View className="space-y-1 mr-4">
32                  <Image
```

EXPLORER

... JS movieList.js U X JS HomeScreen.js U

GMovies > components > JS movieList.js > ...

GMovies


- > .expo
- > assets
- > navigation
- > node_modules
- > screens
 - JS HomeScreen.js
- > theme
- .gitignore
- JS App.js
- app.json
- babel.config.js
- global.css
- JS index.js
- JS metro.config.js
- package-lock.json
- package.json
- tailwind.config.js
- config e inicio.txt
- README.md

24

OUTLINE

TIMELINE

```
21     showsHorizontalScrollIndicator={false}
22     contentContainerStyle={{ paddingHorizontal: 15 }}
23   >
24   {
25     data.map((item, index) => {
26       return (
27         <TouchableWithoutFeedback
28           key={index}
29           onPress={() => navigation.navigate('Movie', item)}
29       >
30         <View className="space-y-1 mr-4">
31           <Image
32             source={require('../assets/images/moviePoster2.jpg')}
33             className="rounded-2xl"
34             style={{ width: width * 0.35, height: height * 0.26 }}
35           />
36           <Text className="text-neutral-300 ml-1 text-center">
37             {
38               movieName.length > 14 ? movieName.slice(0, 14) + '...' : movieName
39             }
40           </Text>
41         </View>
42       </TouchableWithoutFeedback>
43     )
44   })
45 }
46 </ScrollView>
47 </View>
48 )
49 }
50 }
51 }
```

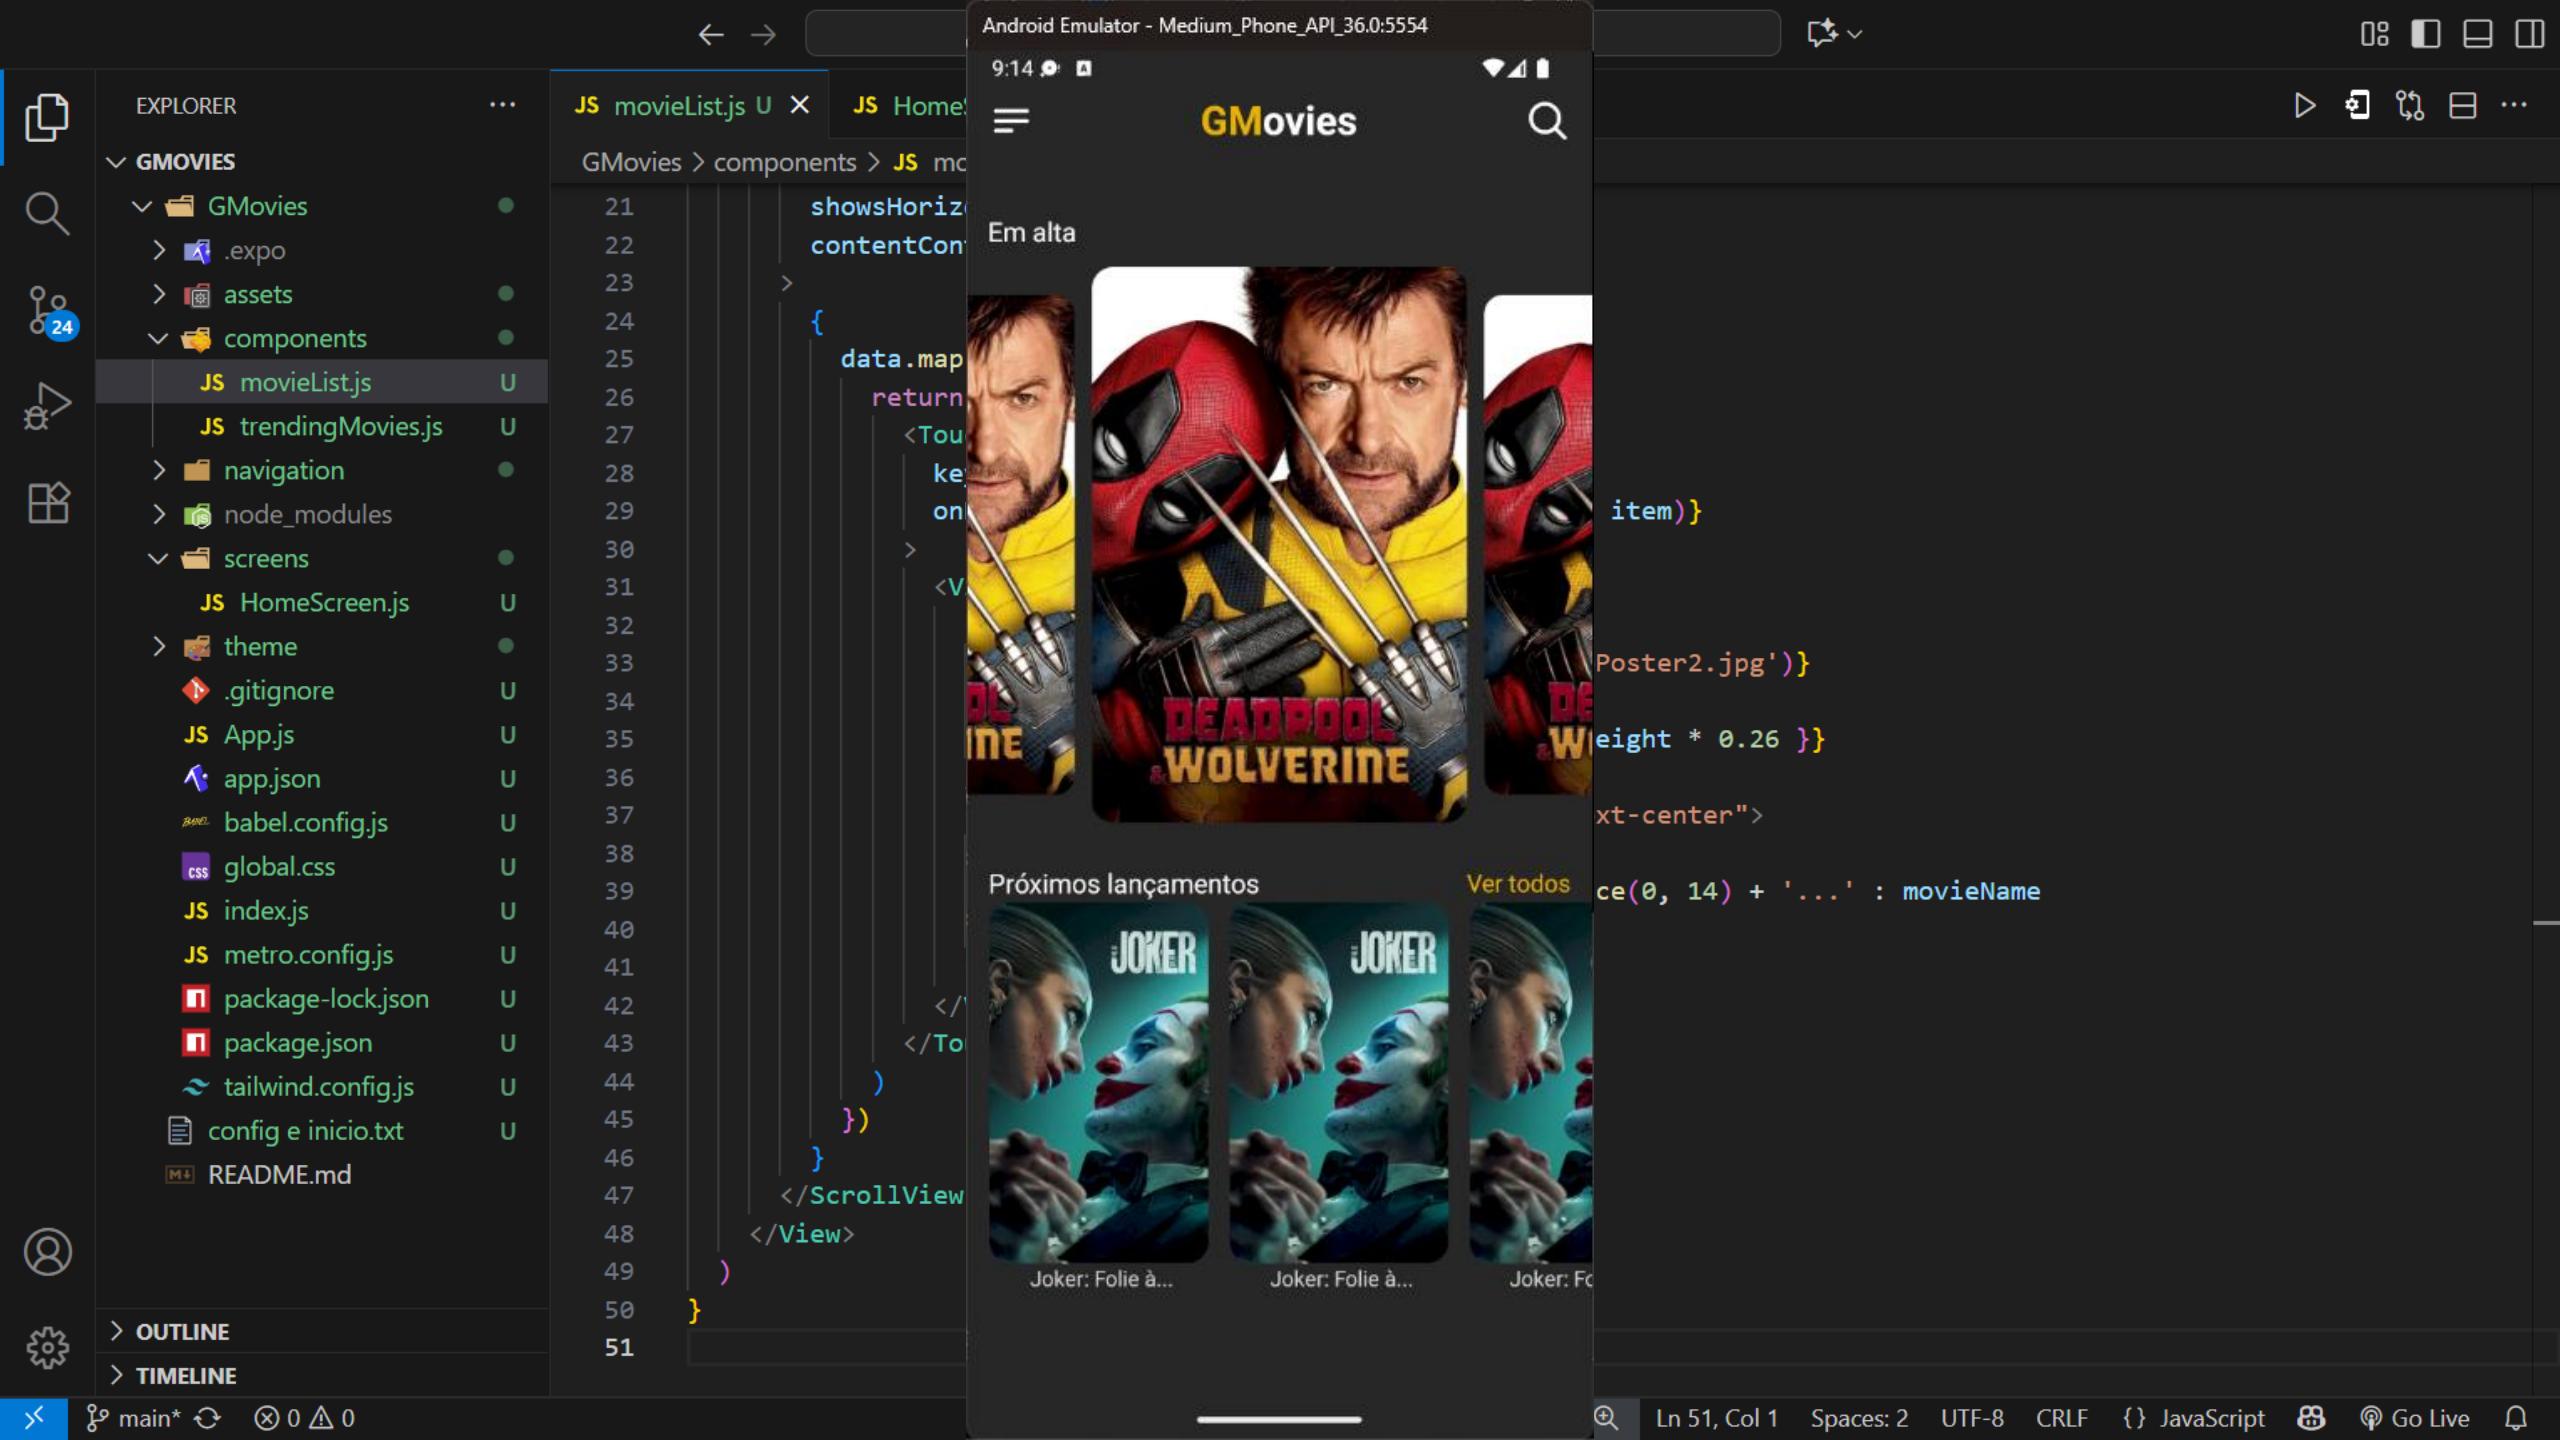



EXPLORER

...

JS movieList.js U

JS HomeScreen.js U ●

GMovies > screens > JS HomeScreen.js > ...
import { SafeAreaView } from 'react-native-safe-area-context'; import { MovieList } from '../components/movieList';
const ios = Platform.OS == "ios";
export default function HomeScreen() {
 const [trending, setTrending] = useState([1,2,3]);
 const [upcoming, setUpcoming] = useState([1,2,3]);
 const [topRated, setTopRated] = useState([1,2,3]);
 return (
 <View className="flex-1 bg-neutral-800">
 <SafeAreaView className={ios ? "-mb-2" : "mb-3"}> ...
 </SafeAreaView>
 <ScrollView
 showVerticalScrollIndicator={false}
 contentContainerStyles={{paddingBottom: 10}}>
 <TrendingMovies data={trending} />
 <MovieList title="Próximos lançamentos" data={upcoming} />
 <MovieList title="Melhor Avaliados" data={topRated} />
 </ScrollView>
 </View>
)
}



GMovies

> .expo

> assets

GMOVIES

> components

JS movieList.js U

JS trendingMovies.js U

> navigation

> node_modules

> screens

JS HomeScreen.js U

> theme

.gitignore

JS App.js U

app.json U

babel.config.js U

global.css U

JS index.js U

JS metro.config.js U

package-lock.json U

package.json U

tailwind.config.js U

config e inicio.txt U

README.md



> OUTLINE

> TIMELINE



main* ⌂ ⌂ 0 ⌂ 0



Ln 46, Col 1

Spaces: 2

UTF-8 CRLF

{ } JavaScript



Go Live



Android Emulator - Medium_Phone_API_36.0:5554

9:15

GMovies

GMovies > screens > HomeScreen.js

```
8 import MovieList from './MovieList';
9
10 const ios = Platform.OS === 'ios' ? true : false;
11
12 export default function HomeScreen({ navigation }) {
13   const [trending, setTrending] = useState([]);
14   const [upcoming, setUpcoming] = useState([]);
15   const [topRated, setTopRated] = useState([]);
16
17   return (
18     <View className="flex flex-col justify-center items-center" style={{ height: '100%' }}>
19       <SafeAreaView style={{ flex: 1 }}/>
20       <ScrollView style={{ width: '100%', height: '100%' }} showsVerticalScrollIndicator={false} contentContainerStyle={{ padding: 10 }}>
21         <TrendingMovies trending={trending} setTrending={setTrending} style={{ margin: 10, border: 1, padding: 5, borderRadius: 5 }}/>
22         <MovieList movies={upcoming} style={{ margin: 10, border: 1, padding: 5, borderRadius: 5 }}/>
23         <MovieList movies={topRated} style={{ margin: 10, border: 1, padding: 5, borderRadius: 5 }}/>
24       </ScrollView>
25     </View>
26   );
27 }
```

Próximos lançamentos

Ver todos

Joker: Folie à... Joker: Folie à... Joker: Folie à...

Melhor Avaliados

Ver todos

Joker: Folie à... Joker: Folie à... Joker: Folie à...

Ln 46, Col 1 Spaces: 2 UTF-8 CRLF {} JavaScript Go Live

EXPLORER

GMOVIES

- GMovies
- .expo
- assets
- components
 - movieList.js
 - trendingMovies.js
- navigation
- node_modules
- screens
 - HomeScreen.js
- theme
- .gitignore
- App.js
- app.json
- babel.config.js
- global.css
- index.js
- metro.config.js
- package-lock.json
- package.json
- tailwind.config.js
- config e inicio.txt
- README.md

OUTLINE

TIMELINE

← →

GMovies



EXPLORER

...

GMOVIES

GMovies

.expo

assets

components

movieList.js

trendingMovies.js

navigation

node_modules

screens

MovieScreen.js

HomeScreen.js

theme

.gitignore

App.js

app.json

babel.config.js

global.css

index.js

metro.config.js

package-lock.json

package.json

tailwind.config.js

config e inicio.txt

README.md

OUTLINE

TIMELINE



Show All Commands Ctrl + Shift + P


Go to File Ctrl + P

Open Chat Ctrl + Alt + I

Start Debugging F5

Toggle Terminal Ctrl + `



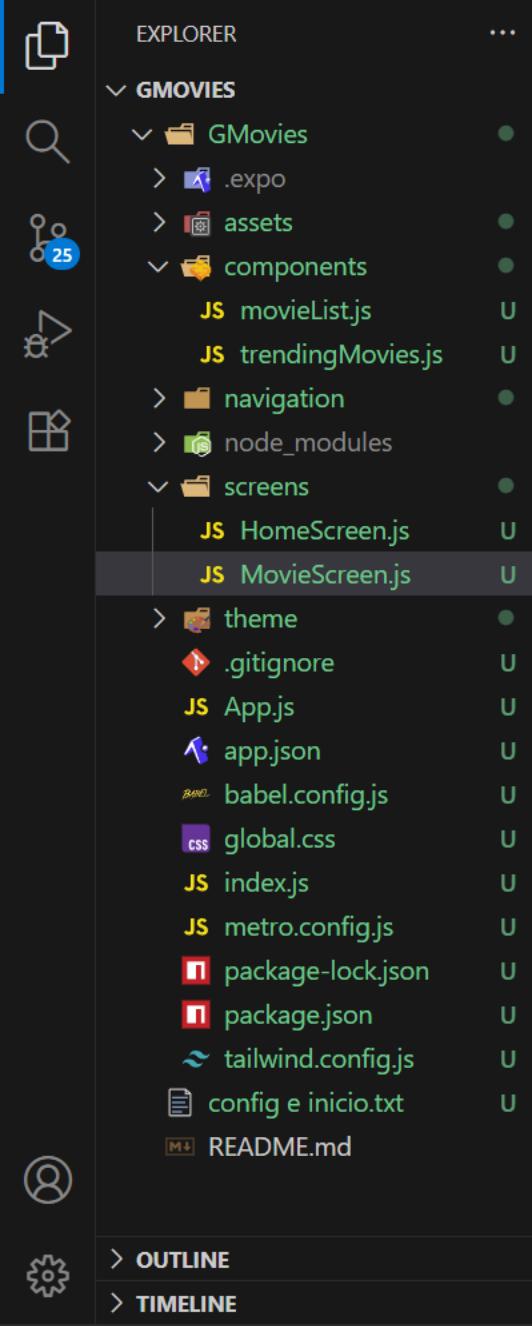

JS MovieScreen.js X

GMovies > screens > JS MovieScreen.js > ...

```
1 import React from 'react'
2 import { View, Text } from 'react-native'
3
4 export default function MovieScreen() {
5   return (
6     <View>
7       |   <Text>MovieScreen</Text>
8     </View>
9   )
10 }
11
```

EXPLORER

...

GMovies

- GMovies
- .expo
- assets
- components
 - movieList.js
 - trendingMovies.js
- navigation
 - appNavigation.js
- node_modules
- screens
 - HomeScreen.js
 - MovieScreen.js
- theme
- .gitignore
- App.js
- app.json
- babel.config.js
- global.css
- index.js
- metro.config.js
- package-lock.json
- package.json
- tailwind.config.js
- config e inicio.txt
- README.md

> OUTLINE

> TIMELINE

JS MovieScreen.js U JS appNavigation.js U X

GMovies > navigation > JS appNavigation.js > ...

```
1 import { NavigationContainer } from '@react-navigation/native';
2 import { createNativeStackNavigator } from '@react-navigation/native-stack';
3 import HomeScreen from '../screens/HomeScreen';
4 import MovieScreen from '../screens/MovieScreen';
5
6 const Stack = createNativeStackNavigator();
7
8 export default function AppNavigation() {
9   return (
10    <NavigationContainer>
11      <Stack.Navigator>
12        <Stack.Screen name='Home' options={{headerShown: false}} component={HomeScreen} />
13        <Stack.Screen name='Movie' options={{ headerShown: false }} component={MovieScreen} />
14      </Stack.Navigator>
15    </NavigationContainer>
16  )
17}
18}
```



EXPLORER

...

JS MovieScreen.js U X

GMovies > screens > JS MovieScreen.js > ...

- GMovies
- .expo
- assets
- components
 - movieList.js
 - trendingMovies.js
- navigation
 - appNavigation.js
- node_modules
- screens
 - HomeScreen.js
 - MovieScreen.js
- theme
- .gitignore
- App.js
- app.json
- babel.config.js
- global.css
- index.js
- metro.config.js
- package-lock.json
- package.json
- tailwind.config.js
- config e inicio.txt
- README.md



> OUTLINE

> TIMELINE

```
1 import React, { useEffect, useState } from 'react'
2 import { View, Text, ScrollView, TouchableOpacity, Dimensions, Image } from 'react-native'
3 import { SafeAreaView } from 'react-native-safe-area-context'
4 import { useNavigation, useRoute } from '@react-navigation/native'
5 import { ChevronLeftIcon } from 'react-native-heroicons/outline';
6 import { HeartIcon } from 'react-native-heroicons/solid';
7 import { styles, theme } from '../theme';
8 import { LinearGradient } from 'expo-linear-gradient';

9 var { width, height } = Dimensions.get('window');

10 export default function MovieScreen() {
11   const { params: item } = useRoute();
12   const [isFavorite, toggleFavorite] = useState(false);
13   const navigation = useNavigation();
14   let movieName = "Joker: Folie à Deux";
15   useEffect(() => {
16     // call API
17   }, [item])

18   return (
19     <ScrollView
20       contentContainerStyle={{ paddingBottom: 20, minHeight: '100%' }}
21       className="flex-1 bg-neutral-900"
22     >
23       <View className="w-full">
24         <SafeAreaView className="absolute z-20 w-full flex-row justify-between items-center p-4 pt-3">
25           <TouchableOpacity onPress={() => navigation.goBack()} style={styles.background} className="rounded-xl p-1">
26             <ChevronLeftIcon size="28" strokeWidth={2.5} color="white" />
27           </TouchableOpacity>
28           <TouchableOpacity onPress={() => toggleFavorite(!isFavorite)}>
29             <HeartIcon size="36" color={isFavorite ? theme.background : "white"} />
30           </TouchableOpacity>
31         </SafeAreaView>
32       </View>
33     </ScrollView>
34   );
35 }
```



Ln 11, Col 1

Spaces: 2

UTF-8

CRLF

{} JavaScript



@ Go Live





EXPLORER

...

JS MovieScreen.js X

GMovies

GMovies

.expo

assets

components

movieList.js

trendingMovies.js

navigation

appNavigation.js

node_modules

screens

HomeScreen.js

MovieScreen.js

theme

.gitignore

App.js

app.json

babel.config.js

global.css

index.js

metro.config.js

package-lock.json

package.json

tailwind.config.js

config e inicio.txt

README.md

...

GMovies > screens > JS MovieScreen.js > ...

```
26   <View className="w-full">
27     <SafeAreaView className="absolute z-20 w-full flex-row justify-between items-center p-4 pt-3">
28       <TouchableOpacity onPress={() => navigation.goBack()} style={styles.background} className="rounded-xl p-1">
29         <ChevronLeftIcon size="28" strokeWidth={2.5} color="white" />
30       </TouchableOpacity>
31       <TouchableOpacity onPress={() => toggleFavorite(!isFavorite)}>
32         <HeartIcon size="36" color={isFavorite ? theme.background : "white"} />
33       </TouchableOpacity>
34     </SafeAreaView>
35   <View>
36     <Image
37       source={require('../assets/images/moviePoster2.jpg')}
38       style={{ width: width, height: height * 0.55 }}
39     />
40     <LinearGradient
41       colors={['transparent', 'rgba(23,23,23,0.8)', 'rgba(23,23,23,1)']}
42       style={{ width, height: height * 0.4 }}
43       start={{ x: 0.5, y: 0 }}
44       end={{ x: 0.5, y: 1 }}
45       className="absolute bottom-0"
46     />
47   </View>
48
49   <View style={{ marginTop: -(height * 0.09) }} className="space-y-3">
50     /* Nome do Filme */
51     <Text className="text-white text-center text-3xl font-bold tracking-wider">
52       {movieName}
53     </Text>
54
55     /* Status, Estreia, Tempo de Duração */
56     <Text className="text-neutral-400 font-semibold text-base text-center">
57       Lancado • 2024 • 138 min

```



EXPLORER

...

JS MovieScreen.js X

GMovies

GMovies

.expo

assets

components

movieList.js

trendingMovies.js

navigation

appNavigation.js

node_modules

screens

HomeScreen.js

MovieScreen.js

theme

.gitignore

App.js

app.json

babel.config.js

global.css

index.js

metro.config.js

package-lock.json

package.json

tailwind.config.js

config e inicio.txt

README.md

> OUTLINE

> TIMELINE

GMovies > screens > JS MovieScreen.js > ...

```
56      <Text className="text-neutral-400 font-semibold text-base text-center">
57        Lancado • 2024 • 138 min
58      </Text>
59
60      /* Gêneros */
61      <View className="flex-row justify-center mx-4 space-x-2">
62        <Text className="text-neutral-400 font-semibold text-base text-center">
63          Drama •
64        </Text>
65        <Text className="text-neutral-400 font-semibold text-base text-center">
66          Crime •
67        </Text>
68        <Text className="text-neutral-400 font-semibold text-base text-center">
69          Thriller
70        </Text>
71      </View>
72
73      /* Sinopse */
74      <Text className="text-neutral-400 mx-4 tracking-wide">
75        Coringa 2 se passa depois dos acontecimentos do filme de 2019, após ser iniciado um movimento popular contra a
76      </Text>
77
78      /* Elenco */
79
80      </View>
81    </View>
82  </ScrollView>
83
84  }
85 }
```

9:19



GMovies



E

G

Em alta



Próximos lançamentos



Ver todos

Melhor Avaliados

Ver todos

9:19



9:19



9:19



Joker: Folie à Deux

Lancado • 2024 • 138 min

Drama • Crime • Thriller

Coringa 2 se passa depois dos acontecimentos do filme de 2019, após ser iniciado um movimento popular contra a elite de Gotham City, revolução esta, que teve o Coringa como seu maior representante. Preso no hospital psiquiátrico de Arkham, ele acaba conhecendo Harleen "Lee" Quinzel (Lady Gaga). A curiosidade mútua acaba se transformando em paixão e obsessão e eles desenvolvem um relacionamento romântico e doentio. Lee e Arthur embarcam em uma desventura alucinada, fervorosa e musical pelo submundo de Gotham City, enquanto o julgamento público d'O Coringa se desenrola, impactando toda a cidade e suas próprias mentes conturbadas.

```
s U X
  s > JS MovieS
    <Text cl
      Lancad
    </Text>
    /* Gêne
    <View cl
      <Text
        Dram
      </Text>
      <Text
        Crim
      </Text>
      <Text
        Thri
      </Text>
    </View>
    /* Sino
    <Text cl
      Coring
    </Text>
    /* Elen
    </View>
    </View>
  ScrollView>
```

ext-base te

ce-x-2">

text-base

text-base

text-base

ide">

filme de 2



Joker: Folie à Deux

Lancado • 2024 • 138 min

Drama • Crime • Thriller

Coringa 2 se passa depois dos acontecimentos do filme de 2019, após ser iniciado um movimento popular contra a elite de Gotham City, revolução esta, que teve o Coringa como seu maior representante. Preso no hospital psiquiátrico de Arkham, ele acaba conhecendo Harleen "Lee" Quinzel (Lady Gaga). A curiosidade mútua acaba se transformando em paixão e obsessão e eles desenvolvem um relacionamento romântico e doentio. Lee e Arthur embarcam em uma desventura alucinada, fervorosa e musical pelo submundo de Gotham City, enquanto o julgamento público d'O Coringa se desenrola, impactando toda a cidade e suas próprias mentes conturbadas.

ar contra a

Ln 11, Col

Go Live



← →

🔍 GMovies



EXPLORER

...

GMovies

GMovies

.expo

assets

components

cast.js

movieList.js

trendingMovies.js

navigation

appNavigation.js

node_modules

screens

HomeScreen.js

MovieScreen.js

theme

.gitignore

App.js

app.json

babel.config.js

global.css

index.js

metro.config.js

package-lock.json

package.json

tailwind.config.js

config e inicio.txt

README.md

...

OUTLINE

TIMELINE



Show All Commands Ctrl + Shift + P

Go to File Ctrl + P

Open Chat Ctrl + Alt + I

Start Debugging F5

Toggle Terminal Ctrl + `

The screenshot shows the Visual Studio Code interface with a dark theme. The Explorer sidebar on the left displays the file structure of a React Native project named 'GMOVIES'. The 'components' folder contains 'cast.js', 'movieList.js', and 'trendingMovies.js'. The 'navigation' folder contains 'appNavigation.js'. Other files listed include '.gitignore', 'App.js', 'app.json', 'babel.config.js', 'global.css', 'index.js', 'metro.config.js', 'package-lock.json', 'package.json', 'tailwind.config.js', 'config e inicio.txt', and 'README.md'. The 'OUTLINE' and 'TIMELINE' tabs are also visible in the Explorer sidebar.

The main editor area shows the content of 'cast.js':

```
1 import React from 'react'
2 import { View, Text } from 'react-native'
3
4 export default function Cast() {
5   return (
6     <View>
7       |   <Text>cast</Text>
8     </View>
9   )
10 }
11
```

The status bar at the bottom shows the file name 'main*', line count '0', character count '0', and other standard status indicators.



EXPLORER

...

JS cast.js U

JS MovieScreen.js U X

GMovies

GMovies

.expo

assets

components

JS cast.js

JS movieList.js

JS trendingMovies.js

navigation

JS appNavigation.js

node_modules

screens

JS HomeScreen.js

JS MovieScreen.js

theme

.gitignore

JS App.js

app.json

babel.config.js

global.css

JS index.js

JS metro.config.js

package-lock.json

package.json

tailwind.config.js

config e inicio.txt

README.md

> OUTLINE

> TIMELINE

```
GMovies > screens > JS MovieScreen.js > MovieScreen
  5   import { ChevronLeftIcon } from 'react-native-heroicons/outline';
  6   import { HeartIcon } from 'react-native-heroicons/solid';
  7   import { styles, theme } from '../theme';
  8   import { LinearGradient } from 'expo-linear-gradient';
  9   import Cast from '../components/cast';

 10  var { width, height } = Dimensions.get('window');

 13  export default function MovieScreen() {
 14    const { params: item } = useRoute();
 15    const [isFavorite, toggleFavorite] = useState(false);
 16    const [cast, setCast] = useState([1,2,3,4,5]);
 17    const navigation = useNavigation();
 18    let movieName = "Joker: Folie à Deux";
 19    useEffect(() => {
 20      // call API
 21    }, [item])

 23    return (
 24      <ScrollView
 25        contentContainerStyle={{ paddingBottom: 20, minHeight: '100%' }}
 26        className="flex-1 bg-neutral-900"
 27      >
 28        <View className="w-full">
 29          <SafeAreaView className="absolute z-20 w-full flex-row justify-between items-center p-4 pt-3">
 30            <TouchableOpacity onPress={() => navigation.goBack()} style={styles.background} className="rounded-xl p-1">
 31              <ChevronLeftIcon size="28" strokeWidth={2.5} color="white" />
 32            </TouchableOpacity>
 33            <TouchableOpacity onPress={() => toggleFavorite(!isFavorite)}>
 34              <HeartIcon size="36" color={isFavorite ? theme.background : "white"} />
 35            </TouchableOpacity>
 36          </SafeAreaView>
 37        ...
 38      </View>
 39    );
 40  }
 41
 42  const [cast, setCast] = useState([1,2,3,4,5]);
 43  const navigation = useNavigation();
 44  let movieName = "Joker: Folie à Deux";
 45  useEffect(() => {
 46    // call API
 47  }, [item])
 48
 49  return (
 50    <ScrollView
 51      contentContainerStyle={{ paddingBottom: 20, minHeight: '100%' }}
 52      className="flex-1 bg-neutral-900"
 53    >
 54      <View className="w-full">
 55        <SafeAreaView className="absolute z-20 w-full flex-row justify-between items-center p-4 pt-3">
 56          <TouchableOpacity onPress={() => navigation.goBack()} style={styles.background} className="rounded-xl p-1">
 57            <ChevronLeftIcon size="28" strokeWidth={2.5} color="white" />
 58          </TouchableOpacity>
 59          <TouchableOpacity onPress={() => toggleFavorite(!isFavorite)}>
 60            <HeartIcon size="36" color={isFavorite ? theme.background : "white"} />
 61          </TouchableOpacity>
 62        </SafeAreaView>
 63      </View>
 64    </ScrollView>
 65  );
 66}
```



EXPLORER

...

JS cast.js U

JS MovieScreen.js U X

GMovies

GMovies

.expo

assets

components

JS cast.js

JS movieList.js

JS trendingMovies.js

navigation

JS appNavigation.js

node_modules

screens

JS HomeScreen.js

JS MovieScreen.js

theme

.gitignore

JS App.js

app.json

babel.config.js

global.css

JS index.js

JS metro.config.js

package-lock.json

package.json

tailwind.config.js

config e inicio.txt

README.md

> OUTLINE

> TIMELINE

GMovies > screens > JS MovieScreen.js > MovieScreen

```
61
62  /* Gêneros */
63  <View className="flex-row justify-center mx-4 space-x-2">
64    <Text className="text-neutral-400 font-semibold text-base text-center">
65      Drama
66    </Text>
67    <Text className="text-neutral-400 font-semibold text-base text-center">
68      Crime
69    </Text>
70    <Text className="text-neutral-400 font-semibold text-base text-center">
71      Thriller
72    </Text>
73  </View>
74
75  /* Sinopse */
76  <Text className="text-neutral-400 mx-4 tracking-wide">
77    Coringa 2 se passa depois dos acontecimentos do filme de 2019, após ser iniciado um movimento popular contra a
78  </Text>
79
80  /* Elenco */
81  <Cast navigation={navigation} cast={cast} />
82
83  </View>
84  </View>
85  </ScrollView>
86  )
87 }
88 }
```



EXPLORER

...

JS cast.js U X

GMovies

GMovies

.expo

assets

components

JS cast.js U

JS movieList.js U

JS trendingMovies.js U

navigation

JS appNavigation.js U

node_modules

screens

JS HomeScreen.js U

JS MovieScreen.js U

theme

.gitignore

JS App.js U

app.json

babel.config.js

global.css

JS index.js U

JS metro.config.js U

package-lock.json

package.json

tailwind.config.js

config e inicio.txt U

README.md

> OUTLINE

> TIMELINE

GMovies > components > JS cast.js > ...

```
1 import React from 'react'
2 import { View, Text, ScrollView, TouchableOpacity, Image } from 'react-native'
3
4 export default function Cast({ cast, navigation }) {
5   let personName = 'Joaquin Phoenix'
6   let characterName = 'Arthur Fleck'
7   return (
8     <View className="my-6">
9       <Text className="text-white text-lg mx-4 mb-5">Elenco</Text>
10      <ScrollView
11        horizontal
12        showsHorizontalScrollIndicator={false}
13        contentContainerStyle={{ paddingHorizontal: 15 }}>
14
15      {
16        cast && cast.map((person, index) => {
17          return (
18            <TouchableOpacity
19              key={index}
20              className="mr-3 items-center"
21              onPress={() => navigation.navigate('Person', person)}>
22              >
23                <View className="overflow-hidden rounded-full h-20 w-20 items-center border border-neutral-500">
24                  <Image className="rounded-2xl h-24 w-20"
25                    source={require('../assets/images/actor.jpg')}>
26                  />
27                </View>
28                <Text className="text-white text-xs mt-1">
29                  {
30                    characterName.length > 10 ? characterName.slice(0,10) + '...' : characterName
31                  }
32                </Text>
```



EXPLORER

...

JS cast.js U X

GMovies

GMovies

> .expo

> assets

> components

JS cast.js U

JS movieList.js U

JS trendingMovies.js U

> navigation

JS appNavigation.js U

> node_modules

> screens

JS HomeScreen.js U

JS MovieScreen.js U

> theme

.gitignore

JS App.js

app.json

babel.config.js

global.css

JS index.js

JS metro.config.js

package-lock.json

package.json

tailwind.config.js

config e inicio.txt U

README.md

> OUTLINE

> TIMELINE

GMovies > components > JS cast.js > ...

```
16          cast &gt; cast.map((person, index) => {
17            return (
18              <TouchableOpacity
19                key={index}
20                className="mr-3 items-center"
21                onPress={() => navigation.navigate('Person', person)}
22              >
23                <View className="overflow-hidden rounded-full h-20 w-20 items-center border border-neutral-500">
24                  <Image className="rounded-2xl h-24 w-20"
25                    source={require('../assets/images/actor.jpg')}
26                  />
27                </View>
28                <Text className="text-white text-xs mt-1">
29                  {
30                    characterName.length > 10 ? characterName.slice(0,10) + '...' : characterName
31                  }
32                </Text>
33                <Text className="text-neutral-400 text-xs mt-1">
34                  {
35                    personName.length > 10 ? personName.slice(0,10) + '...' : personName
36                  }
37                </Text>
38              </TouchableOpacity>
39            )
40          )
41        }
42      </ScrollView>
43    </View>
44  )
45 }
```

Android Emulator - Medium_Phone_API_36.0:5554

9:36

JOKER

GMovies > components > JS cast.js

```
JS cast.js  U X
17     return
18     <TouchableHighlight
19       key={key}
20       close
21       on
22     >
23     <View style={style}
24     <Text style={style}
25     </Text>
26     <Text style={style}
27     </Text>
28     <Text style={style}
29     </Text>
30     <Text style={style}
31     </Text>
32     <Text style={style}
33     </Text>
34     <Text style={style}
35     </Text>
36     <Text style={style}
37     </Text>
38     <Text style={style}
39     </Text>
40     <Text style={style}
41     </Text>
42     <Text style={style}
43     </Text>
44     <Text style={style}
45     </Text>
46   }
```

Joker: Folie à Deux

Lancado • 2024 • 138 min

Drama • Crime • Thriller

Coringa 2 se passa depois dos acontecimentos do filme de 2019, após ser iniciado um movimento popular contra a elite de Gotham City, revolução esta, que teve o Coringa como seu maior representante. Preso no hospital psiquiátrico de Arkham, ele acaba conhecendo Harleen "Lee" Quinzel (Lady Gaga). A curiosidade mútua acaba se transformando em paixão e obsessão e eles desenvolvem um relacionamento romântico e doentio. Lee e Arthur embarcam em uma desventura alucinada, fervorosa e musical pelo submundo de Gotham City, enquanto o julgamento público d'O Coringa se desenrola, impactando toda a cidade e suas próprias mentes conturbadas.

Elenco

Arthur Fleck... Joaquin Phoenix... Arthur Fleck... Joaquin Phoenix... Arthur Fleck... Joaquin Phoenix... Arthur Fleck... Joaquin Phoenix...

me.slice(0.10) + '...' : characterName

t-1">

ce(0.10) + '...' : personName

Ln 46, Col 1 Spaces: 4 UTF-8 CRLF {} JavaScript Go Live



EXPLORER

...

JS MovieScreen.js X

GMovies

GMovies

.expo

assets

components

cast.js

movieList.js

trendingMovies.js

navigation

appNavigation.js

node_modules

screens

HomeScreen.js

MovieScreen.js

theme

.gitignore

App.js

app.json

babel.config.js

global.css

index.js

metro.config.js

package-lock.json

package.json

tailwind.config.js

config e inicio.txt

README.md

OUTLINE

TIMELINE

GMovies > screens > JS MovieScreen.js > MovieScreen

```
1  import React, { useEffect, useState } from 'react'
2  import { View, Text, ScrollView, TouchableOpacity, Dimensions, Image } from 'react-native'
3  import { SafeAreaView } from 'react-native-safe-area-context'
4  import { useNavigation, useRoute } from '@react-navigation/native'
5  import { ChevronLeftIcon } from 'react-native-heroicons/outline';
6  import { HeartIcon } from 'react-native-heroicons/solid';
7  import { styles, theme } from '../theme';
8  import { LinearGradient } from 'expo-linear-gradient';
9  import Cast from '../components/cast';
10 import MovieList from '../components/movieList';
11
12 var { width, height } = Dimensions.get('window');
13
14 export default function MovieScreen() {
15   const { params: item } = useRoute();
16   const [isFavorite, toggleFavorite] = useState(false);
17   const [cast, setCast] = useState([1,2,3,4,5]);
18   const [similarMovies, setSimilarMovies] = useState([1, 2, 3, 4, 5]);
19   const navigation = useNavigation();
20   let movieName = "Joker: Folie à Deux";
21   useEffect(() => {
22     // call API
23   }, [item])
24
25   return (
26     <ScrollView
27       contentContainerStyle={{ paddingBottom: 20, minHeight: '100%' }}
28       className="flex-1 bg-neutral-900"
29     >
30       <View className="w-full">
31         <SafeAreaView className="absolute z-20 w-full flex-row justify-between items-center p-4 pt-3">
32           <TouchableOpacity onPress={() => navigation.goBack()} style={styles.background} className="rounded-xl p-1">
```



EXPLORER

...

JS MovieScreen.js U X

GMovies

GMovies

.expo

assets

components

cast.js

movieList.js

trendingMovies.js

navigation

appNavigation.js

node_modules

screens

HomeScreen.js

MovieScreen.js

theme

.gitignore

App.js

app.json

babel.config.js

global.css

index.js

metro.config.js

package-lock.json

package.json

tailwind.config.js

config e inicio.txt

README.md

> OUTLINE

> TIMELINE

GMovies > screens > JS MovieScreen.js > ...

```
67   Drama •
68   </Text>
69   <Text className="text-neutral-400 font-semibold text-base text-center">
70   | Crime •
71   </Text>
72   <Text className="text-neutral-400 font-semibold text-base text-center">
73   | Thriller
74   </Text>
75   </View>
76
77   /* Sinopse */
78   <Text className="text-neutral-400 mx-4 tracking-wide">
79   | Coringa 2 se passa depois dos acontecimentos do filme de 2019, após ser iniciado um movimento popular contra a
80   </Text>
81
82   /* Elenco */
83   <Cast navigation={navigation} cast={cast} />
84
85   /* Filmes Similares */
86   <MovieList title="Filmes Similares" data={similarMovies} />
87   </View>
88   </View>
89   </ScrollView>
90
91 }
92 }
```

Android Emulator - Medium_Phone_API_36.0:5554

9:38

JS MovieScreen.js X

GMovies > screens > JS MovieScreen.js

```
67     Dram
68     </Text>
69     <Text>
70     | Crim
71     | </Text>
72     | <Text>
73     | | Thri
74     | | </Text>
75     | </View>
76
77     /* Sino
78     <Text cl
79     | Coring
80     </Text>
81
82     /* Elen
83     <Cast na
84
85     /* Film
86     <MovieLi
87     </View>
88     </View>
89     </ScrollView>
90
91 }
92 }
```

Joker: Folie à Deux

Lancado • 2024 • 138 min

Drama • Crime • Thriller

Coringa 2 se passa depois dos acontecimentos do filme de 2019, após ser iniciado um movimento popular contra a elite de Gotham City, revolução esta, que teve o Coringa como seu maior representante. Preso no hospital psiquiátrico de Arkham, ele acaba conhecendo Harleen "Lee" Quinzel (Lady Gaga). A curiosidade mútua acaba se transformando em paixão e obsessão e eles desenvolvem um relacionamento romântico e doentio. Lee e Arthur embarcam em uma desventura alucinada, fervorosa e musical pelo submundo de Gotham City, enquanto o julgamento público d'O Coringa se desenrola, impactando toda a cidade e suas próprias mentes conturbadas.

Elenco

Arthur Fleck... Arthur Fleck... Arthur Fleck... Arthur Fleck...

Joaquin Phoenix... Joaquin Phoenix... Joaquin Phoenix... Joaquin Phoenix...

Movies} />

Filmes Similares Ver todos

Joker: Folie à... Joker: Folie à... Joker: Fo...

Ln 92, Col 1 Spaces: 2 UTF-8 CRLF {} JavaScript Go Live

EXPLORER

... JS MovieScreen.js U ●

GMovies > screens > JS MovieScreen.js > ...

```
67   Drama •
68   </Text>
69   <Text className="text-neutral-400 font-semibold text-base text-center">
70   | Crime •
71   | </Text>
72   | <Text className="text-neutral-400 font-semibold text-base text-center">
73   |   | Thriller
74   |   | </Text>
75   | </View>
76
77   /* Sinopse */
78   <Text className="text-neutral-400 mx-4 tracking-wide">
79   | Coringa 2 se passa depois dos acontecimentos do filme de 2019, após ser iniciado um movimento popular contra a
80   </Text>
81
82   /* Elenco */
83   <Cast navigation={navigation} cast={cast} />
84
85   /* Filmes Similares */
86   <MovieList title="Filmes Similares" hideSeeAll={true} data={similarMovies} />
87   </View>
88   </View>
89   </ScrollView>
90 )
91 }
92 }
```

...

GMovies

1 .expo

26 assets

components

JS cast.js

JS movieList.js

JS trendingMovies.js

navigation

JS appNavigation.js

node_modules

screens

JS HomeScreen.js

JS MovieScreen.js

theme

.gitignore

JS App.js

app.json

babel.config.js

global.css

JS index.js

JS metro.config.js

package-lock.json

package.json

tailwind.config.js

config e inicio.txt

README.md

> OUTLINE

> TIMELINE

main* ⌂ 0 △ 0

Ln 92, Col 1 Spaces: 2 UTF-8 CRLF {} JavaScript Go Live



EXPLORER

...

JS MovieScreen.js U

JS movieList.js U X

GMovies

GMovies

.expo

assets

components

JS cast.js

JS movieList.js

JS trendingMovies.js

navigation

JS appNavigation.js

node_modules

screens

JS HomeScreen.js

JS MovieScreen.js

theme

.gitignore

JS App.js

app.json

babel.config.js

global.css

JS index.js

JS metro.config.js

package-lock.json

package.json

tailwind.config.js

config e inicio.txt

README.md

> OUTLINE

> TIMELINE

GMovies > components > JS movieList.js > MovieList

```
1 import React from 'react'
2 import { View, Text, TouchableOpacity, ScrollView, TouchableWithoutFeedback, Image, Dimensions } from 'react-native'
3 import { styles } from '../theme'
4 import { useNavigation } from '@react-navigation/native';
5
6 var { width, height } = Dimensions.get('window');
7
8 export default function MovieList({ title, data, hideSeeAll }) {
9   let movieName = "Joker: Folie à Deux";
10  const navigation = useNavigation();
11  return (
12    <View className="mb-9 space-y-4">
13      <View className="mx-4 flex-row justify-between items-center">
14        <Text className="text-white text-xl">{title}</Text>
15        {
16          !hideSeeAll && (
17            <TouchableOpacity>
18              <Text style={styles.text} className="text-lg">Ver todos</Text>
19            </TouchableOpacity>
20          )
21        }
22      </View>
23      <ScrollView
24        horizontal
25        showsHorizontalScrollIndicator={false}
26        contentContainerStyle={{ paddingHorizontal: 15 }}>
27        >
28          {
29            data.map((item, index) => {
30              return (
31                <TouchableWithoutFeedback
32                  key={index}>
```

The screenshot shows a React Native mobile application running on an Android emulator. The app displays information about the movie 'Joker: Folie à Deux'. The title 'Joker: Folie à Deux' is at the top, followed by release details ('Lancado • 2024 • 138 min') and genres ('Drama • Crime • Thriller'). A descriptive paragraph follows, mentioning Coringa 2's plot involving Arthur Fleck and Harleen 'Lee' Quinzel. Below this is a section titled 'Elenco' showing four circular profile pictures of Joaquin Phoenix as Arthur Fleck. A 'Ver todos' button is present. At the bottom, there's a section titled 'Filmes Similares' showing three cards for 'Joker: Folie à Deux'.

Android Emulator - Medium_Phone_API_36.0:5554

9:40

Joker: Folie à Deux

Lancado • 2024 • 138 min

Drama • Crime • Thriller

Coringa 2 se passa depois dos acontecimentos do filme de 2019, após ser iniciado um movimento popular contra a elite de Gotham City, revolução esta, que teve o Coringa como seu maior representante. Preso no hospital psiquiátrico de Arkham, ele acaba conhecendo Harleen "Lee" Quinzel (Lady Gaga). A curiosidade mútua acaba se transformando em paixão e obsessão e eles desenvolvem um relacionamento romântico e doentio. Lee e Arthur embarcam em uma desventura alucinada, fervorosa e musical pelo submundo de Gotham City, enquanto o julgamento público d'O Coringa se desenrola, impactando toda a cidade e suas próprias mentes conturbadas.

Elenco

Arthur Fleck... Arthur Fleck... Arthur Fleck... Arthur Fleck...

Joaquin Phoenix... Joaquin Phoenix... Joaquin Phoenix... Joaquin Phoenix...

Ver todos

Filmes Similares

Joker: Folie à...

Joker: Folie à...

Joker: Folie à...

Ln 15, Col 10 Spaces: 2 UTF-8 CRLF {} JavaScript Go Live

← →

GMovies



EXPLORER

...

GMOVIES

GMovies .expo assets components navigation node_modules screens

PersonScreen.js HomeScreen.js MovieScreen.js

theme .gitignore App.js app.json babel.config.js global.css index.js metro.config.js package-lock.json package.json tailwind.config.js config.inicio.txt

OUTLINE

TIMELINE

main* 0 0 0 Go Live




Show All Commands Ctrl + Shift + P

Go to File Ctrl + P

Open Chat Ctrl + Alt + I

Start Debugging F5

Toggle Terminal Ctrl + `

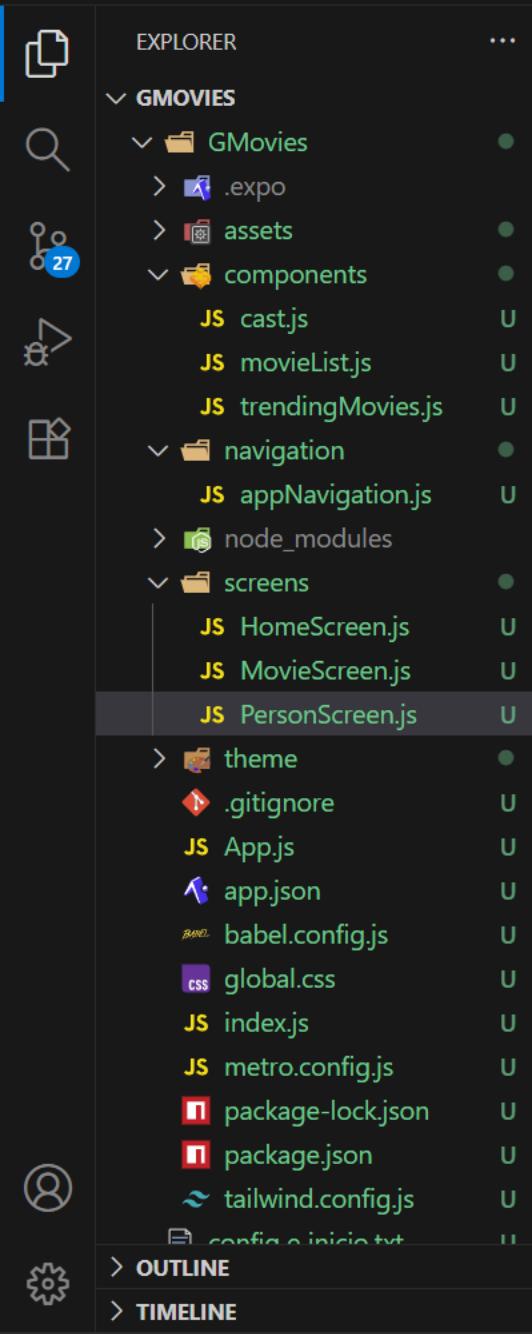

JS PersonScreen.js X

GMovies > screens > JS PersonScreen.js > ...

```
1 import React from 'react'
2 import { View, Text } from 'react-native'
3
4 export default function PersonScreen() {
5   return (
6     <View>
7       |   <Text>PersonScreen</Text>
8     </View>
9   )
10 }
11
```

EXPLORER

... JS PersonScreen.js U JS appNavigation.js U X

GMovies > navigation > JS appNavigation.js > ...

- GMovies
- .expo
- assets
- components
 - cast.js
 - movieList.js
 - trendingMovies.js
- navigation
 - appNavigation.js
- node_modules
- screens
 - HomeScreen.js
 - MovieScreen.js
 - PersonScreen.js
- theme
 - .gitignore
 - App.js
 - app.json
 - babel.config.js
 - global.css
 - index.js
 - metro.config.js
 - package-lock.json
 - package.json
 - tailwind.config.js
 - config.inicio.txt

> OUTLINE

> TIMELINE

```
1 import { NavigationContainer } from '@react-navigation/native';
2 import { createNativeStackNavigator } from '@react-navigation/native-stack';
3 import HomeScreen from '../screens/HomeScreen';
4 import MovieScreen from '../screens/MovieScreen';
5 import PersonScreen from '../screens/PersonScreen';
6
7 const Stack = createNativeStackNavigator();
8
9 export default function AppNavigation() {
10   return (
11     <NavigationContainer>
12       <Stack.Navigator>
13         <Stack.Screen name='Home' options={{headerShown: false}} component={HomeScreen} />
14         <Stack.Screen name='Movie' options={{ headerShown: false }} component={MovieScreen} />
15         <Stack.Screen name='Person' options={{ headerShown: false }} component={PersonScreen} />
16       </Stack.Navigator>
17     </NavigationContainer>
18   )
19 }
20 |
```

9:45



EXP

GMovies



GM

Em alta



Próximos lançamentos

Ver todos



Joker: Folie à...

Joker: Folie à...

Joker: Fo

Melhor Avaliados

Ver todos

<

main

JOKER

JOKER

9:45



U X

> JS

PersonS

React

from

{ View,

Text

> Person

View

default

fun

n

(

ew>

Text

>Person

view

Joker: Folie à Deux

Lancado • 2024 • 138 min

Drama • Crime • Thriller

Coringa 2 se passa depois dos acontecimentos do filme de 2019, após ser iniciado um movimento popular contra a elite de Gotham City, revolução esta, que teve o Coringa como seu maior representante. Preso no hospital psiquiátrico de Arkham, ele acaba conhecendo Harleen "Lee" Quinzel (Lady Gaga). A curiosidade mútua acaba se transformando em paixão e obsessão e eles desenvolvem um relacionamento romântico e doentio. Lee e Arthur embarcam em uma desventura alucinada, fervorosa e musical pelo submundo de Gotham City, enquanto o julgamento público d'O Coringa se desenrola, impactando toda a cidade e suas próprias mentes conturbadas.

Elenco




Arthur Fleck...

Joaquin Phoenix...



Arthur Fleck...

Joaquin Phoenix...



Arthur Fleck...

Joaquin Phoenix...

Filmes Similares



Joker: Folie à...



Joker: Folie à...



Joker: Fo

PersonS.re...

Go Live



← →

🔍 GMovies



EXPLORER

...

GMovies

- GMovies
- .expo
- assets
- components
 - cast.js
 - movieList.js
 - trendingMovies.js
- navigation
 - appNavigation.js
- node_modules
- screens
 - HomeScreen.js
 - MovieScreen.js
 - PersonScreen.js
- theme
 - .gitignore
 - App.js
 - app.json
 - babel.config.js
 - global.css
 - index.js
 - metro.config.js
 - package-lock.json
 - package.json
 - tailwind.config.js
 - config-inicio.txt

...

OUTLINE

TIMELINE

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

powershell - GMovies

PS C:\Projetos\GMovies\GMovies> npm i react-native-shadow-2

🔍 📁 Go Live 🚙

✖ main* ⌂ 0 ⚠ 0



EXPLORER

...

JS PersonScreen.js U X

GMovies

expo

assets

components

cast.js

movieList.js

trendingMovies.js

navigation

appNavigation.js

node_modules

screens

HomeScreen.js

MovieScreen.js

PersonScreen.js

theme

.gitignore

App.js

app.json

babel.config.js

global.css

index.js

metro.config.js

package-lock.json

package.json

tailwind.config.js

config.inicio.txt

GMovies > screens > JS PersonScreen.js > PersonScreen

```
1  import React, { useEffect, useState } from 'react'
2  import { View, Text, Dimensions, ScrollView, TouchableOpacity, Image } from 'react-native'
3  import { SafeAreaView } from 'react-native-safe-area-context'
4  import { useNavigation, useRoute } from '@react-navigation/native'
5  import { ChevronLeftIcon } from 'react-native-heroicons/outline';
6  import { HeartIcon } from 'react-native-heroicons/solid';
7  import { styles, theme } from '../theme';
8  import { Shadow } from 'react-native-shadow-2';
9  import MovieList from '../components/movieList';

10 var { width, height } = Dimensions.get('window');

11 export default function PersonScreen() {
12   const { params: item } = useRoute();
13   const navigation = useNavigation();
14   const [isFavorite, toggleFavorite] = useState(false)
15   const [personMovies, setPersonMovies] = useState([1,2,3,4])
16   return (
17     <ScrollView
18       contentContainerStyle={{ paddingBottom: 20, minHeight: '100%' }}
19       className="flex-1 bg-neutral-900"
20     >
21       {/* Botões de Navegação */}
22       <SafeAreaView className="z-20 w-full flex-row justify-between items-center p-4 pt-3">
23         <TouchableOpacity onPress={() => navigation.goBack()} style={styles.background} className="rounded-xl p-1">
24           <ChevronLeftIcon size="28" strokeWidth={2.5} color="white" />
25         </TouchableOpacity>
26         <Text className="text-white text-3xl font-bold">
27           <Text style={styles.text}>GM</Text>ovies
28         </Text>
29         <TouchableOpacity onPress={() => toggleFavorite(!isFavorite)}>
30           <HeartIcon size="36" color={isFavorite ? theme.background : "white"} />
31         </TouchableOpacity>
32       </SafeAreaView>
33     </ScrollView>
34   )
35 }
```



EXPLORER

...

JS PersonScreen.js U X

GMovies

.expo

assets

components

cast.js

movieList.js

trendingMovies.js

navigation

appNavigation.js

node_modules

screens

HomeScreen.js

MovieScreen.js

PersonScreen.js

theme

.gitignore

App.js

app.json

babel.config.js

global.css

index.js

metro.config.js

package-lock.json

package.json

tailwind.config.js

config.inicio.txt

> OUTLINE

> TIMELINE

GMovies > screens > JS PersonScreen.js > PersonScreen

```
28     <Text className="text-white text-3xl font-bold">
29       |   <Text style={styles.text}>GM</Text>ovies
30       |   </Text>
31       <TouchableOpacity onPress={() => toggleFavorite(!isFavorite)}>
32         |   <HeartIcon size="36" color={isFavorite ? theme.background : "white"} />
33       </TouchableOpacity>
34     </SafeAreaView>
35
36     /* Dados da Pessoa */
37   <View>
38     <View className="flex-row justify-center">
39       <Shadow className="items-center overflow-hidden h-72 w-72 border-3 border-neutral-500" startColor='rgb(60 60 60)' endColor='white' style={{ height: 120, width: 120, borderRadius: 150 }}>
40         <Image
41           |   style={{ height: height * 0.42, width: width * 0.70, borderRadius: 150 }}
42           |   source={require('../assets/images/actor.jpg')}
43         />
44       </Shadow>
45     </View>
46     <View className="mt-5">
47       <Text className="text-3xl text-white font-bold text-center">
48         |   Joaquin Phoenix
49       </Text>
50       <Text className="text-base text-neutral-500 text-center">
51         |   San Juan, Puerto Rico
52       </Text>
53     </View>
54     <View className="mx-3 p-4 mt-6 flex flex-row items-center bg-neutral-700 rounded-full">
55       <View className="basis-1/3 border-r-2 border-r-neutral-400 px-2 items-center">
56         <Text className="text-white font-semibold">Gênero</Text>
57         <Text className="text-neutral-300 text-sm">Masculino</Text>
58       </View>
```



EXPLORER

...

JS PersonScreen.js U X

GMovies > screens > JS PersonScreen.js > PersonScreen

▶ 🔍 ⌂ ☰ ☰ ☰



GMovies

> .expo

> assets

27

> components

JS cast.js

JS movieList.js

JS trendingMovies.js

> navigation

JS appNavigation.js

> node_modules

> screens

JS HomeScreen.js

JS MovieScreen.js

JS PersonScreen.js U

> theme

.gitignore

JS App.js

app.json

babel.config.js

global.css

JS index.js

JS metro.config.js

package-lock.json

package.json

tailwind.config.js

config.inicio.txt

> OUTLINE

> TIMELINE

```
52           </Text>
53       </View>
54   <View className="mx-3 p-4 mt-6 flex flex-row items-center bg-neutral-700 rounded-full">
55     <View className="basis-1/3 border-r-2 border-r-neutral-400 px-2 items-center">
56       <Text className="text-white font-semibold">Gênero</Text>
57       <Text className="text-neutral-300 text-sm">Masculino</Text>
58     </View>
59   <View className="basis-1/3 border-r-2 border-r-neutral-400 px-2 items-center">
60     <Text className="text-white font-semibold">Nascimento</Text>
61     <Text className="text-neutral-300 text-sm">28/10/1974</Text>
62   </View>
63   <View className="basis-1/3 px-2 items-center">
64     <Text className="text-white font-semibold">Popularidade</Text>
65     <Text className="text-neutral-300 text-sm">89</Text>
66   </View>
67 </View>
68 <View className="my-6 mx-4 space-y-2">
69   <Text className="text-white text-lg">Biografia</Text>
70   <Text className="text-neutral-400 tracking-wide">
71     Joaquin Rafael Phoenix, nascido Joaquin Rafael Bottom (San Juan, Porto Rico, 28 de outubro de 1974) é um ator,
72   </Text>
73 </View>
74   /* Filmes */
75   <MovieList title={'Filmes'} hideSeeAll={true} data={personMovies} />
76 </View>
77 </ScrollView>
78 )
79 }
80 }
```

9:45



EXP

GMovies



GM

Em alta



Próximos lançamentos



Ver todos

Melhor Avaliados

Ver todos

U

X

>

JS

PersonS

</Text>

</View>

<View clas

<View cl

<Text

<Text

</View>

<View cl

<Text

<Text

</View>

<View cl

<Text

<Text

</View>

</View>

<View clas

<Text cl

<Text cl

</Text>

</View>

<View clas

<Text cl

<Text cl

</Text>

</View>

9:45



Joker: Folie à Deux

Lancado • 2024 • 138 min

Drama • Crime • Thriller

Coringa 2 se passa depois dos acontecimentos do filme de 2019, após ser iniciado um movimento popular contra a elite de Gotham City, revolução esta, que teve o Coringa como seu maior representante. Preso no hospital psiquiátrico de Arkham, ele acaba conhecendo Harleen "Lee" Quinzel (Lady Gaga). A curiosidade mútua acaba se transformando em paixão e obsessão e eles desenvolvem um relacionamento romântico e doentio. Lee e Arthur embarcam em uma desventura alucinada, fervorosa e musical pelo submundo de Gotham City, enquanto o julgamento público d'O Coringa se desenrola, impactando toda a cidade e suas próprias mentes conturbadas.

Elenco



Arthur Fleck... Joaquin Phoenix... Arthur Fleck... Joaquin Phoenix... Arthur Fleck... Joaquin Phoenix... Arthur Fleck... Joaquin Phoenix...

Filmes Similares



Joker: Folie à... Joker: Folie à... Joker: Folie à...

9:49



GMovies

**Joaquin Phoenix**

San Juan, Puerto Rico

Gênero

Masculino

Nascimento

28/10/1974

Popularidade

89

Biografia

Joaquin Rafael Phoenix, nascido Joaquin Rafael Bottom (San Juan, Porto Rico, 28 de outubro de 1974) é um ator, produtor e ativista Portoriqueno. Por seu trabalho como ator, Phoenix recebeu um Grammy, dois Globo de Ouro e quatro indicações ao Oscar, vencendo como melhor ator na cerimônia de 2020 por sua atuação em Joker (2019). Ele recebeu atenção internacional por sua interpretação de Commodo no épico histórico Gladiador (2000), que lhe rendeu uma indicação ao Oscar de Melhor Ator Coadjuvante. Posteriormente, recebeu indicações para Melhor Ator por interpretar o músico Johnny Cash na cinebiografia Walk the Line (2005).

Go Live



← →

GMovies



EXPLORER

...

GMOVIES

GMovies

.expo

assets

components

cast.js

movieList.js

trendingMovies.js

navigation

appNavigation.js

node_modules

screens

SearchScreen.js

HomeScreen.js

MovieScreen.js

PersonScreen.js

theme

.gitignore

App.js

app.json

babel.config.js

global.css

index.js

metro.config.js

package-lock.json

package.json

tailwind.config.js

OUTLINE

TIMELINE



Show All Commands Ctrl + Shift + P


Go to File Ctrl + P

Open Chat Ctrl + Alt + I

Start Debugging F5

Toggle Terminal Ctrl + `



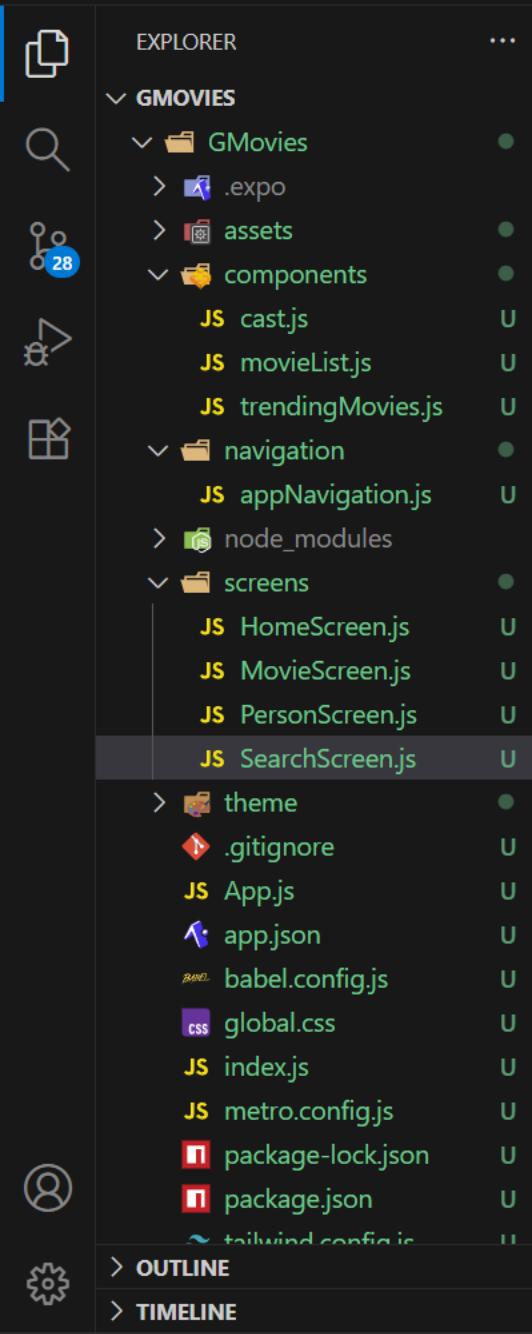

JS SearchScreen.js U X

GMovies > screens > JS SearchScreen.js > ...

```
1 import React from 'react'
2 import { View, Text } from 'react-native'
3
4 export default function SearchScreen() {
5   return (
6     <View>
7       <Text>SearchScreen</Text>
8     </View>
9   )
10 }
11
```



EXPLORER

GMovies

GMovies

.expo

assets

components

cast.js

movieList.js

trendingMovies.js

navigation

appNavigation.js

node_modules

screens

HomeScreen.js

MovieScreen.js

PersonScreen.js

SearchScreen.js

theme

.gitignore

App.js

app.json

babel.config.js

global.css

index.js

metro.config.js

package-lock.json

package.json

tailwind.config.js

> OUTLINE

> TIMELINE

JS SearchScreen.js U

JS appNavigation.js U X

GMovies > navigation > JS appNavigation.js > AppNavigation

```
1 import { NavigationContainer } from '@react-navigation/native';
2 import { createNativeStackNavigator } from '@react-navigation/native-stack';
3 import HomeScreen from '../screens/HomeScreen';
4 import MovieScreen from '../screens/MovieScreen';
5 import PersonScreen from '../screens/PersonScreen';
6 import SearchScreen from '../screens/SearchScreen';
7
8 const Stack = createNativeStackNavigator();
9
10 export default function AppNavigation() {
11   return (
12     <NavigationContainer>
13       <Stack.Navigator>
14         <Stack.Screen name='Home' options={{headerShown: false}} component={HomeScreen} />
15         <Stack.Screen name='Movie' options={{ headerShown: false }} component={MovieScreen} />
16         <Stack.Screen name='Person' options={{ headerShown: false }} component={PersonScreen} />
17         <Stack.Screen name='Search' options={{ headerShown: false }} component={SearchScreen} />
18       </Stack.Navigator>
19     </NavigationContainer>
20   )
21 }
22 }
```



EXPLORER

GMOVIES

GMovies

.expo

assets

components

cast.js

movieList.js

trendingMovies.js

navigation

appNavigation.js

node_modules

screens

HomeScreen.js

MovieScreen.js

PersonScreen.js

SearchScreen.js

theme

.gitignore

App.js

app.json

babel.config.js

global.css

index.js

metro.config.js

package-lock.json

package.json

tailwind.config.js

JS SearchScreen.js U

JS HomeScreen.js U X

```
GMovies > screens > JS HomeScreen.js > HomeScreen
  5   import { Bars3BottomLeftIcon, MagnifyingGlassIcon } from 'react-native-heroicons/outline';
  6   import { styles } from '../theme';
  7   import TrendingMovies from '../components/trendingMovies';
  8   import MovieList from '../components/movieList';
  9   import { useNavigation } from '@react-navigation/native'

 10  const ios = Platform.OS == "ios";

 13  export default function HomeScreen() {
 14    const [trending, setTrending] = useState([1,2,3]);
 15    const [upcoming, setUpcoming] = useState([1,2,3]);
 16    const [topRated, setTopRated] = useState([1,2,3]);
 17    const navigation = useNavigation();

 18    return (
 19      <View className="flex-1 bg-neutral-800">
 20        <SafeAreaView className={ios ? "-mb-2" : "mb-3"}>
 21          <StatusBar style="light" />
 22          <View className="flex-row justify-between items-center mx-4 mt-2">
 23            <TouchableOpacity>
 24              <Bars3BottomLeftIcon size={30} strokeWidth={2} color="white"/>
 25            </TouchableOpacity>
 26            <Text className="text-white text-3xl font-bold">
 27              <Text style={styles.text}>GM</Text>ovies
 28            </Text>
 29            <TouchableOpacity onPress={() => navigation.navigate('Search')}>
 30              <MagnifyingGlassIcon size={30} strokeWidth={2} color="white" />
 31            </TouchableOpacity>
 32          </View>
 33        </SafeAreaView>
 34      <ScrollView>
```

The screenshot displays a developer's environment with two main components: a mobile application running on an Android emulator and its associated source code.

Mobile Application (Left):

- Title Bar:** GMovies
- Header:** Em alta
- Content:** A grid of movie cards. One card for "DEADPOOL & WOLVERINE" is prominently displayed in the center, featuring both actors. Below it are cards for "Joker" and other movies.
- Bottom Navigation:** Categories like "Próximos lançamentos", "Ver todos", "Melhor Avaliados", and "Vertudos".

Code Editor (Right):

- Search Bar:** GMovies
- Text Area:** Displays the source code for the application, written in JavaScript. The code includes imports for components like `HomeScreen` and `MovieScreen`, state management with `useState`, and navigation logic using `useNavigation`.

Explorer (Bottom Left):

- Project Structure:** Shows the project tree under "GMovies". It includes folders for assets, components (with files like `cast.js`, `movieList.js`, and `trendingMovies.js`), navigation (with `appNavigation.js`), and screens (with files like `HomeScreen.js`, `MovieScreen.js`, `PersonScreen.js`, and `SearchScreen.js`).
- Files:** Includes a `theme` folder, configuration files like `App.js`, `app.json`, and `babel.config.js`, style files like `global.css`, and build artifacts like `index.js`, `metro.config.js`, `package-lock.json`, and `package.json`.

Bottom Status Bar:

- File tabs: main*, index.js, App.js
- Icons: Refresh, Save, Undo, Redo, Version, Timeline
- Metrics: 0△0
- Language: JavaScript
- Features: Go Live, Notifications



EXPLORER

...

JS SearchScreen.js U X

GMovies

expo

assets

components

cast.js

movieList.js

trendingMovies.js

navigation

appNavigation.js

node_modules

screens

HomeScreen.js

MovieScreen.js

PersonScreen.js

SearchScreen.js

theme

.gitignore

App.js

app.json

babel.config.js

global.css

index.js

metro.config.js

package-lock.json

package.json

tailwind.config.js

> OUTLINE

> TIMELINE

GMovies > screens > JS SearchScreen.js > ...

```
1  import React, { useState } from 'react'
2  import { View, Text, Dimensions, ScrollView, TouchableOpacity, Image, TextInput, TouchableWithoutFeedback } from 'react-native'
3  import { useNavigation } from '@react-navigation/native'
4  import { XMarkIcon } from 'react-native-heroicons/outline';
5  import { SafeAreaView } from 'react-native-safe-area-context';
6
7  var { width, height } = Dimensions.get('window');
8
9  export default function SearchScreen() {
10    const navigation = useNavigation();
11    const [results, setResults] = useState([1, 2, 3, 4, 5, 6])
12    let movieName = "Joker: Folie à Deux";
13    return (
14      <SafeAreaView className="bg-neutral-800 flex-1">
15        <View className="m-4 flex-row justify-between items-center border border-neutral-500 rounded-full">
16          <TextInput
17            placeholder="Pesquisar..."
18            placeholderTextColor={'lightgray'}
19            className="pb-1 pl-6 flex-1 text-base font-semibold text-white tracking-wider"
20          />
21          <TouchableOpacity onPress={() => navigation.navigate('Home')}
22            className="rounded-full p-3 m-1 bg-neutral-500"
23          >
24            <XMarkIcon size="25" color="white" />
25          </TouchableOpacity>
26        </View>
27
28        {/* resultado da pesquisa */}
29        <ScrollView
30          showsVerticalScrollIndicator={false}
31          contentContainerStyle={{ paddingHorizontal: 15 }}
32          className="space-y-3"
```



EXPLORER

...

JS SearchScreen.js U X

GMovies

.expo

assets

components

cast.js

movieList.js

trendingMovies.js

navigation

appNavigation.js

node_modules

screens

HomeScreen.js

MovieScreen.js

PersonScreen.js

SearchScreen.js

theme

.gitignore

App.js

app.json

babel.config.js

global.css

index.js

metro.config.js

package-lock.json

package.json


tailwind.config.js

> OUTLINE

> TIMELINE

GMovies > screens > JS SearchScreen.js > ...

```
32     className="space-y-3"
33   >
34     <Text className="text-white font-semibold ml-1">Resultados ({results.length})</Text>
35     <View className="flex-row justify-between flex-wrap">
36       {
37         results.map((item, index) => {
38           return (
39             <TouchableWithoutFeedback
40               key={index}
41               onPress={() => navigation.push("Movie", item)}
42             >
43               <View className="space-y-2 mb-4">
44                 <Image className="rounded-2xl"
45                   source={require('../assets/images/moviePoster2.jpg')}
46                   style={{ width: width * 0.44, height: height * 0.3 }}
47                 />
48                 <Text className="text-neutral-400 ml-1">
49                   {
50                     movieName.length > 22 ? movieName.slice(0, 22) + '...' : movieName
51                   }
52                 </Text>
53               </View>
54             </TouchableWithoutFeedback>
55           )
56         )
57       }
58     </View>
59   </ScrollView>
60 </SafeAreaView>
61   )
62 }
63 }
```

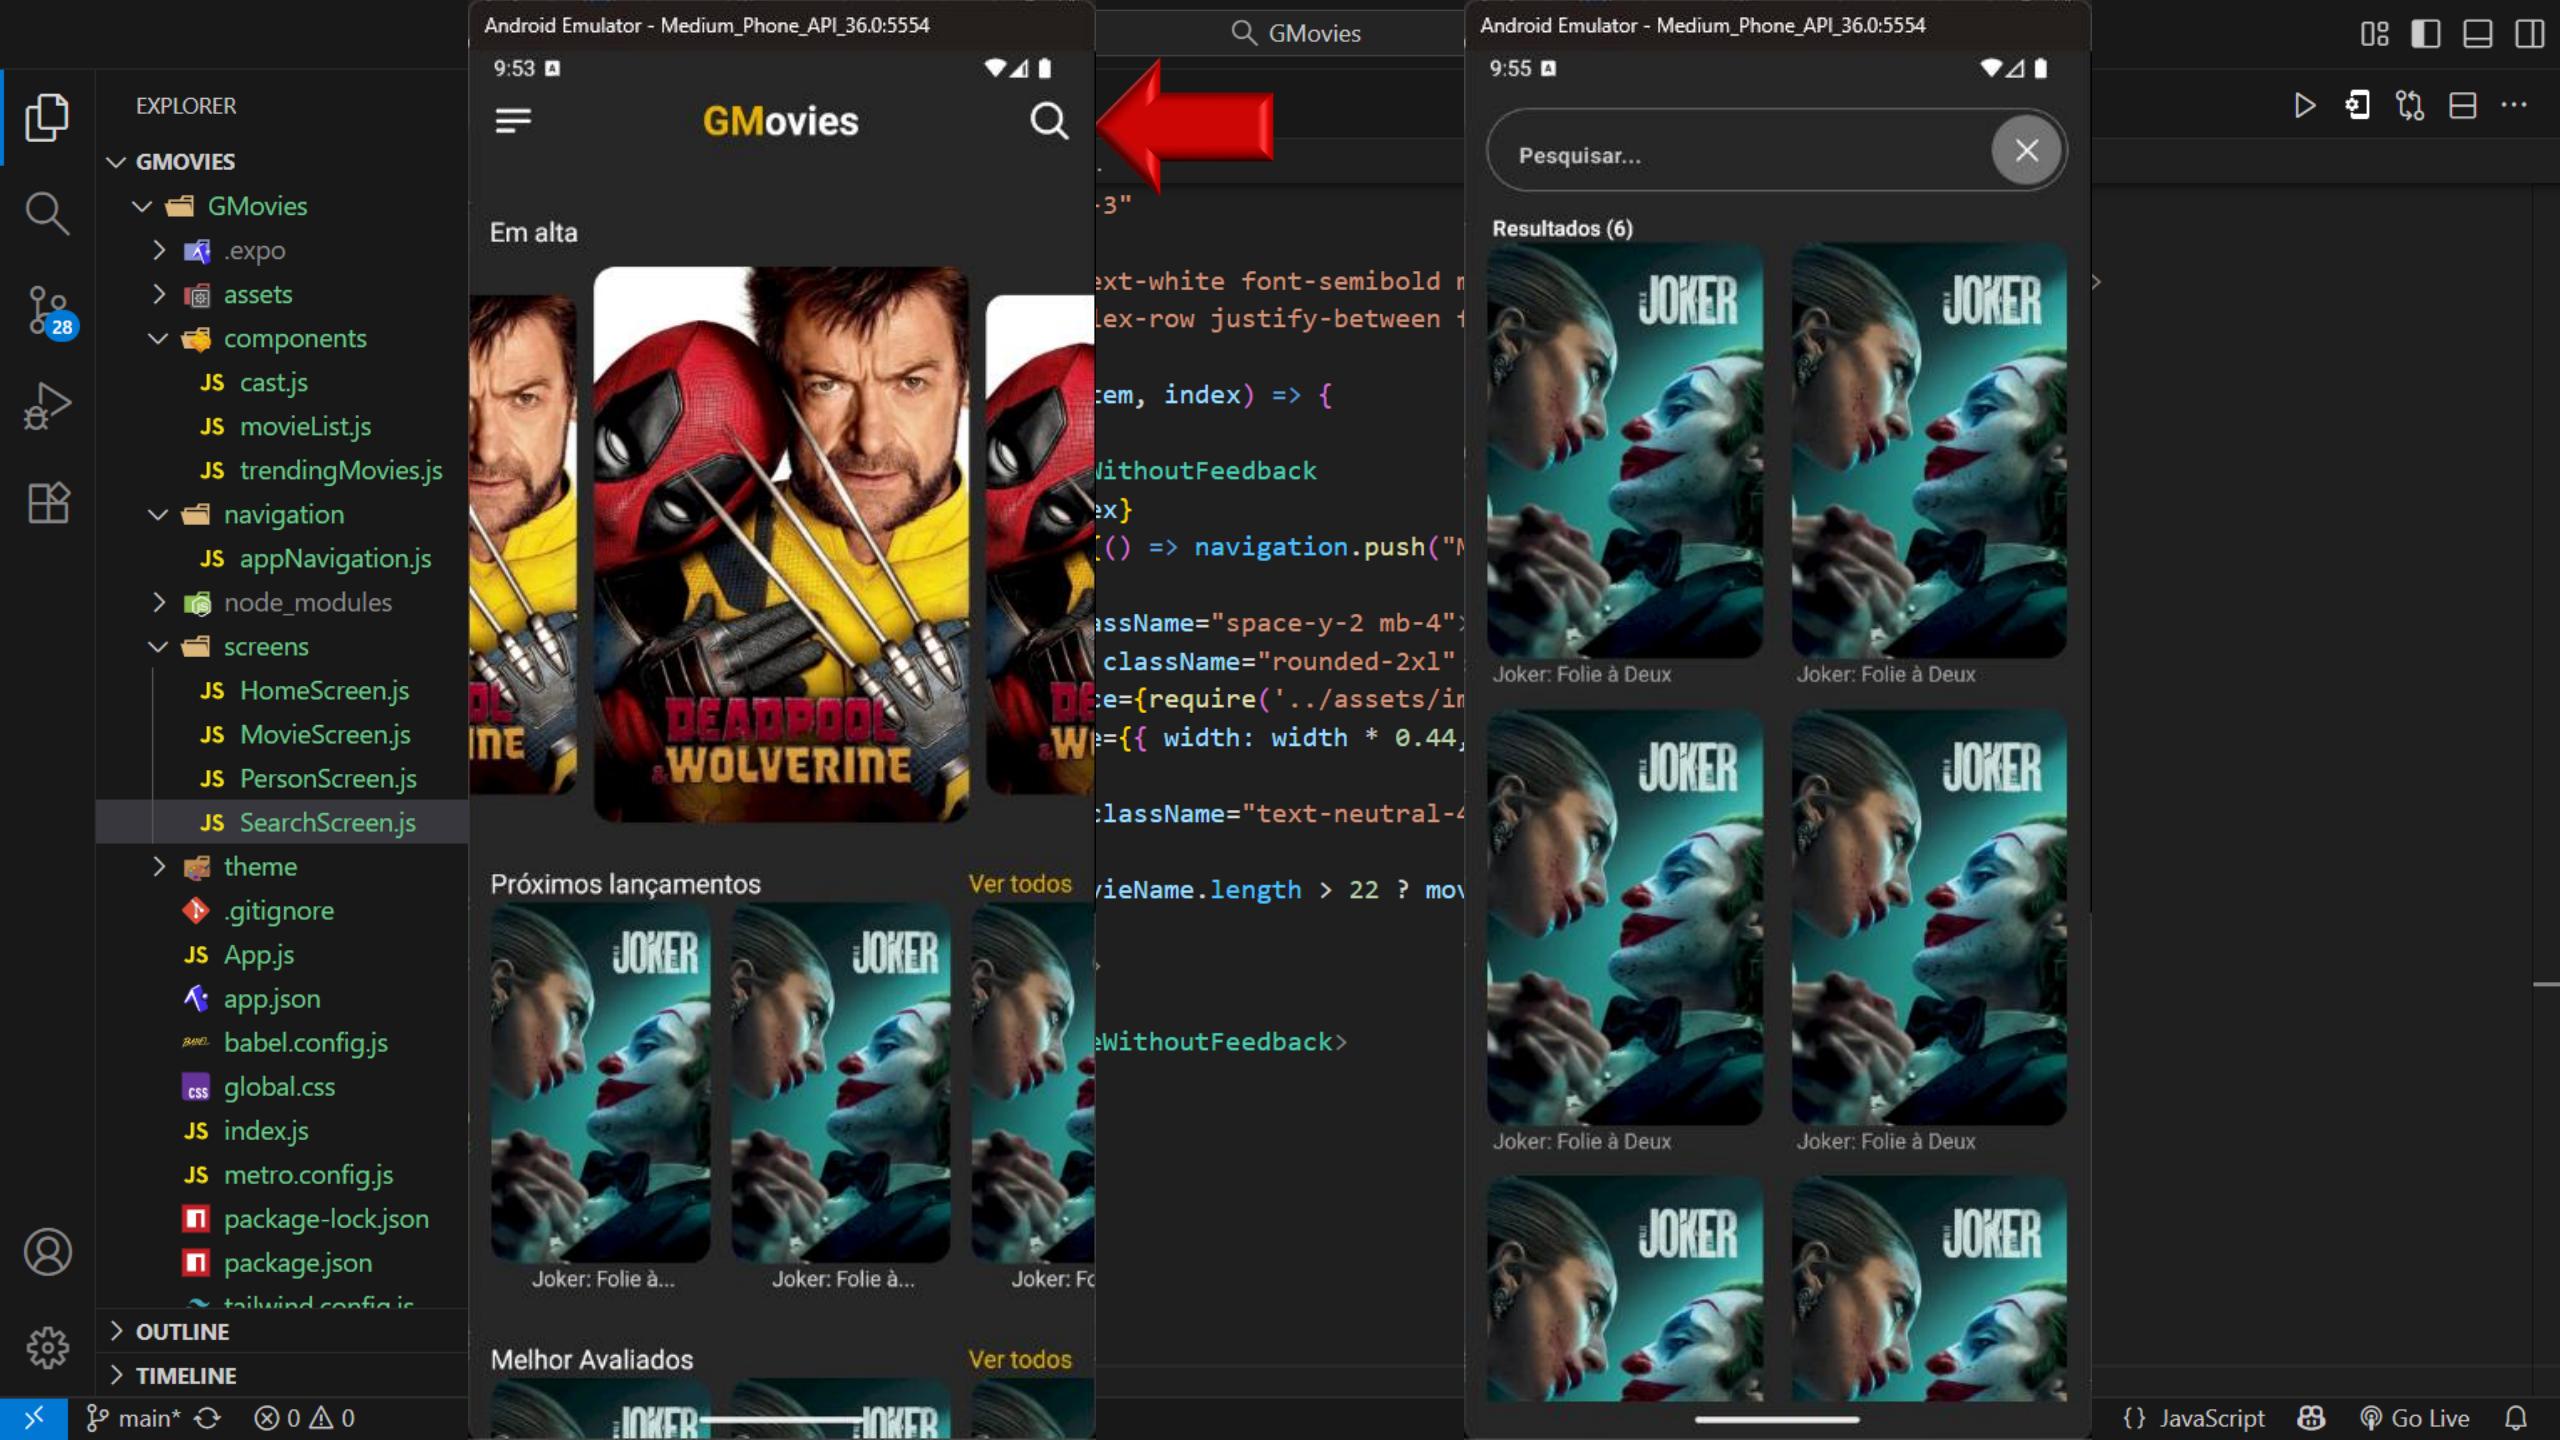



EXPLORER

...

JS SearchScreen.js U X

GMovies
GMovies
.expo
.assets
components
JS cast.js
JS movieList.js
JS trendingMovies.js
navigation
JS appNavigation.js
.node_modules
screens
JS HomeScreen.js
JS MovieScreen.js
JS PersonScreen.js
JS SearchScreen.js
theme
.gitignore
JS App.js
.app.json
.babel.config.js
CSS global.css
JS index.js
JS metro.config.js
.package-lock.json
.package.json
.tailwind.config.js
> OUTLINE
> TIMELINE

GMovies > screens > JS SearchScreen.js > ...

```
1  import React, { useState } from 'react'
2  import { View, Text, Dimensions, ScrollView, TouchableOpacity, Image, TextInput, TouchableWithoutFeedback } from 'react-native'
3  import { useNavigation } from '@react-navigation/native'
4  import { XMarkIcon } from 'react-native-heroicons/outline';
5  import { SafeAreaView } from 'react-native-safe-area-context';
6
7  var { width, height } = Dimensions.get('window');
8
9  export default function SearchScreen() {
10    const navigation = useNavigation();
11    const [results, setResults] = useState([])
12    let movieName = "Joker: Folie à Deux";
13    return (
14      <SafeAreaView className="bg-neutral-800 flex-1">
15        <View className="m-4 flex-row justify-between items-center border border-neutral-500 rounded-full">
16          <TextInput
17            placeholder="Pesquisar..."
18            placeholderTextColor="lightgray"
19            className="pb-1 pl-6 flex-1 text-base font-semibold text-white tracking-wider"
20          />
21          <TouchableOpacity onPress={() => navigation.navigate('Home')}
22            className="rounded-full p-3 m-1 bg-neutral-500"
23          >
24            <XMarkIcon size="25" color="white" />
25          </TouchableOpacity>
26        </View>
27
28        {/* resultado da pesquisa */}
29        {
30          results.length > 0 ? (
31            <ScrollView
32              showsVerticalScrollIndicator={false}
```



EXPLORER

...

JS SearchScreen.js U X

GMovies

.expo

assets

components

cast.js

movieList.js

trendingMovies.js

navigation

appNavigation.js

node_modules

screens

HomeScreen.js

MovieScreen.js

PersonScreen.js

SearchScreen.js

theme

.gitignore

App.js

app.json

babel.config.js

global.css

index.js

metro.config.js

package-lock.json

package.json

tailwind.config.js

> OUTLINE

> TIMELINE

GMovies > screens > JS SearchScreen.js > ...

```
32 showsVerticalScrollIndicator={false}
33 contentContainerStyle={{ paddingHorizontal: 15 }}
34 className="space-y-3"
35 >
36 <Text className="text-white font-semibold ml-1">Resultados ({results.length})</Text>
37 <View className="flex-row justify-between flex-wrap">
38 {
39   results.map((item, index) => {
40     return (
41       <TouchableWithoutFeedback
42         key={index}
43         onPress={() => navigation.push("Movie", item)}
44       >
45         <View className="space-y-2 mb-4">
46           <Image className="rounded-2xl"
47             source={require('../assets/images/moviePoster2.jpg')}
48             style={{ width: width * 0.44, height: height * 0.3 }}
49           />
50           <Text className="text-neutral-400 ml-1">
51             {
52               movieName.length > 22 ? movieName.slice(0, 22) + '...' : movieName
53             }
54           </Text>
55         </View>
56       </TouchableWithoutFeedback>
57     )
58   }
59 }
60 </View>
61 </ScrollView>
62 ) : (
63   <View className="flex-1 flex-col justify-center items-center">
```



EXPLORER

...

JS SearchScreen.js U X

GMovies > screens > JS SearchScreen.js > ...

```
62      ) : (
63        <View className="flex-1 flex-col justify-center items-center">
64          <Text className="text-white text-center mb-7"
65            style={{ fontSize: 32, display: 'none' }}>Nenhum Resultado Encontrado</Text>
66          <Image className="h-96 w-96 rounded-2xl"
67            source={require('../assets/images/movieTime.jpg')}>
68        </View>
69      )
70    }
71  </SafeAreaView>
72  )
73 }
74 }
75 }
```



GMovies

> .expo

> assets

GMOVIES 28 > components

JS cast.js

JS movieList.js

JS trendingMovies.js

navigation

JS appNavigation.js

> node_modules

screens

JS HomeScreen.js

JS MovieScreen.js

JS PersonScreen.js

JS SearchScreen.js

> theme

.gitignore

JS App.js

app.json

babel.config.js

global.css

JS index.js

JS metro.config.js

package-lock.json

package.json

~ tailwind.config.js

> OUTLINE

> TIMELINE



main* ↕ 0 △ 0



Ln 6, Col 1

Spaces: 4

UTF-8 CRLF

{ } JavaScript



Go Live



Android Emulator - Medium_Phone_API_36.0:5554

9:53

GMovies

Em alta

Próximos lançamentos

Ver todos

Melhor Avaliados

Vert todos

Android Emulator - Medium_Phone_API_36.0:5554

9:57

GMovies

Pesquisar...

EXPLORER

GMOVIES

- GMovies
- .expo
- assets
- components
 - cast.js
 - movieList.js
 - trendingMovies.js
- navigation
 - appNavigation.js
- node_modules
- screens
 - HomeScreen.js
 - MovieScreen.js
 - PersonScreen.js
 - SearchScreen.js
- theme
- .gitignore
- App.js
- app.json
- babel.config.js
- global.css
- index.js
- metro.config.js
- package-lock.json
- package.json
- tailwind.config.js

OUTLINE

TIMELINE

main* 0 0 0 0

JavaScript Go Live

A large red arrow points from the search bar in the second emulator window back towards the first one.

← →

GMovies



EXPLORER

...

GMovies

GMovies

.expo

assets

components

loading.js

cast.js

U

movieList.js

U

trendingMovies.js

U

navigation

node_modules

screens

HomeScreen.js

U

MovieScreen.js

U

PersonScreen.js

U

SearchScreen.js

U

theme

.gitignore

U

App.js

U

app.json

U

babel.config.js

U

global.css

U

index.js

U

metro.config.js

U

package-lock.json

U

package.json

U

tailwind.config.js

U

OUTLINE

TIMELINE




Show All Commands **Ctrl + Shift + P**

Go to File **Ctrl + P**

Open Chat **Ctrl + Alt + I**

Start Debugging **F5**

Toggle Terminal **Ctrl + `**

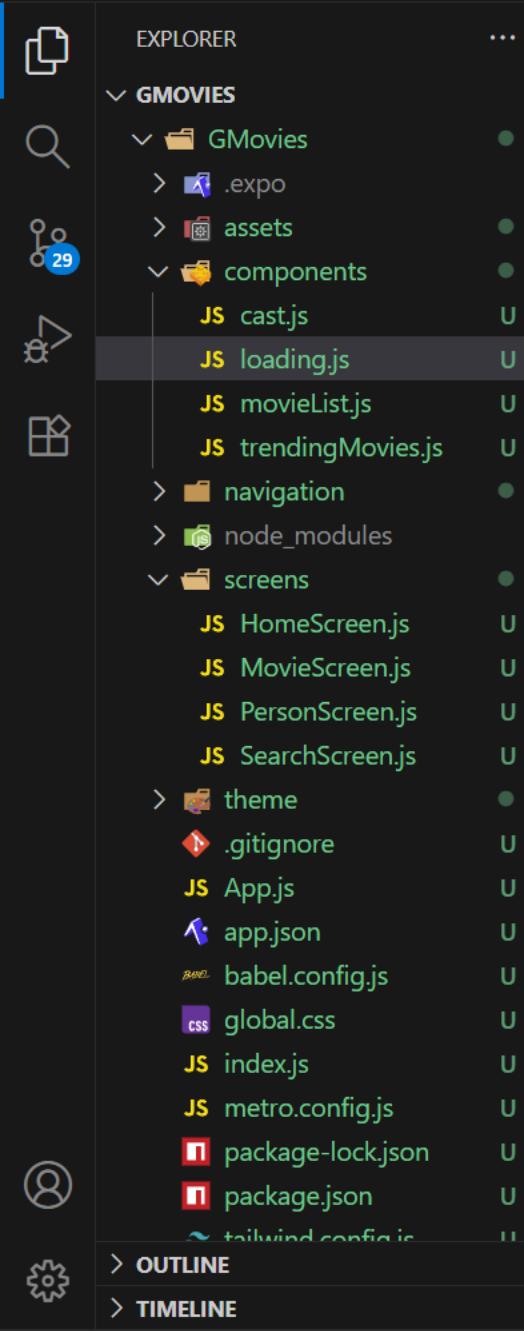

JS loading.js U X

GMovies > components > JS loading.js > ...

```
1 import React from 'react'
2 import { View, Dimensions } from 'react-native'
3 import * as Progress from 'react-native-progress'
4 import { theme } from '../theme'
5
6 var { width, height } = Dimensions.get('window');
7
8 export default function Loading() {
9   return (
10     <View style={{height, width}} className="absolute flex-row justify-center items-center">
11       <Progress.CircleSnail thickness={12} size={160} color={theme.background} />
12     </View>
13   )
14 }
15 }
```



EXPLORER

GMovies

GMovies

.expo

assets

components

cast.js

loading.js

movieList.js

trendingMovies.js

navigation

node_modules

screens

HomeScreen.js

MovieScreen.js

PersonScreen.js

SearchScreen.js

theme

.gitignore

App.js

app.json

babel.config.js

global.css

index.js

metro.config.js

package-lock.json

package.json

tailwind.config.js

> OUTLINE

> TIMELINE

...

JS HomeScreen.js U X

JS loading.js U

GMovies > screens > JS HomeScreen.js > ...

```
1 import React, { useState } from 'react'
2 import { View, Text, Platform, TouchableOpacity, ScrollView } from 'react-native'
3 import { StatusBar } from 'expo-status-bar'
4 import { SafeAreaView } from 'react-native-safe-area-context'
5 import { Bars3BottomLeftIcon, MagnifyingGlassIcon } from 'react-native-heroicons/outline';
6 import { styles } from '../theme';
7 import { useNavigation } from '@react-navigation/native'
8 import TrendingMovies from '../components/trendingMovies';
9 import MovieList from '../components/movieList';
10 import Loading from '../components/loading';
11
12 const ios = Platform.OS == "ios";
13
14 export default function HomeScreen() {
15   const [trending, setTrending] = useState([1, 2, 3]);
16   const [upcoming, setUpcoming] = useState([1, 2, 3]);
17   const [topRated, setTopRated] = useState([1, 2, 3]);
18   const [loading, setLoading] = useState(true);
19   const navigation = useNavigation();
20
21   return (
22     <View className="flex-1 bg-neutral-800">
23       <SafeAreaView className={ios ? "-mb-2" : "mb-3"}>
24         <StatusBar style="light" />
25         <View className="flex-row justify-between items-center mx-4 mt-2">
26           <TouchableOpacity>
27             <Bars3BottomLeftIcon size={30} strokeWidth={2} color="white" />
28           </TouchableOpacity>
29           <Text className="text-white text-3xl font-bold">
30             <Text style={styles.text}>GM</Text>ovies
31           </Text>
32           <TouchableOpacity onPress={() => navigation.navigate('Search')}>
```



EXPLORER

...

JS HomeScreen.js U X

JS loading.js U

▷ 🔍 ⌂ ⌂ ⌂ ⌂

GMovies > screens > JS HomeScreen.js > ...

```
32     <TouchableOpacity onPress={() => navigation.navigate('Search')}>
33         <MagnifyingGlassIcon size={30} strokeWidth={2} color="white" />
34     </TouchableOpacity>
35 </View>
36 </SafeAreaView>
37
38 <ScrollView
39     showVerticalScrollIndicator={false}
40     contentContainerStyles={{ paddingBottom: 10 }}>
41     >
42     {
43         loading ? (
44             <Loading />
45         ) : (
46             <ScrollView
47                 showsVerticalScrollIndicator={false}
48                 contentContainerStyle={{ paddingBottom: 10 }}>
49                 >
50                     <TrendingMovies data={trending} />
51
52                     <MovieList title="Próximos lançamentos" data={upcoming} />
53
54                     <MovieList title="Melhor Avaliados" data={topRated} />
55                 </ScrollView>
56             )
57         }
58     </ScrollView>
59 </View>
60
61     )
62   }
```



GMovies

.expo

assets

components

cast.js

loading.js

movieList.js

trendingMovies.js

navigation

node_modules

screens

HomeScreen.js

MovieScreen.js

PersonScreen.js

SearchScreen.js

theme

.gitignore

App.js

app.json

babel.config.js

global.css

index.js

metro.config.js

package-lock.json

package.json

tailwind.config.js

> OUTLINE

> TIMELINE



29



main* ↻ ⊞ 0 △ 0



Ln 63, Col 1

Spaces: 2

UTF-8 CRLF

{ } JavaScript



Go Live



Android Emulator - Medium_Phone_API_36.0:5554

10:00

GMovies

GMovies > screens > HomeScreen.js

```
32     <TouchableHighlight>
33         <MagnifyIcon style={ styles.icon } />
34     </TouchableHighlight>
35     </View>
36   </SafeAreaView>
37
38   <ScrollView showsVerticalScrollIndicator={ false } style={ styles.container }>
39       <View style={ styles.contentContainer }>
40           >
41           <Text style={ styles.loadingText }>
42               loading
43           <LoadingIndicator style={ styles.loadingIndicator } />
44           ) : (
45             <ScrollView showsVerticalScrollIndicator={ false } style={ styles.container }>
46                 <View style={ styles.contentContainer }>
47                     <Text style={ styles.loadingText }>
48                         >
49                         <Text style={ styles.upcomingText }>
50                             <Text style={ styles.upcomingText }>
51                               <Text style={ styles.upcomingText }>
52                                 <Text style={ styles.upcomingText }>
53                                   <Text style={ styles.upcomingText }>
54                                     <Text style={ styles.upcomingText }>
55                                       <Text style={ styles.upcomingText }>
56                                         <Text style={ styles.upcomingText }>
57                                           <Text style={ styles.upcomingText }>
58                                         <Text style={ styles.upcomingText }>
59                                           <Text style={ styles.upcomingText }>
60                                             <Text style={ styles.upcomingText }>
61                                               <Text style={ styles.upcomingText }>
62                                                 <Text style={ styles.upcomingText }>
63                                                   <Text style={ styles.upcomingText }>
```

ate('Search')}>
color="white" />

{upcoming} />

Rated} />

Ln 63, Col 1 Spaces: 2 UTF-8 CRLF {} JavaScript Go Live



EXPLORER

...

JS HomeScreen.js U X

JS loading.js U

▷ 🔍 ⌂ ⌂ ⌂ ⌂

GMOVIES

GMovies

> .expo

> assets

components

JS cast.js

JS loading.js

JS movieList.js

JS trendingMovies.js

> navigation

> node_modules

screens

JS HomeScreen.js U

JS MovieScreen.js U

JS PersonScreen.js U

JS SearchScreen.js U

> theme

.gitignore

JS App.js

app.json

babel.config.js

global.css

JS index.js

JS metro.config.js

package-lock.json

package.json

~ tailwind.config.js

> OUTLINE

> TIMELINE

GMovies > screens > JS HomeScreen.js > HomeScreen

```
 3 import { StatusBar } from 'expo-status-bar'
 4 import { SafeAreaView } from 'react-native-safe-area-context'
 5 import { Bars3BottomLeftIcon, MagnifyingGlassIcon } from 'react-native-heroicons/outline';
 6 import { styles } from '../theme';
 7 import { useNavigation } from '@react-navigation/native'
 8 import TrendingMovies from '../components/trendingMovies';
 9 import MovieList from '../components/movieList';
10 import Loading from '../components/loading';
11
12 const ios = Platform.OS == "ios";
13
14 export default function HomeScreen() {
15   const [trending, setTrending] = useState([1, 2, 3]);
16   const [upcoming, setUpcoming] = useState([1, 2, 3]);
17   const [topRated, setTopRated] = useState([1, 2, 3]);
18   const [loading, setLoading] = useState(false);
19   const navigation = useNavigation();
20
21   return (
22     <View className="flex-1 bg-neutral-800">
23       <SafeAreaView className={ios ? "-mb-2" : "mb-3"}>
24         <StatusBar style="light" />
25         <View className="flex-row justify-between items-center mx-4 mt-2">
26           <TouchableOpacity>
27             <Bars3BottomLeftIcon size={30} strokeWidth={2} color="white" />
28           </TouchableOpacity>
29           <Text className="text-white text-3xl font-bold">
30             <Text style={styles.text}>GM</Text>ovies
31           </Text>
32           <TouchableOpacity onPress={() => navigation.navigate('Search')}>
33             <MagnifyingGlassIcon size={30} strokeWidth={2} color="white" />
34           </TouchableOpacity>
```