

OPEN-SOURCE EBOOK

# ++101 LINUX COMMANDS

BOBBY ILIEV

# Table of Contents

# 101 Linux commands Open-source eBook

This is an open-source eBook with 101 Linux commands that everyone should know. No matter if you are a DevOps/SysOps engineer, developer, or just a Linux enthusiast, you will most likely have to use the terminal at some point in your career.

## Hacktoberfest

This eBook is made possible thanks to [Hacktoberfest](#) and the open source community!

## About me

My name is Bobby Iliev, and I have been working as a Linux DevOps Engineer since 2014. I am an avid Linux lover and supporter of the open-source movement philosophy. I am always doing that which I cannot do in order that I may learn how to do it, and I believe in sharing knowledge.

I think it's essential always to keep professional and surround yourself with good people, work hard, and be nice to everyone. You have to perform at a consistently higher level than others. That's the mark of a true professional.

For more information, please visit my blog at <https://bobbyiliev.com>, follow me on Twitter [@bobbyiliev\\_](#) and [YouTube](#).

## DigitalOcean

DigitalOcean is a cloud services platform delivering the simplicity developers love and businesses trust to run production applications at scale.

It provides highly available, secure, and scalable compute, storage, and networking solutions that help developers build great software faster.

Founded in 2012 with offices in New York and Cambridge, MA, DigitalOcean offers transparent and affordable pricing, an elegant user interface, and one of the largest libraries of open source resources available.

For more information, please visit <https://www.digitalocean.com> or follow [@digitalocean](#) on Twitter.

If you are new to DigitalOcean, you can get a free \$200 credit and spin up your own servers via this referral link here:

[Free \\$200 Credit For DigitalOcean](#)

## **DevDojo**

The DevDojo is a resource to learn all things web development and web design. Learn on your lunch break or wake up and enjoy a cup of coffee with us to learn something new.

Join this developer community, and we can all learn together, build together, and grow together.

[Join DevDojo](#)

For more information, please visit <https://www.devdojo.com> or follow [@thedeveloperdojo](#) on Twitter.

## Ebook Generation Tool

This ebook was generated by [Ibis Next](#) developed by [Roberto Butti](#), forked from the original [Ibis](#) by [Mohamed Said](#).

Ibis Next is a PHP tool that helps you write eBooks in markdown and supports generating PDF, EPUB, and HTML formats.

## Book Cover

The cover for this ebook was created by [Suhail Kakar](#).



## License

### MIT License

Copyright (c) 2020 Bobby Iliev

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

# The `ls` command

The `ls` command lets you see the files and directories inside a specific directory (*current working directory by default*). It normally lists the files and directories in ascending alphabetical order.

## Examples:

1. To show the files inside your current working directory:

```
ls
```

2. To show the files and directory inside a specific Directory:

```
ls {Directory_Path}
```

## Syntax:

```
ls [-OPTION] [DIRECTORY_PATH]
```

## Interactive training

In this interactive tutorial, you will learn the different ways to use the `ls` command:

[The ls command by Tony](#)

## Additional Flags and their Functionalities:

Short Flag	Long Flag	Description
<code>-l</code>	<code>-</code>	Show results in long format
<code>-S</code>	<code>-</code>	Sort results by file size
<code>-t</code>	<code>-</code>	Sort results by modification time
<code>-r</code>	<code>--reverse</code>	Show files and directories in reverse order ( <i>descending alphabetical order</i> )
<code>-a</code>	<code>--all</code>	Show all files, including hidden files ( <i>file names which begin with a period .</i> )
<code>-la</code>	<code>-</code>	Show long format files and directories including hidden files
<code>-lh</code>	<code>-</code>	list long format files and directories with readable size
<code>-A</code>	<code>--almost-all</code>	Shows all like <code>-a</code> but without showing <code>.</code> (current working directory) and <code>..</code> (parent directory)
<code>-d</code>	<code>--directory</code>	Instead of listing the files and directories inside the directory, it shows any information about the directory itself, it can be used with <code>-l</code> to show long formatted information
<code>-F</code>	<code>--classify</code>	Appends an indicator character to the end of each listed name, as an example: <code>/</code> character is appended after each directory name listed
<code>-h</code>	<code>--human-readable</code>	like <code>-l</code> but displays file size in human-readable unit not in bytes

## SELinux Support on Red Hat-Based Systems:

On Red Hat-based distributions (RHEL, CentOS, Fedora, Rocky Linux, AlmaLinux) that use SELinux, the `ls` command provides additional options to display SELinux security context information:

**Short Flag Long Flag Description**

<b>-Z</b>	<b>--context</b>	Display SELinux security context for files and directories
<b>-lZ</b>	<b>-</b>	Show long format with SELinux security context

**Example Output:**

```
ls -Z
unconfined_u:object_r:user_home_t:s0 file.txt
unconfined_u:object_r:user_home_t:s0 directory
```

```
ls -lZ
-rw-rw-r--. 1 user user unconfined_u:object_r:user_home_t:s0
1234 Jan 15 10:30 file.txt
drwxrwxr-x. 2 user user unconfined_u:object_r:user_home_t:s0
4096 Jan 15 10:25 directory
```

The SELinux context format is: **user:role:type:level**

**Note:** The **-Z** option is only functional on systems with SELinux enabled. On non-SELinux systems, this option may not be available or will show no additional information.

**Setting Persistent Options:**

Customizing command behavior in Linux is easy using the **alias** command. To make these changes permanent, follow these steps:

1. **Create the Alias:** Define your alias with the desired options. For example, to enhance the **ls** command:

```
alias ls="ls --color=auto -lh"
```

2. **Persistence:** This alias is effective only for the current session. To make it permanent, add the alias to your shell's configuration file:

- **Bash:** Append the alias to `~/.bashrc`:

```
echo 'alias ls="ls --color=auto -lh"' >> ~/.bashrc  
source ~/.bashrc
```

3. **Verification:** Open a new terminal session, and the `ls` command will display files as configured.

# The `cd` command

The `cd` command is used to change the current working directory (*i.e., in which the current user is working*). The "cd" stands for "change directory" and it is one of the most frequently used commands in the Linux terminal.

The `cd` command is often combined with the `ls` command (see chapter 1) when navigating through a system, however, you can also press the `TAB` key two times to list the contents of the new directory you just changed to.

## Examples of uses:

1. Change the current working directory:

```
cd <specified_directory_path>
```

2. Change the current working directory to the home directory:

```
cd ~
```

OR

```
cd
```

3. Change to the previous directory:

```
cd -
```

This will also echo the absolute path of the previous directory.

4. Change the current working directory to the system's root directory:

```
cd /
```

## ▣ Quick Tips

Adding a `..` as a directory will allow you to move "up" from a folder:

```
cd ..
```

This can also be done multiple times! For example, to move up three folders:

```
cd ../../../../
```

## Syntax:

```
cd [OPTIONS] directory
```

## Additional Flags and Their Functionalities

Short flag	Long flag	Description
<code>-L</code>	<code>-</code>	Follow symbolic links. By default, <code>cd</code> behaves as if the <code>-L</code> option is specified.
<code>-P</code>	<code>-</code>	Don't follow symbolic links.



# The `cat` command

---

The `cat` command allows us to create single or multiple files, to view the content of a file or to concatenate files and redirect the output to the terminal or files.

The "cat" stands for 'concatenate.' and it's one of the most frequently used commands in the Linux terminal.

## Examples of uses:

1. To display the content of a file in terminal:

```
cat <specified_file_name>
```

2. To display the content of multiple files in terminal:

```
cat file1 file2 ...
```

3. To create a file with the cat command:

```
cat > file_name
```

4. To display all files in current directory with the same filetype:

```
cat *.<filetype>
```

5. To display the content of all the files in current directory:

```
cat *
```

6. To put the output of a given file into another file:

```
cat old_file_name > new_file_name
```

7. Use cat command with **more** and **less** options:

```
cat filename | more  
cat filename | less
```

8. Append the contents of file1 to file2:

```
cat file1 >> file2
```

9. To concatenate two files together in a new file:

```
cat file1_name file2_name merge_file_name
```

10. Some implementations of cat, with option -n, it's possible to show line numbers:

```
cat -n file1_name file2_name > new_numbered_file_name
```

## Syntax:

```
cat [OPTION] [FILE]...
```

## Additional Flags and their Functionalities:

Short Flag	Long Flag	Description
-A	--show-all	equivalent to -vET
-b	--number-nonblank	number nonempty output lines, overrides -n
-e	-	equivalent to -vE
-T	-	Display tab separated lines in file opened with <b>cat</b> command.
-E	-	To show \$ at the end of each file.
-E	-	Display file with line numbers.
-n	--number	number all output lines
-s	--squeeze-blank	suppress repeated empty output lines
-u	-	(ignored)
-v	--show-nonprinting	use ^ and M- notation, except for LFD and TAB
-	--help	display this help and exit
-	--version	output version information and exit

---

# The `tac` command

`tac` is a Linux command that allows you to view files line-by-line, beginning from the last line. (`tac` doesn't reverse the contents of each individual line, only the order in which the lines are presented.) It is named by analogy with `cat`.

## Examples of uses:

1. To display the content of a file in terminal:

```
tac <specified_file_name>
```

2. This option attaches the separator before instead of after.

```
tac -b concat_file_name tac_example_file_name
```

3. This option will interpret the separator as a regular expression.

```
tac -r concat_file_name tac_example_file_name
```

4. This option uses STRING as the separator instead of newline.

```
tac -s concat_file_name tac_example_file_name
```

5. This option will display the help text and exit.

```
tac --help
```

6. This option will give the version information and exit.

```
tac --version
```

## Syntax:

```
tac [OPTION]... [FILE]...
```

## Additional Flags and their Functionalities:

Short Flag	Long Flag	Description
-b	--before	attach the separator before instead of after
-r	--regex	interpret the separator as a regular expression
-s	--separator=STRING	use STRING as the separator instead of newline
-	--help	display this help and exit
-	--version	output version information and exit

# The `head` command

The `head` command prints the first ten lines of a file.

Example:

```
head filename.txt
```

Syntax:

```
head [OPTION] [FILENAME]
```

## Get a specific number of lines:

Use the `-n` option with a number (should be an integer) of lines to display.

Example:

```
head -n 10 foo.txt
```

This command will display the first ten lines of the file `foo.txt`.

Syntax:

```
head -n <number> foo.txt
```

## Additional Flags and their Functionalities

Short Flag	Long Flag	Description
-c	--bytes=[-]NUM	Print the first NUM bytes of each file; with the leading '-', print all but the last NUM bytes of each file
-n	--lines=[-]NUM	Print the first NUM lines instead of the first 10; with the leading '-', print all but the last NUM lines of each file
-q	--quiet, --silent	Never print headers giving file names
-v	--verbose	Always print headers giving file names
-z	--zero-terminated	Line delimiter is NUL, not newline
	--help	Display this help and exit
	--version	Output version information and exit

# The `tail` command

The `tail` command prints the last ten lines of a file.

Example:

```
tail filename.txt
```

Syntax:

```
tail [OPTION] [FILENAME]
```

## Get a specific number of lines with `tail`:

Use the `-n` option with a number(should be an integer) of lines to display.

Example:

```
tail -n 10 foo.txt
```

This command will display the last ten lines of the file `foo.txt`.

## Refresh the output on any new entry in a file

It is possible to let `tail` output any new line added to the file you are looking into. So, if a new line is written to the file, it will immediately be



shown in your output. This can be done using the `--follow` or `-f` option. This is especially useful for monitoring log files.

Example:

```
tail -f foo.txt
```

Syntax:

```
tail -n <number> foo.txt
```

## Additional Flags and their Functionalities

Short Flag	Long Flag	Description
-c	--bytes=[+]NUM	Output the last NUM bytes; or use -c +NUM to output starting with byte NUM of each file
-f	--follow[={name descriptor}]	Output appended data as the file grows; an absent option argument means 'descriptor'
-F		Same as --follow=name --retry
-n	--lines=[+]NUM	Output the last NUM lines, instead of the last 10; or use -n +NUM to output starting with line NUM

Short Flag	Long Flag	Description
	<code>--max-unchanged-stats=N</code>	with <code>--follow=name</code> , reopen a FILE which has not changed size after N (default 5) iterations to see if it has been unlinked or rename (this is the usual case of rotated log files); with <code>inotify</code> , this option is rarely useful
	<code>--pid=PID</code>	with <code>-f</code> , terminate after process ID, PID dies
<code>-q</code>	<code>--quiet, --silent</code>	Never output headers giving file names
<code>--</code>	<code>--retry</code>	keep trying to open a file if it is inaccessible
<code>-s</code>	<code>--sleep-interval=N</code>	With <code>-f</code> , sleep for approximately N seconds (default 1.0) between iterations; with <code>inotify</code> and <code>--pid=P</code> , check process P at least once every N seconds
<code>-v</code>	<code>--verbose</code>	Always output headers giving file names
<code>-z</code>	<code>--zero-terminated</code>	Line delimiter is NUL, not newline
	<code>--help</code>	Display this help and exit
	<code>--version</code>	Output version information and exit

# The `pwd` command

The `pwd` stands for Print Working Directory. It prints the path of the current working directory, starting from the root.

Example:

```
pwd
```

The output would be your current directory:

```
/home/your_user/some_directory
```

Syntax:

```
pwd [OPTION]
```

Tip: You can also check this by printing out the `$PWD` variable:

```
echo $PWD
```

The output would be the same as of the `pwd` command.

## Options:

Short Flag	Long Flag	Description
-L	--logical	If the environment variable \$PWD contains an absolute name of the current directory with no "." or ".." components, then output those contents, even if they contain symbolic links. Otherwise, fall back to default (-P) behavior.
-P	--physical	Print a fully resolved name for the current directory, where all components of the name are actual directory names, and not symbolic links.
	--help	Display a help message, and exit.
	--version	Display version information, and exit.

By default, `pwd` behaves as if `-L` were specified.

# The `touch` Command

The `touch` command modifies a file's timestamps. If the file specified doesn't exist, an empty file with that name is created.

## Syntax

```
touch [OPTION]... FILE...
```

## Options

Short Flag	Long Flag	Description
<code>-a</code>	<code>-</code>	Change only the access time.
<code>-c</code>	<code>--no-create</code>	Do not create any files.
<code>-d</code> <code>STRING</code>	<code>--date=STRING</code>	Parse <i>STRING</i> and use it instead of the current time.
<code>-f</code>	<code>-</code>	(Ignored) This option does nothing but is accepted to provide compatibility with BSD versions of the <code>touch</code> command.
<code>-h</code>	<code>--no-dereference</code>	Affect each symbolic link instead of any referenced file (useful only on systems that can change the timestamps of a symlink). This option implies <code>-c</code> , nothing is created if the file does not exist.
<code>-m</code>	<code>-</code>	Change only the modification time.
<code>-r=FILE</code>	<code>--reference=FILE</code>	Use this file's times instead of the current time.

Short Flag	Long Flag	Description
<code>-t</code> <code>STAMP</code>	-	Use the numeric time <i>STAMP</i> instead of the current time. The format of <i>STAMP</i> is <code>[[CC]YY]MMDDhhmm[.ss]</code> .  An alternate way to specify which type of time is set (e.g. <i>access</i> , <i>modification</i> , or <i>change</i> ). This is equivalent to specifying <code>-a</code> or <code>-m</code> .
-	<code>--time=WORD</code>	

- WORD is `access`, `atime`, or `use`: equivalent to `-a`.
- WORD is `modify` or `mtime`: equivalent to `-m`.

An alternate way to specify what type of time to set (as with `-a` and `-m`).| |

-

| `--help` | Display a help message, and exit. | |

-

| `--version` | Display version information, and exit. |

## Examples

1. If **file.txt** exists, set all of its timestamps to the current system time. If **file.txt** doesn't exist, create an empty file with that name.

```
touch file.txt
```

2. If **file.txt** exists, set its times to the current system time. If it does not exist, do nothing.

```
touch -c file.txt
```

3. Change the *access* time of **file.txt**. The *modification* time is not changed. The *change* time is set to the current system time. If **file.txt** does not exist, it is created.

```
touch -a file.txt
```

4. Change the times of file **symboliclink**. If it's a symbolic link, change the times of the symlink, **NOT** the times of the referenced file.

```
touch -h symboliclink
```

5. Change the *access* and *modification* times of **file-b.txt** to match the times of **file-a.txt**. The *change* time will be set to the current system time. If **file-b.txt** does not exist, it is not created. Note, **file-a.txt** must already exist in this context.

```
touch -cr file-a.txt file-b.txt
```

6. Set the *access* time and *modification* time of **file.txt** to **February 1st** of the current year. The *change* time is set to the current system time.

```
touch -d "1 Feb" file.txt
```

# The `cal` Command

The `cal` command displays a formatted calendar in the terminal. If no options are specified, `cal` displays the current month, with the current day highlighted.

## Syntax:

```
cal [general options] [-jy] [[month] year]
```

## Options:

Option	Description
<code>-h</code>	Don't highlight today's date.
<code>-m month</code>	Specify a month to display. The month specifier is a full month name (e.g., February), a month abbreviation of at least three letters (e.g., Feb), or a number (e.g., 2). If you specify a number, followed by the letter "f" or "p", the month of the following or previous year, respectively, display. For instance, <code>-m 2f</code> displays February of next year.
<code>-y year</code>	Specify a year to display. For example, <code>-y 1970</code> displays the entire calendar of the year 1970.
<code>-3</code>	Display last month, this month, and next month.
<code>-1</code>	Display only this month. This is the default.
<code>-A num</code>	Display num months occurring after any months already specified. For example, <code>-3 -A 3</code> displays last month, this month, and four months after this one; and <code>-y 1970 -A 2</code> displays every month in 1970, and the first two months of 1971.



Option	Description
<b>-B num</b>	Display num months occurring before any months already specified. For example, <b>-3 -B 2</b> displays the previous three months, this month, and next month.
<b>-d YYYY-MM</b>	Operate as if the current month is number MM of year YYYY.

## Examples:

1. Display the calendar for this month, with today highlighted.

```
cal
```

2. Same as the previous command, but do not highlight today.

```
cal -h
```

3. Display last month, this month, and next month.

```
cal -3
```

4. Display this entire year's calendar.

```
cal -y
```

5. Display the entire year 2000 calendar.

```
cal -y 2000
```

6. Same as the previous command.

```
cal 2000
```

7. Display the calendar for December of this year.

```
cal -m [December, Dec, or 12]
```

10. Display the calendar for December 2000.

```
cal 12 2000
```

# The `bc` command

The `bc` command provides the functionality of being able to perform mathematical calculations through the command line.

## Examples:

### 1 . Arithmetic:

```
Input : $ echo "11+5" | bc
Output : 16
```

### 2 . Increment:

- `var ++` : Post increment operator, the result of the variable is used first and then the variable is incremented.
- `-- var` : Pre increment operator, the variable is increased first and then the result of the variable is stored.

```
Input: $ echo "var=3;++var" | bc
Output: 4
```

### 3 . Decrement:

- `var --` : Post decrement operator, the result of the variable is used first and then the variable is decremented.
- `-- var` : Pre decrement operator, the variable is decreased first and then the result of the variable is stored.

```
Input: $ echo "var=3;--var" | bc
Output: 2
```

#### 4 . Assignment:

- `var = value` : Assign the value to the variable
- `var += value` : similar to `var = var + value`
- `var -= value` : similar to `var = var - value`
- `var *= value` : similar to `var = var * value`
- `var /= value` : similar to `var = var / value`
- `var ^= value` : similar to `var = var ^ value`
- `var %= value` : similar to `var = var % value`

```
Input: $ echo "var=4;var" | bc
Output: 4
```

#### 5 . Comparison or Relational:

- If the comparison is true, then the result is 1. Otherwise,(false), returns 0
- `expr1<expr2` : Result is 1, if expr1 is strictly less than expr2.
- `expr1<=expr2` : Result is 1, if expr1 is less than or equal to expr2.
- `expr1>expr2` : Result is 1, if expr1 is strictly greater than expr2.
- `expr1>=expr2` : Result is 1, if expr1 is greater than or equal to expr2.
- `expr1==expr2` : Result is 1, if expr1 is equal to expr2.
- `expr1!=expr2` : Result is 1, if expr1 is not equal to expr2.

```
Input: $ echo "6<4" | bc
Output: 0
```

```
Input: $ echo "2==2" | bc
Output: 1
```

## 6 . Logical or Boolean:

- `expr1 && expr2` : Result is 1, if both expressions are non-zero.
- `expr1 || expr2` : Result is 1, if either expression is non-zero.
- `! expr` : Result is 1, if expr is 0.

```
Input: $ echo "! 1" | bc
Output: 0
```

```
Input: $ echo "10 && 5" | bc
Output: 1
```

## Syntax:

```
bc [ -hlwsqv ] [long-options] [ file ... ]
```

## Additional Flags and their Functionalities:

*Note: This does not include an exhaustive list of options.*

Short Flag	Long Flag	Description
<code>-i</code>	<code>--interactive</code>	Force interactive mode
<code>-l</code>	<code>--mathlib</code>	Use the predefined math routines
<code>-q</code>	<code>--quiet</code>	Opens the interactive mode for bc without printing the header
<code>-s</code>	<code>--standard</code>	Treat non-standard bc constructs as errors

Short Flag	Long Flag	Description
<code>-w</code>	<code>--warn</code>	Provides a warning if non-standard bc constructs are used

**Notes:**

1. The capabilities of `bc` can be further appreciated if used within a script. Aside from basic arithmetic operations, `bc` supports increments/decrements, complex calculations, logical comparisons, etc.
2. Two of the flags in `bc` refer to non-standard constructs. If you evaluate `100>50 | bc` for example, you will get a strange warning. According to the POSIX page for `bc`, relational operators are only valid if used within an `if`, `while`, or `for` statement.

# The `df` command

The `df` command in Linux/Unix is used to show the disk usage & information. `df` is an abbreviation for "disk free".

`df` displays the amount of disk space available on the file system containing each file name argument. If no file name is given, the space available on all currently mounted file systems is shown.

## Syntax

```
df [OPTION]... [FILE]...
```

## Options

Short Flag	Long Flag	Description
<code>-a</code>	<code>--all</code>	Include pseudo, duplicate, inaccessible file systems.
<code>-B</code>	<code>--block-size=SIZE</code>	Scale sizes by SIZE before printing them; e.g., <code>-BM</code> prints sizes in units of 1,048,576 bytes; see SIZE format below.
<code>-h</code>	<code>--human-readable</code>	Print sizes in powers of 1024 (e.g., 1023M).
<code>-H</code>	<code>--si</code>	Print sizes in powers of 1000 (e.g., 1.1G).
<code>-i</code>	<code>--inodes</code>	List inode information instead of block usage.

Short Flag	Long Flag	Description
-k	-	Like <code>--block-size=1K</code> .
-l	<code>--local</code>	Limit listing to local file systems.
-	<code>--no-sync</code>	Do not invoke <code>sync</code> before getting usage info (default).
-	<code>--output[=FIELD_LIST]</code>	Use the output format defined by <code>FIELD_LIST</code> , or print all fields if <code>FIELD_LIST</code> is omitted.
-P	<code>--portability</code>	Use the <code>POSIX</code> output format
-	<code>--sync</code>	Invoke <code>sync</code> before getting usage info.
-	<code>--total</code>	Elide all entries insignificant to available space, and produce a grand total.
-t	<code>--type=TYPE</code>	Limit listing to file systems of type <code>TYPE</code> .
-T	<code>--print-type</code>	Print file system type.
-x	<code>--exclude-type=TYPE</code>	Limit listing to file systems not of type <code>TYPE</code> .
-v	-	Ignored; included for compatibility reasons.
-	<code>--help</code>	Display help message and exit.
-	<code>--version</code>	Output version information and exit.

## Examples:

1. Show available disk space **Action:** --- Output the available disk space and where the directory is mounted

**Details:** --- Outputted values are not human-readable (are in bytes)

## Command:



`df`

2. Show available disk space in human-readable form **Action:** ---  
Output the available disk space and where the directory is mounted

**Details:** --- Outputted values ARE human-readable (are in GBs/MBs)

**Command:**

`df -h`

3. Show available disk space for the specific file system **Action:** ---  
Output the available disk space and where the directory is mounted

**Details:** --- Outputted values are only for the selected file system

**Command:**

`df -hT file_system_name`

4. Show available inodes **Action:** --- Output the available inodes for all file systems

**Details:** --- Outputted values are for inodes and not available space

**Command:**

`df -i`

5. Show file system type **Action:** --- Output the file system types

**Details:** --- Outputted values are for all file systems

**Command:**

```
df -T
```

6. Exclude file system type from the output **Action:** --- Output the information while excluding the chosen file system type

**Details:** --- Outputted values are for all file systems EXCEPT the chosen file system type

**Command:**

```
df -x file_system_type
```

# The `help` command

The `help` command displays information about builtin commands.  
Display information about builtin commands.

If a `PATTERN` is specified, this command gives detailed help on all commands matching the `PATTERN`, otherwise the list of available help topics is printed.

**Quick Tip:** The `help` command only works for commands that are "built-in" to the Bash shell itself (like `cd`, `pwd`, `echo`, `read`). It will not work for standalone programs like `ls`, `grep`, or `find`. To get help for those, you should use the `man` command (e.g., `man ls`).

## Syntax

```
$ help [-dms] [PATTERN ...]
```

## Options

Option	Description
--------	-------------

- |    |  |
|----|--|
| -d | Output short description for each topic.   |
| -m | Display usage in pseudo-manpage format.  |
| -s | Output only a short usage synopsis for each topic matching the provided <b>PATTERN</b> . |

## Examples of uses:

1. We get the complete information about the `cd` command

```
$ help cd
cd: cd [-L|[-P [-e]] [-@]] [dir]
    Change the shell working directory.

    Change the current directory to DIR.  The default DIR is
    the value of the
    HOME shell variable.

...
(additional details about options and exit status follow)
```

2. We get a short description about the `pwd` command

```
$ help -d pwd
pwd: pwd [-LP]
    Print the name of the current working directory.
```

3. We get the syntax of the `cd` command

```
$ help -s cd
cd [-L|[-P [-e]] [-@]] [dir]
```

# The `factor` command

The `factor` command prints the prime factors of each specified integer `NUMBER`. If none are specified on the command line, it will read them from the standard input.

## Syntax

```
$ factor [NUMBER]...
```

OR:

```
$ factor OPTION
```



## Options

Option	Description
<code>--help</code>	Display this a help message and exit.
<code>--version</code>	Output version information and exit.

## Examples

1. Print prime factors of a prime number.

```
$ factor 50
```


2. Print prime factors of a non-prime number.

```
$ factor 75
```

# The `uname` command

The `uname` command lets you print out system information and defaults to outputting the kernel name.

## Syntax:



```
$ uname [OPTION]
```

## Examples

1. Print out all system information.

```
$ uname -a
```

2. Print out the kernel version.

```
$ uname -v
```

## Options

Short Flag	Long Flag	Description
-a	--all	Print all information, except omit processor and hardware platform if unknown.
-s	--kernel-name	Print the kernel name.
-n	--nodename	Print the network node hostname.
-r	--kernel-release	Print the kernel release.
-v	--kernel-version	Print the kernel version.
-m	--machine	Print the machine hardware name.
-p	--processor	Print the processor type (non-portable).
-i	--hardware-platform	Print the hardware platform (non-portable).
-o	--operating-system	Print the operating system.

# The `mkdir` command

The `mkdir` command in Linux/Unix is used to create a directory.

## Syntax

```
$ mkdir [-m=mode] [-p] [-v] [-Z=context] directory [directory  
...]
```



## Examples

1. Make a directory named **myfiles**.

```
$ mkdir myfiles
```

2. Create a directory named **myfiles** at the home directory:

```
$ mkdir ~/myfiles
```

3. Create the **mydir** directory, and set its file mode (**-m**) so that all users (**a**) may read (**r**), write (**w**), and execute (**x**) it.

```
$ mkdir -m a=rwx mydir
```

You can also create sub-directories of a directory. It will create the parent directory first, if it doesn't exist. If it already exists, then it move further to create the sub-directories without any error message.

For directories, this means that any user on the system may view ("read"), and create/modify/delete ("write") files in the directory. Any user may also change to ("execute") the directory, for example with the **cd** command.

4. Create the directory **/home/test/src/python**. If any of the parent directories **/home**, **/home/test**, or **/home/test/src** do not already exist, they are automatically created.

```
$ mkdir -p /home/test/src/python
```

## Options

Short Flags	Long Flags	Descriptions
-m	--mode=MODE	Set file mode (as in chmod), not <b>a=rwx</b> - <b>umask</b> .
-p	--parents	No error if existing, make parent directories as needed.
-v	--verbose	Print a message for each created directory.
-Z	--context=CTX	Set the SELinux security context of each created directory to CTX.
-	--help	Display a help message and exit.
-	--version	Output version information and exit.

# The `gzip` command

The `gzip` command in Linux/Unix is used to compress/decompress data.

# Usage

## Compress a file

**Action:** --- Compressing a file

**Details:** --- Reduce the size of the file by applying compression

**Command:**

```
gzip file_name
```

## Decompress a file

**Action:** --- Decompressing a file

**Details:** --- Restore the file's original form in terms of data and size

**Command:**

```
gzip -d archive_01.gz
```

## Compress multiple files:

**Action:** --- Compress multiple files

**Details:** --- Compress multiple files into multiple archives

**Command:**

```
gzip file_name_01 file_name_02 file_name_03
```

## Decompress multiple files:

**Action:** --- Decompress multiple files

**Details:** --- Decompress multiple files from multiple archives

**Command:**

```
gzip -d archive_01.gz archive_02.gz archive_03.gz
```



## Compress a directory:

**Action:** --- Compress all the files in a directory

**Details:** --- Compress multiple files under a directory in one single archive

**Command:**

```
gzip -r directory_name
```

## Decompress a directory:

**Action:** --- Decompress all the files in a directory

**Details:** --- Decompress multiple files under a directory from one single archive

**Command:**

```
gzip -dr directory_name
```

## Verbose (detailed) output while compressing:

**Action:** --- Compress a file in a more verbose manner

**Details:** --- Output more information about the action of the command

**Command:**

```
gzip -v file_name
```

# The `whatis` command

The `whatis` command is used to display one-line manual page descriptions for commands. It can be used to get a basic understanding of what a (unknown) command is used for.

## Examples of uses:

1. To display what `ls` is used for:

```
whatis ls
```

2. To display the use of all commands which start with `make`, execute the following:

```
whatis -w make*
```

## Syntax:

```
whatis [-OPTION] [KEYWORD]
```

## Additional Flags and their Functionalities:

Short Flag	Long Flag	Description
<code>-d</code>	<code>--debug</code>	Show debugging messages
<code>-r</code>	<code>--regex</code>	Interpret each keyword as a regex

**Short Flag Long Flag Description**

<b>-w</b>	<b>--wildcard</b>	The keyword(s) contain wildcards
-----------	-------------------	----------------------------------

# The `who` command

The `who` command lets you print out a list of logged-in users, the current run level of the system and the time of last system boot.

## Examples

1. Print out all details of currently logged-in users

```
who -a
```

2. Print out the list of all dead processes

```
who -d -H
```

## Syntax:

```
who [options] [filename]
```

## Additional Flags and their Functionalities

Short Flag	Description
-r	prints all the current runlevel
-d	print all the dead processes
-q	print all the login names and total number of logged on users

Short Flag	Description
-h	print the heading of the columns displayed
-b	print the time of last system boot

# The `free` command

The `free` command in Linux/Unix is used to show memory (RAM/SWAP) information.



# Usage

## Show memory usage

**Action:** --- Output the memory usage - available and used, as well as swap

**Details:** --- The values are shown in kibibytes by default.

**Command:**

```
free
```

## Show memory usage in human-readable form

**Action:** --- Output the memory usage - available and used, as well as swap

**Details:** --- Outputted values ARE human-readable (are in GB / MB)

**Command:**

```
free -h
```

## Show memory usage with a total line

**Action:** --- Output the memory usage and also add a summary line with the total.

**Details:** --- The `-t` flag is useful for seeing the combined total of memory and swap.

### Command:

```
free -t
```

# The `top/htop` command

`top` is the default command-line utility that comes pre-installed on Linux distributions and Unix-like operating systems. It is used for displaying information about the system and its top CPU-consuming processes as well as RAM usage.

`htop` is interactive process-viewer and process-manager for Linux and Unix-like operating system based on ncurses. If you take `top` and put it on steroids, you get `htop`.

## Comparison between top and htop:

Feature	top	htop
Type	Interactive system-monitor, process-viewer and process-manager	Interactive system-monitor, process-viewer and process-manager
Operating System	Linux distributions, macOS	Linux distributions, macOS
Installation	Built-in and is always there. Also has more adoption due to this fact.	Doesn't come preinstalled on most Linux distros. Manual installation is needed
User Interface	Basic text only	Colorful and nicer text-graphics interface
Scrolling Support	No	Yes, supports horizontal and vertical scrolling
Mouse Support	No	Yes
Process utilization	Displays processes but not in tree format	Yes, including user and kernel threads
Scrolling Support	No	Yes, supports horizontal and vertical scrolling
Mouse Support	No	Yes
Process utilization	Displays processes but not in tree format	Yes, including user and kernel threads
Network Utilization	No	No
Disk Utilization	No	No
Comments	Has a learning curve for some advanced options like searching, sending messages to processes, etc. It is good to have some knowledge of top because it is the default process viewer on many systems.	Easier to use and supports vi like searching with <code>/</code> . Sending messages to processes (kill, renice) is easier and doesn't require typing in the process number like top.

## Examples:

### top

1. To display dynamic real-time information about running processes:

```
top
```

2. Sorting processes by internal memory size (default order - process ID):

```
top -o mem
```

3. Sorting processes first by CPU, then by running time:

```
top -o cpu -0 time
```

4. Display only processes owned by given user:

```
top -user {user_name}
```

### htop

1. Display dynamic real-time information about running processes. An enhanced version of **top**.

```
htop
```

2. displaying processes owned by a specific user:


```
htop --user {user_name}
```

3. Sort processes by a specified `sort_item` (use `htop --sort help` for available options):


```
htop --sort {sort_item}
```



## Syntax:



```
top [OPTIONS]
```




```
htop [OPTIONS]
```

## Additional Flags and their Functionalities:

Short Flag	Long Flag	Description
-a	-	Sort by memory usage.
-b	-	Batch mode operation. Starts top in 'Batch mode', which could be useful for sending output from top to other programs or to a file. In this mode, top will not accept input and runs until the iterations limit you've set with the '-n' command-line option or until killed.
-h	-	<code>top --user {user_name}</code> Only display processes owned by user.
-U	-user	Help.
-u	-	This is an alias equivalent to: -o cpu -O time.

# The `sl` command

The `sl` command in Linux is a humorous program that runs a steam locomotive(`sl`) across your terminal.

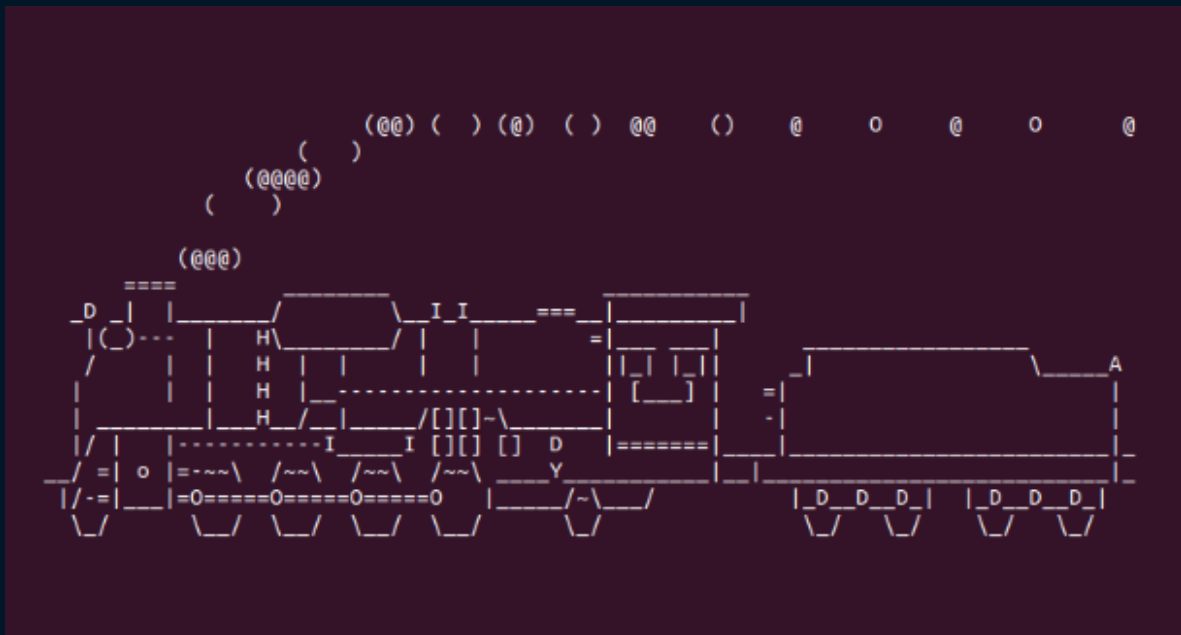

## Installation

Install the package before running.

```
sudo apt install sl
```

## Syntax

```
| sl
```

# The `echo` command

The `echo` command lets you display the line of text/string that is passed as an argument

## Examples:

1. To Show the line of text or string passed as an argument:

```
echo Hello There
```

2. To show all files/folders similar to the `ls` command:

```
echo *
```

3. To save text to a file named `foo.bar`:

```
echo "Hello There" > foo.bar
```

4. To append text to a file named `foo.bar`:

```
echo "Hello There" >> foo.bar
```

## Syntax:

```
echo [option] [string]
```

It is usually used in shell scripts and batch files to output status text to the screen or a file. The **-e** used with it enables the interpretation of backslash escapes

### Additional Options and their Functionalities:

Option	Description
<b>\b</b>	removes all the spaces in between the text
<b>\c</b>	suppress trailing new line with backspace interpreter '-e' to continue without emitting new line.
<b>\n</b>	creates new line from where it is used
<b>\t</b>	creates horizontal tab spaces
<b>\r</b>	carriage returns with backspace interpreter '-e' to have specified carriage return in output
<b>\v</b>	creates vertical tab spaces
<b>\a</b>	alert returns with a backspace interpreter '-e' to have sound alert
<b>-n</b>	omits echoing trailing newline .

# The `finger` Command

The `finger` command displays information about local system users by querying files such as `/etc/passwd`, `/var/run/utmp`, and `/var/log/wtmp`. It is a local command and does not rely on any service or daemon to run. This command helps to quickly retrieve user-related details such as login times, idle status, and other system information.

## Examples:

1. View details about a particular user.

```
finger abc
```

### Output

```
Login: abc                               Name: (null)
Directory: /home/abc                     Shell: /bin/bash
On since Mon Nov  1 18:45 (IST) on :0 (messages off)
On since Mon Nov  1 18:46 (IST) on pts/0 from :0.0
New mail received Fri May  7 10:33 2013 (IST)
Unread since Sat Jun  7 12:59 2003 (IST)
No Plan.
```

2. View login details and idle status about a user.

```
finger -s root
```



*Output*

Login	Name		Tty	Idle	Login Time
Office	Office	Phone			
root	root	*1	19d Wed	17:45	
root	root	*2	3d Fri	16:53	
root	root	*3	Mon	20:20	
root	root	*ta	2 Tue	15:43	
root	root	*tb	2 Tue	15:44	

**Syntax:**

```
finger [-l] [-m] [-p] [-s] [username]
```

**Additional Flags and Their Functionalities:****Flag Description**

- l Force long output format.
- m Match arguments only on username (not first or last name).
- p Suppress printing of the .plan file in a long format printout.
- s Force short output format.

**Additional Information:****Default Format:**

The default format includes items like login name, full username, terminal name, and write status. The command provides details like idle time, login time, and site-specific information.

**Longer Format:**

In a long format, the command adds details such as the user's home directory, login shell, and the contents of `.plan` and `.project` files.



## Privacy Considerations

While the `finger` command is useful for retrieving information about system users, it may also expose sensitive details in shared or multi-user environments:

1. **Username and Login Times:** Displays login times, which can be used to track user activity.
2. **Home Directories:** Exposes paths to users' home directories.
3. **Idle Status:** Shows how long a user has been inactive, potentially signaling whether they are actively using their system.
4. **Mail Status:** Displays mail information, which may inadvertently reveal user engagement.

### Potential Risks:

In environments with untrusted users, the information exposed by `finger` could be exploited for:

- **Social Engineering Attacks:** Malicious actors could use this information to craft personalized phishing attacks.
- **Timing Attacks:** Knowing when a user is idle or active could give attackers an advantage in timing their attempts.
- **Targeted Attacks:** Knowledge of user home directories can focus attacks on those locations.

### Mitigating Privacy Risks:

To mitigate these risks, consider limiting access to the `finger` command in environments where user privacy is important.



## The `in.fingerd` Service

It's important to distinguish between the `finger` command and the `in.fingerd` service. The `finger` command is local, while `in.fingerd` is a network daemon that allows remote queries of user information. This service is typically disabled by default in modern systems due to potential security risks.

If enabled, the `in.fingerd` service can expose user information over the network, which could be exploited by attackers. To mitigate this risk, system administrators should ensure the service is disabled if it is not needed.

### Disabling the `in.fingerd` Service:

If you are concerned about remote queries, you can disable the `in.fingerd` service:

```
sudo systemctl disable in.fingerd  
sudo systemctl stop in.fingerd
```

By disabling the `in.fingerd` service, you prevent remote querying of user information, enhancing system security.

# The `groups` command

In Linux, there can be multiple users (those who use/operate the system), and groups (a collection of users). Groups make it easy to manage users with the same security and access privileges. A user can be part of different groups.

Important Points:

The `groups` command prints the names of the primary and any supplementary groups for each given username, or the current process if no names are given. If more than one name is given, the name of each user is printed before the list of that user's groups and the username is separated from the group list by a colon.

## Syntax:

```
groups [username]
```

## Example 1

Provided with a username

```
groups demon
```

In this example, username `demon` is passed with `groups` command and the output shows the groups in which the user `demon` is present, separated by a colon.

## Example 2

When no username is passed then this will display the group membership for the current user:

```
groups
```

Here the current user is demon . So when we run the `groups` command without arguments we get the groups in which demon is a user.

## Example 3

Passing root with groups command:

```
$demon# groups
```

Note: Primary and supplementary groups for a process are normally inherited from its parent and are usually unchanged since login. This means that if you change the group database after logging in, groups will not reflect your changes within your existing login session. The only options are `-help` and `-version`.

# The `man` command

The `man` command is used to display the manual of any command that we can run on the terminal. It provides information like: DESCRIPTION, OPTIONS, AUTHORS and more.

## Examples:

1. Man page for printf:

```
man printf
```

2. Man page section 2 for intro:

```
man 2 intro
```

3. Viewing the Manual for a Local File (using the `-l` flag):

```
man -l [LOCAL-FILE]
```

## Syntax:

```
man [SECTION-NUM] [COMMAND NAME]
```




**Additional Flags and their Functionalities:**

Short Flag	Long Flag	Description
-f	-	Return the sections of an command
-a	-	Display all the manual pages of an command
-k	-	Searches the given command with RegEx in all man pages
-w	-	Returns the location of a given command man page
-I	-	Searches the command manual case sensitive

# The `passwd` command

In Linux, `passwd` command changes the password of user accounts. A normal user may only change the password for their own account, but a superuser may change the password for any account. `passwd` also changes the account or associated password validity period.

## Example



```
$ passwd
```

**The syntax of the `passwd` command is :**

```
$ passwd [options] [LOGIN]
```

## options

- a, --all  
This option can be used only with -S and causes show status **for** all users.
- d, --delete  
Delete a user's **password**.
- e, --expire  
Immediately expire an account's password.
- h, --help  
Display help message and exit.
- i, --inactive  
This option is used to disable an account after the password has been expired **for** a number of days.
- k, --keep-tokens  
Indicate password change should be performed only **for** expired authentication tokens (passwords).
- l, --lock  
Lock the password of the named account.
- q, --quiet  
Quiet mode.
- r, --repository  
change password **in** repository.
- S, --status  
Display account status information.

# The `w` command

The `w` command displays information about the users that are currently active on the machine and their processes.

## Examples:

1. Running the `w` command without arguments shows a list of logged on users and their processes.

```
w
```

2. Show information for the user named *hope*.

```
w hope
```

## Syntax:

```
finger [-l] [-m] [-p] [-s] [username]
```

## Additional Flags and their Functionalities:

Short Flag	Long Flag	Description
<code>-h</code>	<code>--no-header</code>	Don't print the header.

Short Flag	Long Flag	Description
<code>-u</code>	<code>--no-current</code>	Ignores the username while figuring out the current process and cpu times. <i>(To see an example of this, switch to the root user with <code>su</code> and then run both <code>w</code> and <code>w -u</code>.)</i>
<code>-s</code>	<code>--short</code>	Display abbreviated output <i>(don't print the login time, JCPU or PCPU times)</i> .
<code>-f</code>	<code>--from</code>	Toggle printing the from <i>(remote hostname)</i> field. The default as released is for the from field to not be printed, although your system administrator or distribution maintainer may have compiled a version where the from field is shown by default.
<code>--help</code>	<code>-</code>	Display a help message, and exit.
<code>-V</code>	<code>--version</code>	Display version information, and exit.
<code>-o</code>	<code>--old-style</code>	Old style output <i>(prints blank space for idle times less than one minute)</i> .
<code>user</code>	<code>-</code>	Show information about the specified the user only.

## Additional Information

The header of the output shows (in this order): the current time, how long the system has been running, how many users are currently logged on, and the system load averages for the past 1, 5, and 15 minutes.

The following entries are displayed for each user:

- login name the tty
- name the remote
- host they are
- logged in from the amount of time they are logged in their
- idle time JCPU

- PCPU
- command line of their current process

The JCPU time is the time used by all processes attached to the tty. It does not include past background jobs, but does include currently running background jobs.

The PCPU time is the time used by the current process, named in the "what" field.



# The `whoami` command

---

The `whoami` command displays the username of the current effective user. In other words it just prints the username of the currently logged-in user when executed.

To display your effective user id just type `whoami` in your terminal:

```
manish@godsmack:~$ whoami
# Output:
manish
```

Syntax:

```
whoami [-OPTION]
```

There are only two options which can be passed to it :

`--help`: Used to display the help and exit

Example:

```
whoami --help
```

Output:

Usage: whoami [OPTION]...

**Print** the user name associated with the current effective user ID.

Same **as** `id -un`.

`--help` display this help **and exit**

`--version` output version information **and exit**

**--version**: Output version information and exit

Example:

```
whoami --version
```

Output:

```
whoami (GNU coreutils) 8.32
```

```
Copyright (C) 2020 Free Software Foundation, Inc.
```

```
License GPLv3+: GNU GPL version 3 or later
```

```
<https://gnu.org/licenses/gpl.html>.
```

```
This is free software: you are free to change and redistribute  
it.
```

```
There is NO WARRANTY, to the extent permitted by law.
```

```
Written by Richard Mlynarik.
```

# The `history` command

If you type `history` you will get a list of the last 500 commands used. This gives you the possibility to copy and paste commands that you executed in the past.

This is powerful in combination with `grep`. So you can search for a command in your command history.

## Examples:

1. If you want to search in your history for artisan commands you ran in the past.

```
history | grep artisan
```

2. If you only want to show the last 10 commands you can.

```
history 10
```

# The `login` Command

The `login` command initiates a user session.

## Syntax

```
$ login [-p] [-h host] [-H] [-f username|username]
```

## Flags and their functionalities

Short Flag	Description
<b>-f</b>	Used to skip a login authentication. This option is usually used by the <code>getty(8)</code> autologin feature.
<b>-h</b>	Used by other servers (such as <code>telnetd(8)</code> ) to pass the name of the remote host to login so that it can be placed in <code>utmp</code> and <code>wtmp</code> . Only the superuser is allowed use this option.
<b>-p</b>	Used by <code>getty(8)</code> to tell login to preserve the environment.
<b>-H</b>	Used by other servers (for example, <code>telnetd(8)</code> ) to tell login that printing the hostname should be suppressed in the login: prompt.
<b>--help</b>	Display help text and exit.
<b>-v</b>	Display version information and exit.

## Examples

To log in to the system as user abhishek, enter the following at the login prompt:

```
$ login: abhishek
```

If a password is defined, the password prompt appears. Enter your password at this prompt.

## lscpu command

**lscpu** in Linux/Unix is used to display CPU Architecture info. **lscpu** gathers CPU architecture information from **sysfs** and **/proc/cpuinfo** files.

For example :

```
manish@godsmack:~$ lscpu
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                 4
On-line CPU(s) list:   0-3
Thread(s) per core:    2
Core(s) per socket:    2
Socket(s):              1
NUMA node(s):          1
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  142
Model name:             Intel(R) Core(TM) i5-7200U CPU @
2.50GHz
Stepping:               9
CPU MHz:                700.024
CPU max MHz:            3100.0000
CPU min MHz:            400.0000
BogoMIPS:               5399.81
Virtualization:         VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               256K
L3 cache:               3072K
NUMA node0 CPU(s):     0-3
```



## Options

**-a, --all** Include lines for online and offline CPUs in the output (default for -e). This option may only be specified together with option -e or -p. For example: `lsof -a`

**-b, --online** Limit the output to online CPUs (default for -p). This option may only be specified together with option -e or -p. For example: `lscpu -b`

**-c, --offline** Limit the output to offline CPUs. This option may only be specified together with option -e or -p.

**-e, --extended [=list]** Display the CPU information in human readable format. For example: `lsof -e`

For more info: use `man lscpu` or `lscpu --help`

# The `cp` command

The `cp` is a command-line utility for copying files and directory. `cp` stands for copy. This command is used to copy files or group of files or directory. It creates an exact image of a file on a disk with different file name. The `cp` command requires at least two filenames in its arguments.

## Examples:

1. To copy the contents of the source file to the destination file.

```
cp sourceFile destFile
```

If the destination file doesn't exist then the file is created and the content is copied to it. If it exists then the file is overwritten.

2. To copy a file to another directory specify the absolute or the relative path to the destination directory.

```
cp sourceFile /folderName/destFile
```

3. To copy a directory, including all its files and subdirectories

```
cp -R folderName1 folderName2
```

The command above creates the destination directory and recursively

copies all files and subdirectories from the source to the destination directory.

If the destination directory already exists, the source directory itself and its content are copied inside the destination directory.

4. To copy only the files and subdirectories but not the source directory

```
cp -RT folderName1 folderName2
```

## Syntax:

The general syntax for the cp command is as follows:

```
cp [OPTION] SOURCE DESTINATION  
cp [OPTION] SOURCE DIRECTORY  
cp [OPTION] SOURCE-1 SOURCE-2 SOURCE-3 SOURCE-n DIRECTORY
```

The first and second syntax is used to copy Source file to Destination file or Directory. The third syntax is used to copy multiple Sources(files) to Directory.

## Some useful options

1. **-i** (interactive) **i** stands for Interactive copying. With this option system first warns the user before overwriting the destination file. cp prompts for a response, if you press y then it overwrites the file and with any other option leave it uncopied.

```
$ cp -i file1.txt fileName2.txt  
cp: overwrite 'file2.txt'? y
```

2. **-b**(backup) **-b**(backup): With this option cp command creates the backup of the destination file in the same folder with the different name and in different format.

```
$ ls  
a.txt b.txt  
  
$ cp -b a.txt b.txt  
  
$ ls  
a.txt b.txt b.txt~
```

3. **-f**(force) If the system is unable to open destination file for writing operation because the user doesn't have writing permission for this file then by using -f option with cp command, destination file is deleted first and then copying of content is done from source to destination file.

```
$ ls -l b.txt  
-r-xr-xr-x+ 1 User User 3 Nov 24 08:45 b.txt
```

User, group and others doesn't have writing permission.

Without **-f** option, command not executed

```
$ cp a.txt b.txt  
cp: cannot create regular file 'b.txt': Permission denied
```

With **-f** option, command executed successfully

```
$ cp -f a.txt b.txt
```

## Additional Flags and their Functionalities:

Short Flag	Long Flag	Description
-i	--interactive	prompt before overwrite
-f	--force	If an existing destination file cannot be opened, remove it and try again
-b	-	Creates the backup of the destination file in the same folder with the different name and in different format.
-r or -R	--recursive	<b>cp</b> command shows its recursive behavior by copying the entire directory structure recursively.
-n	--no-clobber	do not overwrite an existing file (overrides a previous -i option)
-p	-	preserve the specified attributes (default: mode,ownership,timestamps), if possible additional attributes: context, links, xattr, all

# The `mv` command

The `mv` command lets you **move one or more files or directories** from one place to another in a file system like UNIX. It can be used for two distinct functions:

- To rename a file or folder.
- To move a group of files to a different directory.

**Note:** *No additional space is consumed on a disk during renaming, and the `mv` command doesn't provide a prompt for confirmation*

## Syntax:

```
mv [options] source (file or directory) destination
```

## Examples:

1. To rename a file called `old_name.txt`:

```
mv old_name.txt new_name.txt
```

2. To move a file called `essay.txt` from the current directory to a directory called `assignments` and rename it `essay1.txt`:

```
mv essay.txt assignments/essay1.txt
```

3. To move a file called *essay.txt* from the current directory to a directory called *assignments* without renaming it

```
mv essay.txt assignments
```

### Additional Flags and their Functionalities:

Short Flag	Long Flag	Description
-f	--force	Force move by overwriting destination file without prompt
-i	--interactive	Interactive prompt before overwrite
-u	--update	Move only when the source file is newer than the destination file or when the destination file is missing
-n	--no-clobber	Do not overwrite an existing file
-v	--verbose	Print source and destination files
-b	--backup	Create a Backup of Existing Destination File

# The `ps` command

The `ps` command is used to identify programs and processes that are running on the system and the resources they are using. Its frequently pipelined with other commands like `grep` to search for a program/process or `less` so that the user can analyze the output one page at a time.

Let's say you have a program like openshot which is notorious for hogging system resources when exporting a video, and you want to close it, but the GUI has become unresponsive.

## Example

1. You want to find the PID of openshot and kill it.

```
ps aux | grep openshot  
kill - <openshot PID>
```

2. To Show all the running processes:

```
ps -A
```

## Syntax

`ps [options]`

When run without any options, it's useless and will print: `CMD` - the



executable processes/(program) running, their **PID** - process ID, **TTY** - terminal type and **Time** - How long the process has utilized the CPU or thread.

## Common Option

If you are going to remember only one thing from this page let it be these three letter **aux**: **a** - which displays all processes running, including those being run by other users. **u** - which shows the effective user of a process, i.e. the person whose file access permissions are used by the process. **x** - which shows processes that do not have a **TTY** associated with them.

## Additional Options:

Option	Description
<b>a</b>	Shows list all processes with a terminal (tty)
<b>-A</b>	Lists all processes. Identical to <b>-e</b>
<b>-a</b>	Shows all processes except both session leaders and processes not associated with a terminal
<b>-d</b>	Select all processes except session leaders
<b>--deselect</b>	Shows all processes except those that fulfill the specified conditions. Identical to <b>-N</b>
<b>-e</b>	Lists all processes. Identical to <b>-A</b>
<b>-N</b>	Shows all processes except those that fulfill the specified conditions. Identical to <b>--deselect</b>
<b>T</b>	Select all processes associated with this terminal. Identical to the <b>-t</b> option without any argument
<b>r</b>	Restrict the selection to only running processes
<b>--help simple</b>	Shows all the basic options
<b>--help all</b>	Shows every available options

Another useful command which give a realtime snapshot of the

processes and the resources they are using about every ten seconds is `top`.

# The `kill` command

`kill` command in Linux (located in `/bin/kill`), is a built-in command which is used to terminate processes manually. The `kill` command sends a signal to a process which terminates the process. If the user doesn't specify any signal which is to be sent along with kill command then default *TERM* signal is sent that terminates the process.

Signals can be specified in three ways:

- **By number (e.g. -5)**
- **With SIG prefix (e.g. -SIGkill)**
- **Without SIG prefix (e.g. -kill)**

## Syntax

```
kill [OPTIONS] [PID]...
```

## Examples:

1. To display all the available signals you can use below command option:

```
kill -l
```

2. To show how to use a *PID* with the *kill* command.

```
$kill pid
```

3. To show how to send signal to processes.

```
kill {-signal | -s signal} pid
```

4. Specify Signal:

- using numbers as signals

```
kill -9 pid
```

- using SIG prefix in signals

```
kill -SIGHUP pid
```

- without SIG prefix in signals

```
kill -HUP pid
```

## Arguments:

The list of processes to be signaled can be a mixture of names and PIDs.

pid      Each pid can be expressed in one of the following ways:

n          where n is larger than 0. The process with PID n is signaled.

0          All processes in the current process group are signaled.

-1         All processes with a PID larger than 1 are signaled.

-n         where n is larger than 1. All processes in process group n are signaled.

When an argument of the form '-n' is given, and it is meant to denote a process group, either a signal must be specified first, or the argument must be preceded by a '--' option, otherwise it will be taken as the signal to send.

name      All processes invoked using this name will be signaled.

## Options:

`-s, --signal signal`  
The signal to send. It may be given as a name or a number.

`-l, --list [number]`  
Print a list of signal names, or convert the given signal number to a name. The signals can be found in `/usr/include/linux/signal.h`.

`-L, --table`  
Similar to `-l`, but it will print signal names and their corresponding numbers.

`-a, --all`  
Do not restrict the command-name-to-PID conversion to processes with the same UID as the present process.

`-p, --pid`  
Only print the process ID (PID) of the named processes, do not send any signals.

`--verbose`  
Print PID(s) that will be signaled with kill along with the signal.

# The `killall` command

`killall` sends a signal to **all** processes running any of the specified commands. If no signal name is specified, `SIGTERM` is sent. In general, `killall` command kills all processes by knowing the name of the process.

Signals can be specified either by name (e.g. `-HUP` or `-SIGHUP`) or by number (e.g. `-1`) or by option `-s`.

If the command name is not a regular expression (option `-r`) and contains a slash (`/`), processes executing that particular file will be selected for killing, independent of their name.

`killall` returns a zero return code if at least one process has been killed for each listed command, or no commands were listed and at least one process matched the `-u` and `-Z` search criteria. `killall` returns non-zero otherwise.

A `killall` process never kills itself (but may kill other `killall` processes).

## Examples:

1. Kill all processes matching the name `conky` with `SIGTERM`:

```
killall conky  
# OR  
killall -SIGTERM conky  
# OR  
killall -15 conky
```

I was able to kill Wine ( which are Windows exe files running on Linux ) applications this way too.

```
killall TQ.exe
```

2. List all the supported signals:

```
$ killall -l  
HUP INT QUIT ILL TRAP ABRT BUS FPE KILL USR1 SEGV USR2 PIPE  
ALRM TERM STKFLT  
CHLD CONT STOP TSTP TTIN TTOU URG XCPU XFSZ VTALRM PROF WINCH  
POLL PWR SYS
```

As for the numbers.



```
$ for s in $(killall -l); do echo -n "$s " && kill -l $s; done
HUP 1
INT 2
QUIT 3
ILL 4
TRAP 5
ABRT 6
BUS 7
FPE 8
KILL 9
USR1 10
SEGV 11
USR2 12
PIPE 13
ALRM 14
TERM 15
STKFLT 16
CHLD 17
CONT 18
STOP 19
TSTP 20
TTIN 21
TTOU 22
URG 23
XCPU 24
XFSZ 25
VTALRM 26
PROF 27
WINCH 28
POLL 29
PWR 30
SYS 31
```

3. Ask before killing, to prevent unwanted kills:

```
$ killall -i conky
Kill conky(1685) ? (y/N)
```

4. Kill all processes and wait until the processes die.

```
killall -w conky
```

#### 5. Kill based on time:

```
# Kill all firefox younger than 2 minutes  
killall -y 2m firefox
```

```
# Kill all firefox older than 2 hours  
killall -o 2h firefox
```

### Syntax:

```
killall [OPTION]... [--] NAME...  
killall -l, --list  
killall -V, --version
```

### Additional Flags and their Functionalities:

Short Flag	Long Flag	Description
-e	--exact	require an exact match for very long names
-I	--ignore-case	case insensitive process name match
-g	--process-group	kill process group instead of process
-y	--younger-than	kill processes younger than TIME
-o	--older-than	kill processes older than TIME
-i	--interactive	ask for confirmation before killing
-l	--list	list all known signal names
-q	--quiet	don't print complaints
-r	--regexp	interpret NAME as an extended regular expression

Short Flag	Long Flag	Description
-s	--signal SIGNAL	send this signal instead of SIGTERM
-u	--user USER	kill only process(es) running as USER
-v	--verbose	report if the signal was successfully sent
-w	--wait	wait for processes to die
-n	--ns PID	match processes that belong to the same namespaces as PID
-Z	--context	REGEXP kill only process(es) having context (must precede other arguments)

## Related commands

kill, `pidof`

# The `env` command

The `env` command in Linux/Unix is used to either print a list of the current environment variables or to run a program in a custom environment without changing the current one.

## Syntax

```
env [OPTION]... [-] [NAME=VALUE]... [COMMAND [ARG]...]
```

## Usage

1. Print out the set of current environment variables

```
env
```

2. Run a command with an empty environment

```
env -i command_name
```

3. Remove variable from the environment

```
env -u variable_name
```

4. End each output with NULL

```
env -0
```

## Full List of Options

Short Flag	Long Flag	Description
-i	--ignore-environment	Start with an empty environment
-0	--null	End each output line with NUL, not newline
-u	--unset=NAME	Remove variable from the environment
-C	--chdir=DIR	Change working directory to DIR
-S	--split-string=S	Process and split S into separate arguments. It's used to pass multiple arguments on shebang lines
-v	--debug	Print verbose information for each processing step
-	--help	Print a help message
-	--version	Print the version information

# The `printenv` command

The `printenv` prints the values of the specified environment VARIABLE(s). If no VARIABLE is specified, print name and value pairs for them all.

## Examples:

1. Display the values of all environment variables.

```
printenv
```

2. Display the location of the current user's home directory.

```
printenv HOME
```

3. To use the `--null` command line option as the terminating character between output entries.

```
printenv --null SHELL HOME
```

*NOTE: By default, the `printenv` command uses newline as the terminating character between output entries.*

## Syntax:



```
printenv [OPTION]... PATTERN...
```

## Additional Flags and their Functionalities:

Short Flag	Long Flag	Description
------------	-----------	-------------

<code>-0</code>	<code>--null</code>	End each output line with <b>0</b> byte rather than <u>newline</u> .
<code>--help</code>	<code>-</code>	Display a help message, and exit.

# The `hostname` command

`hostname` is used to display the system's DNS name, and to display or set its hostname or NIS domain name.

## Syntax:

```
hostname [-a|--alias] [-d|--domain] [-f|--fqdn|--long] [-A|--all-fqdns] [-i|--ip-address] [-I|--all-ip-addresses] [-s|--short] [-y|--yp|--nis]
```

## Examples:

1. `hostname -a`, `hostname --alias` Display the alias name of the host (if used). This option is deprecated and should not be used anymore.
2. `hostname -s`, `hostname --short` Display the short host name. This is the host name cut at the first dot.
3. `hostname -V`, `hostname --version` Print version information on standard output and exit successfully.

## Help Command

Run below command to view the complete guide to **hostname** command.

```
man hostname
```

# The **nano** command

The **nano** command lets you create/edit text files.

## Installation:

Nano text editor is pre-installed on macOS and most Linux distros. It's an alternative to **vi** and **vim**. To check if it is installed on your system type:

```
nano --version
```

If you don't have **nano** installed you can do it by using the package manager:

Ubuntu or Debian:

```
sudo apt install nano
```

## Examples:

1. Open an existing file, type **nano** followed by the path to the file:

```
nano /path/to/filename
```

2. Create a new file, type **nano** followed by the filename:

```
nano filename
```

3. Open a file with the cursor on a specific line and character use the following syntax:

```
nano +line_number,character_number filename
```

## Overview of some Shortcuts and their Functionalities:

### Shortcut Description

**Ctrl + S** Save current file  
**Ctrl + O** Offer to write file ("Save as")  
**Ctrl + X** Close buffer, exit from nano  
**Ctrl + K** Cut current line into cutbuffer  
**Ctrl + U** Paste contents of cutbuffer  
**Alt + 6** Copy current line into cutbuffer  
**Alt + U** Undo last action  
**Alt + E** Redo last undone action

# The `rm` command

`rm` which stands for "remove" is a command used to remove (*delete*) specific files. It can also be used to remove directories by using the appropriate flag.

## Example:

```
rm filename.txt
```

## Syntax

```
rm [OPTION] [FILE|DIRECTORY]
```

## Flags and their Functionalities:

Short Flag	Long Flag	Description
<code>-f</code>	<code>--force</code>	Ignore nonexistence of files or directories, never prompt
<code>-i</code>	-	Prompt before every removal
<code>-I</code>	-	Prompt once before removal of more than 3 files, or when removing recursively
<code>-d</code>	<code>--dir</code>	remove empty directories
<code>-v</code>	<code>--verbose</code>	explain what is being done

Short Flag	Long Flag	Description
<code>-r</code> or <code>-R</code>	<code>--recursive</code>	remove directories and their contents recursively
<code>-</code>	<code>--help</code>	Display help then exit
<code>-</code>	<code>--version</code>	First, Print version Information, Then exit
<code>-</code>	<code>--no-preserve-root</code>	do not treat <code>/</code> specially
<code>-</code>	<code>-preserve-root[=all]</code>	do not remove <code>/</code> (default) with 'all', reject any command line argument on a separate device from its parent
<code>-</code>	<code>--interactive[=WHEN]</code>	prompt according to WHEN, never, once <code>-I</code> , or always <code>-i</code> , without WHEN, prompt always
<code>-</code>	<code>--one-file-system</code>	when removing a hierarchy recursively, skip any directory that is on a file system different from that of the corresponding command line argument0

**IMPORTANT NOTICE:**

1. `rm` doesn't remove directories by default, so use `-r`, `-R`, `--recursive` options to remove each listed directory, along with all of its contents.
2. To remove a file whose name starts with `-` such as `-foo`, use one of the following commands:
  - `rm -- -foo`
  - `rm ./-foo`
3. To ensure that files/directories being deleted are truly unrecoverable, consider using the `shred` command.

# The `ifconfig` command

`ifconfig` is used to configure the kernel-resident network interfaces. It is used at boot time to set up interfaces as necessary. After that, it is usually only needed when debugging or when system tuning is needed.

If no arguments are given, `ifconfig` displays the status of the currently active interfaces. If a single interface argument is given, it displays the status of the given interface only; if a single `-a` argument is given, it displays the status of all interfaces, even those that are down. Otherwise, it configures an interface.

## Syntax:

```
ifconfig [-v] [-a] [-s] [interface]
ifconfig [-v] interface [atype] options
```

## Examples:

1. To display the currently active interfaces:

```
ifconfig
```

2. To show all interfaces which are currently active, even if down:

```
ifconfig -a
```



3. To show all the error conditions:

```
ifconfig -v
```

4. To show a short list:

```
ifconfig -s
```

5. To display details of the specific network interface (say **eth0**):

```
ifconfig eth0
```

6. To activate the driver for a interface (say **eth0**):

```
ifconfig eth0 up
```

7. To deactivate the driver for a interface (say **eth0**):

```
ifconfig eth0 down
```

8. To assign a specific IP address to a network interface (say **eth0**):

```
ifconfig eth0 10.10.1.23
```

9. To change MAC(Media Access Control) address of a network interface (say **eth0**):

```
ifconfig eth0 hw ether AA:BB:CC:DD:EE:FF
```

10. To define a netmask for a network interface (say `eth0`):

```
ifconfig eth0 netmask 255.255.255.224
```

11. To enable promiscuous mode on a network interface (say `eth0`):

```
ifconfig eth0 promisc
```

In normal mode, when a packet is received by a network card, it verifies that it belongs to itself. If not, it drops the packet normally. However, in the promiscuous mode, it accepts all the packets that flow through the network card.

12. To disable promiscuous mode on a network interface (say `eth0`):

```
ifconfig eth0 -promisc
```

13. To set the maximum transmission unit to a network interface (say `eth0`):

```
ifconfig eth0 mtu 1000
```

The MTU allows you to set the limit size of packets that are transmitted on an interface. The MTU is able to handle a maximum number of octets to an interface in one single transaction.

14. To add additional IP addresses to a network interface, you can configure a network alias to the network interface:

```
ifconfig eth0:0 10.10.1.24
```

Please note that the alias network address is in the same subnet mask of the network interface. For example, if your eth0 network ip address is 10.10.1.23, then the alias ip address can be 10.10.1.24. Example of an invalid IP address is 10.10.2.24 since the interface subnet mask is 255.255.255.224

15. To remove a network alias:

```
ifconfig eth0:0 down
```

Remember that for every scope (i.e. same net with address/netmask combination) all aliases are deleted, if you delete the first alias.

## Help Command

Run below command to view the complete guide to `ifconfig` command.

```
man ifconfig
```

# The `ip` command

The `ip` command is present in the net-tools which is used for performing several network administration tasks. IP stands for Internet Protocol. This command is used to show or manipulate routing, devices, and tunnels. It can perform tasks like configuring and modifying the default and static routing, setting up tunnel over IP, listing IP addresses and property information, modifying the status of the interface, assigning, deleting and setting up IP addresses and routes.

## Examples:

1. To assign an IP Address to a specific interface (eth1) :

```
ip addr add 192.168.50.5 dev eth1
```

2. To show detailed information about network interfaces like IP Address, MAC Address information etc. :

```
ip addr show
```

## Syntax:

```
ip [ OPTIONS ] OBJECT { COMMAND | help }
```

## Additional Flags and their Functionalities:


### Flag Description

- a Display and modify IP Addresses
- l Display and modify network interfaces
- r Display and alter the routing table
- n Display and manipulate neighbor objects (ARP table)
- ru Rule in routing policy database.
- s Output more information. If the option appears twice or more, the amount of information increases
- f Specifies the protocol family to use
- r Use the system's name resolver to print DNS names instead of host addresses
- c To configure color output

# The `clear` command

In linux, the `clear` command is used to clear terminal screen.

## Example



```
$ clear
```

## Before:


```
$ echo Hello World  
Hello World  
  
$ clear
```



## After executing clear command:


 \$

Screenshot:

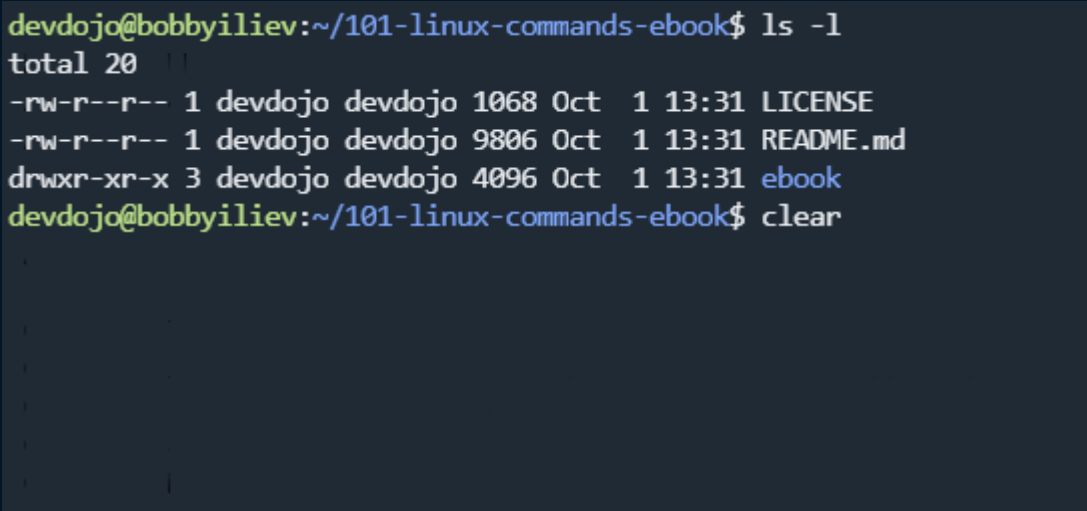

```
devdojo@bobbyiliev:~/101-linux-commands-ebook$ ls -l
total 20
-rw-r--r-- 1 devdojo devdojo 1068 Oct  1 13:31 LICENSE
-rw-r--r-- 1 devdojo devdojo 9806 Oct  1 13:31 README.md
drwxr-xr-x 3 devdojo devdojo 4096 Oct  1 13:31 ebook
devdojo@bobbyiliev:~/101-linux-commands-ebook$ clear
```

After running the command your terminal screen will be clear:

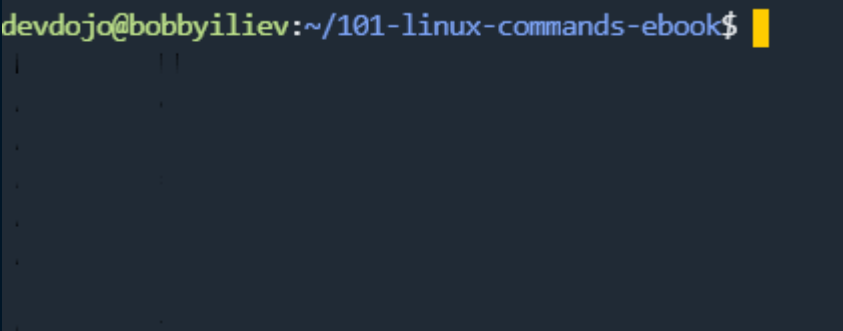

```
devdojo@bobbyiliev:~/101-linux-commands-ebook$
```

# The `su` command

In linux, `su` allows you to run commands with a substitute user and group ID.

When called without arguments, `su` defaults to running an interactive shell as root.

## Example :

```
$ su
```

In case that you wanted to switch to a user called **devdojo**, you could do that by running the following command:

```
$ su devdojo
```

**The syntax of the `su` command is :**

```
$ su [options] [-] [<user>[<argument>...]]
```

## Options :

-m, -p	--> do not reset environment variables
-w	--> do not reset specified variables
-g	--> specify the primary group
-G	--> specify a supplemental group
-l	--> make the shell a login shell
-f	--> pass -f to the shell (for csh or tcsh)
-s	--> run <shell> if /etc/shell allows it
-p	--> create a new pseudo terminal
-h	--> display this help
-v	--> display version

# The `wget` command

The `wget` command is used for downloading files from the Internet. It supports downloading files using HTTP, HTTPS and FTP protocols. It allows you to download several files at once, download in the background, resume downloads, limit the bandwidth, mirror a website, and much more.

## Syntax

The **wget** syntax requires you to define the downloading options and the URL the to be downloaded file is coming from.

```
$ wget [options] [URL]
```

## Examples

In this example we will download the Ubuntu 20.04 desktop iso file from different sources. Go over to your terminal or open a new one and type in the below **wget**. This will start the download. The download may take a few minutes to complete.

1. Starting a regular download

```
wget  
https://releases.ubuntu.com/20.04/ubuntu-20.04.3-desktop-amd64  
.iso
```

2. You can resume a download using the **-c** option

```
wget -c  
https://mirrors.piconets.webwerks.in/ubuntu-mirror/ubuntu-rele  
ases/20.04.3/ubuntu-20.04.3-desktop-amd64.iso
```


3. To download in the background, use the **-b** option

```
wget -b  
https://mirrors.piconets.webwerks.in/ubuntu-mirror/ubuntu-rele  
ases/20.04.3/ubuntu-20.04.3-desktop-amd64.iso
```



## More options

On top of downloading, **wget** provides many more features, such as downloading multiple files, downloading in the background, limiting download bandwidth and resuming stopped downloads. View all **wget** options in its man page.

 `man wget`

## Additional Flags and their Functionalities

Short Flag	Description
-v	prints version of the wget available on your system
-h	print help message displaying all the possible options
-b	This option is used to send a process to the background as soon as it starts.
-t	This option is used to set number of retries to a specified number of times
-c	This option is used to resume a partially downloaded file

# The `curl` command

In Linux, `curl` is a powerful command-line tool used to transfer data from or to a server using a wide variety of protocols, including HTTP, HTTPS, and FTP. It is often used for testing APIs, downloading files, and automating web-related tasks.

## The syntax of the `curl` command :

```
$ curl [options...] <url>
```

The command will print the source code of the example.com homepage in the terminal window.

## Common Options :

curl has over 200 options! Here are some of the most common and useful ones.

Option	Long Version	Description
-O	--remote-name	Downloads the file and saves it with the same name as the remote file.
-o <file>	--output <file>	Saves the downloaded output to a specific filename.
-L	--location	Follows redirects if the server reports that the requested page has moved.
-X <METHOD>	--request <METHOD>	Specifies the HTTP request method to use (e.g., POST, PUT, DELETE).
-H <header>	--header <header>	Allows you to add a custom HTTP header to your request.

## Examples :

### 1. View the source code of a webpage

This is the simplest use of curl. It will fetch the content from the URL and print its HTML source code directly to your terminal.

```
$ curl example.com
```

### 2. Download a file

The -O flag is used to download a file. curl will save it in your current directory using the same name as the remote file.

```
$ curl -O  
https://github.com/bobbyiliev/101-linux-commands/archive/refs/  
tags/v1.0.zip
```

### 3. Download a file and rename it

Using the -o flag, you can specify a new name for the downloaded file.

```
$ curl -o linux-commands.zip  
https://github.com/bobbyiliev/101-linux-commands/archive/refs/  
tags/v1.0.zip
```

## Installation:

The curl command comes with most of the Linux distributions. But, if the system does not carry the curl by default. You need to install it manually. To install the curl, execute the following commands:

Update the system by executing the following commands:

```
$ sudo apt update  
$ sudo apt upgrade
```

Now, install the curl utility by executing the below command:

```
$ sudo apt install curl
```

Verify the installation by executing the below command:

```
$ curl -version
```

The above command will display the installed version of the curl command.

# The `yes` command

The `yes` command in linux is used to print a continuous output stream of given *STRING*. If *STRING* is not mentioned then it prints 'y'. It outputs a string repeatedly until killed (using something like ctrl + c).

## Examples :

1. Prints hello world infinitely in the terminal until killed :

```
yes hello world
```

2. A more generalized command:

```
yes [STRING]
```

## Options

It accepts the following options:

1. `--help`  
display this help and exit
2. `--version`  
output version information and exit



# The `last` command

This command shows you a list of all the users that have logged in and out since the creation of the `var/log/wtmp` file. There are also some parameters you can add which will show you for example when a certain user has logged in and how long he was logged in for.

If you want to see the last 5 logs, just add `-5` to the command like this:

```
last -5
```

And if you want to see the last 10, add `-10`.

Another cool thing you can do is if you add `-F` you can see the login and logout time including the dates.

```
last -F
```

There are quite a lot of stuff you can view with this command. If you need to find out more about this command you can run:

```
last --help
```

# The `locate` command

The `locate` command searches the file system for files and directories whose name matches a given pattern through a database file that is generated by the `updatedb` command.

## Examples:

1. Running the `locate` command to search for a file named `.bashrc`.

```
locate .bashrc
```

### Output

```
/etc/bash.bashrc
/etc/skel/.bashrc
/home/linuxize/.bashrc
/usr/share/base-files/dot.bashrc
/usr/share/doc/adduser/examples/adduser.local.conf.examples/ba
sh.bashrc
/usr/share/doc/adduser/examples/adduser.local.conf.examples/sk
el/dot.bashrc
```

The `/root/.bashrc` file will not be shown because we ran the command as a normal user that doesn't have access permissions to the `/root` directory.

If the result list is long, for better readability, you can pipe the output to the `less` command:

```
locate .bashrc | less
```

2. To search for all `.md` files on the system

```
locate *.md
```

3. To search all `.py` files and display only 10 results

```
locate -n 10 *.py
```

4. To performs case-insensitive search.

```
locate -i readme.md
```

### *Output*

```
/home/linuxize/p1/readme.md  
/home/linuxize/p2/README.md  
/home/linuxize/p3/ReadMe.md
```

5. To return the number of all files containing `.bashrc` in their name.

```
locate -c .bashrc
```

### *Output*

```
6
```

6. The following would return only the existing `.json` files on the file system.

```
locate -e *.json
```

7. To run a more complex search the `-r` (`--regex`) option is used. To search for all `.mp4` and `.avi` files on your system and ignore case.

```
locate --regex -i "(\\.mp4|\\.avi)"
```

## Syntax:

1. `locate [OPTION]... PATTERN...`

## Additional Flags and their Functionalities:

Short Flag	Long Flag	Description
<code>-A</code>	<code>--all</code>	It is used to display only entries that match all PATTERNS instead of requiring only one of them to match.
<code>-b</code>	<code>--basename</code>	It is used to match only the base name against the specified patterns.
<code>-c</code>	<code>--count</code>	It is used for writing the number matching entries instead of writing file names on standard output.
<code>-d</code>	<code>--database DBPATH</code>	It is used to replace the default database with DBPATH.
<code>-e</code>	<code>--existing</code>	It is used to display only entries that refer to existing files during the command is executed.

Short Flag	Long Flag	Description
-L	--follow	If the <b>--existing</b> option is specified, It is used for checking whether files exist and follow trailing symbolic links. It will omit the broken symbolic links to the output. This is the default behavior. The opposite behavior can be specified using the <b>--nofollow</b> option.
-h	--help	It is used to display the help documentation that contains a summary of the available options.
-i	--ignore-case	It is used to ignore case sensitivity of the specified patterns.
-p	--ignore-spaces	It is used to ignore punctuation and spaces when matching patterns.
-t	--transliterate	It is used to ignore accents using iconv transliteration when matching patterns.
-l	--limit, -n LIMIT	If this option is specified, the command exit successfully after finding LIMIT entries.
-m	--mmap	It is used to ignore the compatibility with BSD, and GNU locate.
-0	--null	It is used to separate the entries on output using the ASCII NUL character instead of writing each entry on a separate line.
-S	--statistics	It is used to write statistics about each read database to standard output instead of searching for files.
-r	--regexp REGEXP	It is used for searching a basic regexp REGEXP.
--regex	-	It is used to describe all PATTERNS as extended regular expressions.
-V	--version	It is used to display the version and license information.
-w	--wholename	It is used for matching only the whole path name in specified patterns.



# The `iostat` command

The `iostat` command in Linux is used for monitoring system input/output statistics for devices and partitions. It monitors system input/output by observing the time the devices are active in relation to their average transfer rates. The `iostat` produce reports may be used to change the system configuration to raised balance the input/output between the physical disks. `iostat` is being included in `sysstat` package. If you don't have it, you need to install first.

## Syntax:

```
iostat [ -c ] [ -d ] [ -h ] [ -N ] [ -k | -m ] [ -t ] [ -V ] [
-x ]
      [ -z ] [ [ [ -T ] -g group_name ] { device [...] | ALL
} ]
      [ -p [ device [,...] | ALL ] ] [ interval [ count ] ]
```

## Examples:

1. Display a single history-since-boot report for all CPU and Devices:

```
iostat -d 2
```

2. Display a continuous device report at two-second intervals:

```
iostat -d 2 6
```

3.Display, for all devices, six reports at two-second intervals:

```
iostat -x sda sdb 2 6
```

4.Display, for devices sda and sdb, six extended reports at two-second intervals:

```
iostat -p sda 2 6
```

## Additional Flags and their Functionalities:

Short Flag	Description
-x	Show more details statistics information.
-c	Show only the cpu statistic.
-d	Display only the device report
`-xd	Show extended I/O statistic for device only.
-k	Capture the statistics in kilobytes or megabytes.
-k23	Display cpu and device statistics with delay.
-j ID mmcblk0 sda6	Display persistent device name statistics.
-x -m 2 2	
-p	Display statistics for block devices.
-N	Display lvm2 statistic information.



# The `sudo` command

The `sudo` ("substitute user do" or "super user do") command allows a user with proper permissions to execute a command as another user, such as the superuser.

This is the equivalent of "run as administrator" option in Windows. The `sudo` command allows you to elevate your current user account to have root privileges. Also, the root privilege in `sudo` is only valid for a temporary amount of time. Once that time expires, you have to enter your password again to regain root privilege.

WARNING: Be very careful when using the `sudo` command. You can cause irreversible and catastrophic changes while acting as root!

## Syntax:

```
sudo [-OPTION] command
```

## Additional Flags and their Functionalities:

### Flag Description

- V The -V (version) option causes sudo to print the version number and exit. If the invoking user is already root, the -V option prints out a list of the defaults sudo was compiled with and the machine's local network addresses
- l The -l (list) option prints out the commands allowed (and forbidden) the user on the current host.

**Flag Description**

- L** The **-L** (list defaults) option lists out the parameters set in a Defaults line with a short description for each. This option is useful in conjunction with **grep**.
- h** The **-h** (help) option causes **sudo** to print a usage message and exit.
- v** If given the **-v** (validate) option, **sudo** updates the user's timestamp, prompting for the user's password if necessary. This extends the **sudo** timeout for another 5 minutes (or whatever the timeout is set to in **sudoers**) but does not run a command.
- K** The **-K** (sure kill) option to **sudo** removes the user's timestamp entirely. Likewise, this option does not require a password.
- u** The **-u** (user) option causes **sudo** to run the specified command as a user other than **root**. To specify a **uid** instead of a username, use **#uid**.
- s** The **-s** (shell) option runs the shell specified by the **SHELL** environment variable if it's set or the shell as specified in the file **passwd**.
- The **--** flag indicates that **sudo** should stop processing command line arguments. It is most useful in conjunction with the **-s** flag.

## Examples

This command switches your command prompt to the BASH shell as a root user:

```
sudo bash
```

Your command line should change to:

```
root@hostname:/home/[username]
```

Adding a string of text to a file is often used to add the name of a software repository to the sources file, without opening the file for editing. Use the following syntax with echo, sudo and tee command:

```
echo 'string-of-text' | sudo tee -a [path_to_file]
```

Example:

```
echo "deb http://nginx.org/packages/debian `lsb_release -cs`  
nginx" \ | sudo tee /etc/apt/sources.list.d/nginx.list
```

# The `apt` command

`apt` (Advantage package system) command is used for interacting with `dpkg` (packaging system used by debian). There is already the `dpkg` command to manage `.deb` packages. But `apt` is a more user-friendly and efficient way.

In simple terms `apt` is a command used for installing, deleting and performing other operations on debian based Linux.

You will be using the `apt` command mostly with `sudo` privileges.

## Installing packages:

`install` followed by `package_name` is used with `apt` to install a new package.

### Syntax:

```
sudo apt install package_name
```

### Example:

```
sudo apt install g++
```

This command will install `g++` on your system.

## Removing packages:

`remove` followed by `package_name` is used with `apt` to remove a specific package.

### Syntax:

```
sudo apt remove package_name
```

### Example:

```
sudo apt remove g++
```

This command will remove g++ from your system.

## Searching for a package:

`search` followed by the `package_name` used with `apt` to search a package across all repositories.

### Syntax:

```
apt search package_name
```

note: sudo not required

### Example:

```
apt search g++
```

## Removing unused packages:

Whenever a new package that depends on other packages is installed on the system, the package dependencies will be installed too. When the package is removed, the dependencies will stay on the system. This leftover packages are no longer used by anything else and can be removed.

### Syntax:

```
sudo apt autoremove
```

This command will remove all unused from your system.

## Updating package index:

**apt** package index is nothing but a database that stores records of available packages that are enabled on your system.

### Syntax:

```
sudo apt update
```

This command will update the package index on your system.

## Upgrading packages:

If you want to install the latest updates for your installed packages you may want to run this command.

**Syntax:**

```
sudo apt upgrade
```

The command doesn't upgrade any packages that require removal of installed packages.

If you want to upgrade a single package, pass the package name:

**Syntax:**

```
sudo apt upgrade package_name
```

This command will upgrade your packages to the latest version.

# The `yum` command

The `yum` command is the primary package management tool for installing, updating, removing, and managing software packages in Red Hat Enterprise Linux. It is an acronym for *Yellow Dog Updater, Modified*.

`yum` performs dependency resolution when installing, updating, and removing software packages. It can manage packages from installed repositories in the system or from `.rpm` packages.

## Syntax:

```
yum -option command
```

## Examples:

1. To see an overview of what happened in past transactions:

```
yum history
```

2. To undo a previous transaction:

```
yum history undo <id>
```

3. To install firefox package with 'yes' as a response to all



confirmations

```
yum -y install firefox
```

4. To update the mysql package it to the latest stable version

```
yum update mysql
```

## Commonly used commands along with yum:

Command	Description
<code>install</code>	Installs the specified packages
<code>remove</code>	Removes the specified packages
<code>search</code>	Searches package metadata for keywords
<code>info</code>	Lists the description
<code>update</code>	Updates each package to the latest version
<code>repolist</code>	Lists repositories
<code>history</code>	Displays what has happened in past transactions
<code>groupinstall</code>	To install a particular package group
<code>clean</code>	To clean all cached files from enabled repository

## Additional Flags and their Functionalities:

Short Flag	Long Flag	Description
<code>-C</code>	<code>--cacheonly</code>	Runs entirely from system cache, doesn't update the cache and use it even in case it is expired.
<code>-</code>	<code>--security</code>	Includes packages that provide a fix for a security issue. Applicable for the upgrade command.
<code>-y</code>	<code>--assumeyes</code>	Automatically answer yes for all questions.

Short Flag	Long Flag	Description
-	<code>--skip-broken</code>	Resolves depsolve problems by removing packages that are causing problems from the transaction. It is an alias for the strict configuration option with value False.
<code>-v</code>	<code>--verbose</code>	Verbose operation, show debug messages.

# The `zip` command

The `zip` command is used to compress files and reduce their size. It outputs an archive containing one or more compressed files or directories.

## Examples:

In order to compress a single file with the `zip` command the syntax would be the following:

```
zip myZipFile.zip filename.txt
```

This also works with multiple files as well:

```
zip multipleFiles.zip file1.txt file2.txt
```

If you are compressing a whole directory, don't forget to add the `-r` flag:

```
zip -r zipFolder.zip myFolder/
```

## Syntax:

```
zip [OPTION] zipFileName filesList
```

## Possible options:

### Flag Description

- d Removes the file from the zip archive. After creating a zip file, you can remove a file from the archive using the -d option
- u Updates the file in the zip archive. This option can be used to update the specified list of files or add new files to the existing zip file. Update an existing entry in the zip archive only if it has been modified more recently than the version already in the zip archive.
- m Deletes the original files after zipping.
- r To zip a directory recursively, it will recursively zip the files in a directory. This option helps to zip all the files present in the specified directory.
- x Exclude the files in creating the zip
- v Verbose mode or print diagnostic version info. Normally, when applied to real operations, this option enables the display of a progress indicator during compression and requests verbose diagnostic info about zip file structure oddities

# The `unzip` command

The `unzip` command extracts all files from the specified ZIP archive to the current directory.

## Examples:

In order to extract the files the syntax would be the following:

```
unzip myZipFile.zip
```

To unzip a ZIP file to a different directory than the current one, don't forget to add the `-d` flag:

```
unzip myZipFile.zip -d /path/to/directory
```

To unzip a ZIP file and exclude specific file or files or directories from being extracted, don't forget to add the `-x` flag:

```
unzip myZipFile.zip -x file1.txt file2.txt
```

## Syntax:

```
unzip zipFileName [OPTION] [PARAMS]
```

**Possible options:**

Flag	Description	Params
-d	Unzip an archive to a different directory.	/path/to/directory
-x	Extract the archive but do not extract the specified files.	filename(s)
-j	Unzip without creating new folders, if the zipped archive contains a folder structure.	-
-l	Lists the contents of an archive file without extracting it.	-
-n	Do not overwrite existing files; supply an alternative filename instead.	-
-o	Overwrite files.	-
-P	Supplies a password to unzip a protected archive file.	password
-q	Unzips without writing status messages to the standard output.	-
-t	Tests whether an archive file is valid.	-
-v	Displays detailed (verbose) information about the archive without extracting it.	-

# The `shutdown` command

The `shutdown` command lets you bring your system down in a secure way. When `shutdown` is executed the system will notify all logged-in users and disallow further logins. You have the option to shut down your system immediately or after a specific time.

Only users with root (or sudo) privileges can use the `shutdown` command.

## Examples:

1. Shut down your system immediately:

```
sudo shutdown now
```


2. Shut down your system after 10 minutes:

```
sudo shutdown +10
```

3. Shut down your system with a message after 5 minutes:

```
sudo shutdown +5 "System will shutdown in 5 minutes"
```

## Syntax:



```
shutdown [OPTIONS] [TIME] [MESSAGE]
```

## Additional Flags and their Functionalities:

### Short Flag Long Flag Description

- |    |   |                               |
|----|---|-------------------------------|
| -r | - | Reboot the system             |
| -c | - | Cancel an scheduled shut down |



# The `dir` command

The `dir` command lists the contents of a directory(*the current directory by default*). **It differs from `ls` command in the format of listing the content.** By default, the `dir` command lists the files and folders in columns, sorted vertically and special characters are represented by backslash escape sequences.

## Syntax:

```
dir [OPTIONS] [FILE]
```

## Examples:

1. To list files in the current directory:

```
dir
```

2. To list even the hidden files in the current directory:

```
dir -a
```

3. To list the content with detailed information for each entry

```
dir -l
```

## Additional Flags and their Functionalities:

Short Flag	Long Flag	Description
-a	--all	It displays all the hidden files(starting with <code>.</code> ) along with two files denoted by <code>.</code> and <code>..</code>
-A	--almost-all	It is <b>similar to -a</b> option except that it <i>does not display files that signals the current directory and previous directory.</i>
-l	-	Display detailed information for each entry
-s	--size	Print the allocated size of each file, in blocks File
-h	--human-readable	Used with with -l and -s, to print sizes like in human readable format like 1K, 2M and so on
-F	-	Classifies entries into their type based on appended symbol ( <code>/</code> , <code>*</code> , <code>@</code> , <code>%</code> , <code>=</code> )
-v	--verbose	Print source and destination files
-	--group-directories-first	To group directories before files
-R	--recursive	To List subdirectories recursively.
-S	-	sort by file size, display largest first

# The `reboot` Command

The `reboot` command is used to restart a linux system. However, it requires elevated permission using the `sudo` command. Necessity to use this command usually arises after significant system or network updates have been made to the system.

## Syntax

```
reboot [OPTIONS...]
```

## Options

- **-help** : This option prints a short help text and exit.
- **-halt** : This command will stop the machine.
- **-w, -wtmp-only** : This option only writes wtmp shutdown entry, it do not actually halt, power-off, reboot.

## Examples

1. Basic Usage. Mainly used to restart without any further details

```
$ sudo reboot
```

However, alternatively the shutdown command with the **-r** option

```
$ sudo shutdown -r now
```

**Note** that the usage of the reboot, halt and power off is almost similar in syntax and effect. Run each of these commands with **-help** to see the details.

2. The **reboot** command has limited usage, and the **shutdown** command is being used instead of reboot command to fulfill much more advance reboot and shutdown requirements. One of those situations is a scheduled restart. Syntax is as follows

```
$ sudo shutdown -r [TIME] [MESSAGE]
```

Here the TIME has various formats. The simplest one is **now**, already been listed in the previous section, and tells the system to restart immediately. Other valid formats we have are +m, where m is the number of minutes we need to wait until restart and HH:MM which specifies the TIME in a 24hr clock.

### Example to reboot the system in 2 minutes

```
$ sudo shutdown -r +2
```

### Example of a scheduled restart at 03:00 A.M

```
$ sudo shutdown -r 03:00
```

3. Cancelling a Reboot. Usually happens in case one wants to cancel a scheduled restart


### Syntax

```
$ sudo shutdown -c [MESSAGE]
```

### Usage

```
$sudo shutdown -c "Scheduled reboot cancelled because the  
chicken crossed the road"
```

4. Checking your reboot logs



```
$ last reboot
```

# The `sort` command

the `sort` command is used to sort a file, arranging the records in a particular order. By default, the sort command sorts a file assuming the contents are ASCII. Using options in the sort command can also be used to sort numerically.

## Examples:

Suppose you create a data file with name file.txt:

```
Command :  
$ cat > file.txt  
abhishek  
chitransh  
satish  
rajan  
naveen  
divyam  
harsh
```

Sorting a file: Now use the sort command

Syntax :

```
sort filename.txt
```

```
Command:  
$ sort file.txt
```

```
Output :  
abhishek  
chitransh  
divyam  
harsh  
naveen  
rajan  
satish
```

Note: This command does not actually change the input file, i.e. file.txt.

## The sort function on a file with mixed case content

i.e. uppercase and lower case: When we have a mix file with both uppercase and lowercase letters then first the upper case letters would be sorted following with the lower case letters.

Example:

Create a file mix.txt

```
Command :  
$ cat > mix.txt  
abc  
apple  
BALL  
Abc  
bat
```

Now use the sort command



```
Command :  
$ sort mix.txt  
Output :  
Abc  
BALL  
abc  
apple  
bat
```

# The `paste` command

The `paste` command writes lines of two or more files, sequentially and separated by TABs, to the standard output

## Syntax:

```
paste [OPTIONS]... [FILE]...
```

## Examples:

1. To paste two files

```
paste file1 file2
```

2. To paste two files using new line as delimiter

```
paste -d '\n' file1 file2
```

## Additional Flags and their Functionalities:

Short Flag	Long Flag	Description
<code>-d</code>	<code>--delimiter</code>	use character of TAB
<code>-s</code>	<code>--serial</code>	paste one file at a time instead of in parallel

Short Flag	Long Flag	Description
-z	--zero-terminated	set line delimiter to NUL, not newline
	--help	print command help
	--version	print version information

# The `exit` command

The `exit` command is used to terminate (close) an active shell session

## Syntax:

```
| exit
```

**Shortcut:** Instead of typing `exit`, press `ctrl + D`, it will do the same Functionality.

# The `diff/sdiff` command

This command is used to display the differences in the files by comparing the files line by line.

## Syntax:

```
diff [options] File1 File2
```

## Example

1. Lets say we have two files with names a.txt and b.txt containing 5 Indian states as follows:-

```
$ cat a.txt
Gujarat
Uttar Pradesh
Kolkata
Bihar
Jammu and Kashmir
```

```
$ cat b.txt
Tamil Nadu
Gujarat
Andhra Pradesh
Bihar
Uttar pradesh
```

On typing the diff command we will get below output.

```
$ diff a.txt b.txt
0a1
> Tamil Nadu
2,3c3
< Uttar Pradesh
  Andhra Pradesh
5c5
  Uttar pradesh
```

## Flags and their Functionalities

Short Flag	Description
-c	To view differences in context mode, use the -c option.
-u	To view differences in unified mode, use the -u option. It is similar to context mode
-i	By default this command is case sensitive. To make this command case in-sensitive use -i option with diff.
-version	This option is used to display the version of diff which is currently running on your system.

# The `tar` command

The `tar` command stands for tape archive, is used to create Archive and extract the Archive files. This command provides archiving functionality in Linux. We can use tar command to create compressed or uncompressed Archive files and also maintain and modify them.

## Examples:

1. To create a tar file in abel directory:

```
tar -cvf file-14-09-12.tar /home/abel/
```

2. To un-tar a file in the current directory:

```
tar -xvf file-14-09-12.tar
```

## Syntax:

```
tar [options] [archive-file] [file or directory to be archived]
```

## Additional Flags and their Functionalities:

Use Flag	Description
<code>-c</code>	Creates Archive
<code>-x</code>	Extract the archive

Use Flag	Description
-f	Creates archive with given filename
-t	Displays or lists files in archived file
-u	Archives and adds to an existing archive file
-v	Displays Verbose Information
-A	Concatenates the archive files
-z	zip, tells tar command that creates tar file using gzip
-j	Filter archive tar file using tbzip
w	Verify a archive file
r	update or add file or directory in already existed .tar file
-?	Displays a short summary of the project
-d	Find the difference between an archive and file system
--usage	shows available tar options
--version	Displays the installed tar version
--show-defaults	Shows default enabled options

Option Flag	Description
--check-device	Check device numbers during incremental archive
-g	Used to allow compatibility with GNU-format incremental ackups
--hole-detection	Used to detect holes in the sparse files
-G	Used to allow compatibility with old GNU-format incremental backups
--ignore-failed-read	Don't exit the program on file read errors
--level	Set the dump level for created archives
-n	Assume the archive is seekable
--no-check-device	Do not check device numbers when creating archives
--no-seek	Assume the archive is not seekable



Option Flag	Description
<code>--occurrence=N</code>	`Process only the Nth occurrence of each file
<code>--restrict</code>	`Disable use of potentially harmful options
<code>--sparse-version=MAJOR,MINOR</code>	Set version of the sparse format to use
<code>-S</code>	Handle sparse files efficiently.
Overwright control Flag	Description
<code>-k</code>	Don't replace existing files
<code>--keep-newer-files</code>	Don't replace existing files that are newer than the archives version
<code>--keep-directory-symlink</code>	Don't replace existing symlinks
<code>--no-overwrite-dir</code>	Preserve metadata of existing directories
<code>--one-top-level=DIR</code>	Extract all files into a DIR
<code>--overwrite</code>	Overwrite existing files
<code>--overwrite-dir</code>	Overwrite metadata of directories
<code>--recursive-unlink</code>	Recursively remove all files in the directory before extracting
<code>--remove-files</code>	Remove files after adding them to a directory
<code>--skip-old-files</code>	Don't replace existing files when extracting
<code>-u</code>	Remove each file before extracting over it
<code>-w</code>	Verify the archive after writing it

# The `gunzip` command

The `gunzip` command is an antonym command of `gzip` command. In other words, it decompresses files deflated by the `gzip` command.

`gunzip` takes a list of files on its command line and replaces each file whose name ends with `.gz`, `-gz`, `.z`, `-z`, or `_z` (ignoring case) and which begins with the correct magic number with an uncompressed file without the original extension. `gunzip` also recognizes the special extensions `.tgz` and `.taz` as shorthands for `.tar.gz` and `.tar.Z` respectively.

## Examples:

1. Uncompress a file

```
gunzip filename.gz
```

2. Recursively uncompress content inside a directory, that match extension (suffix) compressed formats accepted by `gunzip`:

```
gunzip -r directory_name/
```

3. Uncompress all files in the current/working directory whose suffix match `.tgz`:

```
gunzip -S .tgz *
```

4. List compressed and uncompressed sizes, compression ratio and uncompressed name of input compressed file/s:

```
gunzip -l file_1 file_2
```

## Syntax:

```
gunzip [ -acfhkLLnNrtvV ] [-S suffix] [ name ... ]
```

## Video tutorial about using gzip, gunzip and tar commands:

[This video](#) shows how to compress and decompress in a Unix shell. It uses **gunzip** as decompression command.

## Additional Flags and their Functionalities:

Short Flag	Long Flag	Description
-c	--stdout	write on standard output, keep original files unchanged
-h	--help	give help information
-k	--keep	keep (don't delete) input files
-l	--list	list compressed file contents
-q	--quiet	suppress all warnings
-r	--recursive	operate recursively on directories
-S	--suffix=SUF	use suffix SUF on compressed files

Short Flag	Long Flag	Description
	--synchronous	synchronous output (safer if system crashes, but slower)
-t	--test	test compressed file integrity
-v	--verbose	verbose mode
-V	--version	display version number

# The `hostnamectl` command

The `hostnamectl` command provides a proper API used to control Linux system hostname and change its related settings. The command also helps to change the hostname without actually locating and editing the `/etc/hostname` file on a given system.

## Syntax

```
$ hostnamectl [OPTIONS...] COMMAND ...
```

where **COMMAND** can be any of the following

**status**: Used to check the current hostname settings

**set-hostname NAME**: Used to set system hostname

**set-icon-name NAME**: Used to set icon name for host

## Example

1. Basic usage to view the current hostnames

```
$ hostnamectl
```

or

```
$ hostnamectl status
```

2. To change the static host name to *myhostname*. It may or may not require root access

```
$ hostnamectl set-hostname myhostname --static
```

3. To set or change a transient hostname

```
$ hostnamectl set-hostname myotherhostname --transient
```

4. To set the pretty hostname. The name that is to be set needs to be in the double quote(" ").

```
$ hostname set-hostname "prettyname" --pretty
```

# The `iptables` command

The `iptables` command is a powerful firewall administration tool for Linux systems. It allows you to configure the Linux kernel firewall (netfilter) by setting up, maintaining, and inspecting the tables of IP packet filter rules.



## Syntax

```
iptables [options] [chain] [rule-specification] [target]
```

## Basic Concepts

### Tables

- **filter**: Default table for packet filtering (INPUT, OUTPUT, FORWARD)
- **nat**: Network Address Translation (PREROUTING, POSTROUTING, OUTPUT)
- **mangle**: Packet alteration (PREROUTING, POSTROUTING, INPUT, OUTPUT, FORWARD)
- **raw**: Connection tracking exemption (PREROUTING, OUTPUT)

### Chains

- **INPUT**: Incoming packets to local system
- **OUTPUT**: Outgoing packets from local system
- **FORWARD**: Packets routed through the system
- **PREROUTING**: Packets before routing decision
- **POSTROUTING**: Packets after routing decision

### Targets

- **ACCEPT**: Allow the packet
- **DROP**: Silently discard the packet
- **REJECT**: Discard and send error message
- **LOG**: Log the packet and continue processing
- **DNAT**: Destination NAT
- **SNAT**: Source NAT
- **MASQUERADE**: Dynamic source NAT

## Basic Commands

### Listing Rules

```
# List all rules
sudo iptables -L

# List rules with line numbers
sudo iptables -L --line-numbers

# List rules in specific table
sudo iptables -t nat -L
sudo iptables -t mangle -L

# Show packet and byte counters
sudo iptables -L -v

# Show rules in iptables-save format
sudo iptables -S
```

### Basic Rule Operations

```
# Add rule to end of chain
sudo iptables -A INPUT -p tcp --dport 22 -j ACCEPT

# Insert rule at specific position
sudo iptables -I INPUT 1 -p tcp --dport 80 -j ACCEPT

# Delete specific rule
sudo iptables -D INPUT -p tcp --dport 22 -j ACCEPT

# Delete rule by line number
sudo iptables -D INPUT 3

# Replace rule at specific position
sudo iptables -R INPUT 1 -p tcp --dport 443 -j ACCEPT
```

## Common Rule Examples

### 1. Allow/Block Specific Ports

```
# Allow SSH (port 22)
sudo iptables -A INPUT -p tcp --dport 22 -j ACCEPT

# Allow HTTP (port 80)
sudo iptables -A INPUT -p tcp --dport 80 -j ACCEPT

# Allow HTTPS (port 443)
sudo iptables -A INPUT -p tcp --dport 443 -j ACCEPT

# Block specific port
sudo iptables -A INPUT -p tcp --dport 8080 -j DROP
```

### 2. Allow/Block by IP Address

```
# Allow specific IP
sudo iptables -A INPUT -s 192.168.1.100 -j ACCEPT

# Block specific IP
sudo iptables -A INPUT -s 192.168.1.50 -j DROP

# Allow subnet
sudo iptables -A INPUT -s 192.168.1.0/24 -j ACCEPT

# Block IP range
sudo iptables -A INPUT -m iprange --src-range
192.168.1.100-192.168.1.200 -j DROP
```

### 3. Allow/Block by Interface

```
# Allow traffic on loopback  
sudo iptables -A INPUT -i lo -j ACCEPT  
  
# Allow on specific interface  
sudo iptables -A INPUT -i eth0 -p tcp --dport 80 -j ACCEPT  
  
# Block on specific interface  
sudo iptables -A INPUT -i eth1 -j DROP
```

# Advanced Rules

## 1. Stateful Connections

```
# Allow established and related connections
sudo iptables -A INPUT -m state --state ESTABLISHED,RELATED -j
ACCEPT

# Allow new connections on specific ports
sudo iptables -A INPUT -m state --state NEW -p tcp --dport 22
-j ACCEPT
```

## 2. Rate Limiting

```
# Limit SSH connections (6 per minute)
sudo iptables -A INPUT -p tcp --dport 22 -m limit --limit
6/min -j ACCEPT

# Limit ping requests
sudo iptables -A INPUT -p icmp --icmp-type echo-request -m
limit --limit 1/sec -j ACCEPT
```

## 3. Time-based Rules

```
# Allow access during business hours
sudo iptables -A INPUT -p tcp --dport 80 -m time --timestart
09:00 --timestop 17:00 -j ACCEPT

# Allow access on weekdays
sudo iptables -A INPUT -p tcp --dport 22 -m time --weekdays
Mon,Tue,Wed,Thu,Fri -j ACCEPT
```

## 4. Multiport Rules

```
# Allow multiple ports  
sudo iptables -A INPUT -p tcp -m multiport --dports 22,80,443  
-j ACCEPT
```

```
# Block multiple ports  
sudo iptables -A INPUT -p tcp -m multiport --dports  
135,445,1433 -j DROP
```



# NAT Configuration

## 1. Source NAT (SNAT)

```
# Static SNAT
sudo iptables -t nat -A POSTROUTING -s 192.168.1.0/24 -o eth0
-j SNAT --to-source 203.0.113.1

# Dynamic SNAT (Masquerading)
sudo iptables -t nat -A POSTROUTING -s 192.168.1.0/24 -o eth0
-j MASQUERADE
```

## 2. Destination NAT (DNAT)

```
# Port forwarding
sudo iptables -t nat -A PREROUTING -p tcp --dport 8080 -j DNAT
--to-destination 192.168.1.100:80

# Forward to different IP
sudo iptables -t nat -A PREROUTING -d 203.0.113.1 -j DNAT --
to-destination 192.168.1.100
```

# Policy Configuration

## Default Policies

```
# Set default policies
sudo iptables -P INPUT DROP
sudo iptables -P FORWARD DROP
sudo iptables -P OUTPUT ACCEPT

# View current policies
sudo iptables -L | grep "policy"
```

## Chain Management

```
# Create custom chain
sudo iptables -N CUSTOM_CHAIN

# Delete custom chain (must be empty)
sudo iptables -X CUSTOM_CHAIN

# Flush specific chain
sudo iptables -F INPUT

# Flush all chains
sudo iptables -F
```

## Logging

```
# Log dropped packets
sudo iptables -A INPUT -j LOG --log-prefix "DROPPED: " --log-level 4

# Log before dropping
sudo iptables -A INPUT -p tcp --dport 23 -j LOG --log-prefix "TELNET_ATTEMPT: "
sudo iptables -A INPUT -p tcp --dport 23 -j DROP

# View logs
sudo tail -f /var/log/syslog | grep "DROPPED:"
```

# Common Firewall Configurations

## 1. Basic Desktop Firewall

```
#!/bin/bash
# Clear existing rules
sudo iptables -F
sudo iptables -X
sudo iptables -t nat -F
sudo iptables -t nat -X

# Default policies
sudo iptables -P INPUT DROP
sudo iptables -P FORWARD DROP
sudo iptables -P OUTPUT ACCEPT

# Allow loopback
sudo iptables -A INPUT -i lo -j ACCEPT

# Allow established connections
sudo iptables -A INPUT -m state --state ESTABLISHED,RELATED -j ACCEPT

# Allow SSH
sudo iptables -A INPUT -p tcp --dport 22 -j ACCEPT

# Allow ping
sudo iptables -A INPUT -p icmp --icmp-type echo-request -j ACCEPT
```

## 2. Web Server Firewall

```
#!/bin/bash
# Basic web server configuration
sudo iptables -F

# Default policies
sudo iptables -P INPUT DROP
sudo iptables -P FORWARD DROP
sudo iptables -P OUTPUT ACCEPT

# Allow loopback and established connections
sudo iptables -A INPUT -i lo -j ACCEPT
sudo iptables -A INPUT -m state --state ESTABLISHED,RELATED -j ACCEPT

# Allow SSH (limit attempts)
sudo iptables -A INPUT -p tcp --dport 22 -m limit --limit 6/min -j ACCEPT

# Allow HTTP/HTTPS
sudo iptables -A INPUT -p tcp --dport 80 -j ACCEPT
sudo iptables -A INPUT -p tcp --dport 443 -j ACCEPT

# Allow ping
sudo iptables -A INPUT -p icmp --icmp-type echo-request -j ACCEPT
```

### 3. Router/Gateway Configuration

```
#!/bin/bash
# Enable IP forwarding
echo 1 > /proc/sys/net/ipv4/ip_forward

# NAT for internal network
sudo iptables -t nat -A POSTROUTING -s 192.168.1.0/24 -o eth0
-j MASQUERADE

# Allow forwarding for established connections
sudo iptables -A FORWARD -m state --state ESTABLISHED,RELATED
-j ACCEPT

# Allow forwarding from internal network
sudo iptables -A FORWARD -s 192.168.1.0/24 -j ACCEPT
```

# Persistence

## 1. Save/Restore Rules

```
# Save current rules
sudo iptables-save > /etc/iptables/rules.v4

# Restore rules
sudo iptables-restore < /etc/iptables/rules.v4

# Install persistence package (Ubuntu/Debian)
sudo apt install iptables-persistent
```

## 2. Automatic Loading

```
# Create systemd service
sudo vim /etc/systemd/system/iptables-restore.service

[Unit]
Description=Restore iptables firewall rules
Before=network-pre.target

[Service]
Type=oneshot
ExecStart=/sbin/iptables-restore /etc/iptables/rules.v4

[Install]
WantedBy=multi-user.target

# Enable service
sudo systemctl enable iptables-restore.service
```

# Troubleshooting

## 1. Testing Rules

```
# Test connectivity
telnet target-ip port
nc -zv target-ip port

# Check if rule matches
sudo iptables -L -v -n | grep "rule-description"

# Monitor rule usage
watch "sudo iptables -L -v -n"
```

## 2. Debugging

```
# Enable all logging temporarily
sudo iptables -A INPUT -j LOG --log-prefix "INPUT: "
sudo iptables -A OUTPUT -j LOG --log-prefix "OUTPUT: "
sudo iptables -A FORWARD -j LOG --log-prefix "FORWARD: "

# Monitor logs
sudo tail -f /var/log/syslog | grep
"INPUT:\|OUTPUT:\|FORWARD:"
```

## 3. Emergency Access



```
# Temporary rule to allow all (emergency)
sudo iptables -I INPUT 1 -j ACCEPT

# Flush all rules (removes all protection)
sudo iptables -F
sudo iptables -X
sudo iptables -P INPUT ACCEPT
sudo iptables -P OUTPUT ACCEPT
sudo iptables -P FORWARD ACCEPT
```

# Security Best Practices

## 1. Default Deny Policy

```
# Always start with deny-all policy
sudo iptables -P INPUT DROP
sudo iptables -P FORWARD DROP
# Keep OUTPUT as ACCEPT for normal operation
```

## 2. Order Matters

```
# More specific rules should come first
sudo iptables -I INPUT 1 -s 192.168.1.100 -p tcp --dport 22 -j
ACCEPT
sudo iptables -A INPUT -p tcp --dport 22 -j DROP
```

## 3. Rate Limiting Critical Services

```
# Protect SSH from brute force
sudo iptables -A INPUT -p tcp --dport 22 -m recent --set --
name SSH
sudo iptables -A INPUT -p tcp --dport 22 -m recent --update --
seconds 60 --hitcount 3 --name SSH -j DROP
sudo iptables -A INPUT -p tcp --dport 22 -j ACCEPT
```

## Performance Considerations

```
# Use connection tracking for better performance
sudo iptables -A INPUT -m state --state ESTABLISHED,RELATED -j
ACCEPT

# Place frequently matched rules first
sudo iptables -I INPUT 1 -m state --state ESTABLISHED,RELATED
-j ACCEPT

# Use specific matches to reduce processing
sudo iptables -A INPUT -p tcp --dport 80 -s 192.168.1.0/24 -j
ACCEPT
```

## Important Notes

- Always test rules before making them permanent
- Keep a way to access the system if rules block you out
- Use specific protocols and ports rather than blanket rules
- Monitor logs to understand traffic patterns
- Document your firewall rules for future reference
- Regular backup of working configurations
- Consider using UFW for simpler firewall management

The `iptables` command provides comprehensive firewall capabilities but requires careful planning and testing to avoid security issues or system lockouts.

For more details, check the manual: `man iptables`

# The `netstat` command

The term `netstat` stands for Network Statistics. In layman's terms, `netstat` command displays the current network connections, networking protocol statistics, and a variety of other interfaces.

Check if you have `netstat` on your PC:

```
netstat -v
```

If you don't have `netstat` installed on your PC, you can install it with the following command:

```
sudo apt install net-tools
```

**You can use `netstat` command for some use cases given below:**

- `Netstat` command with `-nr` flag shows the routing table detail on the terminal.

Example:

```
netstat -nr
```

- `Netstat` command with `-i` flag shows statistics for the currently configured network interfaces. This command will display the first

10 lines of file `foo.txt` .

Example:

```
netstat -i
```

- `Netstat` command with `-tunlp` will gives a list of networks, their current states, and their associated ports.

Example:

```
netstat -tunlp
```

- You can get the list of all TCP port connection by using `-at` with `netstat`.

```
netstat -at
```

- You can get the list of all UDP port connection by using `-au` with `netstat`.

```
netstat -au
```

- You can get the list of all active connection by using `-l` with `netstat`.

```
netstat -l
```

# The `lsof` command

The `lsof` command shows **file information** of all the files opened by a running process. Its name is also derived from the fact that, list open files > `lsof`

An open file may be a regular file, a directory, a block special file, a character special file, an executing text reference, a library, a stream or a network file (Internet socket, NFS file or UNIX domain socket). A specific file or all the files in a file system may be selected by path.

## Syntax:

```
lsof [-OPTION] [USER_NAME]
```

## Examples:

1. To show all the files opened by all active processes:

```
lsof
```

2. To show the files opened by a particular user:

```
lsof -u [USER_NAME]
```

3. To list the processes with opened files under a specified directory:

```
lsof +d [PATH_TO_DIR]
```

## Options and their Functionalities:

### Option Additional Options Description

<b>-i</b>	<b>tcp/udp/:port</b>	List all network connections running, Additionally, on udp/tcp or on specified port.
<b>-i4</b>	-	List all processes with ipv4 connections.
<b>-i6</b>	-	List all processes with ipv6 connections.
<b>-c</b>	<b>[PROCESS_NAME]</b>	List all the files of a particular process with given name.
<b>-p</b>	<b>[PROCESS_ID]</b>	List all the files opened by a specified process id.
<b>-p</b>	<b>^[PROCESS_ID]</b>	List all the files that are not opened by a specified process id.
<b>+d</b>	<b>[PATH]</b>	List the processes with opened files under a specified directory
<b>+R</b>	-	List the files opened by parent process Id.

## Help Command

Run below command to view the complete guide to **lsof** command.

```
man lsof
```



# The `bzip2` command

The `bzip2` command lets you compress and decompress the files i.e. it helps in binding the files into a single file which takes less storage space as the original file use to take.

## Syntax:

```
bzip2 [OPTIONS] filenames ...
```

**Note :** Each file is replaced by a compressed version of itself, with the name original name of the file followed by extension `bz2`.

## Options and their Functionalities:

Option	Alias	Description
-d	--decompress	to decompress compressed file
-f	--force	to force overwrite an existing output file
-h	--help	to display the help message and exit
-k	--keep	to enable file compression, doesn't deletes the original input file
-L	--license	to display the license terms and conditions
-q	--quiet	to suppress non-essential warning messages
-t	--test	to check integrity of the specified .bz2 file, but don't want to decompress them
-v	--verbose	to display details for each compression operation

Option	Alias	Description
-V	--version	to display the software version
-z	--compress	to enable file compression, but deletes the original input file

**By default, when bzip2 compresses a file, it deletes the original (or input) file. However, if you don't want that to happen, use the -k command line option.**

### Examples:

1. To force compression:

```
bzip2 -z input.txt
```

**Note: This option deletes the original file also**

2. To force compression and also retain original input file:

```
bzip2 -k input.txt
```

3. To force decompression:

```
bzip2 -d input.txt.bz2
```

4. To test integrity of compressed file:

```
bzip2 -t input.txt.bz2
```

5. To show the compression ratio for each file processed:

```
bzip2 -v input.txt
```

# The `service` command

Service runs a System V init script in as predictable environment as possible, removing most environment variables and with current working directory set to `/`.

The `SCRIPT` parameter specifies a System V init script, located in `/etc/init.d/SCRIPT`. The supported values of `COMMAND` depend on the invoked script, service passes `COMMAND` and `OPTIONS` it to the init script unmodified. All scripts should support at least the start and stop commands. As a special case, if `COMMAND` is `--full-restart`, the script is run twice, first with the stop command, then with the start command.

The `COMMAND` can be at least start, stop, status, and restart.

`service --status-all` runs all init scripts, in alphabetical order, with the `status` command

Examples :


1. To check the status of all the running services:

```
service --status-all
```

2. To run a script

```
service SCRIPT-Name start
```

3. A more generalized command:



```
service [SCRIPT] [COMMAND] [OPTIONS]
```

# The `vmstat` command

The `vmstat` command lets you monitor the performance of your system. It shows you information about your memory, disk, processes, CPU scheduling, paging, and block IO. This command is also referred to as **virtual memory statistic report**.

The very first report that is produced shows you the average details since the last reboot and after that, other reports are made which report over time.

## `vmstat`



As you can see it is a pretty useful little command. The most important things that we see above are the `free`, which shows us the free space that is not being used, `si` shows us how much memory is swapped in every second in kB, and `so` shows how much memory is swapped out each second in kB as well.

## `vmstat -a`

If we run `vmstat -a`, it will show us the active and inactive memory of the system running.



## `vmstat -d`

The `vmstat -d` command shows us all the disk statistics.



As you can see this is a pretty useful little command that shows you different statistics about your virtual memory

# The `mpstat` command

The `mpstat` command is used to report processor related statistics. It accurately displays the statistics of the CPU usage of the system and information about CPU utilization and performance.

## Syntax:

```
mpstat [options] [<interval> [<count>]]
```

**Note :** It initializes the first processor with CPU 0, the second one with CPU 1, and so on.

## Options and their Functionalities:

Option	Description
<code>-A</code>	to display all the detailed statistics
<code>-h</code>	to display mpstat help
<code>-I</code>	to display detailed interrupts statistics
<code>-n</code>	to report summary CPU statistics based on NUMA node placement
<code>-N</code>	to indicate the NUMA nodes for which statistics are to be reported
<code>-P</code>	to indicate the processors for which statistics are to be reported
<code>-o</code>	to display the statistics in JSON (Javascript Object Notation) format
<code>-T</code>	to display topology elements in the CPU report



Option	Description
-u	to report CPU utilization
-v	to display utilization statistics at the virtual processor level
-V	to display mpstat version
-ALL	to display detailed statistics about all CPUs

### Examples:

1. To display processor and CPU statistics:

```
mpstat
```

2. To display processor number of all CPUs:

```
mpstat -P ALL
```

3. To get all the information which the tool may collect:

```
mpstat -A
```

4. To display CPU utilization by a specific processor:

```
mpstat -P 0
```

5. To display CPU usage with a time interval:

```
mpstat 1 5
```

**Note: This command will print 5 reports with 1 second time**

## interval

# The `ncdu` Command

`ncdu` (NCurses Disk Usage) is a curses-based version of the well-known `du` command. It provides a fast way to see what directories are using your disk space.

## Example

### 1. Quiet Mode

```
ncdu -q
```

### 2. Omit mounted directories

```
ncdu -q -x
```

## Syntax

```
ncdu [-hqvX] [--exclude PATTERN] [-X FILE] dir
```

## Additional Flags and their Functionalities:

Short Flag	Long Flag	Description
-h	-	Print a small help message
-q	-	Quiet mode. While calculating disk space, ncd� will update the screen 10 times a second by default, this will be decreased to once every 2 seconds in quiet mode. Use this feature to save bandwidth over remote connections.
-v	-	Print version.
-x	-	Only count files and directories on the same filesystem as the specified dir.
-	--exclude PATTERN	Exclude files that match PATTERN. This argument can be added multiple times to add more patterns.
-X FILE	--exclude-from FILE	Exclude files that match any pattern in FILE. Patterns should be separated by a newline.

# The `uniq` command

The `uniq` command in Linux is a command line utility that reports or filters out the repeated lines in a file. In simple words, `uniq` is the tool that helps you to detect the adjacent duplicate lines and also deletes the duplicate lines. It filters out the adjacent matching lines from the input file(that is required as an argument) and writes the filtered data to the output file .

## Examples:

In order to omit the repeated lines from a file, the syntax would be the following:

```
uniq kt.txt
```

In order to tell the number of times a line was repeated, the syntax would be the following:

```
uniq -c kt.txt
```

In order to print repeated lines, the syntax would be the following:

```
uniq -d kt.txt
```

In order to print unique lines, the syntax would be the following:

```
uniq -u kt.txt
```

In order to allow the N fields to be skipped while comparing uniqueness of the lines, the syntax would be the following:

```
uniq -f 2 kt.txt
```

In order to allow the N characters to be skipped while comparing uniqueness of the lines, the syntax would be the following:

```
uniq -s 5 kt.txt
```

In order to make the comparison case-insensitive, the syntax would be the following:

```
uniq -i kt.txt
```

## Syntax:

```
uniq [OPTION] [INPUT[OUTPUT]]
```

## Possible options:

Flag	Description	Params
-c	It tells how many times a line was repeated by displaying a number as a prefix with the line.	-
-d	It only prints the repeated lines and not the lines which aren't repeated.	-



Flag	Description	Params
<code>-i</code>	By default, comparisons done are case sensitive but with this option case insensitive comparisons can be made.	-
<code>-f</code>	It allows you to skip N fields(a field is a group of characters, delimited by whitespace) of a line before determining uniqueness of a line.	N
<code>-s</code>	It doesn't compares the first N characters of each line while determining uniqueness. This is like the -f option, but it skips individual characters rather than fields.	N
<code>-u</code>	It allows you to print only unique lines.	-
<code>-z</code>	It will make a line end with 0 byte(NULL), instead of a newline.	-
<code>-w</code>	It only compares N characters in a line.	N
<code>--help</code>	It displays a help message and exit.	-
<code>--version</code>	It displays version information and exit.	-

# The **RPM** command

**rpm** - RPM Package Manager

**rpm** is a powerful **Package Manager**, which can be used to build, install, query, verify, update, and erase individual software packages. A **package** consists of an archive of files and meta-data used to install and erase the archive files. The meta-data includes helper scripts, file attributes, and descriptive information about the package. Packages come in two varieties: binary packages, used to encapsulate software to be installed, and source packages, containing the source code and recipe necessary to produce binary packages.

One of the following basic modes must be selected: **Query, Verify, Signature Check, Install/Upgrade/Freshen, Uninstall, Initialize Database, Rebuild Database, Resign, Add Signature, Set Owners/Groups, Show Querytags, and Show Configuration.**

## General Options

These options can be used in all the different modes.

Short Flag	Long Flag	Description
-?	--help	Print a longer usage message than normal.
-	--version	Print a single line containing the version number of rpm being used.
-	--quiet	Print as little as possible - normally only error messages will be displayed.
-v	-	Print verbose information - normally routine progress messages will be displayed.
-vv	-	Print lots of ugly debugging information.

Short Flag	Long Flag	Description
-	--rcfile FILELIST	Each of the files in the colon separated FILELIST is read sequentially by rpm for configuration information. Only the first file in the list must exist, and tildes will be expanded to the value of \$HOME. The default FILELIST is /usr/lib/rpm/rpmrc:/usr/lib/rpm/redhat/rpmrc:/etc/rpmrc:~/.rpmrc.
-	--pipe CMD	Pipes the output of rpm to the command CMD.
-	--dbpath DIRECTORY	Use the database in DIRECTORY rather than the default path /var/lib/rpm
-	--root DIRECTORY	Use the file system tree rooted at DIRECTORY for all operations. Note that this means the database within DIRECTORY will be used for dependency checks and any scriptlet(s) (e.g. %post if installing, or %prep if building, a package) will be run after a chroot(2) to DIRECTORY.
-D	--define='MACRO EXPR'	Defines MACRO with value EXPR.
-E	--eval='EXPR'	Prints macro expansion of EXPR.

# Synopsis

## Querying and Verifying Packages:

```
rpm {-q|--query} [select-options] [query-options]

rpm {-V|--verify} [select-options] [verify-options]

rpm --import PUBKEY ...

rpm {-K|--checksig} [--nosignature] [--nodigest] PACKAGE_FILE
...
```

## Installing, Upgrading, and Removing Packages:

```
rpm {-i|--install} [install-options] PACKAGE_FILE ...
```

```
rpm {-U|--upgrade} [install-options] PACKAGE_FILE ...
```

```
rpm {-F|--freshen} [install-options] PACKAGE_FILE ...
```

```
rpm {-e|--erase} [--allmatches] [--nodeps] [--noscripts] [--notriggers] [--test] PACKAGE_NAME ...
```

## Miscellaneous:

```
rpm {--initdb|--rebuilddb}

rpm {--addsign|--resign} PACKAGE_FILE...

rpm {--querytags|--showrc}

rpm {--setperms|--setugids} PACKAGE_NAME .
```

## query-options

```
[--changelog] [-c,--configfiles] [-d,--docfiles] [--dump]
[--filesbypkg] [-i,--info] [--last] [-l,--list]
[--provides] [--qf,--queryformat QUERYFMT]
[-R,--requires] [--scripts] [-s,--state]
[--triggers,--triggerscripts]
```

## verify-options

```
[--nodeps] [--nofiles] [--noscripts]
[--nodigest] [--nosignature]
[--nolinkto] [--nofiledigest] [--nosize] [--nouser]
[--nogroup] [--nomtime] [--nomode] [--nordev]
[--nocaps]
```

## install-options

```
[--aid] [--allfiles] [--badreloc] [--excludepath OLDPATH]
[--excludedocs] [--force] [-h,--hash]
[--ignoresize] [--ignorearch] [--ignoreeos]
[--includedocs] [--justdb] [--nodeps]
[--nodigest] [--nosignature] [--nosuggest]
[--noorder] [--noscripts] [--notriggers]
[--oldpackage] [--percent] [--prefix NEWPATH]
[--relocate OLDPATH=NEWPATH]
[--replacefiles] [--replacepkgs]
[--test]
```



# The `scp` command

SCP (secure copy) is a command-line utility that allows you to securely copy files and directories between two locations.

Both the files and passwords are encrypted so that anyone snooping on the traffic doesn't get anything sensitive.

## Different ways to copy a file or directory:

- From local system to a remote system.
- From a remote system to a local system.
- Between two remote systems from the local system.

## Examples:

1. To copy the files from a local system to a remote system:

```
scp /home/documents/local-file root@{remote-ip-address}:/home/
```

2. To copy the files from a remote system to the local system:

```
scp root@{remote-ip-address}:/home/remote-file  
/home/documents/
```

3. To copy the files between two remote systems from the local system.

```
scp root@{remote1-ip-address}:/home/remote-file root@{remote2-ip-address}/home/
```

4. To copy file through a jump host server.

```
scp /home/documents/local-file -oProxyJump=<jump-host-ip> root@{remote-ip-address}/home/
```

On newer version of scp on some machines you can use the above command with a **-J** flag.

```
scp /home/documents/local-file -J <jump-host-ip> root@{remote-ip-address}/home/
```

## Syntax:

```
scp [OPTION] [user@]SRC_HOST:]file1 [user@]DEST_HOST:]file2
```

- **OPTION** - scp options such as cipher, ssh configuration, ssh port, limit, recursive copy ...etc.
- **[user@]SRC\_HOST:]file1** - Source file
- **[user@]DEST\_HOST:]file2** - Destination file

Local files should be specified using an absolute or relative path, while remote file names should include a user and host specification.

scp provides several that control every aspect of its behaviour. The most widely used options are:

Short Flag	Long Flag	Description
-P	-	Specifies the remote host ssh port.
-p	-	Preserves files modification and access times.
-q	-	Use this option if you want to suppress the progress meter and non-error messages.
-C	-	This option forces scp to compresses the data as it is sent to the destination machine.
-r	-	This option tells scp to copy directories recursively.

## Before you begin

The `scp` command relies on `ssh` for data transfer, so it requires an `ssh` key or `password` to authenticate on the remote systems.

The `colon ( : )` is how scp distinguish between local and remote locations.

To be able to copy files, you must have at least read permissions on the source file and write permission on the target system.

Be careful when copying files that share the same name and location on both systems, `scp` will overwrite files without warning.

When transferring large files, it is recommended to run the `scp` command inside a `screen` or `tmux` session.

# The `sleep` command

The `sleep` command is used to create a dummy job. A dummy job helps in delaying the execution. It takes time in seconds by default but a small suffix(s, m, h, d) can be added at the end to convert it into any other format. This command pauses the execution for an amount of time which is defined by NUMBER.

Note: If you will define more than one NUMBER with sleep command then this command will delay for the sum of the values.

## Examples :

1. To sleep for 10s

```
sleep 10s
```

2. A more generalized command:

```
sleep NUMBER[SUFFIX]...
```

## Options

It accepts the following options:

1. `--help`  
display this help and exit
  2. `--version`  
output version information and exit
-

# The `split` command

The `split` command in Linux is used to split a file into smaller files.

## Examples

1. Split a file into a smaller file using file name

```
split filename.txt
```

2. Split a file named filename into segments of 200 lines beginning with prefix file

```
split -l 200 filename file
```

This will create files of the name fileaa, fileab, fileac, filead, etc. of 200 lines.

3. Split a file named filename into segments of 40 bytes with prefix file

```
split -b 40 filename file
```

This will create files of the name fileaa, fileab, fileac, filead, etc. of 40 bytes.

4. Split a file using --verbose to see the files being created.

```
split filename.txt --verbose
```

## Syntax:

```
split [options] filename [prefix]
```

## Additional Flags and their Functionalities

Short Flag	Long Flag	Description
-a	--suffix-length=N	Generate suffixes of length N (default 2)
	--additional-suffix=SUFFIX	Append an additional SUFFIX to file names
-b	--bytes=SIZE	Put SIZE bytes per output file
-C	--line-bytes=SIZE	Put at most SIZE bytes of records per output file
-d		Use numeric suffixes starting at 0, not alphabetic
	--numeric-suffixes[=FROM]	Same as -d, but allow setting the start value
-x		Use hex suffixes starting at 0, not alphabetic
	--hex-suffixes[=FROM]	Same as -x, but allow setting the start value
-e	--elide-empty-files	Do not generate empty output files with '-n'
	--filter=COMMAND	Write to shell COMMAND; file name is \$FILE
-l	--lines=NUMBER	Put NUMBER lines/records per output file

Short Flag	Long Flag	Description
-n	--number=CHUNKS	Generate CHUNKS output files; see explanation below
-t	--separator=SEP	Use SEP instead of newline as the record separator; '\0' (zero) specifies the NUL character
-u	--unbuffered	Immediately copy input to output with '-n r/...'
	--verbose	Print a diagnostic just before each output file is opened
	--help	Display this help and exit
	--version	Output version information and exit

The SIZE argument is an integer and optional unit (example: 10K is 10\*1024). Units are K,M,G,T,P,E,Z,Y (powers of 1024) or KB,MB,... (powers of 1000).

CHUNKS may be:

### CHUNKS Description

N	Split into N files based on size of input
K/N	Output Kth of N to stdout
l/N	Split into N files without splitting lines/records
l/K/N	Output Kth of N to stdout without splitting lines/records
r/N	Like 'l' but use round robin distribution
r/K/N	Likewise but only output Kth of N to stdout



# The `stat` command

The `stat` command lets you display file or file system status. It gives you useful information about the file (or directory) on which you use it.

## Examples:

1. Basic command usage

```
stat file.txt
```

2. Use the `-c` (or `--format`) argument to only display information you want to see (here, the total size, in bytes)

```
stat file.txt -c %s
```

## Syntax:

```
stat [OPTION] [FILE]
```

## Additional Flags and their Functionalities:

Short Flag	Long Flag	Description
<code>-L</code>	<code>--dereference</code>	Follow links

Short Flag	Long Flag	Description
-f	--file-system	Display file system status instead of file status
-c	--format=FORMAT	Specify the format (see below)
-t	--terse	Print the information in terse form
-	--cached=MODE	Specify how to use cached attributes. Can be: <b>always</b> , <b>never</b> , or <b>default</b>
-	--printf=FORMAT	Like --format, but interpret backslash escapes ( <b>\n</b> , <b>\t</b> , ...)
-	--help	Display the help and exit
-	--version	Output version information and exit

### Example of Valid Format Sequences for Files:

Format	Description
%a	Permission bits in octal
%A	Permission bits and file type in human readable form
%d	Device number in decimal
%D	Device number in hex
%F	File type
%g	Group ID of owner
%G	Group name of owner
%h	Number of hard links
%i	Inode number
%m	Mount point
%n	File name
%N	Quoted file name with dereference if symbolic link
%s	Total size, in bytes
%u	User ID of owner
%U	User name of owner
%w	Time of file birth, human-readable; - if unknown
%X	Time of last access, human-readable

Format	Description
<code>%y</code>	Time of last data modification, human-readable
<code>%z</code>	Time of last status change, human-readable

# The `useradd` command

The `useradd` command is used to add or update user accounts to the system.

## Examples:

To add a new user with the `useradd` command the syntax would be the following:

```
useradd NewUser
```

To add a new user with the `useradd` command and give a home directory path for this new user the syntax would be the following:

```
useradd -d /home/NewUser NewUser
```

To add a new user with the `useradd` command and give it a specific id the syntax would be the following:

```
useradd -u 1234 NewUser
```

## Syntax:

```
useradd [OPTIONS] NameOfUser
```

## Possible options:

Flag	Description	Params
-d	The new user will be created using /path/to/directory as the value for the user's login directory	/path/to/directory
-u	The numerical value of the user's ID	ID
-g	Create a user with specific group id	GroupID
-M	Create a user without home directory	-
-e	Create a user with expiry date	DATE (format: YYYY-MM-DD)
-c	Create a user with a comment	COMMENT
-s	Create a user with changed login shell	/path/to/shell
-p	Set an unencrypted password for the user	PASSWORD

# The `userdel` command

The `userdel` command is used to delete a user account and related files

## Examples:

To delete a user with the `userdel` command the syntax would be the following:

```
userdel userName
```


To force the removal of a user account even if the user is still logged in, using the `userdel` command the syntax would be the following:

```
userdel -f userName
```

To delete a user along with the files in the user's home directory using the `userdel` command the syntax would be the following:

```
userdel -r userName
```

## Syntax:



```
userdel [OPTIONS] userName
```

## Possible options:

### Flag Description

- f Force the removal of the specified user account even if the user is logged in
- r Remove the files in the user's home directory along with the home directory itself and the user's mail spool
- Z Remove any SELinux(Security-Enhanced Linux) user mapping for the user's login.

# The `usermod` command

The `usermod` command lets you change the properties of a user in Linux through the command line. After creating a user we sometimes have to change their attributes, like their password or login directory etc. So in order to do that we use the `usermod` command.

## Syntax:

```
usermod [options] USER
```

**Note :** Only superuser (root) is allowed to execute `usermod` command

## Options and their Functionalities:

### Option Description

- a to add anyone of the group to a secondary group
- c to add comment field for the useraccount
- d to modify the directory for any existing user account
- g change the primary group for a User
- G to add supplementary groups
- l to change existing user login name
- L to lock system user account
- m to move the contents of the home directory from existing home dir to new dir
- p to create an un-encrypted password
- s to create a specified shell for new accounts



**Option Description**

- u to assigned UID for the user account
- U to unlock any locked user

**Examples:**

1. To add a comment/description for a user:

```
sudo usermod -c "This is test user" test_user
```

2. To change the home directory of a user:

```
sudo usermod -d /home/sam test_user
```

3. To change the expiry date of a user:

```
sudo usermod -e 2021-10-05 test_user
```

4. To change the group of a user:

```
sudo usermod -g sam test_user
```

5. To change user login name:

```
sudo usermod -l test_account test_user
```

6. To lock a user:

```
sudo usermod -L test_user
```

7. To unlock a user:

```
sudo usermod -U test_user
```

8. To set an unencrypted password for the user:

```
sudo usermod -p test_password test_user
```

9. To create a shell for the user:

```
sudo usermod -s /bin/sh test_user
```

10. To change the user id of a user:

```
sudo usermod -u 1234 test_user
```

# The `ionice` command

The `ionice` command is used to set or get process I/O scheduling class and priority.

If no arguments are given , `ionice` will query the current I/O scheduling class and priority for that process.

## Usage

```
ionice [options] -p <pid>
```

```
ionice [options] -P <pgid>
```

```
ionice [options] -u <uid>
```

```
ionice [options] <command>
```

## A process can be of three scheduling classes:

- **Idle**

A program with idle I/O priority will only get disk time when **no other program has asked for disk I/O for a defined grace period.**

The impact of idle processes on normal system actively should be **zero.**

This scheduling class **doesn't take priority** argument.

Presently this scheduling class is permitted for an **ordinary user (since kernel 2.6.25).**

- **Best Effort**

This is **effective** scheduling class for any process that has **not asked for a specific I/O priority.**

This class **takes priority argument from 0-7, with lower number being higher priority.**

Programs running at the same best effort priority are served in **round- robbin fashion.**

Note that before kernel 2.6.26 a process that has not asked for an I/O priority formally uses "None" as scheduling class , but the io scheduler will treat such processes as if it were in the best effort class.

The priority within best effort class will be dynamically derived from the CPU nice level of the process :  $\text{io\_priority} = (\text{cpu\_nice} + 20) / 5$  for kernels after 2.6.26 with CFQ I/O scheduler a process that has not asked for an io priority inherits CPU scheduling class.

The I/O priority is derived from the CPU nice level of the process ( same as before kernel 2.6.26 ).

- **Real Time**

The real time scheduler class is given first access to disk, regardless of what else is going on in the system.

Thus the real time class needs to be used with some care, as it can starve other processes .

As with the best effort class, 8 priority levels are defined denoting how big a time slice a given process will receive on each scheduling window.

This scheduling class is not permitted for an ordinary user(non-root).

## Options

Options	Description
-c, --class	name or number of scheduling class, 0: none, 1: realtime, 2: best-effort, 3: idle
-n, --classdata	priority (0..7) in the specified scheduling class, only for the realtime and best-effort classes
-p, --pid ...	act on these already running processes
-P, --pgid ...	act on already running processes in these groups
-t, --ignore	ignore failures
-u, --uid ...	act on already running processes owned by these users
-h, --help	display this help
-V, --version	display version

For more details see `ionice(1)`.

## Examples

Command	O/P	Explanation
\$ <b>ionice</b>	<i>none: prio 4</i>	Running alone <b>ionice</b> will give the class and priority of current process
\$ <b>ionice -p 101</b>	<i>none : prio 4</i>	Give the details(class : priority) of the process specified by given process id
\$ <b>ionice -p 2</b>	<i>none: prio 4</i>	Check the class and priority of process with pid 2 it is none and 4 resp.
\$ <b>ionice -c2 -n0 -p2</b>	2 ( best-effort ) priority 0 process 2	Now lets set process(pid) 2 as a best-effort program with highest priority
\$ <b>ionice -p 2</b>	best-effort : prio 0	Now if I check details of Process 2 you can see the updated one
\$ <b>ionice /bin/ls</b>		get priority and class info of bin/ls
\$ <b>ionice -n4 -p2</b>		set priority 4 of process with pid 2
\$ <b>ionice -p 2</b>	best-effort: prio 4	Now observe the difference between the command ran above and this one we have changed priority from 0 to 4
\$ <b>ionice -c0 -n4 -p2</b>	ionice: ignoring given class data for none class	(Note that before kernel 2.6.26 a process that has not asked for an I/O priority formally uses "None" as scheduling class , but the io scheduler will treat such processes as if it were in the best effort class. ) -t option : ignore failure
\$ <b>ionice -c0 -n4 -p2 -t</b>		For ignoring the warning shown above we can use -t option so it will ignore failure



## Conclusion

Thus we have successfully learnt about `ionice` command.

# The `du` command

The `du` command, which is short for **disk usage** lets you retrieve information about disk space usage information in a specified directory. In order to customize the output according to the information you need, this command can be paired with the appropriate options or flags.

## Examples:

1. To show the estimated size of sub-directories in the current directory:

```
du
```

2. To show the estimated size of sub-directories inside a specified directory:

```
du {PATH_TO_DIRECTORY}
```

## Syntax:

```
du [OPTION]... [FILE]...  
du [OPTION]... --files0-from=F
```

## Additional Flags and their Functionalities:

*Note: This does not include an exhaustive list of options.*

Short Flag	Long Flag	Description
-a	--all	Includes information for both files and directories
-c	--total	Provides a grand total at the end of the list of files/directories
-d	--max-depth=N	Provides information up to <b>N</b> levels from the directory where the command was executed
-h	--human-readable	Displays file size in human-readable units, not in bytes
-s	--summarize	Display only the total filesize instead of a list of files/directories

# The `ping` command

The `ping` (Packet Internet Groper) command is a network utility used to check network connectivity between a host and a server or another host. It sends ICMP (Internet Control Message Protocol) echo requests to a specified IP address or URL and measures the time it takes to receive a response. This time delay is referred to as "latency." Ping is a fundamental tool for network troubleshooting and monitoring.

## Understanding Latency

Latency, in the context of networking, is the time delay between sending a packet and receiving a response.

When you use the `ping` command, it measures the latency by sending a series of packets to the target host and calculating the time it takes for each packet to complete the round trip. The latency is typically measured in milliseconds (ms). Understanding latency is essential because:

- **Network Performance:** Lower latency means faster data transmission and more responsive network connections, which is critical for real-time applications.
- **Troubleshooting:** High latency can indicate network congestion, packet loss, or connectivity issues that need attention.
- **Quality of Service (QoS):** Service providers and network administrators use latency metrics to ensure that network services meet quality standards.

The basic ping syntax includes ping followed by a hostname, a name of a website, or the exact IP address.

```
ping [option] [hostname] or [IP address]
```

## Examples:

1. To get ping version installed on your system.

```
sudo ping -v
```

2. To check whether a remote host is up, in this case, google.com, type in your terminal:

```
ping google.com
```

3. Controlling the number of packets to send: Earlier we did not define the number of packets to send to the server/host by using -c option we can do so.

```
ping -c 5 google.com
```

4. Controlling the size of the packet: Earlier a default sized packets were sent to a host but we can send light and heavy packet by using -s option.

```
ping -s 40 -c 5 google.com
```

5. Changing the time interval between ping packets: By default ping wait for 1 sec to send next packet we can change this time by using -i option.

```
ping -i 2 google.com
```

# The `rsync` command

The `rsync` command is probably one of the most used commands out there. It is used to securely copy files from one server to another over SSH.

Compared to the `scp` command, which does a similar thing, `rsync` makes the transfer a lot faster, and in case of an interruption, you could restore/resume the transfer process.

In this tutorial, I will show you how to use the `rsync` command and copy files from one server to another and also share a few useful tips!

Before you get started, you would need to have 2 Linux servers. I will be using DigitalOcean for the demo and deploy 2 Ubuntu servers.

You can use my referral link to get a free \$100 credit that you could use to deploy your virtual machines and test the guide yourself on a few DigitalOcean servers:

**[DigitalOcean \\$100 Free Credit](#)**

## Transfer Files from local server to remote

This is one of the most common causes. Essentially this is how you would copy the files from the server that you are currently on (the source server) to remote/destination server.

What you need to do is SSH to the server that is holding your files, cd to the directory that you would like to transfer over:

```
cd /var/www/html
```

And then run:

```
rsync -avz user@your-remote-server.com:/home/user/dir/
```

The above command would copy all the files and directories from the current folder on your server to your remote server.

Rundown of the command:

- **-a**: is used to specify that you want recursion and want to preserve the file permissions and etc.
- **-v**: is verbose mode, it increases the amount of information you are given during the transfer.
- **-z**: this option, rsync compresses the file data as it is sent to the destination machine, which reduces the amount of data being transmitted -- something that is useful over a slow connection.

I recommend having a look at the following website which explains the commands and the arguments very nicely:

<https://explainshell.com/explain?cmd=rsync+-avz>



In case that the SSH service on the remote server is not running on the standard 22 port, you could use `rsync` with a special SSH port:

```
rsync -avz -e 'ssh -p 1234' user@your-remote-  
server.com:/home/user/dir/
```

## Transfer Files remote server to local

In some cases you might want to transfer files from your remote server to your local server, in this case, you would need to use the following syntax:

```
rsync -avz your-user@your-remote-server.com:/home/user/dir/  
/home/user/local-dir/
```

Again, in case that you have a non-standard SSH port, you can use the following command:

```
rsync -avz -e 'ssh -p 2510' your-user@your-remote-  
server.com:/home/user/dir/ /home/user/local-dir/
```

## Transfer only missing files

If you would like to transfer only the missing files you could use the `--ignore-existing` flag.

This is very useful for final sync in order to ensure that there are no missing files after a website or a server migration.

Basically the commands would be the same apart from the appended `--ignore-existing` flag:

```
rsync -avz --ignore-existing user@your-remote-  
server.com:/home/user/dir/
```

## Conclusion

Using `rsync` is a great way to quickly transfer some files from one machine over to another in a secure way over SSH.

For more cool Linux networking tools, I would recommend checking out this tutorial here:

[Top 15 Linux Networking tools that you should know!](#)

Hope that this helps!

Initially posted here: [How to Transfer Files from One Linux Server to Another Using rsync](#)

# The `dig` command

`dig` - DNS lookup utility

The `dig` is a flexible tool for interrogating DNS name servers. It performs DNS lookups and displays the answers that are returned from the name server(s) that were queried.

## Examples:

1. Dig is a network administration command-line tool for querying the Domain Name System.

```
dig google.com
```

2. The system will list all google.com DNS records that it finds, along with the IP addresses.

```
dig google.com ANY
```

## Syntax:

```
dig [server] [name] [type] [q-type] [q-class] {q-opt}  
    {global-d-opt} host [@local-server] {local-d-opt}  
    [ host [@local-server] {local-d-opt} [...]]
```

## Additional Flags and their Functionalities:

```

domain      is in the Domain Name System
q-class     is one of (in,hs,ch,...) [default: in]
q-type      is one of
(a,any,mx,ns,soa,hinfo,axfr,txt,...) [default:a]
            (Use ixfr=version for type ixfr)
q-opt       is one of:
            -4                      (use IPv4 query transport
only)
            -6                      (use IPv6 query transport
only)
            -b address[#port]      (bind to source
address/port)
            -c class                (specify query class)
            -f filename            (batch mode)
            -k keyfile              (specify tsig key file)
            -m                      (enable memory usage
debugging)
            -p port                (specify port number)
            -q name                (specify query name)
            -r                      (do not read ~/.digrc)
            -t type                (specify query type)
            -u                      (display times in usec
instead of msec)
            -x dot-notation        (shortcut for reverse
lookups)
            -y [hmac:]name:key     (specify named base64
tsig key)
d-opt       is of the form +keyword[=value], where
keyword is:
            +[no]aaflag            (Set AA flag in query
(+[no]aaflag))
            +[no]aaonly            (Set AA flag in query
(+[no]aaflag))
            +[no]additional        (Control display of
additional section)
            +[no]adflag            (Set AD flag in query
(default on))
            +[no]all               (Set or clear all display
flags)
            +[no]answer            (Control display of

```

```

answer section)
+[no]authority          (Control display of
authority section)
+[no]badcookie          (Retry BADCOOKIE
responses)
+[no]besteffort          (Try to parse even
illegal messages)
+bufsize[=###]          (Set EDNS0 Max UDP packet
size)
+[no]cdflag              (Set checking disabled
flag in query)
+[no]class                (Control display of class
in records)
+[no]cmd                  (Control display of
command line -
global option)
+[no]comments            (Control display of
packet header
and section name
comments)
+[no]cookie              (Add a COOKIE option to
the request)
+[no]crypto              (Control display of
cryptographic
fields in records)
+[no]defname              (Use search list
(+[no]search))
+[no]dnssec              (Request DNSSEC records)
+domain=###              (Set default domainname)
+[no]dscp[=###]          (Set the DSCP value to
### [0..63])
+[no]edns[=###]          (Set EDNS version) [0]
+ednsflags=###           (Set EDNS flag bits)
+[no]ednsnegotiation      (Set EDNS version
negotiation)
+ednsopt=###[:value]     (Send specified EDNS
option)
+noednsopt                (Clear list of +ednsopt
options)
+[no]expandaaaa          (Expand AAAA records)
+[no]expire               (Request time to expire)
+[no]fail                 (Don't try next server on
SERVFAIL)
+[no]header-only          (Send query without a
question section)

```

answers)	<code>+[no]identify</code>	(ID responders in short
	<code>+[no]idnin</code>	(Parse IDN names
<code>[default=on on tty])</code>		
	<code>+[no]idnout</code>	(Convert IDN response
<code>[default=on on tty])</code>		
	<code>+[no]ignore</code>	(Don't revert to TCP for
TC responses.)		
	<code>+[no]keepalive</code>	(Request EDNS TCP
keepalive)		
	<code>+[no]keepopen</code>	(Keep the TCP socket open
between queries)		
	<code>+[no]mapped</code>	(Allow mapped IPv4 over
IPv6)		
	<code>+[no]multiline</code>	(Print records in an
expanded format)		
	<code>+ndots=###</code>	(Set search NDOTS value)
	<code>+[no]nsid</code>	(Request Name Server ID)
	<code>+[no]nssearch</code>	(Search all authoritative
nameservers)		
	<code>+[no]onesoa</code>	(AXFR prints only one soa
record)		
	<code>+[no]opcode=###</code>	(Set the opcode of the
request)		
	<code>+padding=###</code>	(Set padding block size
<code>[0])</code>		
	<code>+[no]qr</code>	(Print question before
sending)		
	<code>+[no]question</code>	(Control display of
question section)		
	<code>+[no]raflag</code>	(Set RA flag in query
<code>(+[no]raflag))</code>		
	<code>+[no]rdflag</code>	(Recursive mode
<code>(+[no]recurse))</code>		
	<code>+[no]recurse</code>	(Recursive mode
<code>(+[no]rdflag))</code>		
	<code>+retry=###</code>	(Set number of UDP
retries) [2]		
	<code>+[no]rrcomments</code>	(Control display of per-
record comments)		
	<code>+[no]search</code>	(Set whether to use
searchlist)		
	<code>+[no]short</code>	(Display nothing except
short		form of answers - global



```

option)
    +[no]showsearch      (Search with intermediate
results)
    +[no]split=##       (Split hex/base64 fields
into chunks)
    +[no]stats          (Control display of
statistics)
    +subnet=addr        (Set edns-client-subnet
option)
    +[no]tcflag         (Set TC flag in query
(+[no]tcflag))
    +[no]tcp            (TCP mode (+[no]vc))
    +timeout=###       (Set query timeout) [5]
    +[no]trace          (Trace delegation down
from root [+dnssec])
    +tries=###         (Set number of UDP
attempts) [3]
    +[no]ttlid          (Control display of ttls
in records)
    +[no]ttlunits       (Display TTLs in human-
readable units)
    +[no]unexpected     (Print replies from
unexpected sources
                        default=off)
    +[no]unknownformat  (Print RDATA in RFC 3597
"unknown" format)
    +[no]vc            (TCP mode (+[no]tcp))
    +[no]yaml          (Present the results as
YAML)
    +[no]zflag         (Set Z flag in query)
    global d-opts and servers (before host name) affect
all queries.
    local d-opts and servers (after host name) affect only
that lookup.
    -h                (print help and exit)
    -v                (print version and exit)

```

# The `whois` command

The `whois` command in Linux to find out information about a domain, such as the owner of the domain, the owner's contact information, and the nameservers that the domain is using.

## Examples:

1. Performs a whois query for the domain name:

```
whois {Domain_name}
```

2. `-H` option omits the lengthy legal disclaimers that many domain registries deliver along with the domain information.

```
whois -H {Domain_name}
```

## Syntax:

```
whois [ -h HOST ] [ -p PORT ] [ -aCFHLLMrRSVx ] [ -g  
SOURCE:FIRST-LAST ]  
      [ -i ATTR ] [ -S SOURCE ] [ -T TYPE ] object
```

```
whois -t TYPE
```

```
whois -v TYPE
```

```
whois -q keyword
```

## Additional Flags and their Functionalities:

Flag	Description
<code>-h HOST, --host HOST</code>	Connect to HOST.
<code>-H</code>	Do not display the legal disclaimers some registries like to show you.
<code>-p, --port PORT</code>	Connect to PORT.
<code>--verbose</code>	Be verbose.
<code>--help</code>	Display online help.
<code>--version</code>	Display client version information. Other options are flags understood by whois.ripe.net and some other RIPE-like servers.
<code>-a</code>	Also search all the mirrored databases.
<code>-b</code>	Return brief IP address ranges with abuse contact.
<code>-B</code>	Disable object filtering ( <i>show the e-mail addresses</i> )
<code>-c</code>	Return the smallest IP address range with a reference to an irt object.
<code>-d</code>	Return the reverse DNS delegation object too.
<code>-g SOURCE:FIRST-LAST</code>	Search updates from SOURCE database between FIRST and LAST update serial number. It's useful to obtain Near Real Time Mirroring stream.
<code>-G</code>	Disable grouping of associated objects.

Flag	Description
<code>-i ATTR[,ATTR]...</code>	Search objects having associated attributes. ATTR is attribute name. Attribute value is positional OBJECT argument.
<code>-K</code>	Return primary key attributes only. Exception is members attribute of set object which is always returned. Another exceptions are all attributes of objects organisation, person, and role that are never returned.
<code>-l</code>	Return the one level less specific object.
<code>-L</code>	Return all levels of less specific objects.
<code>-m</code>	Return all one level more specific objects.
<code>-M</code>	Return all levels of more specific objects.
<code>-q KEYWORD</code>	Return list of keywords supported by server. KEYWORD can be version for server version, sources for list of source databases, or types for object types.
<code>-r</code>	Disable recursive look-up for contact information.
<code>-R</code>	Disable following referrals and force showing the object from the local copy in the server.
<code>-s SOURCE[,SOURCE]...</code>	Request the server to search for objects mirrored from SOURCES. Sources are delimited by comma and the order is significant. Use <code>-q</code> sources option to obtain list of valid sources.
<code>-t TYPE</code>	Return the template for a object of TYPE.
<code>-T TYPE[,TYPE]...</code>	Restrict the search to objects of TYPE. Multiple types are separated by a comma.
<code>-v TYPE</code>	Return the verbose template for a object of TYPE.
<code>-x</code>	Search for only exact match on network address prefix.

# The `ssh` command

The `ssh` command in Linux stands for "Secure Shell". It is a protocol used to securely connect to a remote server/system. `ssh` is more secure in the sense that it transfers the data in encrypted form between the host and the client. `ssh` runs at TCP/IP port 22.

## Examples:

1. Use a Different Port Number for SSH Connection:

```
ssh test.server.com -p 3322
```

2. `-i` `ssh` to remote server using a private key?

```
ssh -i private.key user_name@host
```

3. `-l` `ssh` specifying a different username

```
ssh -l alternative-username sample.ssh.com
```

## Syntax:

```
ssh user_name@host(IP/Domain_Name)
```

```
ssh -i private.key user_name@host
```

```
ssh sample.ssh.com ls /tmp/doc
```

## Additional Flags and their Functionalities:

Flag	Description
-1	Forces ssh to use protocol SSH-1 only.
-2	Forces ssh to use protocol SSH-2 only.
-4	Allows IPv4 addresses only.
-A	Authentication agent connection forwarding is enabled..
-a	Authentication agent connection forwarding is disabled.
-B bind_interface	Bind to the address of bind_interface before attempting to connect to the destination host. This is only useful on systems with more than one address.
-b bind_address	Use bind_address on the local machine as the source address of the connection. Only useful on systems with more than one address.

Flag	Description
<code>-C</code>	Compresses all data (including stdin, stdout, stderr, and data for forwarded X11 and TCP connections) for a faster transfer of data.
<code>-c cipher_spec</code>	Selects the cipher specification for encrypting the session.
<code>-D [bind_address:]port</code>	Dynamic application-level port forwarding. This allocates a socket to listen to port on the local side. When a connection is made to this port, the connection is forwarded over the secure channel, and the application protocol is then used to determine where to connect to from the remote machine.
<code>-E log_file</code>	Append debug logs instead of standard error.
<code>-e escape_char</code>	Sets the escape character for sessions with a pty (default: '~'). The escape character is only recognized at the beginning of a line. The escape character followed by a dot ('.') closes the connection; followed by control-Z suspends the connection; and followed by itself sends the escape character once. Setting the character to "none" disables any escapes and makes the session fully transparent.

Flag	Description
<code>-F configfile</code>	Specifies a per-user configuration file. The default for the per-user configuration file is <code>~/.ssh/config</code> .
<code>-f</code>	Requests ssh to go to background just before command execution.
<code>-G</code>	Causes ssh to print its configuration after evaluating Host and Match blocks and exit.
<code>-g</code>	Allows remote hosts to connect to local forwarded ports.
<code>-I pkcs11</code>	Specify the PKCS#11 shared library ssh should use to communicate with a PKCS#11 token providing keys.
<code>-i identity_file</code>	A file from which the identity key (private key) for public key authentication is read.
<code>-J [user@]host[:port]</code>	Connect to the target host by first making a ssh connection to the jump host[(/iam/jump-host) and then establishing a TCP forwarding to the ultimate destination from there.
<code>-K</code>	Enables GSSAPI-based authentication and forwarding (delegation) of GSSAPI credentials to the server.
<code>-k</code>	Disables forwarding (delegation) of GSSAPI credentials to the server.



**Flag**

-L  
 [bind\_address:]port:host:hostport,  
 -L  
 [bind\_address:]port:remote\_socket,  
 -L local\_socket:host:hostport, -L  
 local\_socket:remote\_socket

-l login\_name

-M

-m mac\_spec

**Description**

Specifies that connections to the given TCP port or Unix socket on the local (client) host are to be forwarded to the given host and port, or Unix socket, on the remote side. This works by allocating a socket to listen to either a TCP port on the local side, optionally bound to the specified bind\_address, or to a Unix socket. Whenever a connection is made to the local port or socket, the connection is forwarded over the secure channel, and a connection is made to either host port hostport, or the Unix socket remote\_socket, from the remote machine.

Specifies the user to log in as on the remote machine.

Places the ssh client into "master" mode for connection sharing. Multiple -M options places ssh into "master" mode but with confirmation required using ssh-askpass before each operation that changes the multiplexing state (e.g. opening a new session).

A comma-separated list of MAC (message authentication code) algorithms, specified in order of preference.

Flag	Description
<code>-N</code>	Do not execute a remote command. This is useful for just forwarding ports.
<code>-n</code>	Prevents reading from stdin.
<code>-O ctl_cmd</code>	Control an active connection multiplexing master process. When the <code>-O</code> option is specified, the <code>ctl_cmd</code> argument is interpreted and passed to the master process. Valid commands are: "check" (check that the master process is running), "forward" (request forwardings without command execution), "cancel" (cancel forwardings), "exit" (request the master to exit), and "stop" (request the master to stop accepting further multiplexing requests).
<code>-o</code>	Can be used to give options in the format used in the configuration file. This is useful for specifying options for which there is no separate command-line flag.
<code>-p, --port PORT</code>	Port to connect to on the remote host.

**Flag****Description****-Q query\_option**

Queries ssh for the algorithms supported for the specified version 2. The available features are: cipher (supported symmetric ciphers), cipher-auth (supported symmetric ciphers that support authenticated encryption), help (supported query terms for use with the -Q flag), mac (supported message integrity codes), kex (key exchange algorithms), kex-gss (GSSAPI key exchange algorithms), key (keytypes), key-cert (certificate key types), key-plain (non-certificate key types), key-sig (all keytypes and signature algorithms), protocol-version (supported SSH protocol versions), and sig (supported signature algorithms). Alternatively, any keyword from `ssh_config(5)` or `sshd_config(5)` that takes an algorithm list may be used as an alias for the corresponding query\_option.

**-q**

Quiet mode. Causes most warning and diagnostic messages to be suppressed.

**-R****[bind\_address:]port:host:hostport,****-R****[bind\_address:]port:local\_socket,****-R remote\_socket:host:hostport, -R****remote\_socket:local\_socket, -R****[bind\_address:]port**

Specifies that connections to the given TCP port or Unix socket on the remote (server) host are to be forwarded to the local side.

Flag	Description
<code>-S ctl_path</code>	<p>Specifies the location of a control socket for connection sharing, or the string “none” to disable connection sharing.</p> <p>May be used to request invocation of a subsystem on the remote system. Subsystems facilitate the use of SSH as a secure transport for other applications (e.g. <code>sftp(1)</code>). The subsystem is specified as the remote command.</p>
<code>-s</code>	<p>Disable pseudo-terminal allocation.</p>
<code>-T</code>	<p>Force pseudo-terminal allocation. This can be used to execute arbitrary screen-based programs on a remote machine, which can be very useful, e.g. when implementing menu services. Multiple <code>-t</code> options force tty allocation, even if <code>ssh</code> has no local tty.</p>
<code>-t</code>	<p>Display the version number.</p>
<code>-V</code>	<p>Verbose mode. It echoes everything it is doing while establishing a connection. It is very useful in the debugging of connection failures.</p>
<code>-v</code>	

Flag	Description
<code>-W host:port</code>	Requests that standard input and output on the client be forwarded to host on port over the secure channel. Implies <code>-N</code> , <code>-T</code> , <code>ExitOnForwardFailure</code> and <code>ClearAllForwardings</code> , though these can be overridden in the configuration file or using <code>-o</code> command line options.
<code>-w local_tun[remote_tun]</code>	Requests tunnel device forwarding with the specified tun devices between the client ( <code>local_tun</code> ) and the server ( <code>remote_tun</code> ). The devices may be specified by numerical ID or the keyword “any”, which uses the next available tunnel device. If <code>remote_tun</code> is not specified, it defaults to “any”. If the Tunnel directive is unset, it will be set to the default tunnel mode, which is “point-to-point”. If a different Tunnel forwarding mode is desired, then it should be specified before <code>-w</code> .
<code>-X</code>	Enables X11 forwarding (GUI Forwarding).
<code>-x</code>	Disables X11 forwarding (GUI Forwarding).
<code>-Y</code>	Enables trusted X11 Forwarding.
<code>-y</code>	Sends log information using the syslog system module. By default this information is sent to stderr.

# The `awk` command

Awk is a general-purpose scripting language designed for advanced text processing. It is mostly used as a reporting and analysis tool.

## WHAT CAN WE DO WITH AWK?

1. AWK Operations: (a) Scans a file line by line (b) Splits each input line into fields (c) Compares input line/fields to pattern (d) Performs action(s) on matched lines
2. Useful For: (a) Transform data files (b) Produce formatted reports
3. Programming Constructs: (a) Format output lines (b) Arithmetic and string operations (c) Conditionals and loops

## Syntax

```
awk options 'selection _criteria {action }' input-file >  
output-file
```

## Example

Consider the following text file as the input file for below example:

```
```\n$cat > employee.txt\n```\n```\n\najay manager account 45000\nsunil clerk account 25000\nvarun manager sales 50000\namit manager account 47000\ntarun peon sales 15000\n```\n
```

1. Default behavior of Awk: By default Awk prints every line of data from the specified file.

```
$ awk '{print}' employee.txt
```

```
ajay manager account 45000\nsunil clerk account 25000\nvarun manager sales 50000\namit manager account 47000\ntarun peon sales 15000
```

In the above example, no pattern is given. So the actions are applicable to all the lines. Action print without any argument prints the whole line by default, so it prints all the lines of the file without failure.

2. Print the lines which match the given pattern.

```
awk '/manager/ {print}' employee.txt
```

```
ajay manager account 45000  
varun manager sales 50000  
amit manager account 47000
```

In the above example, the awk command prints all the line which matches with the 'manager'.

3. Splitting a Line Into Fields : For each record i.e line, the awk command splits the record delimited by whitespace character by default and stores it in the \$n variables. If the line has 4 words, it will be stored in \$1, \$2, \$3 and \$4 respectively. Also, \$0 represents the whole line.

```
$ awk '{print $1,$4}' employee.txt
```

```
ajay 45000  
sunil 25000  
varun 50000  
amit 47000  
tarun 15000
```

## Built-In Variables In Awk

Awk's built-in variables include the field variables—\$1, \$2, \$3, and so on (\$0 is the entire line) — that break a line of text into individual words or pieces called fields.

NR: NR command keeps a current count of the number of input records. Remember that records are usually lines. Awk command performs the pattern/action statements once for each record in a file. NF: NF command keeps a count of the number of fields within the current input record. FS: FS command contains the field separator character which is used to divide fields on the input line. The default is "white space",



meaning space and tab characters. FS can be reassigned to another character (typically in BEGIN) to change the field separator. RS: RS command stores the current record separator character. Since, by default, an input line is the input record, the default record separator character is a newline. OFS: OFS command stores the output field separator, which separates the fields when Awk prints them. The default is a blank space. Whenever print has several parameters separated with commas, it will print the value of OFS in between each parameter. ORS: ORS command stores the output record separator, which separates the output lines when Awk prints them. The default is a newline character. print automatically outputs the contents of ORS at the end of whatever it is given to print.

# The `crontab` command

`crontab` is used to maintain crontab files for individual users (Vixie Cron)

`crontab` is the program used to install, uninstall or list the tables used to drive the `cron(8)` daemon in Vixie Cron. Each user can have their own crontab, and though these are files in `/var/spool/cron/crontabs`, they are not intended to be edited directly.

## Syntax:

```
crontab [ -u user ] file
crontab [ -u user ] [ -i ] { -e | -l | -r }
```

## Examples:

1. The `-l` option causes the current crontab to be displayed on standard output.

```
crontab -l
```

2. The `-r` option causes the current crontab to be removed.

```
crontab -r
```

3. The `-e` option is used to edit the current crontab using the editor

specified by the VISUAL or EDITOR environment variables. After you exit from the editor, the modified crontab will be installed automatically. If neither of the environment variables is defined, then the default editor /usr/bin/editor is used.

```
crontab -e
```

4. You can specify the user you want to edit the crontab for. Every user has its own crontab. Assume you have a `www-data` user, which is in fact the user Apache is default running as. If you want to edit the crontab for this user you can run the following command

```
crontab -u www-data -e
```

## Help Command

Run below command to view the complete guide to `crontab` command.

```
man crontab
```

# The `xargs` command

`xargs` is used to build and execute command lines from standard input

Some commands like `grep` can accept input as parameters, but some commands accept arguments, this is the place where `xargs` came into picture.

## Syntax:

```
xargs [options] [command [initial-arguments]]
```

## Options:

```
-0, --null
```

Input items are terminated by a null character instead of by whitespace, and the quotes and backslash are not special (every character is taken literally). Disables the end of file string, which is treated like any other argument. Useful when input items might contain white space, quote marks, or backslashes.

```
-a file, --arg-file=file
```

Read items from file instead of standard input. If you use this option, `stdin` remains unchanged when commands are run. Otherwise, `stdin` is

redirected from /dev/null.

`-o, --open-tty`

Reopen stdin as /dev/tty in the child process before executing the command. This is useful if you want xargs to run an interactive application.

`--delimiter=delim, -d delim`

Input items are terminated by the specified character. The specified delimiter may be a single character, a C-style character escape such as `\n`, or an octal or hexadecimal escape code. Octal and hexadecimal escape codes are understood as for the `printf` command. Multibyte characters are not supported. When processing the input, quotes and backslash are not special; every character in the input is taken literally. The `-d` option disables any end-of-file string, which is treated like any other argument. You can use this option when the input consists of simply newline-separated items, although it is almost always better to design your program to use `--null` where this is possible.

`-p, --interactive`

Prompt the user about whether to run each command line and read a line from the terminal. Only run the command line if the response starts with `y'` or `Y'`. Implies `-t`.

## Examples:

```
find /tmp -name core -type f -print | xargs /bin/rm -f
```

Find files named core in or below the directory /tmp and delete them. Note that this will work incorrectly if there are any filenames containing newlines or spaces.

```
find /tmp -name core -type f -print0 | xargs -0 /bin/rm -f
```

Find files named core in or below the directory /tmp and delete them, processing filenames in such a way that file or directory names containing spaces or new- lines are correctly handled.

```
find /tmp -depth -name core -type f -delete
```

Find files named core in or below the directory /tmp and delete them, but more efficiently than in the previous example (because we avoid the need to use fork(2) and exec(2) to launch rm and we don't need the extra xargs process).

```
cut -d: -f1 < /etc/passwd | sort | xargs echo
```

Generates a compact listing of all the users on the system.

## Help Command

Run below command to view the complete guide to **xargs** command.

```
man xargs
```

# The `nohup` command

When a shell exits (maybe while logging out of an SSH session), the HUP ('hang up') signal is sent to all of its child processes, causing them to terminate. If you require a long-running process to continue after exiting shell, you'll need the `nohup` command. Prefixing any command with `nohup` causes the command to become *immune* to HUP signals. Additionally, STDIN is being ignored and all output gets redirected to local file `./nohup.out`.

## Examples:

1. Applying `nohup` to a long-running debian upgrade:

```
nohup apt-get -y upgrade
```

## Syntax:

```
nohup COMMAND [ARG]...  
nohup OPTION
```

# The `pstree` command

The `pstree` command is similar to `ps`, but instead of listing the running processes, it shows them as a tree. The tree-like format is sometimes more suitable way to display the processes hierarchy which is a much simpler way to visualize running processes. The root of the tree is either `init` or the process with the given pid.

## Examples

1. To display a hierarchical tree structure of all running processes:

```
pstree
```

2. To display a tree with the given process as the root of the tree:

```
pstree [pid]
```

3. To show only those processes that have been started by a user:

```
pstree [USER]
```

4. To show the parent processes of the given process:

```
pstree -s [PID]
```



5. To view the output one page at a time, pipe it to the **less** command:

```
pstree | less
```

## Syntax

```
ps [OPTIONS] [USER or PID]
```

## Additional Flags and their Functionalities

Short Flag	Long Flag	Description
-a	--arguments	Show command line arguments
-A	--ascii	use ASCII line drawing characters
-c	--compact	Don't compact identical subtrees
-h	--highlight-all	Highlight current process and its ancestors
-H PID	--highlight-pid=PID	highlight this process and its ancestors
-g	--show-pgids	show process group ids; implies -c
-G	--vt100	use VT100 line drawing characters
-l	--long	Don't truncate long lines
-n	--numeric-sort	Sort output by PID
-N type	--ns-sort=type	Sort by namespace type (cgroup, ipc, mnt, net, pid, user, uts)
-p	--show-pids	show PIDs; implies -c
-s	--show-parents	Show parents of the selected process
-S	--ns-changes	show namespace transitions
-t	--thread-names	Show full thread names
-T	--hide-threads	Hide threads, show only processes
-u	--uid-changes	Show uid transitions

Short Flag	Long Flag	Description
-U	--unicode	Use UTF-8 (Unicode) line drawing characters
-V	--version	Display version information
-Z	--security-context	Show SELinux security contexts

# The `tree` command

The `tree` command in Linux recursively lists directories as tree structures. Each listing is indented according to its depth relative to root of the tree.

## Examples:

1. Show a tree representation of the current directory.

```
tree
```

2. `-L NUMBER` limits the depth of recursion to avoid display very deep trees.

```
tree -L 2 /
```

## Syntax:

```
tree [-acdfghilnpqrstuvxACDFQNSUX] [-L level [-R]] [-H
baseHREF] [-T title]
      [-o filename] [--nolinks] [-P pattern] [-I pattern] [-
-inodes]
      [--device] [--noreport] [--dirsfirst] [--version] [--
help] [--filelimit #]
      [--si] [--prune] [--du] [--timefmt format] [--
matchdirs] [--from-file]
      [--] [directory ...]
```

## Additional Flags and their Functionalities:

Flag	Description
<b>-a</b>	Print all files, including hidden ones.
<b>-d</b>	Only list directories.
<b>-l</b>	Follow symbolic links into directories.
<b>-f</b>	Print the full path to each listing, not just its basename.
<b>-x</b>	Do not move across file-systems.
<b>-L #</b>	Limit recursion depth to #.
<b>-P REGEX</b>	Recurse, but only list files that match the REGEX.
<b>-I REGEX</b>	Recurse, but do not list files that match the REGEX.
<b>--ignore-case</b>	Ignore case while pattern-matching.
<b>--prune</b>	Prune empty directories from output.
<b>--filelimit #</b>	Omit directories that contain more than # files.
<b>-o FILE</b>	Redirect STDOUT output to FILE.
<b>-i</b>	Do not output indentation.

# The `whereis` command

The `whereis` command is used to find the location of source/binary file of a command and manuals sections for a specified file in Linux system. If we compare `whereis` command with `find` command they will appear similar to each other as both can be used for the same purposes but `whereis` command produces the result more accurately by consuming less time comparatively.

## Points to be kept on mind while using the `whereis` command:

Since the `whereis` command uses `chdir`(change directory 2V) to give you the result in the fastest possible way, the pathnames given with the `-M`, `-S`, or `-B` must be full and well-defined i.e. they must begin with a `/` and should be a valid path that exist in the system's directories, else it exits without any valid result. `whereis` command has a hard-coded(code which is not dynamic and changes with specification) path, so you may not always find what you're looking for.

## Syntax

```
whereis [options] [filename]
```

## Options

`-b` : This option is used when we only want to search for binaries. `-m` :

This option is used when we only want to search for manual sections. `-s`

: This option is used when we only want to search for source files. `-u`:

This option search for unusual entries. A source file or a binary file is said to be unusual if it does not have any existence in system as per [-bmsu] described along with “-u”. Thus `whereis -m -u \*` asks for those files in the current directory which have unusual entries.

-B : This option is used to change or otherwise limit the places where whereis searches for binaries. -M : This option is used to change or otherwise limit the places where whereis searches for manual sections. -S : This option is used to change or otherwise limit the places where whereis searches for source files.

-f : This option simply terminate the last directory list and signals the start of file names. This must be used when any of the -B, -M, or -S options are used. -V: Displays version information and exit. -h: Displays the help and exit.

# The `printf` command

This command lets you print the value of a variable by formatting it using rules. It is pretty similar to the `printf` in C language.

## Syntax:

```
$printf [-v variable_name] format [arguments]
```

## Options:

OPTION	Description
<code>FORMAT</code>	FORMAT controls the output, and defines the way that the ARGUMENTs will be expressed in the output
<code>ARGUMENT</code>	An ARGUMENT will be inserted into the formatted output according to the definition of FORMAT
<code>--help</code>	Display help and exit
<code>--version</code>	Output version information and exit

## Formats:

The anatomy of the FORMAT string can be extracted into three different parts,

- *ordinary characters*, which are copied exactly the same characters as were used originally to the output.
- *interpreted character sequences*, which are escaped with a backslash ("`\`").

- *conversion specifications*, this one will define the way the ARGUMENTs will be expressed as part of the output.

You can see those parts in this example,

```
printf " %s is where over %d million developers shape \"the  
future of software.\" " Github 65
```

The output:

```
Github is where over 65 million developers shape "the future  
of software."
```

There are two conversion specifications `%s` and `%d`, and there are two escaped characters which are the opening and closing double-quotes wrapping the words of *the future of software*. Other than that are the ordinary characters.

## Conversion Specifications:

Each conversion specification begins with a `%` and ends with a *conversion character*. Between the `%` and the *conversion character* there may be, in order:

- A minus sign. This tells printf to left-adjust the conversion of the argument
- number* An integer that specifies field width; printf prints a conversion of ARGUMENT in a field at least number characters wide. If necessary it will be padded on the left (or right, if left-adjustment is called for) to make up the field width
- . A period, which separates the field width from the precision



*number* An integer, the precision, which specifies the maximum number of characters to be printed from a string, or the number of digits after the decimal point of a floating-point value, or the minimum number of digits for an integer

*h or l* These differentiate between a short and a long integer, respectively, and are generally only needed for computer programming

The conversion characters tell `printf` what kind of argument to print out, are as follows:

Conversion char	Argument type
<code>s</code>	A string
<code>c</code>	An integer, expressed as a character corresponds ASCII code
<code>d, i</code>	An integer as a decimal number
<code>o</code>	An integer as an unsigned octal number
<code>x, X</code>	An integer as an unsigned hexadecimal number
<code>u</code>	An integer as an unsigned decimal number
<code>f</code>	A floating-point number with a default precision of 6
<code>e, E</code>	A floating-point number in scientific notation
<code>p</code>	A memory address pointer
<code>%</code>	No conversion

Here is the list of some examples of the `printf` output the ARGUMENT. we can put any word but in this one we put a 'linuxcommand' word and enclosed it with quotes so we can see easier the position related to the whitespaces.

FORMAT string	ARGUMENT string	Output string
<code>"%s"</code>	<code>"linuxcommand"</code>	<code>"linuxcommand"</code>
<code>"%5s"</code>	<code>"linuxcommand"</code>	<code>"linuxcommand"</code>
<code>"%.5s"</code>	<code>"linuxcommand"</code>	<code>"linux"</code>
<code>"%-8s"</code>	<code>"linuxcommand"</code>	<code>"linuxcommand"</code>

FORMAT string	ARGUMENT string	Output string
<code>"%-15s"</code>	<code>"linuxcommand"</code>	<code>"linuxcommand "</code>
<code>"%12.5s"</code>	<code>"linuxcommand"</code>	<code>" linux"</code>
<code>"%-12.5"</code>	<code>"linuxcommand"</code>	<code>"linux "</code>
<code>"%-12.4"</code>	<code>"linuxcommand"</code>	<code>"linu "</code>

Notes:

- `printf` requires the number of conversion strings to match the number of ARGUMENTs
- `printf` maps the conversion strings one-to-one, and expects to find exactly one ARGUMENT for each conversion string
- Conversion strings are always interpreted from left to right.

Here's the example:

The input

```
printf "We know %f is %s %d" 12.07 "larger than" 12
```

The output:

```
We know 12.070000 is larger than 12
```

The example above shows 3 arguments, *12.07*, *larger than*, and *12*. Each of them interpreted from left to right one-to-one with the given 3 conversion strings (`%f`, `%d`, `%s`).

Character sequences which are interpreted as special characters by `printf`:

Escaped char	Description
<code>\a</code>	issues an alert (plays a bell). Usually ASCII BEL characters
<code>\b</code>	prints a backspace
<code>\c</code>	instructs <code>printf</code> to produce no further output
<code>\e</code>	prints an escape character (ASCII code 27)
<code>\f</code>	prints a form feed
<code>\n</code>	prints a newline
<code>\r</code>	prints a carriage return
<code>\t</code>	prints a horizontal tab
<code>\v</code>	prints a vertical tab
<code>\"</code>	prints a double-quote (")
<code>\\</code>	prints a backslash ( )
<code>\NNN</code>	prints a byte with octal value <code>NNN</code> (1 to 3 digits)
<code>\xHH</code>	prints a byte with hexadecimal value <code>HH</code> (1 to 2 digits)
<code>\uHHHH</code>	prints the unicode character with hexadecimal value <code>HHHH</code> (4 digits)
<code>\UHHHHHHHH</code>	prints the unicode character with hexadecimal value <code>HHHHHHHH</code> (8 digits)
<code>%b</code>	prints ARGUMENT as a string with "\" escapes interpreted as listed above, with the exception that octal escapes take the form <code>\0</code> or <code>\0NN</code>

## Examples:

The format specifiers usually used with `printf` are stated in the examples below:

- `%s`

```
$printf "%s\n" "Printf command documentation!"
```

This will print `Printf command documentation!` in the shell.

**Other important attributes of printf command:**

- **%b** - Prints arguments by expanding backslash escape sequences.
- **%q** - Prints arguments in a shell-quoted format which is reusable as input.
- **%d** , **%i** - Prints arguments in the format of signed decimal integers.
- **%u** - Prints arguments in the format of unsigned decimal integers.
- **%o** - Prints arguments in the format of unsigned octal(base 8) integers.
- **%x** , **%X** - Prints arguments in the format of unsigned hexadecimal(base 16) integers. %x prints lower-case letters and %X prints upper-case letters.
- **%e** , **%E** - Prints arguments in the format of floating-point numbers in exponential notation. %e prints lower-case letters and %E prints upper-case.
- **%a** , **%A** - Prints arguments in the format of floating-point numbers in hexadecimal(base 16) fractional notation. %a prints lower-case letters and %A prints upper-case.
- **%g** , **%G** - Prints arguments in the format of floating-point numbers in normal or exponential notation, whichever is more appropriate for the given value and precision. %g prints lower-case letters and %G prints upper-case.
- **%c** - Prints arguments as single characters.
- **%f** - Prints arguments as floating-point numbers.
- **%s** - Prints arguments as strings.
- **%%** - Prints a "%" symbol.

**More Examples:**

The input:

```
printf 'Hello\nyoung\nman!'
```

The output:

```
hello
young
man!
```

The two `\n` break the sentence into 3 parts of words.

The input:

```
printf "%f\n" 2.5 5.75
```

The output

```
2.500000
5.750000
```

The `%f` specifier combined with the `\n` interpreted the two arguments in the form of floating point in the separated new lines.

# The `cut` command

The `cut` command lets you remove sections from each line of files. Print selected parts of lines from each FILE to standard output. With no FILE, or when FILE is -, read standard input.

## Usage and Examples:

1. Selecting specific fields in a file

```
cut -d "delimiter" -f (field number) file.txt
```

2. Selecting specific characters:

```
cut -c [(k)-(n)/(k),(n)/(n)] filename
```

Here, **k** denotes the starting position of the character and **n** denotes the ending position of the character in each line, if *k* and *n* are separated by "-" otherwise they are only the position of character in each line from the file taken as an input.

3. Selecting specific bytes:

```

cut -b 1,2,3 filename           //select bytes 1,2
and 3
cut -b 1-4 filename             //select bytes 1
through 4
cut -b 1- filename              //select bytes
1 through the end of file
cut -b -4 filename              //select bytes
from the beginning till the 4th byte

```

**Tabs and backspaces** are treated like as a character of 1 byte.

## Syntax:

```
cut OPTION... [FILE]...
```

## Additional Flags and their Functionalities:

Short Flag	Long Flag	Description
-b	--bytes=LIST	select only these bytes
-c	--characters=LIST	select only these characters
-d	--delimiter=DELIM	use DELIM instead of TAB for field delimiter
-f	--fields	select only these fields; also print any line that contains no delimiter character, unless the -s option is specified
-s	--only-delimited	do not print lines not containing delimiters
-z	--zero-terminated	line delimiter is NUL, not newline

# The `sed` command

`sed` command stands for stream editor. A stream editor is used to perform basic text transformations on an input stream (a file or input from a pipeline). For instance, it can perform lot's of functions on files like searching, find and replace, insertion or deletion. While in some ways it is similar to an editor which permits scripted edits (such as `ed`), `sed` works by making only one pass over the input(s), and is consequently more efficient. But it is `sed`'s ability to filter text in a pipeline that particularly distinguishes it from other types of editors.

The most common use of `sed` command is for a substitution or for find and replace. By using `sed` you can edit files even without opening it, which is a much quicker way to find and replace something in the file. It supports basic and extended regular expressions that allow you to match complex patterns. Most Linux distributions come with GNU and `sed` is pre-installed by default.

## Examples:

1. To Find and Replace String with `sed`

```
sed -i 's/{search_regex}/{replace_value}/g' input-file
```

2. For Recursive Find and Replace (*along with `find`*)



Sometimes you may want to recursively search directories for files containing a string and replace the string in all files. This can be done using commands such as `find` to recursively find files in the directory and piping the file names to `sed`. The following command will recursively search for files in the current working directory and pass the file names to `sed`. It will recursively search for files in the current working directory and pass the file names to `sed`.

```
find . -type f -exec sed -i
's/{search_regex}/{replace_value}/g' {} +
```

## Syntax:

```
sed [OPTION]... {script-only-if-no-other-script} [INPUT-
FILE]...
```

- **OPTION** - sed options in-place, silent, follow-symlinks, line-length, null-data ...etc.
- **{script-only-if-no-other-script}** - Add the script to command if available.
- **INPUT-FILE** - Input Stream, A file or input from a pipeline.

If no option is given, then the first non-option argument is taken as the sed script to interpret. All remaining arguments are names of input files; if no input files are specified, then the standard input is read.

GNU sed home page: <http://www.gnu.org/software/sed/>

Short Flag	Long Flag	Description
<b>-i[SUFFIX]</b>	<b>--in-place[=SUFFIX]</b>	Edit files in place (makes backup if SUFFIX supplied).

Short Flag	Long Flag	Description
<code>-n</code>	<code>--quiet, --silent</code>	Suppress automatic printing of pattern space.
<code>-e script</code>	<code>--expression=script</code>	Add the script to the commands to be executed.
<code>-f script-file</code>	<code>--file=script-file</code>	Add the contents of script-file to the commands to be executed.
<code>-l N</code>	<code>--line-length=N</code>	Specify the desired line-wrap length for the <code>l</code> command.
<code>-r</code>	<code>--regexp-extended</code>	Use extended regular expressions in the script.
<code>-s</code>	<code>--separate</code>	Consider files as separate rather than as a single continuous long stream.
<code>-u</code>	<code>--unbuffered</code>	Load minimal amounts of data from the input files and flush the output buffers more often.
<code>-z</code>	<code>--null-data</code>	Separate lines by NULL characters.

## Before you begin

It may seem complicated and complex at first, but searching and replacing text in files with sed is very simple.

To find out more: <https://www.gnu.org/software/sed/manual/sed.html>

# The `vim` command

The `vim` is a text editor for Unix that comes with Linux, BSD, and macOS. It is known to be fast and powerful, partly because it is a small program that can run in a terminal (although it has a graphical interface). Vim text editor is developed by [Bram Moolenaar](#). It supports most file types and the vim editor is also known as a programmer's editor. It is mainly because it can be managed entirely without menus or a mouse with a keyboard.

**Note:** Do not confuse `vim` with `vi`. `vi`, which stands for "Visual", is a text editor that was developed by [Bill Joy](#) in 1976. `vim` stands for "Vi Improved", and is an improved clone of the `vi` editor.

## The most searched question about `vim` :

`How to exit vim editor?`

The most searched question about vim editor looks very funny but it's true that the new user gets stuck at the very beginning when using vim editor.

The command to save the file and exit vim editor: `:wq`

The command to exit vim editor without saving the file: `:q!`

## Fun reading:

Here's a [survey](#) for the same question, look at this and do not think to quit the vim editor.

## Installation:

First check if vim is already installed or not, enter the following command:

```
vim --version
```

If it is already installed it will show its version, else we can run the below commands for the installations:

On Ubuntu/Debian:

```
sudo apt-get install vim
```

On CentOS/Fedora:

```
sudo yum install vim
```

If you want to use advanced features on CentOS/Fedora, you'll need to install enhanced vim editor, to do this run the following command:

```
sudo yum install -y vim-enhanced
```

## Syntax:

```
vim [FILE_PATH/FILE_NAME]
```

## Examples:

1. To open the file named "demo.txt" from your current directory:

```
vim demo.txt
```

2. To open the file in a specific directory:

```
vim {File_Path/filename}
```

3. To open the file starting on a specific line in the file:

```
vim {File_Path/filename} +LINE_NUMBER
```

## Modes in vim editor:

There are some arguments as to how many modes that vim has, but the modes you're most likely to use are **command mode** and **insert mode**. These modes will allow you to do just about anything you need, including creating your document, saving your document, and doing advanced editing, including taking advantage of search and replace functions.

## Workflow of vim editor:

1. Open a new or existing file with **vim filename**.
2. Type **i** to switch into insert mode so that you can start editing the file.
3. Enter or modify the text of your file.

4. When you're done, press the **Esc** key to exit insert mode and back to command mode.
5. Type **:w** or **:wq** to save the file or save and exit from the file respectively.

## Navigate in vim

Some common commands:

- **j** : move down one line
- **k** : move up one line
- **h** : Move left one character
- **l** : move right one character
- **w** : move forward one word
- **b** : move backward one word
- **e** : Move to the end of your word
- **o** : move to begining of line
- **\$** : move to end of line
- **gg** : go to begining of file
- **G** : go to end of file

## Copy, Paste and Delete

1. Copy(Yank): Copying in vim is called "yanking":

- **yy** : yank (copy) the current line
- **2yy** : yank 2 lines
- **y\$** : yank from cursor to end of line
- **y^** : yank from cursor to begining of line
- **yw** : yank one word
- **y}** : yank until end of paragraph

2. Paste:

- **p** : paste after the cursor
- **P** : paste before the cursor

### 3. Delete:

- **x** : delete a single character
- **dd** : delete the whole current line
- **2dd** : delete 2 lines (or use any number **n dd**)
- **d\$** : delete from cursor to end of line
- **d^** : delete from cursor to beginning of line
- **dG** : delete from cursor to end of file
- **dgg** : delete from cursor to beginning of file

## Selection (visual mode)

- **v** : start character-wise selection
- **V** : start line-wise selection
- **ctrl + v** : start block-wise selection

## Interactive training

In this interactive tutorial, you will learn the different ways to use the **vim** command:

[The Open vim Tutorial](#)

## Additional Flags and their Functionalities:

Flags/Options	Description
<b>-e</b>	Start in Ex mode (see <a href="#">Ex-mode</a> )
<b>-R</b>	Start in read-only mode
<b>-R</b>	Start in read-only mode
<b>-g</b>	Start the <a href="#">GUI</a>

Flags/Options	Description
-eg	Start the GUI in Ex mode
-Z	Like "vim", but in restricted mode
-d	Start in diff mode <u>diff-mode</u>
-h	Give usage (help) message and exit
+NUMBER	Open a file and place the cursor on the line number specified by NUMBER

### Read more about vim:

vim can not be learned in a single day, use in day-to-day tasks to get hands-on in vim editor.

To learn more about `vim` follow the given article:

[Article By Daniel Miessler](#)



# The `chown` command

The `chown` command makes it possible to change the ownership of a file or directory. Users and groups are fundamental in Linux, with `chown` you can change the owner of a file or directory. It's also possible to change ownership on folders recursively

## Examples:

1. Change the owner of a file

```
chown user file.txt
```

2. Change the group of a file

```
chown :group file.txt
```

3. Change the user and group in one line

```
chown user:group file.txt
```

4. Change to ownership on a folder recursively

```
chown -R user:group folder
```

**Syntax:**

```
chown [-OPTION] [DIRECTORY_PATH]
```

# The `find` command

The `find` command lets you **search for files in a directory hierarchy**

- Search a file with specific name.
- Search a file with pattern
- Search for empty files and directories.

## Examples:

1. Search a file with specific name:

```
find ./directory1 -name sample.txt
```

2. Search a file with pattern:

```
find ./directory1 -name '*.txt'
```

3. To find all directories whose name is test in / directory.

```
find / -type d -name test
```

4. Searching empty files in current directory

```
find . -size 0k
```

## Syntax:

```
find [options] [paths] [expression]
```

## In Simple words

```
find [where to start searching from]
    [expression determines what to find] [-options] [what to
    find]
```

## Additional Flags and their Functionalities:

Commonly-used primaries include:

- **name** pattern - tests whether the file name matches the shell-glob pattern given.
- **type** type - tests whether the file is a given type. Unix file types accepted include:

options	Description
<b>b</b>	block device (buffered)
<b>d</b>	directory
<b>f</b>	regular file
<b>l</b>	Symbolic link
<b>-print</b>	always returns true; prints the name of the current file plus a newline to the stdout.
<b>-mtime n</b>	find's all the files which are modified n days back.
<b>-atime n</b>	find's all the files which are accessed 50 days back.
<b>-cmin n</b>	find's all the files which are modified in the last 1 hour.
<b>-newer file</b>	find's file was modified more recently than file.
<b>-size n</b>	File uses n units of space, rounding up.

## Help Command

Run below command to view the complete guide to `find` command or [click here](#).

```
man find
```

# The `rmdir` command

The **rmdir** command is used to remove empty directories from the filesystem in Linux. The rmdir command removes each and every directory specified in the command line only if these directories are empty.

## Usage and Examples:

1. remove directory and its ancestors

```
rmdir -p a/b/c // is similar to 'rmdir  
a/b/c a/b a'
```

2. remove multiple directories

```
rmdir a b c // removes empty  
directories a,b and c
```

## Syntax:

```
rmdir [OPTION]... DIRECTORY...
```

## Additional Flags and their Functionalities:

Short Flag	Long Flag	Description
-	--ignore-fail-on-non-empty	ignore each failure that is solely because a directory is non-empty
-p	--parents	remove DIRECTORY and its ancestors
-d	--delimiter=DELIM	use DELIM instead of TAB for field delimiter
-v	--verbose	output a diagnostic for every directory processed

# The `lsblk` command



## Summary

The `lsblk` command displays the block and loop devices on the system. It is especially useful when you want to format disks, write filesystems, check the filesystem and know the mount point of a device.

## Examples

1. Basic usage is fairly simple - just execute 'lsblk' sans any option.

```
lsblk
```

2. Make lsblk display empty devices as well

```
lsblk -a
```

3. Make lsblk print size info in bytes

```
lsblk -b
```

4. Make lsblk print zone model for each device

```
lsblk -z
```


5. Make lsblk skip entries for slaves

```
lsblk -d
```

6. Make lsblk use ascii characters for tree formatting


```
lsblk -i
```

7. Make lsblk display info about device owner, group, and mode



```
lsblk -m
```

8. Make lsblk output select columns



```
lsblk -o NAME,SIZE
```

## Syntax

```
lsblk [options] [<device> ...]
```

## Reading information given by `lsblk`

On running `lsblk` with no flags or command-line arguments, it writes general disk information to the STDOUT. Here is a table that interpretes that information:

Column Name	Meaning	Interpretation
NAME	Name of the device.	Shows name of the device.
RM	Removable.	Shows 1 if the device is removable, 0 if not.
SIZE	Size of the device.	Shows size of the device.
RO	Read-Only.	Shows 1 if read-only, 0 if not.
TYPE	The type of block or loop device.	Shows <code>disk</code> for entire disk and <code>part</code> for partitions.
MOUNTPOINTS	Where the device is mounted.	Shows where the device is mounted. Empty if not mounted.

## Reading information of a specific device

`lsblk` can display information of a specific device when the device's absolute path is passed to it. For example, `lsblk` command for displaying the information of the `sda` disk is:

```
lsblk /dev/sda
```

## Useful flags for `lsblk`

Here is a table that show some of the useful flags that can be used with `lsblk`

Short Flag	Long Flag	Description
-a	--all	<code>lsblk</code> does not list empty devices by default. This option disables this restriction.
-b	--bytes	Print the SIZE column in bytes rather than in human-readable format.
-d	--nodeps	Don't print device holders or slaves.
-D	--discard	Print information about the discard (TRIM, UNMAP) capabilities for each device.
-E	--dedup column	Use column as a de-duplication key to de-duplicate output tree. If the key is not available for the device, or the device is a partition and parental whole-disk device provides the same key than the device is always printed.
-e	--exclude list	Exclude the devices specified by a comma-separated list of major device numbers. Note that RAM disks (major=1) are excluded by default. The filter is applied to the top-level devices only.
-f	--fs	Displays information about filesystem.
-h	--help	Print a help text and exit.
-l	--include list	Displays all the information in List Format.
-J	--json	Displays all the information in JSON Format.
-l	--list	Displays all the information in List Format.
-m	--perms	Displays info about device owner, group and mode.
-M	--merge	Group parents of sub-trees to provide more readable output for RAID's and Multi-path devices. The tree-like output is required.
-n	--noheadings	Do not print a header line.
-o	--output list	Specify which output columns to print. Use <code>--help</code> to get a list of all supported columns.
-O	--output-all	Displays all available columns.
-p	--paths	Displays absolute device paths.
-P	--pairs	Use key="value" output format. All potentially unsafe characters are hex-escaped (\x)
-r	--raw	Use the raw output format. All potentially unsafe characters are hex-escaped (\x) in NAME, KNAME, LABEL, PARTLABEL and MOUNTPPOINT columns.
-S	--scsi	Output info about SCSI devices only. All partitions, slaves and holder devices are ignored.
-s	--inverse	Print dependencies in inverse order.
-t	--topology	Output info about block device topology. This option is equivalent to "-o NAME,ALIGNMENT,MIN-IO,OPT-IO,PHY-SEC,LOG-SEC,ROTA,SCHED,RQ-SIZE".
-T	--tree[=column]	Displays all the information in Tree Format.
-V	--version	Output version information and exit.

Short Flag	Long Flag	Description
-w	--width	pecifies output width as a number of characters. The default is the number of the terminal columns, and if not executed ona terminal, then output width is not restricted at all by default.
-x	--sort [column]	Sort output lines by column. This option enables --list output format by default. It is possible to use the option --tree to force tree-like output and than the tree branches are sorted by the column.
-z	--zoned	Print the zone model for each device.
-	--sysroot directory	Gather data for a Linux instance other than the instance from which the lsblk command is issued. The specified directory is the system root of the Linux instance to be inspected.



## Exit Codes

Like every Unix / Linux Program, `lsblk` returns an exit code to the environment. Here is a table of all the exit codes.

### Exit Code Meaning

0	Exit with success.
1	Exit with failure.
32	Specified device(s) not found.
64	Some of the specified devices were found while some not.

# The `cmatrix` command

This command doesn't come by default in Linux. It has to be installed, and as seen in chapter [052](#) we need to run the following command:

```
sudo apt-get install cmatrix
```

And after everything is installed, you have become a 'legit hacker'. In order to use this command, just type in `cmatrix` and press enter:

```
cmatrix
```

And this is what you should see:



As you can see you have access to the matrix now. Well, not really.

What this actually is just a fun little command to goof around with. There are actually a few options you can use. For example you can change the text colour. You can choose from **green, red, blue, white, yellow, cyan, magenta and black**.

```
cmatrix -C red
```



And the falling characters will be red. This command isn't really something that will help you with your job or anything, but it is fun to

know that you can have some fun in Linux.

# The `chmod` command

The `chmod` command allows you to change the permissions on a file using either a symbolic or numeric mode or a reference file.

## Examples:

1. Change the permission of a file using symbolic mode:

```
chmod u=rwx,g=rx,o=r myfile
```

The command above means :

- user can read, write, execute `myfile`
- group can read, execute `myfile`
- other can read `myfile`

2. Change the permission of a file using numeric mode

```
chmod 754 myfile user:group file.txt
```

The command above means :

- user can read, write, execute `myfile`
- group can read, execute `myfile`
- other can read `myfile`

3. Change the permission of a folder recursively

```
chmod -R 754 folder
```

## Syntax:

```
chmod [OPTIONS] MODE FILE(s)
```

- **[OPTIONS]** : **-R**: recursive, mean all file inside directory
- **MODE**: different way to set permissions:
- **Symbolic mode explained**
  - u: user
  - g: group
  - o: other
  - =: set the permission
  - r: read
  - w: write
  - x: execute
  - example **u=rwx** means user can read write and execute
- **Numeric mode explained:**

The **numeric mode** is based off of a binary representation of the permissions for user, group, and others, for more information please look at this [explanation](#) from Digital Ocean's community section:

- 4 stands for "read",
- 2 stands for "write",

- 1 stands for "execute", and
- 0 stands for "no permission."
- example 7 mean read + write + execute

# The `grep` command

The `grep` filter searches a file for a particular pattern of characters, and displays all lines that contain that pattern. `grep` stands for globally search for regular expression and print out. The pattern that is searched in the file is referred to as the regular expression.

## Examples:

1. To search the contents of the destination.txt file for a string("KeY") case insensitively.

```
grep -i "KeY" destination.txt
```

2. Displaying the count of number of matches

```
grep -c "key" destination.txt
```

3. We can search multiple files and only display the files that contains the given string/pattern.

```
grep -l "key" destination1.txt destination2.txt  
destination3.txt destination4.txt
```

4. To show the line number of file with the line matched.

```
grep -n "key" destination.txt
```

5. If you want to grep the monitored log files, you can add the `--line-buffered` to search them in real time.

```
tail -f destination.txt | grep --line-buffered "key"
```

## Syntax:

The general syntax for the grep command is as follows:

```
grep [options] pattern [files]
```

## Additional Flags and their Functionalities:

Short Flag	Long Flag	Description
-c	--count	print a count of matching lines for each input file
-h	--no-filename	Display the matched lines, but do not display the filenames
-i	--ignore-case	Ignores, case for matching
-l	--files-with-matches	Displays list of a filenames only.
-n	--line-number	Display the matched lines and their line numbers.
-v	--invert-match	This prints out all the lines that do not matches the pattern
-e	--regexp=	Specifies expression with this option. Can use multiple times
-f	--file=	Takes patterns from file, one per line.



Short Flag	Long Flag	Description
-F	--fixed-strings=	Interpret patterns as fixed strings, not regular expressions.
-E	--extended-regexp	Treats pattern as an extended regular expression (ERE)
-w	--word-regexp	Match whole word
-o	--only-matching	Print only the matched parts of a matching line, with each such part on a separate output line.
	--line-buffered	Force output to be line buffered.

# The `screen` command

`screen` - With `screen` you can start a screen session and then open any number of windows (virtual terminals) inside that session. Processes running in `Screen` will continue to run when their window is not visible even if you get disconnected. This is very handy for running long during session such as bash scripts that run very long.

To start a screen session you type `screen`, this will open a new screen session with a virtual terminal open.

Below are some most common commands for managing Linux Screen Windows:

Command	Description
<code>Ctrl+a+ c</code>	Create a new window (with shell).
<code>Ctrl+a+ "</code>	List all windows.
<code>Ctrl+a+ 0</code>	Switch to window 0 (by number).
<code>Ctrl+a+ A</code>	Rename the current window.
<code>Ctrl+a+ S</code>	Split current region horizontally into two regions.
<code>Ctrl+a+ '</code>	Split current region vertically into two regions.
<code>Ctrl+a+ tab</code>	Switch the input focus to the next region.
<code>Ctrl+a+ Ctrl+a</code>	Toggle between the current and previous windows
<code>Ctrl+a+ Q</code>	Close all regions but the current one.
<code>Ctrl+a+ X</code>	Close the current region.

## Restore a Linux Screen

To restore to a screen session you type `screen -r`, if you have more than one open screen session you have to add the session id to the command to connect to the right session.

## Listing all open screen sessions

To find the session ID you can list the current running screen sessions with:

```
screen -ls
```

There are screens on:

```
18787.pts-0.your-server    (Detached)
15454.pts-0.your-server    (Detached)
2 Sockets in /run/screens/S-yourserver.
```

If you want to restore screen 18787.pts-0, then type the following command:

```
screen -r 18787
```

# The `nc` command

The `nc` (or netcat) command is used to perform any operation involving TCP (Transmission Control Protocol, connection oriented), UDP (User Datagram Protocol, connection-less, no guarantee of data delivery) or UNIX-domain sockets. It can be thought of as swiss-army knife for communication protocol utilities.

## Syntax:

```
nc [options] [ip] [port]
```

## Examples:

**1. Open a TCP connection to port 80 of host, using port 1337 as source port with timeout of 5s:**

```
$ nc -p 1337 -w 5 host.ip 80
```

**2. Open a UDP connection to port 80 on host:**

```
$ nc -u host.ip 80
```

**3. Create and listen on UNIX-domain stream socket:**

```
$ nc -lU /var/tmp/dsocket
```

#### 4. Create a basic server/client model:

This creates a connection, with no specific server/client sides with respect to nc, once the connection is established.

```
$ nc -l 1234 # in one console
```

```
$ nc 127.0.0.1 1234 # in another console
```

#### 5. Build a basic data transfer model:

After the file has been transferred, sequentially, the connection closes automatically

```
$ nc -l 1234 > filename.out # to start listening in one console and collect data
```

```
$ nc host.ip 1234 < filename.in
```

#### 6. Talk to servers:

Basic example of retrieving the homepage of the host, along with headers.

```
$ printf "GET / HTTP/1.0\r\n\r\n" | nc host.ip 80
```

#### 7. Port scanning:

Checking which ports are open and running services on target machines. **-z** flag commands to inform about those rather than initiate

a connection.

```
$ nc -zv host.ip 20-2000 # range of ports to check for
```

## Flags and their Functionalities:

Short Flag	Description
-4	Forces nc to use IPv4 addresses
-6	Forces nc to use IPv6 addresses
-b	Allow broadcast
-D	Enable debugging on the socket
-i	Specify time interval delay between lines sent and received
-k	Stay listening for another connection after current is over
-l	Listen for incoming connection instead of initiate one to remote
-T	Specify length of TCP
-p	Specify source port to be used
-r	Specify source and/or destination ports randomly
-s	Specify IP of interface which is used to send the packets
-U	Use UNIX-domain sockets
-u	Use UDP instead of TCP as protocol
-w	Declare a timeout threshold for idle or unestablished connections
-x	Should use specified protocol when talking to proxy server
-z	Specify to scan for listening daemons, without sending any data

# The `make` command

The `make` command is used to automate the reuse of multiple commands in certain directory structure.

An example for that would be the use of `terraform init`, `terraform plan`, and `terraform validate` while having to change different subscriptions in Azure. This is usually done in the following steps:

```
az account set --subscription "Subscription - Name"
terraform init
```

How the `make` command can help us is it can automate all of that in just one go: `make tf-init`

## Syntax:

```
make [ -f makefile ] [ options ] ... [ targets ] ...
```

## Example use (guide):

1. Create `Makefile` in your guide directory
2. Include the following in your `Makefile` :



```
hello-world:
    echo "Hello, World!"

hello-bobby:
    echo "Hello, Bobby!"

touch-letter:
    echo "This is a text that is being inputted into our
letter!" > letter.txt

clean-letter:
    rm letter.txt
```

**3. Execute `make hello-world` - this echoes "Hello, World" in our terminal.**

**4. Execute `make hello-bobby` - this echoes "Hello, Bobby!" in our terminal.**

**5. Execute `make touch-letter` - This creates a text file named `letter.txt` and populates a line in it.**

**6. Execute `make clean-letter`**

## References to lengthier and more contentful tutorials:

(linoxide - linux make command

examples)[<https://linoxide.com/linux-make-command-examples/>]

(makefiletutorial.com - the name itself gives it  
out)[<https://makefiletutorial.com/>]

# The `basename` command

The `basename` is a command-line utility that strips directory from given file names. Optionally, it can also remove any trailing suffix. It is a simple command that accepts only a few options.

## Examples

The most basic example is to print the file name with the leading directories removed:

```
basename /etc/bar/foo.txt
```

The output will include the file name:

```
foo.txt
```

If you run `basename` on a path string that points to a directory, you will get the last segment of the path. In this example, `/etc/bar` is a directory.

```
basename /etc/bar
```

Output

```
bar
```

The `basename` command removes any trailing `/` characters:

```
basename /etc/bar/foo.txt/
```

Output

```
foo.txt
```

## Options

1. By default, each output line ends in a newline character. To end the lines with NUL, use the `-z` (`--zero`) option.

```
$ basename -z /etc/bar/foo.txt  
foo.txt$
```

2. The `basename` command can accept multiple names as arguments. To do so, invoke the command with the `-a` (`--multiple`) option, followed by the list of files separated by space. For example, to get the file names of `/etc/bar/foo.txt` and `/etc/spam/eggs.docx` you would run:

```
basename -a /etc/bar/foo.txt /etc/spam/eggs.docx
```

```
foo.txt  
eggs.docx
```

## Syntax

The basename command supports two syntax formats:

```
basename NAME [SUFFIX]  
basename OPTION... NAME...
```

## Additional functionalities

**Removing a Trailing Suffix:** To remove any trailing suffix from the file name, pass the suffix as a second argument:

```
basename /etc/hostname name  
host
```

Generally, this feature is used to strip file extensions

## Help Command

Run the following command to view the complete guide to **basename** command.

```
man basename
```

# The `banner` command

The `banner` command writes ASCII character Strings to standard output in large letters. Each line in the output can be up to 10 uppercase or lowercase characters in length. On output, all characters appear in uppercase, with the lowercase input characters appearing smaller than the uppercase input characters.

Note: If you will define more than one NUMBER with sleep command then this command will delay for the sum of the values.

## Examples :

1. To display a banner at the workstation, enter:


```
banner LINUX!
```

2. To display more than one word on a line, enclose the text in quotation marks, as follows:

```
banner "Intro to" Linux
```

This displays Intro to on one line and Linux on the next

3. Printing "101LinuxCommands" in large letters.



```
banner 101LinuxCommands
```

It will print only 101LinuxCo as banner has a default capacity of 10

---

# The `alias` command

The `alias` command lets you create shortcuts for commands or define your own commands.

This is mostly used to avoid typing long commands.

## Examples:

1. To show the list of all defined aliases in the reusable form `alias NAME=VALUE` :

```
alias -p
```

2. To make `ls -A` shortcut:

```
alias la='ls -A'
```

## Syntax:

```
alias [-p] [name[=value]]
```

## Setting Persistent Options:

As with most Linux custom settings for the terminal, any alias you defined is only applied to the current opening terminal session.

For any alias to be active for all new sessions you need to add that command to your rc file to be executed in the startup of every new terminal. this file can be as follows:

- **Bash:** ~/.bashrc
- **ZSH:** ~/.zshrc
- **Fish** - ~/.config/fish/config.fish

you can open that file with your favorite editor as follows:

```
vim ~/.bashrc
```

type your commands one per line, then save the file and exit. the commands will be automatically applied in the next session.

If you want to apply it in the current session, run the following command:

```
source ~/.bashrc
```

## Opposite command:

To remove predefined alias you can use **unalias** command as follows:

```
unalias alias_name
```

to remove all aliases

```
unalias -a
```



# The `which` command

`which` command identifies the executable binary that launches when you issue a command to the shell. If you have different versions of the same program on your computer, you can use `which` to find out which one the shell will use.

It has 3 return status as follows:

```
0 : If all specified commands are found and executable.  
1 : If one or more specified commands is nonexistent or not  
    executable.  
2 : If an invalid option is specified.
```

## Examples

1. To find the full path of the `ls` command, type the following:

```
which ls
```

2. We can provide more than one arguments to the `which` command:

```
which netcat uptime ping
```

The `which` command searches from left to right, and if more than one matches are found in the directories listed in the `PATH` path variable, `which` will print only the first one.

3. To display all the paths for the specified command:

```
which [filename] -a
```

4. To display the path of node executable files, execute the command:

```
which node
```

5. To display the path of Java executable files, execute:

```
which java
```

## Syntax

```
which [filename1] [filename2] ...
```

You can pass multiple programs and commands to which, and it will check them in order.

For example:

```
which ping cat uptime date head
```

## Options

-a : List all instances of executables found (instead of just the first one of each).

-s : No output, just return 0 if all the executables are found, or 1 if some

were not found

# The `date` command

The `date` command is used to print the system current date and time.

`date` command is also used to set the date and time of the system, but you need to be the super-user (*root*) to do it.

## Examples:

1. To show the current date and time:

```
date
```

2. You can use `-u` option to show the date and time in UTC (*Coordinated Universal Time*) time zone

```
date -u
```

1. To display any given date string in formatted date:

```
date --date="2/02/2010"  
date --date="2 years ago"
```

## Syntax:

```
date [OPTION]... [+FORMAT]
date [-u|--utc|--universal] [MMDDhhmm[[CC]YY][.ss]]
```

## Additional Flags and their Functionalities:

Short Flag	Long Flag	Description
-d	--date=STRING	convert the provided string into formatted date
-f	--file=DATEFILE	like --date but for files
-I[FMT]	--iso-8601[=FMT]	Display date and time in ISO 8601 format
-r	--reference=FILE	Display the last modification time of FILE
-s	--set=STRING	sets the time to the one described by STRING
-u	--universal	show the date and time in UTC ( <i>Coordinated Universal Time</i> ) time zone
-R	--rfc-email	Display date and time in ISO 8601 format Example: (Fri, 22 Oct 2021 05:18:42 +0200)
-	rfc-3339=FMT	Display date and time in RFC 3339 format
-	--debug	Usually used with --date to annotate the parsed date and warn about questionable usage to stderr

## Control The output:

You can use Format specifiers to control the output date and time.

## Examples:

Command	Output
\$ date "+%D"	10/22/21
\$ date "+%D %T"	10/22/21 05:33:51
\$ date "+%A %B %d %T %y"	Friday October 22 05:34:47 21

## Syntax:

```
date "+%[format-options ...]"
```

## List of Format specifiers to control the output:

### Specifiers Description

%a	abbreviated weekday name (e.g., Sun)
%A	full weekday name (e.g., Sunday)
%b	abbreviated month name (e.g., Jan)
%B	full month name (e.g., January)
%c	date and time (e.g., Thu Mar 3 23:05:25 2005)
%C	century; like %Y, except omit last two digits (e.g., 20)
%d	day of month (e.g., 01)
%D	date; same as %m/%d/%y
%e	day of month, space padded; same as %_d
%F	full date; same as %Y-%m-%d
%g	last two digits of year of ISO week number (see %G)
%G	year of ISO week number (see %V); normally useful only with %V
%h	same as %b
%H	hour (00..23)
%I	hour (01..12)
%j	day of year (001..366)
%k	hour, space padded ( 0..23); same as %_H

**Specifiers Description**

<b>%l</b>	hour, space padded ( 1..12); same as %_I
<b>%m</b>	month (01..12)
<b>%M</b>	minute (00..59)
<b>%n</b>	a newline
<b>%N</b>	nanoseconds (000000000..999999999)
<b>%p</b>	locale's equivalent of either AM or PM; blank if not known
<b>%P</b>	like %p, but lower case
<b>%q</b>	quarter of year (1..4)
<b>%r</b>	locale's 12-hour clock time (e.g., 11:11:04 PM)
<b>%R</b>	24-hour hour and minute; same as %H:%M
<b>%s</b>	seconds since 1970-01-01 00:00:00 UTC
<b>%S</b>	second (00..60)
<b>%t</b>	a tab
<b>%T</b>	time; same as %H:%M:%S
<b>%u</b>	day of week (1..7); 1 is Monday
<b>%U</b>	week number of year, with Sunday as first day of week (00..53)
<b>%V</b>	ISO week number, with Monday as first day of week (01..53)
<b>%w</b>	day of week (0..6); 0 is Sunday
<b>%W</b>	week number of year, with Monday as first day of week (00..53)
<b>%x</b>	locale's date representation (e.g., 12/31/99)
<b>%X</b>	locale's time representation (e.g., 23:13:48)
<b>%y</b>	last two digits of year (00..99)
<b>%Y</b>	year
<b>%Z</b>	+hhmm numeric time zone (e.g., -0400)
<b>%%:Z</b>	+hh:mm numeric time zone (e.g., -04:00)
<b>%%::Z</b>	+hh:mm:ss numeric time zone (e.g., -04:00:00)
<b>%%:::Z</b>	numeric time zone with : to necessary precision (e.g., -04, +05:30)
<b>%Z</b>	alphabetic time zone abbreviation (e.g., EDT)

# The `mount` command

The `mount` command is used to mount 'attach' a filesystem and make it accessible by an existing directory structure tree.

## Examples:

1. Displays version information:

```
mount -V
```

2. Attaching filesystem found on device and of type type at the directory dir:

```
mount -t type device dir
```

## Syntax Forms:

```
mount [-lhV]
```

```
mount -a [-fFnrsvw] [-t vfstype] [-O optlist]
```

```
mount [-fnrsvw] [-t fstype] [-o options] device dir
```



## Additional Flags and their Functionalities:

Short Flag	Long Flag	Description
-h	--help	Display a help message and exists
-n	--no-mtab	Mount without writing in /etc/mtab
-a	--all	Mount all filesystems (of the given types) mentioned in fstab
-r	--read-only	Mount the filesystem read-only
-w	--rw	Mount the filesystem as read/write.
-M	--move	Move a subtree to some other place.
-B	--bind	Remount a subtree somewhere else <i>(so that its contents are available in both places)</i> .

# The `nice/renice` command

The `nice/renice` commands is used to modify the priority of the program to be executed. The priority range is between -20 and 19 where 19 is the lowest priority.

## Examples:

1. Running `cc` command in the background with a lower priority than default (slower):

```
nice -n 15 cc -c *.c &
```

2. Increase the priority to all processes belonging to group "test":

```
renice --20 -g test
```

## Syntax:

```
nice [ -Increment | -n Increment ] Command [ Argument ... ]
```

## Flags :

Short Flag	Long Flag	Description
------------	-----------	-------------

Short Flag	Long Flag	Description
-Increment	-	Increment is the value of priority you want to assign.
-n Increment	-	Same as -Increment

# The `wc` command

the `wc` command stands for word count. It's used to count the number of lines, words, and bytes (*characters*) in a file or standard input then prints the result to the standard output.

## Examples:

1. To count the number of lines, words and characters in a file in order:

```
wc file.txt
```

2. To count the number of directories in a directory:

```
ls -F | grep / | wc -l
```

## Syntax:

```
wc [OPTION]... [FILE]...
```

## Additional Flags and their Functionalities:

Short Flag	Long Flag	Description
<code>-c</code>	<code>--bytes</code>	print the byte counts

Short Flag	Long Flag	Description
-m	--chars	print the character counts
-l	--lines	print the newline counts
-	--files0-from=F	read input from the files specified by NUL-terminated names in file F. If F is - then read names from standard input
-L	--max-line-length	print the maximum display width
-w	--words	print the word counts

### Additional Notes:

- Passing more than one file to `wc` command prints the counts for each file and the total counts of them.
- you can combine more than one flag to print the result as you want.

# The `tr` command

The `tr` command in UNIX is a command line utility for translating or deleting characters. It supports a range of transformations including uppercase to lowercase, squeezing repeating characters, deleting specific characters and basic find and replace. It can be used with UNIX pipes to support more complex translation. `tr` stands for translate.

## Examples:

1. Convert all lowercase letters in `file1` to uppercase.

```
$ cat file1
foo
bar
baz
tr a-z A-Z < file1
FOO
BAR
BAZ
```

2. Make consecutive line breaks into one.

```
$ cat file1
foo

bar

baz
$ tr -s "\n" < file1
foo
bar
baz
```

3. Remove the newline code.

```
$ cat file1
foo
bar
baz
$ tr -d "\n" < file1
foobarbaz%
```

## Syntax:

The general syntax for the tr command is as follows:

```
tr [options] string1 [string2]
```

## Additional Flags and their Functionalities:

Short Flag	Long Flag	Description
<b>-C</b>		Complement the set of characters in string1, that is <b>-C ab</b> includes every character except for <b>a</b> and <b>b</b> .

Short Flag	Long Flag	Description
-c		Same as -C.
-d		Delete characters in string1 from the input.
-s		If there is a sequence of characters in string1, combine them into one.



# The `fdisk` command

The `fdisk` command is used for controlling the disk partition table and making changes to it and this is a list of some of options provided by it :

- Organize space for new drives.
- Modify old drives.
- Create space for new partitions.
- Move data to new partitions.

## Examples:

1. To view basic details about all available partitions on the system:

```
fdisk -l
```

2. To show the size of the partition:

```
fdisk -s /dev/sda
```

3. To view the help message and all options of the command:

```
fdisk -h
```

## Syntax:

```
fdisk [options] device
```

## Some of the command options:

On writing the following command

```
fdisk /dev/sdb
```

the following window appears :

```
linux@ubuntu:~$ sudo fdisk /dev/sda

Welcome to fdisk (util-linux 2.31.1).
Changes will remain in memory only, until you decide to write them.
Be careful before using the write command.

Command (m for help):
```

and then you type m which will show you all options you need such as creating new partition and deleting a partition as in the following picture :

```
Command (m for help): m
Help:

DOS (MBR)
a toggle a bootable flag
b edit nested BSD disklabel
c toggle the dos compatibility flag

Generic
d delete a partition
F list free unpartitioned space
l list known partition types
n add a new partition
p print the partition table
t change a partition type
v verify the partition table
i print information about a partition

Misc
m print this menu
u change display/entry units
x extra functionality (experts only)

Script
I load disk layout from sfdisk script file
O dump disk layout to sfdisk script file

Save & Exit
w write table to disk and exit
q quit without saving changes

Create a new label
g create a new empty GPT partition table
G create a new empty SGI (IRIX) partition table
o create a new empty DOS partition table
s create a new empty Sun partition table

Command (m for help):
```

# The `wait` commands

It is a command that waits for completing any running process of given id. if the process id is not given then it waits for all current child processes to complete.

## Example

This example shows how the `wait` command works :

### Step-1:

Create a file named "wait\_example.sh" and add the following script to it.

```
#!/bin/bash
echo "Wait command" &
process_id=$!
wait $process_id
echo "Exited with status $?"
```

### Step-2:

Run the file with bash command.

```
$ bash wait_example.sh
```

# The `zcat` command

The `zcat` allows you to look at a compressed file.

## Examples:

1. To view the content of a compressed file:

```
~$ zcat test.txt.gz  
Hello World
```

2. It can also Works with multiple files:

```
~$ zcat test2.txt.gz test.txt.gz  
hello  
Hello world
```

## Syntax:

The general syntax for the `zcat` command is as follows:

```
zcat [ -n ] [ -V ] [ File ... ]
```

# The `fold` command

The `fold` command in Linux wraps each line in an input file to fit a specified width and prints it to the standard output.

By default, it wraps lines at a maximum width of 80 columns but this is configurable.

To fold input using the fold command pass a file or standard input to the command.

## Syntax:

```
fold [OPTION]... [FILE]...
```

## Options

**-w** : By using this option in fold command, we can limit the width by number of columns.

By using this command we change the column width from default width of 80. Syntax:

```
fold -w[n] [FILE]
```

Example: wrap the lines of file1.txt to a width of 60 columns

```
fold -w60 file1.txt
```

**-b** : This option of fold command is used to limit the width of the output by the number of bytes rather than the number of columns.

By using this we can enforce the width of the output to the number of bytes.

```
fold -b[n] [FILE]
```

Example: limit the output width of the file to 40 bytes and the command breaks the output at 40 bytes.

```
fold -b40 file1.txt
```

**-s** : This option is used to break the lines on spaces so that words are not broken.

If a segment of the line contains a blank character within the first width column positions, break the line after the last such blank character meeting the width constraints.

```
fold -w[n] -s [FILE]
```

# The `quota` command

The `quota` display disk usage and limits.

## Installation:

You can simply go ahead and install quota on ubuntu systems by running:

```
sudo apt-get install quota
```

for Debian use the install command without sudo:

```
apt-get install quota
```

## Syntax:

The general syntax for the `quota` command is as follows:

```
quota [ -u [ User ] ] [ -g [ Group ] ] [ -v | -q ]
```



# The `aplay` command

`aplay` is a command-line audio player for ALSA(Advanced Linux Sound Architecture) sound card drivers. It supports several file formats and multiple soundcards with multiple devices. It is basically used to play audio on command-line interface. `aplay` is much the same as `arecord` only it plays instead of recording. For supported soundfile formats, the sampling rate, bit depth, and so forth can be automatically determined from the soundfile header.

## Syntax:

```
$ aplay [flags] [filename [filename]] ...
```

## Options:

```
-h, -help : Show the help information.  
-d, -duration=# : Interrupt after # seconds.  
-r, -rate=# : Sampling rate in Hertz. The default rate is 8000 Hertz.  
-version : Print current version.  
-l, -list-devices : List all soundcards and digital audio devices.  
-L, -list-pcms : List all PCMs(Pulse Code Modulation) defined.  
-D, -device=NAME : Select PCM by name.
```

Note: This command contain various other options that we normally don't need. If you want to know more about you can simply run following command on your terminal.

```
aplay --help
```

## Examples :

1. To play audio for only 10 secs at 2500hz frequency.

```
$ aplay -d 10 -r 2500hz sample.mp3
```

Plays sample.mp3 file for only 10 secs at 2500hz frequency.

2. To play full audio clip at 2500hz frequency.

```
$ aplay -r 2500hz sample.mp3
```

Plays sample.mp3 file at 2500hz frequency.

3. To Display version information.

```
$ aplay --version
```

Displays version information. For me it shows aplay: version 1.1.0

---

# The `spd-say` command

`spd-say` sends text-to-speech output request to speech-dispatcher process which handles it and ideally outputs the result to the audio system.

## Syntax:

```
$ spd-say [options] "some text"
```

## Options:

```
-r, --rate
    Set the rate of the speech (between -100 and +100,
    default: 0)

-p, --pitch
    Set the pitch of the speech (between -100 and +100,
    default: 0)

-i, --volume
    Set the volume (intensity) of the speech (between -100
    and +100, default: 0)

-o, --output-module
    Set the output module

-l, --language
    Set the language (iso code)

-t, --voice-type
    Set the preferred voice type (male1, male2, male3,
    female1, female2, female3,
    child_male, child_female)

-m, --punctuation-mode
    Set the punctuation mode (none, some, all)

-s, --spelling
    Spell the message

-x, --ssml
    Set SSML mode on (default: off)

-e, --pipe-mode
    Pipe from stdin to stdout plus Speech Dispatcher

-P, --priority
    Set priority of the message (important, message,
    text, notification, progress;
    default: text)
```

```
-N, --application-name
    Set the application name used to establish the
    connection to specified string value
    (default: spd-say)

-n, --connection-name
    Set the connection name used to establish the
    connection to specified string value
    (default: main)

-w, --wait
    Wait till the message is spoken or discarded

-S, --stop
    Stop speaking the message being spoken in Speech
    Dispatcher

-C, --cancel
    Cancel all messages in Speech Dispatcher

-v, --version
    Print version and copyright info

-h, --help
    Print this info
```



## Examples :

1. To Play the given text as the sound.


```
$ spd-say "Hello"
```

Plays "Hello" in sound.

# The `xeyes` command

Xeyes is a graphical user interface program that creates a set of eyes on the desktop that follow the movement of the mouse cursor. It seems much of a funny command, than of any useful use. Being funny is as much useful, is another aspect.

## Syntax:

 `xeyes`

## What is the purpose of xeyes?

`xeyes` is not for fun, at least not only. The purpose of this program is to let you follow the mouse pointer which is sometimes hard to see. It is very useful on multi-headed computers, where monitors are separated by some distance, and if someone (say teacher at school) wants to present something on the screen, the others on their monitors can easily follow the mouse with `xeyes`.

# The `parted` command

The `parted` command is used to manage hard disk partitions on Linux. It can be used to add, delete, shrink and extend disk partitions along with the file systems located on them. You will need root access to the system to run `parted` commands.

**NOTE:** Parted writes the changes immediately to your disk, be careful when you are modifying the disk partitions.

## Examples:

1. Displays partition layout of all block devices:

```
sudo parted -l
```

2. Display partition table of a specific `disk`

```
sudo parted disk print
```

Examples of `disk` are `/dev/sda`, `/dev/sdb`

3. Create a new disk label of `label-type` for a specific disk

```
sudo parted mklabel disk label-type
```

`label-type` can take values "aix", "amiga", "bsd", "dvh", "gpt", "loop",

"mac", "msdos", "pc98", or "sun"

4. Create a new partition in a specific **disk** of type **part-time**, file system is **fs-type** and of size **size** Mb.

```
sudo parted disk mkpart part-time fs-type 1 size
```

**part-time** can take values "primary", "logical", "extended".

**fs-type** is optional. It can take values "btrfs", "ext2", "ext3", "ext4", "fat16", "fat32", "hfs", "hfs+", "linux-swaps", "ntfs", "reiserfs", "udf", or "xfs"

**size** has to be less than the total size of the specified disk. To create a partition of size 50Mb, will take the value of 50

5. **parted** can also be run in an interactive format. Operations to manage the disk partitions can be performed by entering appropriate commands in the interactive session. **help** command in the interactive session shows a list of all possible disk management operations which can be performed.

```

$ sudo parted
GNU Parted 3.3
Using /dev/sda
Welcome to GNU Parted! Type 'help' to view a list of
commands.
(parted) print # prints the partition table of the default
selected disk - /dev/sda
Model: ATA VBOX HARDDISK (scsi)
Disk /dev/sda: 53.7GB
Sector size (logical/physical): 512B/512B
Partition Table: msdos
Disk Flags:

Number  Start   End     Size    Type    File system  Flags
  1      1049kB  53.7GB  53.7GB  primary ext4          boot

(parted) select /dev/sdb # change the current disk on which
operations have to be performed
Using /dev/sdb
(parted) quit # exit the interactive session

```

## Syntax Forms:

```
parted [options] [device [command [options...]]...]
```

## Options:

Short Flag	Long Flag	Description
-h	--help	displays a help message listing all possible commands [options]
-l	--list	lists partition layout on all block devices
-m	--machine	displays machine parseable output
-v	--version	displays the version

Short Flag	Long Flag	Description
-a	--align	set alignment type for newly created partition. It can take the following values: <b>none</b> : Use the minimum alignment allowed by the disk type <b>cylinder</b> : Align partitions to cylinders <b>minimal</b> : Use minimum alignment as given by the disk topology information <b>optimal</b> : Use optimum alignment as given by the disk topology information

# The `nl` command

The “nl” command enumerates lines in a file. A different way of viewing the contents of a file, the “nl” command can be very useful for many tasks.

## Syntax

```
nl [ -b Type ] [ -f Type ] [ -h Type ] [ -l Number ] [ -d  
Delimiter ] [ -i Number ] [ -n Format ] [ -v Number ] [ -w  
Number ] [ -p ] [ -s Separator ] [ File ]
```



## Examples:

1. To number all lines:

```
nl -ba chap1
```

2. Displays all the text lines:

```
[server@ssh ~]$ nl states
1 Alabama
2 Alaska
3 Arizona
4 Arkansas
5 California
6 Colorado
7 Connecticut.
8 Delaware
```

3. Specify a different line number format

```
nl -i10 -nrz -s:: -v10 -w4 chap1
```

You can name only one file on the command line. You can list the flags and the file name in any order.

# The `pidof` command

The `pidof` is a command-line utility that allows you to find the process ID of a running program.

## Syntax

```
pidof [OPTIONS] PROGRAM_NAME
```

To view the help message and all options of the command:

```
[user@home ~]$ pidof -h

-c          Return PIDs with the same root directory
-d <sep>    Use the provided character as output separator
-h          Display this help text
-n          Avoid using stat system function on network
shares
-o <pid>    Omit results with a given PID
-q          Quiet mode. Do not display output
-s          Only return one PID
-x          Return PIDs of shells running scripts with a
matching name
-z          List zombie and I/O waiting processes. May cause
pidof to hang.
```

## Examples:

To find the PID of the SSH server, you would run:

```
pidof sshd
```

If there are running processes with names matching `sshd`, their PIDs will be displayed on the screen. If no matches are found, the output will be empty.

```
# Output  
4382 4368 811
```

`pidof` returns `0` when at least one running program matches with the requested name. Otherwise, the exit code is `1`. This can be useful when writing shell scripts.

To be sure that only the PIDs of the program you are searching for are displayed, use the full pathname to the program as an argument. For example, if you have two running programs with the same name located in two different directories `pidof` will show PIDs of both running programs.

By default, all PIDs of the matching running programs are displayed. Use the `-s` option to force `pidof` to display only one PID:

```
pidof -s program_name
```

The `-o` option allows you to exclude a process with a given PID from the command output:

```
pidof -o pid program_name
```

When `pidof` is invoked with the `-o` option, you can use a special PID named `%PPID` that represents the calling shell or shell script.

To return only the PIDs of the processes that are running with the same root directory, use the `-c` option. This option works only `pidof` is run as `root` or `sudo` user:

```
pidof -c pid program_name
```

## Conclusion

The `pidof` command is used to find out the PIDs of a specific running program.

`pidof` is a simple command that doesn't have a lot of options. Typically you will invoke `pidof` only with the name of the program you are searching for.

# The `shuf` command

The `shuf` command in Linux writes a random permutation of the input lines to standard output. It pseudo randomizes an input in the same way as the cards are shuffled. It is a part of GNU Coreutils and is not a part of POSIX. This command reads either from a file or standard input in bash and randomizes those input lines and displays the output.

## Syntax

```
# file shuf
shuf [OPTION] [FILE]

# list shuf
shuf -e [OPTION]... [ARG]

# range shuf
shuf -i LO-HI [OPTION]
```

Like other Linux commands, **shuf** command comes with **--help** option:

```
[user@home ~]$ shuf --help
Usage: shuf [OPTION]... [FILE]
  or:  shuf -e [OPTION]... [ARG]...
  or:  shuf -i LO-HI [OPTION]...
Write a random permutation of the input lines to standard
output.

With no FILE, or when FILE is -, read standard input.

Mandatory arguments to long options are mandatory for short
options too.
  -e, --echo                treat each ARG as an input line
  -i, --input-range=LO-HI  treat each number LO through HI as
an input line
  -n, --head-count=COUNT  output at most COUNT lines
  -o, --output=FILE         write result to FILE instead of
standard output
      --random-source=FILE  get random bytes from FILE
  -r, --repeat              output lines can be repeated
  -z, --zero-terminated    line delimiter is NUL, not newline
```



## Examples:

### **shuf command without any option or argument.**

```
shuf
```

When **shuf** command is used without any argument in the command line, it takes input from the user until **CTRL-D** is entered to terminate the set of inputs. It displays the input lines in a shuffled form. If **1, 2, 3, 4 and 5** are entered as input lines, then it generates **1, 2, 3, 4 and 5** in random order in the output as seen in the illustration below:

```
[user@home ~]$ shuf
1
2
3
4
5

4
5
1
2
3
```

Consider an example where Input is taken from the pipe:

```
{
seq 5 | shuf
}
```

**seq 5** returns the integers sequentially from **1** to **5** while the **shuf**

command takes it as input and shuffles the content i.e, the integers from 1 to 5. Hence, 1 to 5 is displayed as output in random order.

```
[user@home ~]$ {  
> seq 5 | shuf  
> }  
5  
4  
2  
3  
1
```

## File shuf

When **shuf** command is used without **-e** or **-i** option, then it operates as a file shuf i.e, it shuffles the contents of the file. The **<file\_name>** is the last parameter of the **shuf** command and if it is not given, then input has to be provided from the shell or pipe.

Consider an example where input is taken from a file:

```
shuf file.txt
```

Suppose file.txt contains 6 lines, then the shuf command displays the input lines in random order as output.

```
[user@home ~]$ cat file.txt
line-1
line-2
line-3
line-4
line-5

[user@home ~]$ shuf file.txt
line-5
line-4
line-1
line-3
line-2
```

Any number of lines can be randomized by using `-n` option.

```
shuf -n 2 file.txt
```

This will display any two random lines from the file.

```
line-5
line-2
```

## List shuf

When `-e` option is used with shuf command, it works as a list shuf. The arguments of the command are taken as the input line for the shuf.

Consider an example:

```
shuf -e A B C D E
```

It will take `A`, `B`, `C`, `D`, `E` as input lines, and will shuffle them to

display the output.

```
A
C
B
D
E
```

Any number of input lines can be displayed using the `-n` option along with `-e` option.

```
shuf -e -n 2 A B C D E
```

This will display any two of the inputs.

```
E
A
```

## Range shuf

When `-i` option is used along with `shuf` command, it acts as a **range shuf**. It requires a range of input as input where `L0` is the lower bound while `HI` is the upper bound. It displays integers from `L0-HI` in shuffled form.

```
[user@home ~]$ shuf -i 1-5
4
1
3
2
5
```

## Conclusion

The `shuf` command helps you randomize input lines. And there are features to limit the number of output lines, repeat lines and even generate random positive integers. Once you're done practicing whatever we've discussed here, head to the tool's [man page](#) to know more about it.

# The `less` command

The `less` command is a Linux terminal pager which shows a file's content one screen at a time. Useful when dealing with a large text file because it doesn't load the entire file but accesses it page by page, resulting in fast loading speeds.

## Syntax

```
less [options] file_path
```

## Options

Some popular option flags include:

```
-E less automatically exits upon reaching the end of file.  
-f Forces less to open non-regular files (a directory or  
a device-special file).  
-F Exit less if the entire file can be displayed on the  
first screen.  
-g Highlights the string last found using search. By  
default, less highlights all strings matching the last search  
command.  
-G Removes all highlights from strings found using  
search.
```

For a complete list of options, refer to the less help file by running:

```
less --help
```



## Few Examples:

### 1. Open a Text File

```
less /etc/updatedb.conf
```

### 2. Show Line Numbers

```
less -N /etc/init/mysql.conf
```

### 3. Open File with Pattern Search

```
less -pERROR /etc/init/mysql.conf
```

### 4. Remove Multiple Blank Lines

```
less welcome.txt
```

Here I showed you how to use the less command in Linux. Although there are other terminal pagers, such as most and more, but less could be a better choice as it is a powerful tool present in almost every system.

For more details:

<https://phoenixnap.com/kb/less-command-in-linux#:~:text=The%20less%20command%20is%20a,resulting%20in%20fast%20loading%20speed%20s.>

# The `nslookup` command

The `nslookup` command is a network administration command-line tool for querying the Domain Name System (DNS) to obtain domain name or IP address mapping or any other specific DNS record.

## Syntax

```
nslookup [options] [host]
```

## Options

Some popular option flags include:

```
-domain=[domain-name]    Change the default DNS name.
-debug                   Show debugging information.
-port=[port-number]      Specify the port for queries. The
                           default port number is 53.
-timeout=[seconds]       Specify the time allowed for the
                           server to respond.
-type=a                  View information about the DNS A address records.
-type=any                View all available records.
-type=hinfo              View hardware-related information about the host.
-type=mx                 View Mail Exchange server information.
-type=ns                 View Name Server records.
-type=ptr                View Pointer records. Used in reverse DNS
                           lookups.
-type=soa                View Start of Authority records.
```

## Few Examples:

### 1. Query DNS Server

```
nslookup www.google.com
```

### 2. Specify a port to query

```
nslookup -port=53 www.google.com
```

### 3. Get the MX Record

```
nslookup -type=mx google.com
```

Here I showed you how to use the nslookup command in Linux. Although there are other DNS lookup tools, such as dig, nslookup could be a better choice as it is a powerful tool present in almost every system.

For more details: [Nslookup on Wikipedia](#)

# The `cmp` command

The `cmp` command is used to compare the two files byte by byte.

Example:

```
cmp file1.txt file2.txt
```

Syntax:

```
cmp [option] File1 File2
```

## Few Examples :

### 1. Comparison of two files:

Perform a simple comparison of the two files to check out if they differ from each other or not.

Example:

```
cmp File1 File2
```

### 2. Comparing Files after Skipping a Specified Number of Bytes:

Compare two files after skipping a certain number of bytes

Example:

```
cmp -i 2 list.txt list2.txt
```

Here “INT” represents the number of bytes to be skipped

### 3. Display the Differing Bytes of the Files in the Output:

Example:

```
cmp -b list.txt list1.txt
```

#### 4. Display Byte Numbers and Differing Byte Values of the Files in the Output:

Example:

```
cmp -l list.txt list1.txt
```

#### 5. Comparing the First “n” Number of Bytes of the Files:

Example:

```
cmp -n 10 list.txt list2.txt
```

### Additional Flags and their Functionalities

Short Flag	Long Flag	Description
-b	--print-bytes	print differing bytes
-i	--ignore-initial=SKIP	skip first SKIP bytes of both inputs
-i	--ignore-initial=SKIP1:SKIP2	skip first SKIP1 bytes of FILE1 and first SKIP2 bytes of FILE2
-l	--verbose	output byte numbers and differing byte values




Short Flag	Long Flag	Description
-n	--bytes=LIMIT	compare at most LIMIT bytes
-s	--quiet, --silent	suppress all normal output
v	--version	output version information and exit
	--help	Display this help and exit

# The `expr` command

The `expr` command evaluates a given expression and displays its corresponding output. It is used for basic operations like addition, subtraction, multiplication, division, and modulus on integers and Evaluating regular expressions, string operations like substring, length of strings etc.

## Syntax



```
expr expression
```

## Few Examples:

### 1. Perform basic arithmetic operations using expr command

```
expr 7 + 14  
expr 7 * 8
```

### 2. Comparing two expressions

```
x=10  
y=20  
res=`expr $x = $y`  
echo $res
```

### 3. Match the numbers of characters in two strings

```
expr alphabet : alpha
```

### 4. Find the modulus value

```
expr 20 % 30
```

## 5. Extract the substring

```
a=HelloWorld  
b=`expr substr $a 6 10`  
echo $b
```

## Additional Flags and their Functionalities

Flag	Description
<code>--version</code>	output version information and exit
<code>--help</code>	Display this help and exit

For more details: [Expr on Wikipedia](#)

# The `wall` command

The `wall` command (short for *write all*) is used to send a message to all logged-in users on a Linux system. It is commonly used by system administrators to broadcast important information, such as planned maintenance or urgent announcements.

## Syntax

```
wall [options] [message]
```

If no message is provided as an argument, `wall` will read the message from standard input (stdin).

## Options

Some popular option flags include:

```
-n Do not display the header (username and terminal of the
sender).
-t [seconds] Set a timeout for writing the message to each
terminal.
```



## Few Examples:

1. Broadcast a message to all users

```
wall "The system will shut down in 10 minutes. Please save your work."
```

2. Broadcast a message from a text file

```
wall < message.txt
```

3. Send a message without showing the sender header

```
wall -n "Maintenance completed successfully."
```

Here I showed you how to use the `wall` command in Linux. It is a simple but effective tool for system-wide communication, especially useful when you need to notify multiple logged-in users at once.

For more details: [Wall \(Unix\) on Wikipedia](#)

# The `ln` command

The `ln` command is used to create links between files in Linux. It can create both hard links and symbolic (soft) links, which are essential for file system management and organization.

## Syntax

```
ln [options] target linkname  
ln [options] target... directory
```

## Types of Links

### Hard Links

- Point directly to the file's inode
- Cannot span across different filesystems
- Cannot link to directories
- If original file is deleted, hard link still contains the data

### Symbolic (Soft) Links

- Point to the file path (like shortcuts)
- Can span across different filesystems
- Can link to directories
- If original file is deleted, symbolic link becomes broken

## Options

Some popular option flags include:

- s Create symbolic (soft) links instead of hard links
- f Force creation by removing existing destination files
- v Verbose output, show what's being linked
- n Treat destination as normal file if it's a symlink to a directory
- r Create relative symbolic links
- t Specify target directory for links

## Examples

1. Create a hard link

```
ln file.txt hardlink.txt
```

2. Create a symbolic link

```
ln -s /path/to/original/file.txt symlink.txt
```

3. Create a symbolic link to a directory

```
ln -s /var/log logs
```

4. Create multiple symbolic links in a directory

```
ln -s /usr/bin/python3 /usr/bin/gcc /usr/local/bin/
```


5. Create a relative symbolic link

```
ln -sr ../config/app.conf current_config
```

6. Force create a link (overwrite existing)

```
ln -sf /new/target existing_link
```

7. Create links with verbose output



```
ln -sv /source/file /destination/link
```

## Use Cases

- Creating shortcuts to frequently used files or directories
- Maintaining multiple versions of configuration files
- Organizing files without duplicating storage space
- Creating backup references to important files
- Setting up development environments with shared libraries



## Important Notes

- Use `ls -l` to see if a file is a symbolic link (indicated by `->`)
- Use `ls -i` to see inode numbers for hard links
- Be careful with symbolic links to avoid creating circular references
- Hard links share the same inode and disk space
- Symbolic links take minimal disk space (just the path information)

The `ln` command is essential for efficient file system organization and is widely used in system administration and development workflows.

For more details, check the manual: `man ln`

# The `systemctl` command

The `systemctl` command is used to control and manage systemd services and the systemd system and service manager in Linux. It's the primary tool for managing services in modern Linux distributions.

## Syntax

```
systemctl [options] command [service-name]
```

## Common Commands

### Service Management

<code>start [service]</code>	Start a service
<code>stop [service]</code>	Stop a service
<code>restart [service]</code>	Restart a service
<code>reload [service]</code>	Reload service configuration
<code>status [service]</code>	Show service status
<code>enable [service]</code>	Enable service to start at boot
<code>disable [service]</code>	Disable service from starting at boot

### System Commands

<code>reboot</code>	Restart the system
<code>poweroff</code>	Shutdown the system
<code>suspend</code>	Suspend the system
<code>hibernate</code>	Hibernate the system

## Options

Some popular option flags include:

<code>-l</code>	Show full output (don't <code>truncate</code> )
<code>--no-pager</code>	Don't pipe output into a pager
<code>--failed</code>	Show only failed units
<code>--all</code>	Show all units, including inactive ones
<code>-q</code>	Quiet mode, suppress output
<code>-t</code>	Specify unit type (service, socket, etc.)

## Examples

1. Start a service

```
systemctl start nginx
```

2. Stop a service

```
systemctl stop apache2
```

3. Check service status

```
systemctl status ssh
```

4. Enable a service to start at boot

```
systemctl enable mysql
```

5. Disable a service from starting at boot

```
systemctl disable bluetooth
```

6. Restart a service

```
systemctl restart networking
```

7. Reload service configuration without stopping

```
systemctl reload nginx
```

8. List all active services

```
systemctl list-units --type=service
```

9. List all services (active and inactive)

```
systemctl list-units --type=service --all
```

10. List failed services

```
systemctl --failed
```

11. Show service dependencies

```
systemctl list-dependencies nginx
```


12. Check if a service is enabled

```
systemctl is-enabled ssh
```

13. Check if a service is active


```
systemctl is-active mysql
```

14. Restart the system



```
systemctl reboot
```

## 15. Shutdown the system



```
systemctl poweroff
```



## Service Status Information

When checking status, you'll see:

- **Active (running)**: Service is currently running
- **Active (exited)**: Service completed successfully
- **Inactive (dead)**: Service is not running
- **Failed**: Service failed to start

## Use Cases

- Managing web servers (nginx, apache)
- Controlling database services (mysql, postgresql)
- Managing system services (ssh, networking)
- Troubleshooting service issues
- Automating service management in scripts
- System administration and maintenance

## Important Notes

- Requires root privileges for most operations (use `sudo`)
- Services are called "units" in systemd terminology
- Configuration files are located in `/etc/systemd/system/`
- Always check service status after making changes
- Use `journalctl` to view detailed service logs

The `systemctl` command is essential for modern Linux system administration and service management.

For more details, check the manual: `man systemctl`

# The `journalctl` command

The `journalctl` command is used to view and query the systemd journal, which collects and stores system logs in a structured, indexed format. It's the primary tool for viewing system logs in modern Linux distributions.

## Syntax


```
journalctl [options] [matches]
```

## Options

Some popular option flags include:

```
-f          Follow journal (like tail -f)
-u [unit]   Show logs for specific unit/service
-p [level]  Filter by priority level (0-7)
-S [time]   Show entries since specified time
-U [time]   Show entries until specified time
-b          Show logs from current boot
-k          Show kernel messages only
-r          Reverse output (newest first)
-n [lines]  Show last N lines
--no-pager  Don't pipe output to pager
-x          Add explanatory help texts
-o [format] Output format (json, short, verbose, etc.)
--disk-usage Show current disk usage
--vacuum-size=[size] Remove logs to reduce size
--vacuum-time=[time] Remove logs older than time
```

## Priority Levels



```
0 Emergency (emerg)
1 Alert (alert)
2 Critical (crit)
3 Error (err)
4 Warning (warning)
5 Notice (notice)
6 Informational (info)
7 Debug (debug)
```

## Examples

1. View all journal entries

```
journalctl
```

2. Follow live journal entries

```
journalctl -f
```

3. Show logs for a specific service

```
journalctl -u nginx
```

4. Show logs since last boot

```
journalctl -b
```

5. Show logs from previous boot

```
journalctl -b -1
```

6. Show kernel messages

```
journalctl -k
```

7. Show logs from specific time



```
journalctl --since "2024-01-01 00:00:00"
```

8. Show logs from last hour

```
journalctl --since "1 hour ago"
```

9. Show logs between time periods

```
journalctl --since "2024-01-01" --until "2024-01-02"
```

10. Show only error and critical messages

```
journalctl -p err
```

11. Show last 50 lines

```
journalctl -n 50
```

12. Follow logs for specific service

```
journalctl -u ssh -f
```

13. Show logs in JSON format

```
journalctl -o json
```

14. Show disk usage

```
journalctl --disk-usage
```

15. Remove old logs to free space

```
journalctl --vacuum-size=100M
```

16. Remove logs older than 2 weeks

```
journalctl --vacuum-time=2weeks
```

17. Show logs with explanations

```
journalctl -x
```

18. Show logs for specific process ID

```
journalctl _PID=1234
```

19. Show logs for specific user

```
journalctl _UID=1000
```

20. Show reverse chronological order

```
journalctl -r
```

## Time Specifications

You can use various time formats:

- "2024-01-01 12:00:00"
- "yesterday"
- "today"
- "1 hour ago"
- "30 minutes ago"
- "2 days ago"

## Output Formats

<code>short</code>	Default format
<code>verbose</code>	All available fields
<code>json</code>	JSON format
<code>json-pretty</code>	Pretty-printed JSON
<code>export</code>	Binary <code>export</code> format
<code>cat</code>	Very short format

## Use Cases

- Troubleshooting system issues
- Monitoring service behavior
- Security auditing
- Performance analysis
- Debugging system problems
- Tracking user activities

## Important Notes

- Journal files are stored in `/var/log/journal/` or `/run/log/journal/`
- Requires appropriate permissions to view system logs
- Can consume significant disk space over time
- Use vacuum options to manage log size
- Persistent logging requires proper configuration


The `journalctl` command is essential for system administration and troubleshooting in systemd-based Linux distributions.

For more details, check the manual: `man journalctl`

# The `watch` command

The `watch` command is used to execute a command repeatedly at regular intervals and display the output. It's particularly useful for monitoring changes in system status, file contents, or command output over time.

## Syntax



```
watch [options] command
```



## Options

Some popular option flags include:

-n [seconds]	Set update interval (default is 2 seconds)
-d	Highlight differences between updates
-t	Turn off header showing interval and command
-b	Beep <b>if</b> command has non-zero exit status
-e	Exit on error (non-zero exit status)
-g	Exit when output changes
-c	Interpret ANSI color sequences
-x	Pass command to shell with exec
-p	Precise timing mode

## Examples

1. Watch system uptime every 2 seconds (default)

```
watch uptime
```

2. Watch disk space with custom interval

```
watch -n 5 df -h
```

3. Monitor memory usage with differences highlighted

```
watch -d free -h
```

4. Watch network connections

```
watch -n 1 'netstat -tuln'
```

5. Monitor specific directory contents

```
watch 'ls -la /var/log'
```

6. Watch CPU information

```
watch -n 2 'cat /proc/cpuinfo | grep "cpu MHz"'
```

7. Monitor active processes

```
watch -d 'ps aux | head -20'
```

#### 8. Watch file size changes

```
watch -n 1 'ls -lh /var/log/syslog'
```

#### 9. Monitor system load

```
watch -n 3 'cat /proc/loadavg'
```

#### 10. Watch with precise timing

```
watch -p -n 0.5 date
```

#### 11. Monitor service status

```
watch 'systemctl status nginx'
```

#### 12. Watch with color support

```
watch -c 'ls --color=always'
```

#### 13. Exit when output changes

```
watch -g 'cat /tmp/status.txt'
```

#### 14. Watch with beep on error

```
watch -b 'ping -c 1 google.com'
```

#### 15. Monitor log file size

```
watch 'wc -l /var/log/messages'
```

#### 16. Watch docker containers

```
watch 'docker ps'
```

#### 17. Monitor temperature sensors

```
watch -n 2 sensors
```

#### 18. Watch git status

```
watch -d 'git status --porcelain'
```

#### 19. Monitor bandwidth usage

```
watch -n 1 'cat /proc/net/dev'
```

#### 20. Watch without header

```
watch -t 'date'
```

## Use Cases

- System monitoring and performance analysis
- Watching log files for changes
- Monitoring network connectivity
- Tracking file system changes
- Observing process behavior
- Debugging system issues
- Automation and scripting
- Real-time status monitoring

## Key Features

- **Real-time updates:** Continuously refreshes output
- **Difference highlighting:** Shows what changed between updates
- **Flexible intervals:** Customize update frequency
- **Exit conditions:** Can exit on changes or errors
- **Header information:** Shows command and update interval

## Important Notes

- Press **Ctrl+C** to exit watch
- Use quotes around complex commands with pipes or redirections
- The command runs in a subshell each time
- Be careful with resource-intensive commands and short intervals
- Screen will clear and refresh with each update
- Header shows last update time and interval

## Tips

- Use `-d` to easily spot changes
- Combine with `grep` to filter output
- Use longer intervals for less critical monitoring
- Consider system load when setting very short intervals

The `watch` command is an essential tool for system administrators and developers who need to monitor changes in real-time.

For more details, check the manual: `man watch`



# The `jobs` command

The `jobs` command is used to display information about active jobs in the current shell session. Jobs are processes that have been started from the shell and can be managed using job control commands.

## Syntax

```
jobs [options] [job_spec]
```

## Options

Some popular option flags include:

- l      **List** process IDs along with job information
- p      **List** only process IDs
- n      **List** only jobs that have changed status since last notification
- r      **List** only running jobs
- s      **List** only stopped jobs
- x      Replace job specifications with process IDs in command

## Job States

Jobs can be in different states:

- **Running:** Job is currently executing
- **Stopped:** Job is suspended (paused)
- **Done:** Job has completed successfully
- **Terminated:** Job was killed or ended abnormally

## Examples

1. List all current jobs

```
jobs
```

2. List jobs with process IDs

```
jobs -l
```

3. List only process IDs

```
jobs -p
```

4. List only running jobs

```
jobs -r
```

5. List only stopped jobs

```
jobs -s
```

6. Show status of specific job

```
jobs %1
```

## Job Control Examples

1. Start a background job

```
sleep 100 &
```

2. Start multiple background jobs

```
find / -name "*.log" > /tmp/logs.txt 2>/dev/null &  
ping google.com > /tmp/ping.txt &
```

3. View all jobs

```
jobs
```

Output might look like:

```
[1]-  Running      find / -name "*.log" > /tmp/logs.txt  
2>/dev/null &  
[2]+  Running      ping google.com > /tmp/ping.txt &
```

4. Stop a running job (Ctrl+Z)

```
# Start a command  
vim myfile.txt  
# Press Ctrl+Z to stop it  
# Then check jobs  
jobs
```

5. Bring job to foreground

```
fg %1
```

6. Send job to background

```
bg %1
```

7. Kill a specific job

```
kill %2
```

## Job Specifications

You can refer to jobs using different formats:

- `%1` - Job number 1
- `%+` or `%%` - Current job (most recent)
- `%-` - Previous job
- `%string` - Job whose command line starts with string
- `%?string` - Job whose command line contains string



## Examples with Job Control

### 1. Start and manage multiple jobs

```
# Start some background jobs
sleep 300 &
ping localhost > /dev/null &
find /usr -name "*.conf" > /tmp/configs.txt 2>/dev/null &

# List all jobs
jobs -l

# Bring first job to foreground
fg %1

# Put it back to background (after stopping with Ctrl+Z)
bg %1

# Kill second job
kill %2

# Check remaining jobs
jobs
```

### 2. Working with stopped jobs

```
# Start a text editor  
nano myfile.txt  
  
# Stop it with Ctrl+Z  
# Check jobs  
jobs  
  
# Resume in background  
bg  
  
# Resume in foreground  
fg
```

## Use Cases

- **Multitasking:** Running multiple commands simultaneously
- **Long-running processes:** Managing tasks that take time to complete
- **Background processing:** Running tasks while working on other things
- **Job monitoring:** Keeping track of running processes
- **Process management:** Controlling and organizing shell processes

## Related Commands

- `fg` - Bring job to foreground
- `bg` - Send job to background
- `nohup` - Run command immune to hangups
- `disown` - Remove job from job table
- `kill` - Terminate job or process

## Important Notes

- Jobs are specific to the current shell session
- Job numbers are assigned sequentially
- Jobs disappear when they complete or when you exit the shell
- Use `&` at the end of a command to run it in background
- Press `Ctrl+Z` to stop (suspend) a running job
- Use `Ctrl+C` to terminate a running job

## Advanced Examples

1. Run command in background and disown it

```
long_running_script.sh &  
disown %1
```

2. Check for completed jobs

```
jobs -n
```

3. Kill all jobs

```
kill $(jobs -p)
```

The **jobs** command is essential for managing multiple processes and implementing effective workflow management in the shell.

For more details, check the manual: **man jobs** or **help jobs**

# The `bg` command

The `bg` command is used to put stopped jobs in the background, allowing them to continue running while you use the terminal for other tasks. It's part of the job control features in Unix-like shells.

## Syntax

```
bg [job_spec]
```

If no job specification is provided, **bg** operates on the current job (most recent job).



## Job Specifications

You can refer to jobs using different formats:

- `%1` - Job number 1
- `%+` or `%%` - Current job (most recent)
- `%-` - Previous job
- `%string` - Job whose command line starts with string
- `%?string` - Job whose command line contains string

## Examples

1. Put the current stopped job in background

```
bg
```

2. Put specific job in background

```
bg %1
```

3. Put multiple jobs in background

```
bg %1 %2 %3
```

## Complete Job Control Workflow

Here's a typical workflow demonstrating **bg** usage:

1. Start a long-running command

```
find / -name "*.log" > /tmp/findlogs.txt 2>/dev/null
```

2. Stop the job with Ctrl+Z

```
^Z
[1]+  Stopped      find / -name "*.log" > /tmp/findlogs.txt
2>/dev/null
```

3. Check jobs

```
jobs
```

Output:

```
[1]+  Stopped      find / -name "*.log" > /tmp/findlogs.txt
2>/dev/null
```

4. Put the stopped job in background

```
bg %1
```

Output:

```
[1]+ find / -name "*.log" > /tmp/findlogs.txt 2>/dev/null &
```

5. Verify the job is running in background

```
jobs
```

Output:

```
[1]+  Running      find / -name "*.log" > /tmp/findlogs.txt  
2>/dev/null &
```

## Practical Examples

### 1. Working with a text editor

```
# Start editing a file
vim myfile.txt

# Stop with Ctrl+Z
# Put it in background
bg

# Now you can run other commands while vim runs in background
ls -la

# Bring vim back to foreground when needed
fg %1
```

### 2. Managing multiple background tasks

```
# Start several tasks and stop them
ping google.com > /tmp/ping1.txt
# Ctrl+Z
sleep 300
# Ctrl+Z
tar czf backup.tar.gz /home/user/documents
# Ctrl+Z

# Check all stopped jobs
jobs

# Put all in background
bg %1
bg %2
bg %3

# Or put specific ones
bg %ping    # Job starting with "ping"
```

### 3. Starting command directly in background vs using bg

```
# Method 1: Start directly in background
find /usr -name "*.conf" > /tmp/configs.txt &

# Method 2: Start normally, stop, then background
find /usr -name "*.conf" > /tmp/configs.txt
# Ctrl+Z
bg
```

## Related Commands

- `fg` - Bring job to foreground
- `jobs` - List active jobs
- `kill` - Terminate job
- `nohup` - Run command immune to hangups
- `disown` - Remove job from job table

## Use Cases

- **Multitasking:** Run multiple tasks simultaneously
- **Long processes:** Let time-consuming tasks run while working on other things
- **Interactive programs:** Temporarily background editors or interactive tools
- **Development:** Background compilation while coding
- **System administration:** Background monitoring while performing other tasks



## Important Notes

- Jobs put in background with **bg** are still attached to the terminal
- If you close the terminal, background jobs may be terminated
- Use **nohup** or **disown** for persistent background processes
- Background jobs cannot read from stdin (keyboard input)
- You can use **fg** to bring background jobs back to foreground
- Background jobs continue to write to stdout/stderr unless redirected

## Error Handling

If `bg` fails, common reasons include:

- Job doesn't exist
- Job is already running
- Job cannot be put in background (some interactive programs)

## Tips

- Always check job status with `jobs` before and after using `bg`
- Redirect output for background jobs to avoid cluttering the terminal
- Use job control responsibly to avoid system resource issues
- Consider using terminal multiplexers like `screen` or `tmux` for persistent sessions

The `bg` command is essential for effective multitasking and job management in the shell environment.

For more details, check the manual: `help bg`

# The `fg` command

The `fg` command is used to bring background or stopped jobs to the foreground, making them the active process in your terminal. It's an essential part of job control in Unix-like shells.

## Syntax

```
fg [job_spec]
```

If no job specification is provided, **fg** operates on the current job (most recent job).

## Job Specifications

You can refer to jobs using different formats:

- `%1` - Job number 1
- `%+` or `%%` - Current job (most recent)
- `%-` - Previous job
- `%string` - Job whose command line starts with string
- `%?string` - Job whose command line contains string

## Examples

1. Bring the current job to foreground

```
fg
```

2. Bring specific job to foreground

```
fg %1
```

3. Bring job by partial command name

```
fg %vim
```

4. Bring job containing specific text

```
fg %?backup
```

## Complete Job Control Workflow

Here's a typical workflow demonstrating **fg** usage:

1. Start a background job

```
ping google.com > /tmp/ping.txt &
```

2. Start another job and stop it

```
vim myfile.txt  
# Press Ctrl+Z to stop
```

3. Check current jobs

```
jobs
```

Output:


```
[1]-  Running      ping google.com > /tmp/ping.txt &  
[2]+  Stopped      vim myfile.txt
```

4. Bring vim to foreground

```
fg %2
```

5. Work in vim, then stop again (Ctrl+Z) and bring ping to foreground





fg %1

## Practical Examples

### 1. Working with editors

```
# Start editing  
nano config.txt  
# Stop with Ctrl+Z  
# Do other work  
ls -la  
# Return to editor  
fg
```

### 2. Managing multiple development tasks

```
# Start compilation in background  
make all > build.log 2>&1 &  
  
# Start editing source code  
vim main.c  
# Stop editor (Ctrl+Z)  
  
# Check build progress  
fg %make  
# Stop build monitoring (Ctrl+Z)  
  
# Return to editing  
fg %vim
```

### 3. Interactive debugging session

```
# Start debugger
gdb ./myprogram
# Stop debugger (Ctrl+Z)

# Check core dumps or logs
ls -la core.*

# Return to debugger
fg %gdb
```

#### 4. Working with multiple terminals/sessions

```
# Start SSH session
ssh user@remote-server
# Stop SSH (Ctrl+Z)

# Do local work
ps aux | grep myprocess

# Return to SSH session
fg %ssh
```

## Advanced Usage

### 1. Switching between multiple stopped jobs

```
# Start several editors
vim file1.txt
# Ctrl+Z
vim file2.txt
# Ctrl+Z
nano file3.txt
# Ctrl+Z

# Check all jobs
jobs

# Switch between them
fg %1      # vim file1.txt
# Ctrl+Z
fg %2      # vim file2.txt
# Ctrl+Z
fg %3      # nano file3.txt
```

### 2. Using with job control in scripts

```
#!/bin/bash
# Start background monitoring
tail -f /var/log/syslog &
MONITOR_PID=$!

# Do main work
./main_script.sh

# Bring monitor to foreground for review
fg %tail

# Or kill it
kill $MONITOR_PID
```

## Related Commands

- `bg` - Put job in background
- `jobs` - List active jobs
- `kill` - Terminate job
- `Ctrl+Z` - Stop (suspend) current job
- `Ctrl+C` - Terminate current job

## Use Cases

- **Code editing:** Switch between multiple open editors
- **Development:** Alternate between compilation and editing
- **System monitoring:** Switch between monitoring tools
- **Remote sessions:** Resume SSH or other remote connections
- **Interactive programs:** Return to paused interactive applications
- **Debugging:** Resume debugger sessions

## Important Notes

- When a job is brought to foreground, it becomes the active process
- You can only have one foreground job at a time
- Foreground jobs can receive keyboard input
- Use Ctrl+Z to stop (suspend) a foreground job
- Use Ctrl+C to terminate a foreground job
- Background jobs continue running even when not in foreground

## Error Handling

Common issues with `fg`:

- Job doesn't exist: `fg: %3: no such job`
- No jobs available: `fg: no current job`
- Job already in foreground



## Tips for Effective Usage

1. **Use job numbers:** More reliable than partial names
2. **Check jobs first:** Always run `jobs` to see current status
3. **Consistent workflow:** Develop a routine for job switching
4. **Redirect output:** Background jobs should redirect output to avoid interference

```
# Good practice
tail -f /var/log/messages > monitor.out 2>&1 &
vim script.sh
# Ctrl+Z
fg %tail    # Review logs
# Ctrl+Z
fg %vim     # Continue editing
```

## Integration with Other Tools

`fg` works well with:

- **Terminal multiplexers:** `screen`, `tmux`
- **Development environments:** IDEs, editors
- **System monitoring:** `top`, `htop`, `tail`
- **Network tools:** `ssh`, `ping`, `netstat`

The `fg` command is crucial for efficient terminal multitasking and provides seamless switching between different tasks.

For more details, check the manual: `help fg`

# The `time` command

The `time` command is used to measure the execution time of programs and commands. It provides detailed information about how long a command takes to run, including user time, system time, and real (wall-clock) time.

## Syntax

```
time [options] command [arguments]
```

## Types of Time Measurement

### Real Time (Wall-clock time)

- Total elapsed time from start to finish
- Includes time spent waiting for I/O, other processes, etc.

### User Time


- Time spent executing user-level code
- CPU time used by the process itself

### System Time

- Time spent in kernel mode
- CPU time used for system calls

## Output Format

The standard output shows three measurements:



real	0m2.345s
user	0m1.234s
sys	0m0.567s

## Options

Some popular option flags include:

-p	Use POSIX format output
-f format	Use custom format string
-o file	Write output to file instead of stderr
-a	Append to output file instead of overwriting
-v	Verbose output with detailed statistics

## Examples

1. Time a simple command

```
time ls -la
```

2. Time a script execution

```
time ./my_script.sh
```

3. Time a compilation process

```
time make all
```

4. Time with POSIX format

```
time -p find /usr -name "*.txt"
```

5. Save timing information to file

```
time -o timing.log -a make clean && make
```

6. Verbose timing information

```
time -v python large_calculation.py
```



## Advanced Usage

### 1. Time multiple commands

```
time (command1 && command2 && command3)
```

### 2. Time with custom format

```
/usr/bin/time -f "Time: %E, Memory: %M KB"  
./memory_intensive_program
```

### 3. Time and redirect output

```
time (find /usr -name "*.log" > found_logs.txt 2>&1)
```

### 4. Compare execution times

```
echo "Method 1:"  
time method1_script.sh  
  
echo "Method 2:"  
time method2_script.sh
```

## Using GNU time (Advanced)

The GNU version of `time` (usually at `/usr/bin/time`) provides more detailed information:

```
/usr/bin/time -v command
```

This shows additional statistics like:

- Maximum resident set size (memory usage)
- Page faults
- Context switches
- File system inputs/outputs

## Format Specifiers for GNU time

%E	Elapsed real time (wall clock time)
%U	User CPU time
%S	System CPU time
%M	Maximum resident <b>set</b> size (KB)
%P	Percentage of CPU used
%X	Average size of shared text (KB)
%D	Average size of unshared data (KB)
%c	Number of voluntary context switches
%w	Number of involuntary context switches
%I	Number of file system inputs
%O	Number of file system outputs

## Practical Examples

### 1. Profile a Python script

```
time python -c "  
import time  
for i in range(1000000):  
    str(i)  
"
```

### 2. Compare different algorithms

```
echo "Bubble sort:"  
time ./bubble_sort < large_dataset.txt  
  
echo "Quick sort:"  
time ./quick_sort < large_dataset.txt
```

### 3. Time database operations

```
time mysql -u user -p database < complex_query.sql
```

### 4. Time network operations

```
time wget https://large-file.example.com/bigfile.zip
```

### 5. Time compression operations

```
echo "gzip compression:"  
time gzip -c large_file.txt > large_file.gz  
  
echo "bzip2 compression:"  
time bzip2 -c large_file.txt > large_file.bz2
```

## 6. Profile build processes

```
echo "Clean build timing:"  
time (make clean && make -j4)
```

## Understanding the Output

Example output interpretation:

```
real    0m5.234s    # Total elapsed time (5.234 seconds)
user    0m3.456s    # CPU time in user mode (3.456 seconds)
sys     0m0.789s    # CPU time in system mode (0.789 seconds)
```

### Analysis:

- If **real** > **user** + **sys**: Process was I/O bound or waiting
- If **real**  $\approx$  **user** + **sys**: Process was CPU bound
- If **user** >> **sys**: Process spent most time in user code
- If **sys** >> **user**: Process made many system calls

## Benchmarking Best Practices

1. **Multiple runs:** Run several times and average results

```
for i in {1..5}; do
    echo "Run $i:"
    time ./program
done
```

2. **Warm-up runs:** Do a few runs to warm up caches

```
# Warm-up
./program > /dev/null 2>&1

# Actual timing
time ./program
```

3. **Consistent environment:** Control variables

```
# Clear caches
sync && echo 3 > /proc/sys/vm/drop_caches

# Run with consistent priority
nice -n 0 time ./program
```

## Use Cases

- **Performance optimization:** Identify slow operations
- **Benchmarking:** Compare different implementations
- **System analysis:** Understand resource usage patterns
- **Build optimization:** Time compilation processes
- **Script profiling:** Find bottlenecks in shell scripts
- **Development:** Measure algorithm efficiency



## Important Notes

- Built-in `time` vs. `/usr/bin/time` may have different features
- Results can vary between runs due to system load
- I/O operations can significantly affect timing
- Use multiple measurements for accurate benchmarking
- Consider system caches when timing file operations

## Combining with Other Tools

1. With **nice** for priority control

```
time nice -n 10 ./cpu_intensive_task
```

2. With **timeout** for maximum runtime

```
time timeout 30s ./potentially_slow_command
```

3. With **strace** for system call analysis

```
time strace -c ./program 2> syscalls.log
```

The **time** command is essential for performance analysis, optimization, and understanding program behavior in Linux systems.

For more details, check the manual: **man time**

# The `export` command

The `export` command is used to set environment variables that will be available to child processes. It makes variables available to all processes started from the current shell session.

## Syntax

```
export [options] [variable[=value]]  
export [options] [name[=value] ...]
```

## How Environment Variables Work

- **Local variables:** Only available in the current shell
- **Environment variables:** Available to current shell and all child processes
- **export** converts local variables to environment variables

## Options

Some popular option flags include:

- f Export functions instead of variables
- n Remove variable from environment (unexport)
- p Display all exported variables

## Examples

1. Export a simple variable

```
export MY_VAR="Hello World"
```

2. Export multiple variables at once

```
export VAR1="value1" VAR2="value2" VAR3="value3"
```

3. Export an existing local variable

```
LOCAL_VAR="test"  
export LOCAL_VAR
```

4. Show all exported variables

```
export -p
```

5. Export PATH modifications

```
export PATH="$PATH:/usr/local/bin"
```

6. Export with command substitution

```
export CURRENT_DATE=$(date)  
export HOSTNAME=$(hostname)
```

## 7. Unexport a variable (remove from environment)

```
export -n MY_VAR
```

## 8. Export function

```
my_function() {  
    echo "Hello from function"  
}  
export -f my_function
```



## Common Environment Variables

1. **PATH** - Executable search paths

```
export PATH="/usr/local/bin:$PATH"
```

2. **HOME** - User's home directory

```
export HOME="/home/username"
```

3. **EDITOR** - Default text editor

```
export EDITOR="vim"  
export VISUAL="code"
```

4. **LANG** - System language and locale

```
export LANG="en_US.UTF-8"
```

5. **PS1** - Primary prompt string

```
export PS1="\u@\h:\w\$ "
```

6. **JAVA\_HOME** - Java installation directory

```
export JAVA_HOME="/usr/lib/jvm/java-11-openjdk"
```

7. **NODE\_ENV** - Node.js environment

```
export NODE_ENV="production"
```

# Development Environment Examples

## 1. Python development

```
export PYTHONPATH="$PYTHONPATH:/path/to/modules"  
export VIRTUAL_ENV="/path/to/venv"
```

## 2. Node.js development

```
export NODE_PATH="/usr/local/lib/node_modules"  
export NPM_CONFIG_PREFIX="$HOME/.npm-global"
```

## 3. Go development

```
export GOPATH="$HOME/go"  
export GOROOT="/usr/local/go"  
export PATH="$PATH:$GOROOT/bin:$GOPATH/bin"
```

## 4. Database configuration

```
export DB_HOST="localhost"  
export DB_PORT="5432"  
export DB_NAME="myapp"  
export DB_USER="dbuser"
```

## Shell Configuration Files

Make exports permanent by adding them to configuration files:

### 1. **Bash** - ~/.bashrc or ~/.bash\_profile

```
echo 'export MY_VAR="permanent_value"' >> ~/.bashrc
```

### 2. **Zsh** - ~/.zshrc

```
echo 'export MY_VAR="permanent_value"' >> ~/.zshrc
```

### 3. **System-wide** - /etc/environment or /etc/profile

```
# /etc/environment  
MY_GLOBAL_VAR="system_wide_value"
```

## Checking Variables

### 1. Check if variable is exported

```
env | grep MY_VAR  
printenv MY_VAR  
echo $MY_VAR
```

### 2. Check variable scope

```
# Local variable  
MY_LOCAL="test"  
bash -c 'echo $MY_LOCAL' # Empty output  
  
# Exported variable  
export MY_EXPORTED="test"  
bash -c 'echo $MY_EXPORTED' # Shows "test"
```

## Advanced Usage

### 1. Conditional exports

```
if [ -d "/opt/myapp" ]; then
    export MYAPP_HOME="/opt/myapp"
fi
```

### 2. Export with default values

```
export EDITOR="${EDITOR:-vim}"
export PORT="${PORT:-3000}"
```

### 3. Export arrays (Bash 4+)

```
declare -a my_array=("item1" "item2" "item3")
export my_array
```

### 4. Export with validation

```
validate_and_export() {
    if [ -n "$1" ] && [ -n "$2" ]; then
        export "$1"="$2"
        echo "Exported $1=$2"
    else
        echo "Error: Invalid arguments"
    fi
}

validate_and_export "API_KEY" "your-secret-key"
```

## Use Cases

- **Development environments:** Setting up language-specific paths
- **Application configuration:** Database URLs, API keys, feature flags
- **System administration:** Custom PATH modifications, proxy settings
- **CI/CD pipelines:** Build configuration, deployment targets
- **Security:** Sensitive data that shouldn't be in scripts

## Important Notes

- Exported variables are inherited by child processes
- Changes to exported variables in child processes don't affect parent
- Use quotes for values with spaces or special characters
- Environment variables are typically uppercase by convention
- Be careful with sensitive data in environment variables
- Some variables (like PATH) should be appended to, not replaced



## Security Considerations

### 1. Avoid sensitive data in exports

```
# Bad
export PASSWORD="secret123"

# Better - read from secure file or prompt
read -s -p "Enter password: " PASSWORD
export PASSWORD
```

### 2. Use temporary exports for sensitive operations

```
# Export temporarily
export TEMP_TOKEN="secret"
my_command_that_needs_token
unset TEMP_TOKEN # Clean up
```

The **export** command is fundamental for shell scripting and system administration, enabling proper environment configuration for applications and processes.

For more details, check the manual: **help export** or **man bash**

# The `ufw` command

UFW (Uncomplicated Firewall) is a user-friendly command-line frontend for managing iptables firewall rules on Ubuntu and other Debian-based systems. It provides a simple way to configure firewall rules without dealing with complex iptables syntax.

## Syntax

```
ufw [options] command [parameters]
```

## Installation

```
# Ubuntu/Debian
sudo apt update && sudo apt install ufw

# Check if UFW is installed
which ufw
```

## Basic Commands

### Enable/Disable UFW

```
# Enable UFW
sudo ufw enable

# Disable UFW
sudo ufw disable

# Check UFW status
sudo ufw status
sudo ufw status verbose
sudo ufw status numbered
```

## Basic Rules

### Allow/Deny Traffic

#### 1. Allow specific ports

```
# Allow SSH (port 22)
sudo ufw allow 22
sudo ufw allow ssh

# Allow HTTP (port 80)
sudo ufw allow 80
sudo ufw allow http

# Allow HTTPS (port 443)
sudo ufw allow 443
sudo ufw allow https

# Allow custom port
sudo ufw allow 8080
```

#### 2. Deny specific ports

```
# Deny port 80
sudo ufw deny 80

# Deny SSH from specific IP
sudo ufw deny from 192.168.1.100 to any port 22
```

#### 3. Allow/Deny by service name

```
# Allow common services
sudo ufw allow ssh
sudo ufw allow http
sudo ufw allow https
sudo ufw allow ftp
sudo ufw allow smtp
```

## Advanced Rules

### Port Ranges

```
# Allow port range
sudo ufw allow 1000:2000/tcp
sudo ufw allow 1000:2000/udp

# Allow specific protocol
sudo ufw allow 53/udp # DNS
sudo ufw allow 53/tcp # DNS over TCP
```

### IP Address Rules

#### 1. Allow/Deny specific IP addresses

```
# Allow from specific IP
sudo ufw allow from 192.168.1.100

# Deny from specific IP
sudo ufw deny from 192.168.1.50

# Allow subnet
sudo ufw allow from 192.168.1.0/24
```

#### 2. Allow IP to specific port

```
# Allow specific IP to SSH
sudo ufw allow from 192.168.1.100 to any port 22

# Allow subnet to web server
sudo ufw allow from 10.0.0.0/8 to any port 80
```



## Interface-specific Rules

```
# Allow on specific interface
sudo ufw allow in on eth0 to any port 80

# Allow out on specific interface
sudo ufw allow out on eth1 to any port 443
```

## Rule Management

### List Rules

```
# Show status and rules
sudo ufw status

# Show numbered rules
sudo ufw status numbered

# Show verbose status
sudo ufw status verbose
```

### Delete Rules

```
# Delete by rule number
sudo ufw delete 3

# Delete by specifying the rule
sudo ufw delete allow 80
sudo ufw delete allow from 192.168.1.100
```

### Insert Rules

```
# Insert rule at specific position
sudo ufw insert 1 allow from 192.168.1.0/24
```

## Default Policies

```
# Set default policies
sudo ufw default deny incoming
sudo ufw default allow outgoing
sudo ufw default deny forward

# Check current defaults
sudo ufw status verbose
```

# Application Profiles

## List Available Profiles

```
# List application profiles
sudo ufw app list

# Show profile info
sudo ufw app info OpenSSH
sudo ufw app info "Apache Full"
```

## Use Application Profiles

```
# Allow application
sudo ufw allow OpenSSH
sudo ufw allow "Apache Full"
sudo ufw allow "Nginx Full"

# Common application profiles
sudo ufw allow "OpenSSH"
sudo ufw allow "Apache"
sudo ufw allow "Apache Secure"
sudo ufw allow "Nginx HTTP"
sudo ufw allow "Nginx HTTPS"
sudo ufw allow "Nginx Full"
```

## Logging

```
# Enable logging
sudo ufw logging on

# Set log level
sudo ufw logging low
sudo ufw logging medium
sudo ufw logging high

# Disable logging
sudo ufw logging off

# View logs
sudo tail -f /var/log/ufw.log
```

## Reset and Reload

```
# Reset all rules to default  
sudo ufw --force reset
```

```
# Reload UFW  
sudo ufw reload
```

## Common Use Cases

### 1. Basic Web Server Setup

```
# Allow SSH, HTTP, and HTTPS
sudo ufw allow ssh
sudo ufw allow http
sudo ufw allow https
sudo ufw enable
```

### 2. Database Server (MySQL)

```
# Allow MySQL only from application servers
sudo ufw allow from 192.168.1.10 to any port 3306
sudo ufw allow from 192.168.1.11 to any port 3306
```

### 3. Development Server

```
# Allow common development ports
sudo ufw allow 3000 # Node.js
sudo ufw allow 8000 # Django
sudo ufw allow 5000 # Flask
sudo ufw allow 4200 # Angular
```

### 4. Mail Server

```
# Allow mail server ports
sudo ufw allow smtp      # Port 25
sudo ufw allow 587/tcp   # SMTP submission
sudo ufw allow 993/tcp   # IMAPS
sudo ufw allow 995/tcp   # POP3S
```

## 5. DNS Server

```
# Allow DNS traffic
sudo ufw allow 53/tcp
sudo ufw allow 53/udp
```



# Security Best Practices

## 1. Principle of Least Privilege

```
# Start with deny all
sudo ufw default deny incoming
sudo ufw default allow outgoing

# Only allow what's needed
sudo ufw allow ssh
sudo ufw allow from 192.168.1.0/24 to any port 80
```

## 2. Limit SSH Access

```
# Limit SSH attempts (6 attempts in 30 seconds)
sudo ufw limit ssh

# Allow SSH only from specific networks
sudo ufw allow from 192.168.1.0/24 to any port 22
sudo ufw deny ssh
```

## 3. Monitor and Log

```
# Enable logging
sudo ufw logging medium

# Monitor logs
sudo tail -f /var/log/ufw.log | grep DPT
```

# Troubleshooting

## 1. Check Current Rules

```
sudo ufw status numbered  
sudo iptables -L -n
```

## 2. Test Connections

```
# Test if port is accessible  
telnet your-server-ip 80  
nc -zv your-server-ip 22
```

## 3. Debug UFW

```
# Dry run (show what would happen)  
sudo ufw --dry-run allow 80  
  
# Check UFW version  
ufw --version
```

## Advanced Configuration

### 1. Custom Rules File

```
# Edit UFW rules directly  
sudo vim /etc/ufw/user.rules  
sudo vim /etc/ufw/user6.rules
```

### 2. Rate Limiting

```
# Limit connections per IP  
sudo ufw limit ssh  
sudo ufw limit 80/tcp
```

### 3. Port Forwarding

```
# Enable IP forwarding  
echo 'net.ipv4.ip_forward=1' | sudo tee -a  
/etc/ufw/sysctl.conf  
  
# Add NAT rules to /etc/ufw/before.rules
```

# Integration with Services

## 1. Docker Integration

```
# Allow Docker containers
sudo ufw allow from 172.17.0.0/16

# Block Docker bypass (in /etc/ufw/after.rules)
```

## 2. Fail2ban Integration

```
# UFW works with fail2ban
sudo apt install fail2ban
# Configure fail2ban to use UFW actions
```

## Important Notes

- UFW is a frontend for iptables, not a replacement
- Rules are processed in order (first match wins)
- Default policies apply when no specific rule matches
- UFW doesn't interfere with existing iptables rules by default
- Always test rules before enabling in production
- Keep SSH access rule before enabling UFW remotely

## Quick Reference

```
# Essential commands
sudo ufw enable           # Enable firewall
sudo ufw status           # Check status
sudo ufw allow 22         # Allow SSH
sudo ufw allow from 192.168.1.0/24 # Allow subnet
sudo ufw delete 3         # Delete rule #3
sudo ufw reset            # Reset all rules
sudo ufw reload           # Reload configuration
```


UFW provides an excellent balance between simplicity and functionality, making it ideal for system administrators who need effective firewall management without iptables complexity.

For more details, check the manual: `man ufw`

# The `traceroute` command

The `traceroute` command is used to trace the path that packets take from your computer to a destination host across a network. It shows each hop (router) along the path and measures the time it takes to reach each hop.

## Syntax



```
traceroute [options] destination
```



## Installation

```
# Ubuntu/Debian
sudo apt update && sudo apt install traceroute

# CentOS/RHEL/Fedora
sudo yum install traceroute
# or
sudo dnf install traceroute

# macOS (usually pre-installed)
traceroute

# Check if installed
which traceroute
```

## Basic Usage

### 1. Trace route to a website

```
traceroute google.com  
traceroute github.com  
traceroute 8.8.8.8
```

### 2. Trace route to IP address

```
traceroute 192.168.1.1  
traceroute 208.67.222.222
```

## Options

Some popular option flags include:

-n	Don't resolve hostnames (show IP addresses only)
-w [sec]	Set timeout for responses (default 5 seconds)
-q [num]	Set number of probe packets per hop (default 3)
-m [hops]	Set maximum number of hops (default 30)
-p [port]	Set destination port (default 33434)
-f [ttl]	Set first TTL value (starting hop)
-g [addr]	Use loose source route gateway
-I	Use ICMP ECHO instead of UDP
-T	Use TCP SYN instead of UDP
-U	Use UDP (default)
-4	Force IPv4
-6	Force IPv6
-s [addr]	Set source address
-i [iface]	Set network interface

## Examples

### 1. Basic traceroute

```
traceroute google.com
```

### 2. Show IP addresses only (no DNS resolution)

```
traceroute -n google.com
```

### 3. Set custom timeout

```
traceroute -w 10 google.com
```

### 4. Use ICMP instead of UDP

```
traceroute -I google.com
```

### 5. Use TCP traceroute

```
traceroute -T google.com
```

### 6. Set maximum hops

```
traceroute -m 15 google.com
```

### 7. Set number of probes per hop

```
traceroute -q 1 google.com
```

## 8. Force IPv6

```
traceroute -6 ipv6.google.com
```

## 9. Set custom port

```
traceroute -p 80 google.com
```

## 10. Start from specific TTL

```
traceroute -f 5 google.com
```

## Understanding Output

Sample traceroute output:

```
traceroute to google.com (172.217.164.174), 30 hops max, 60
byte packets
 1  router.local (192.168.1.1)  1.234 ms  1.123 ms  1.045 ms
 2  10.0.0.1 (10.0.0.1)  12.345 ms  11.234 ms  10.123 ms
 3  isp-gateway.net (203.0.113.1)  25.678 ms  24.567 ms
23.456 ms
 4  * * *
 5  google-router.net (172.217.164.174)  45.123 ms  44.234 ms
43.345 ms
```

### Output Explanation:

- **Hop number:** Sequential number of each router
- **Hostname/IP:** Name and IP address of the router
- **Three times:** Round-trip time for three probe packets
- **\*\*\*\*\* :** Indicates timeout or filtered response

## Common Use Cases

### 1. Network Troubleshooting

```
# Check where packets are being dropped
traceroute -n problematic-server.com

# Compare paths to different destinations
traceroute server1.com
traceroute server2.com
```

### 2. Performance Analysis

```
# Identify slow hops
traceroute -w 10 slow-website.com

# Check latency to different regions
traceroute eu-server.com
traceroute us-server.com
traceroute asia-server.com
```

### 3. Network Security Analysis

```
# Check if traffic goes through unexpected countries
traceroute -n suspicious-site.com

# Verify VPN routing
traceroute -n whatismyip.com
```

## 4. ISP Route Analysis

```
# Check ISP routing decisions
traceroute -n 8.8.8.8
traceroute -n 1.1.1.1
traceroute -n 208.67.222.222
```



## Advanced Techniques

### 1. TCP Traceroute (tcptraceroute)

```
# Install tcptraceroute
sudo apt install tcptraceroute

# Trace TCP path to web server
sudo tcptraceroute google.com 80
sudo tcptraceroute -n github.com 443
```

### 2. MTR (My TraceRoute)

```
# Install mtr
sudo apt install mtr

# Continuous traceroute with statistics
mtr google.com
mtr -n google.com      # No DNS resolution
mtr -r google.com      # Report mode
```

### 3. Paris Traceroute

```
# More accurate for load-balanced networks
sudo apt install paris-traceroute
paris-traceroute google.com
```

## Traceroute Variants

### 1. IPv6 Traceroute

```
# IPv6 traceroute
traceroute6 ipv6.google.com
traceroute -6 ipv6.google.com
```

### 2. Visual Traceroute Tools

```
# Web-based visual traceroute
# Visit: traceroute-online.com
# or use: mtr with GUI

# Install mtr-gtk for GUI
sudo apt install mtr-gtk
mtr-gtk
```

# Analyzing Results

## 1. Identifying Issues

```
# High latency at specific hop
# Look for sudden jumps in response times

# Packet loss
# Look for * * * responses

# Asymmetric routing
# Different paths for different packets
```

## 2. Geographic Analysis

```
# Use whois to identify hop locations
whois 203.0.113.1

# Use online IP geolocation services
# to map the route geographically
```

# Troubleshooting Common Issues

## 1. Timeouts and Asterisks

```
# Try different protocols
traceroute -I google.com      # ICMP
traceroute -T google.com      # TCP
traceroute -U google.com      # UDP (default)

# Increase timeout
traceroute -w 10 google.com
```

## 2. Permission Issues

```
# UDP traceroute might need privileges
sudo traceroute google.com

# ICMP definitely needs privileges
sudo traceroute -I google.com
```

## 3. Firewall Interference

```
# Some firewalls block traceroute
# Try different ports
traceroute -p 53 google.com    # DNS port
traceroute -p 80 google.com    # HTTP port
```

# Security Considerations

## 1. Information Disclosure

```
# Traceroute reveals network topology
# Be careful when sharing results publicly

# Use -n to avoid revealing internal hostnames
traceroute -n destination
```

## 2. Firewall Evasion

```
# Try different protocols if blocked
traceroute -T -p 443 target.com
traceroute -I target.com
```

# Automation and Scripting

## 1. Batch Traceroute

```
#!/bin/bash
# Trace routes to multiple destinations
destinations=("google.com" "github.com" "stackoverflow.com")

for dest in "${destinations[@]}; do
    echo "Tracing route to $dest"
    traceroute -n "$dest" > "traceroute_$dest.txt"
done
```

## 2. Monitoring Script

```
#!/bin/bash
# Monitor route changes
while true; do
    traceroute -n google.com > "/tmp/trace_$(date +%s).txt"
    sleep 3600 # Check every hour
done
```

## 3. Route Comparison

```
#!/bin/bash
# Compare routes from different locations
echo "Route from current location:"
traceroute -n $1

echo "Route from VPN:"
# Connect to VPN and run again
```

## Alternative Commands

### 1. pathping (Windows equivalent)

```
# On Windows systems  
pathping google.com
```

### 2. mtr (Better alternative)

```
# Continuous monitoring  
mtr --report google.com  
mtr --report-cycles 10 google.com
```

### 3. hping3 (Advanced probing)

```
sudo apt install hping3  
sudo hping3 -T -p 80 -c 3 google.com
```

# Performance Optimization

## 1. Faster Traceroute

```
# Reduce probes per hop
traceroute -q 1 google.com

# Reduce max hops
traceroute -m 15 google.com

# Skip DNS resolution
traceroute -n google.com
```

## 2. Detailed Analysis

```
# More probes for accuracy
traceroute -q 5 google.com

# Longer timeout for slow links
traceroute -w 15 google.com
```



## Important Notes

- Traceroute may not show the actual path in load-balanced networks
- Some routers don't respond to traceroute probes
- Results can vary between runs due to route changes
- ICMP traceroute often works better than UDP
- Modern networks may use ECMP (Equal Cost Multi-Path) routing
- VPNs and proxies will alter the apparent route

The `traceroute` command is essential for network diagnostics, helping identify routing issues, network performance problems, and understanding network topology.

For more details, check the manual: `man traceroute`

# Conclusion

Congratulations! You've reached the end of the **101 Linux Commands eBook**. Throughout this journey, you've explored over 135 essential Linux commands that form the foundation of system administration, development, and everyday Linux usage.

## What You've Learned

This eBook has covered a comprehensive range of topics including:

### ▣ File and Directory Management

- Navigation commands (`cd`, `ls`, `pwd`)
- File manipulation (`cp`, `mv`, `rm`, `mkdir`)
- Content viewing (`cat`, `head`, `tail`, `less`)
- Search and find operations (`find`, `grep`, `locate`)

### ▣ System Administration

- Process management (`ps`, `kill`, `top`, `htop`)
- User and group management (`useradd`, `usermod`, `chmod`, `chown`)
- System monitoring (`df`, `du`, `free`, `vmstat`)
- Service management (`systemctl`, `service`)

### ▣ Networking and Communication

- Network configuration (`ip`, `ifconfig`, `netstat`)
- Remote access (`ssh`, `scp`, `rsync`)
- Network diagnostics (`ping`, `dig`, `whois`)

### ▣ Package Management and Archives

- Package managers (`apt`, `yum`, `rpm`)
- Compression tools (`tar`, `gzip`, `zip`)
- Archive manipulation

## ⚙ Text Processing and Automation

- Text editors (`vim`, `nano`)
- Text processing (`awk`, `sed`, `cut`, `sort`)
- Task scheduling (`crontab`)
- Shell scripting helpers (`xargs`, `nohup`)

## Your Linux Journey Continues

Mastering these commands is just the beginning of your Linux journey. Here are some recommendations for continuing your learning:

### □ Next Steps

1. **Practice Regularly:** The best way to master Linux commands is through consistent practice
2. **Explore System Administration:** Learn about server management, security, and deployment
3. **Dive into Scripting:** Start writing bash scripts to automate repetitive tasks
4. **Learn Version Control:** Master Git for code management and collaboration
5. **Explore Containerization:** Learn Docker and Kubernetes for modern application deployment

### □ Advanced Topics to Explore

- **Shell Scripting:** Write complex automation scripts
- **System Security:** Learn about firewalls, SSL certificates, and security hardening
- **Performance Tuning:** Optimize system performance and troubleshoot issues
- **DevOps Tools:** Explore CI/CD pipelines, configuration management, and infrastructure as code
- **Cloud Computing:** Learn about AWS, Azure, Google Cloud, and cloud-native technologies

## ▣ Additional Resources

- **Man Pages:** Use `man command` to get detailed information about any command
- **Linux Documentation Project:** Comprehensive guides and HOWTOs
- **Online Communities:** Join forums, Discord servers, and Reddit communities
- **Practice Environments:** Set up virtual machines or use cloud platforms for hands-on learning

## Contributing to This Project

This eBook is open source and community-driven. We welcome contributions from developers and Linux enthusiasts around the world:

### □ How to Contribute

- **Add New Commands:** Help us reach our goal of covering even more Linux commands
- **Improve Examples:** Add better examples or use cases for existing commands
- **Fix Issues:** Report bugs, typos, or outdated information
- **Translations:** Help translate this eBook into other languages
- **Share Knowledge:** Add tips, tricks, and best practices

Visit our [GitHub repository](#) to get started with contributing.

## Acknowledgments

### ▣ Special Thanks

- **Mohamed Said:** Creator of the original [Ibis](#) tool
- **Roberto Butti:** Maintainer of [Ibis Next](#) used to generate this eBook
- **The Hacktoberfest Community:** Contributors who helped expand and improve this resource
- **Open Source Community:** Everyone who has contributed examples, fixes, and improvements

### ▣ Design and Tools

- **Cover Design:** Created by [Suhail Kakar](#)
- **eBook Generation:** Powered by [Ibis Next](#)
- **Hosting:** Thanks to [DevDojo](#) for hosting and support



## Final Words

Linux is more than just an operating system—it's a philosophy of open collaboration, continuous learning, and technological empowerment. The commands you've learned in this eBook are tools that will serve you throughout your career in technology.

Whether you're a system administrator managing servers, a developer building applications, a DevOps engineer automating deployments, or simply a curious learner exploring technology, these Linux commands will be invaluable companions on your journey.

Remember: **The terminal is your friend**. Don't be afraid to experiment, make mistakes, and learn from them. Every Linux expert started exactly where you are now.

### □ Keep Learning, Keep Growing

The world of Linux is vast and constantly evolving. Stay curious, keep practicing, and most importantly, have fun exploring the incredible power and flexibility that Linux offers.

---

### Happy Linux-ing! □

*This eBook was generated using [Ibis Next](#) - a modern, multi-format eBook generation tool for Markdown content.*

---

## Download Other Formats

This eBook is available in multiple formats:

- **PDF:** Perfect for offline reading and printing
- **EPUB:** Compatible with e-readers and mobile devices
- **HTML:** Ideal for web browsing and sharing

Visit our [GitHub releases](#) to download your preferred format.